### Description

We proudly provide Bastone Handicap-Accessible Portable Restroom for business owners and individuals who need it. We have tool-free removable arms beside the toilet to improve flexibility for users. This unit has a wider space to accommodate a full-size adult wheelchair and movement within the stall.



# Specification

| Description                | Specifications  |
|----------------------------|---|
| Model                      | Handicap-Accessible Portable Restroom                     |
| Dimension (LxWxH)          | 81"x50.4"x90"   |
| Interior Dimension (LxWxH) | 75.6"x44.6"x84.6"   |
| Door Size                  | W 39.4" x H 77"   |
| Net Area                   | 23.4 ft <sup>2</sup>                                      |
| Frame                      | Steel   |
| Surface Coating            | High-Temperature Resistant Paint                          |
| Roof Material              | 2-inch EPS fire-resistant & insulated roof panels         |
| Wall Material              | 2-inch EPS fire-resistant & insulated wall panels         |
| Floor Material             | Anti-skid and wear-resistant floor leather+Hard PVC board |
| R-value                    | 0.2~0.5(m2·K/W)   |
| Doors                      | EPS Composite Panel                                       |
|                            | Outward Opening Door                                      |
| Circuit Breaker Spec       | 13~16 Amps  |
| Power Supply               | 110V~220V   |
| Wire info                  | 3 core 2.5 sqmm   |
|                            | White Wire: Live Wire                                     |
| Wiring Instructions        | Black Wire: Neutral Wire                                  |
| Flush volume               | 1.6 gpf   |

| Inlet Pipe Inner diameter          | 4/5 inch   |
|------------------------------------|--|
| Outlet Pipe Material               | PVC Pipe   |
| Outlet Pipe Inner diameter         | ● Gray Water Pipe: 1 ⅓ inch                                  |
|                                    | Black Water Pipe: 3 inch                                     |
| Lowest Pipe Working<br>Temperature | 14°F (if iced, please use 122°F water to melt)               |
| Fire-proof Level                   | B2   |
| Wind Load                          | 56 MPH   |
| Snow Load                          | 125 lb/sqft  |
| Forklift Pockets                   | Dimension: W7"x H3"  |
|                                    | Distance between forklift pocket: 28"                        |
| Footing options                    | Concrete slab or pads  |
|                                    | Compacted ground   |
|                                    | Concrete or Steel stumps                                     |
|                                    | Note: The finished height of the surface must be level.      |
|                                    | Consulting a qualified person is recommended.                |
| Lifespan                           | 15+ Years  |
| Warranty                           | 1 Year   |
| Note                               | The customer must arrange for a licensed Electrician to      |
|                                    | supply & Install all wiring.                                 |
|                                    | All pipe connection needs thread seal tape, instead of glue, |
|                                    | to seal.   |


### Set up

There are 4 lifting lugs for transportation on the top and a forklift slot on the bottom. The equipment needs to be unloaded using a crane or forklift.

Note: Our Portable Restrooms need to be supplied with city water or well pump water, and all portable toilet "sewage" needs to be connected to the city sewer system or a simple septic system.

If this Bastone Handicap-Accessible Portable Restroom for the Disabled is used on a construction site, we recommend you connect toilets to the sanitary sewer system and connect water to the pipe system. If not, you may need tanks outside the structure for waste.

- If it's a concrete floor, please use twist-n-lock anchors on 4 corners of the portable restroom, and use wire rope to connect the anchor and the top corner of the portable restroom.
- If it's a soil floor, please use 20 inches 28 inches ground nails on 4 corners and use wire rope to connect the anchor and top corner of the portable restroom.

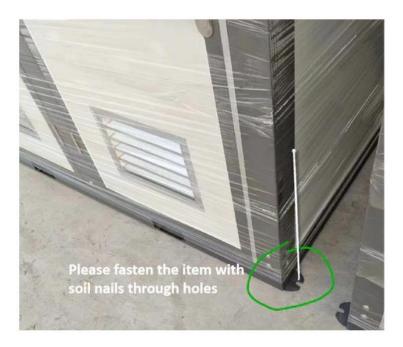

#### **Feature**

- tool-free removable arms, wheelchair accessible
- · The ramp comes inside the unit.
- Toilet w/Ceramic Bowl & Tank, Ceramic Vanity Sink w/Faucet
- 1/2" female inlet ports for cold water
- 3" black water/waste exhaust flexible hose (easily slide your 3" PVC pipe onto flex fitting for waste)
- 1" PVC water outlet exhaust port
- Locking Door w/ set of keys, Hinged Window
- Lifting Eyes, Forklift Pockets

### **Package Size**

- L\*W\*H (inch): 85\*53\*95
- Weight (lb): 1800
- Forklift or equivalent is required for unloading

### **Parts Service**

- Lock
- Faucet
- Grey Water Outlet
- Toilet Seal
- Fan
- Light Switch
- Door Vent











#### Handicap-Accessible Portable Restroom

- Fireproof insulated walls and roofs
- Insulated door with lock
- Complete internal facilities
- Fast on-site assembly



Ceramic Sink



Ceramic Toilet



Convenient Ramp



Insulated Window



**Extractor Shutter Fan** 



Security Door Lock

## **Portable & Convenient**






Used for transport. Dimension: W7"xH3"

Distance: 28"

## How to connect the pipe?



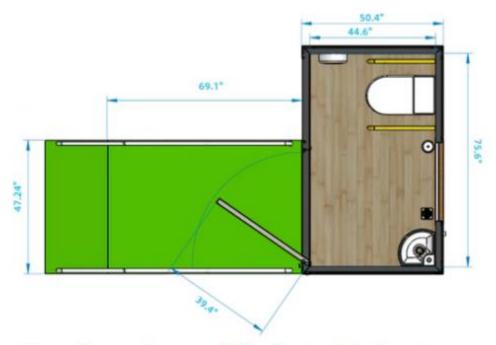

Handicap-Accessible Portable Restroom