

PLAT COMMITTEE November 9, 2022

Case Number: 2022-PLT-056

Property Address: 7510 East Troy Avenue (*Approximate Address*)

Location: Warren Township, Council District #18

Petitioner: Davis Building Group, by Brian K. Robinson

Zoning: D-P

Request: Approval of a Subdivision Plat, to be known as Ridgefield, Section 2, dividing

10.05 acres into 45 single-family detached lots.

Waivers Requested: None

Current Land Use: Undeveloped

Staff Reviewer: Allison Richardson, Senior Planner

PETITION HISTORY

This is the third hearing for this plat petition.

This petition was continued for cause to the November 9, 2022 hearing to request a waiver. The preliminary plat was revised to eliminate the need for a waiver on October 19, 2022. This petition was granted a continuance for cause from the September 14, 2022 hearing to the October 12, 2022 hearing.

STAFF RECOMMENDATION

Staff recommends that the Plat Committee **approve** and find that the plat, file-dated October 19, 2022, complies with the standards of the Subdivision regulations, subject to the following conditions:

- 1. That the applicant provides a bond, as required by Section 741-210, of the Consolidated Zoning and Subdivision Ordinance.
- 2. Subject to the Standards and Specifications of Citizens Energy Group, Sanitation Section.
- 3. Subject to the Standards and Specifications of the Department of Public Works, Drainage Section.
- 4. Subject to the Standards and Specifications of the Department of Public Works, Transportation Section.
- 5. That addresses and street names, as approved by the Department of Metropolitan Development, be affixed to the final plat prior to recording.
- 6. That the Enforcement Covenant (Section 741-701, of the Consolidated Zoning and Subdivision Ordinance) be affixed to the final plat prior to recording
- 7. That the Site Distance Covenant (Section 741-702, of the Consolidated Zoning and Subdivision Ordinance) be affixed to the final plat prior to recording.



- 8. That the Sanitary Sewer Covenant (Section 741-704, of the Consolidated Zoning and Subdivision Ordinance) be affixed to the final plat prior to recording.
- 9. That the Storm Drainage Covenant (Section 741-703, of the Consolidated Zoning and Subdivision Ordinance) be affixed to the final plat prior to recording.
- 10. That the plat restrictions and covenants, done in accordance with the rezoning commitments, be submitted prior to recording the final plat.
- 11. That all the standards related to secondary plat approval listed in Sections 741-207 and 741-208 of the Consolidated Zoning and Subdivision Ordinance be met prior to recording the final plat.

PETITION OVERVIEW

SITE PLAN AND DESIGN

The subject site is zoned D-P and is undeveloped. It was rezoned to the D-P classification in 2003 (2003-ZON-085) to provide for the proposed single-family residential development. The proposed plat generally meets the standards of the zoning classification and the zoning commitments.

STREETS

The plat would provide for three new streets: Sebastian Place, Brahms Way, and Franz Way. Sebastian Place runs east to west and connects Section One to Hanover North Subdivision to the east. Brahms Way runs northeast to southwest and intersects Sebastian Place, and Strauss Lane—a street in Section One. Franz Way is a stub street that would provide for future development to connect to this subdivision.

SIDEWALKS

Sidewalks are required along East Troy Avenue and all proposed interior streets.

GENERAL INFORMATION

Existing Zoning	D-P	
Existing Land Use	Undeveloped	
Comprehensive Plan	Suburban Neighborhood	
Surrounding Context	Zoning	Land Use
North:	SU-9	Undeveloped / County Fairgrounds
South:	D-P	Undeveloped / Single-Family Residential
East:	D-P / PK-1	Single-Family Residential / Park
West:	D-P	Undeveloped / Single-Family Residential
Thoroughfare Plan		
Troy Avenue	Primary Collector	143-foot existing and proposed
Petition Submittal Date	July 29, 2022	



SUBDIVISION PLAT REGULATIONS

741-203		
Required Document	s for Approval	EVALUATION
741.2	201.A-C – Primary Plat Requirements:	
	 Plat name, Legal Description, Surveyor Seal, Scale. 	
	 Boundary Lines, Existing Street Names and dimensions. 	
	 Layout of Proposed Streets – names, widths, classifications. 	
	 Layout of all easements and purpose thereof. 	Satisfied
	 Layout of lots with numbering and dimensions. 	
	Floodway/Floodplain Delineation.	
	Topographic Map.	
	Area Map.	
741-2	203.D – Traffic Control Plan	
	 Traffic control street signs and devices. 	
	Traffic calming devices.	
	Bicycle facilities.	Satisfied
	Sidewalks and pedestrian facilities.	
	 Transit facilities, such as bus stops pads or shelter. 	
	Street lighting.	
741-2	203.E– Natural infrastructure plan (major plats containing more than 20 lots)	
	 Placement of all proposed drainage facilities for the subdivision, indicating type of facility and if the facility is to be designed to be wet or dry 	Satisfied
	 Location of Open Space Areas of the open space common area, indicating size and general improvements 	Satisfied
	 Location of any Stream Protection Corridors in accordance with Section 744-205 (Stream Protection Corridors) 	
741-2	205 – Waivers	
	The granting of the waiver or modification will not be detrimental to the public health, safety, or welfare or injurious to other property	
	 The conditions upon which the request is based are individual to the property for which the relief is sought and are not applicable generally to other property; 	
	 Because of the particular physical surroundings, shape, or topographical conditions of the specific property involved, a particular hardship would result, as distinguished from a mere inconvenience, if the strict letter of these regulations is carried out; 	None Requested
	 The resulting subdivision fulfills the purpose and intent of these regulations at an equal or higher standard than what would have been possible without the deviation; and 	
	 The relief sought shall not in any manner vary from the provisions of the Zoning Ordinance, or official zoning base maps, except as those documents may be amended in the manner prescribed by law. 	



741-300 Design and Installation Standards	All proposed plats submitted for Committee approval under the provisions of these regulations shall meet these standards to the satisfaction of the Committee unless waived by the Committee.	EVALUATION
	 741-302.A – Lots: Comply with zoning district and any cluster approval or variance grant. Lots must have positive drainage away from buildings. No more than 25% of lot area may be under water. Side lots lines at right angles to streets or radial to curving street line. Layout of lots with numbering and dimensions. Floodway/Floodplain Delineation. Topographic Map. 	Satisfied
	 741-302.B – Frontage and Access: Through lots should be avoided except where necessary for primary arterial separation and topography challenges. Triple frontage lots are prohibited. Lots abutting alleys must have vehicular access exclusively from alley. Lots shall not have direct access to arterial streets. Non-residential plats shall provide cross-access easements to limits points of access to existing street network to no more than one per 500 feet. 	Satisfied
	 741-302.C – Blocks: Shall not exceed maximum block lengths per Table 741-302.1 If exceeded, it must be demonstrated that: There are improved pedestrian easements at intervals of 400 feet or less. Adequate traffic calming provisions are made. The block length must be exceeded because of physical conditions of the land. 	Satisfied




744 000	A.II		
741-303 Streets and		plats shall allocate adequate areas for streets in the Comprehensive Plan and Official Thoroughfare Plan	
Connectivity	for Marion Cou	unty, Indiana, and these regulations.	EVALUATION
	741-303.A – Ge	eneral:	
	to us	ubdivisions shall provide a logical street layout in relation to pographical conditions, public convenience, safety, multi-modal se and the proposed use of the land to be served by such reets. <i>Triple frontage lots are prohibited.</i>	
		reets shall intersect as nearly as possible at right angles. No reet shall intersect another at an angle of less than 75 degrees.	
	• No	ot more than two streets shall intersect at any one point.	Satisfied
	Co	cycle lanes meeting the Indiana Manual on Uniform Traffic ontrol Devices (IMUTCD) for location, width, and marking shall be provided along collector streets.	<u> </u>
	• AI	I streets shall be dedicated to the public. Alleys may be private.	
	De sy	urn lanes or other improvements recommended by the epartment of Public Works shall be added to the existing street vistem to minimize the impact of the connection upon the existing reet system.	
	741-303.B – Th	rough Connectivity (Metro Context Area):	
	lo	mergency vehicles must not have to use more than two different cal streets (any street other than a primary arterial, a secondary terial or a collector street) to reach their destination.	
		ermanently dead-ended streets and alleys, except for cul-de-sac reets, are prohibited.	
	bo th	Il existing or platted streets that terminate at the property bundary line of a proposed subdivision shall be continued into e proposed subdivision to provide street connections to djoining lands and streets within the proposed subdivision.	Satisfied
	eit	treets entering opposite sides of another street shall be laid out ther directly opposite one another or with a minimum offset of 25 ft. between their centerlines.	
	pe	henever cul-de-sac streets are created, a 15-foot-wide edestrian access/public utility easement shall be provided etween the cul-de-sac head or street.	
		ubdivisions with 30 or more lots shall have more than one ntrance to the existing street network.	
	741-303.D – Cu	ul-de-sacs (Metro Context Area):	_
		the Metro Context Area, cul-de-sac lengths shall not exceed 00 feet or serve more than 20 dwelling units.	Satisfied
741-304-316			
Additional Dev	elopment Item	S	EVALUATION
	741.304.A-C –	Traffic Control Devices:	
	• Si	treet name signs, traffic control signs, bike route signs.	_
	• Bi	raffic control devices for streets exceeding 900 feet in length. icycle Facilities for subdivisions with a collector street serving ore than 100 dwelling units.	Satisfied




741.305	5 – Numbering and naming:	
•	Street numbering per adopted addressing guidelines.	Street numbering not submitted
•	Streets that are extensions or continuations of existing or approved streets must bear the name of such existing street.	not submitted
741.306	S – Sidewalks:	Satisfied
•	Sidewalks shall be provided along all internal and external streets.	Gationed
741.307	7-309 – Easements, Utilities, Stream Protection Corridors:	
•	Utility easements shall be located along lot lines and shall be a minimum of 10 feet.	
•	All BMPs and drainage facilities must be located within an easement. The easement must accommodate adequate access for maintenance.	Satisfied
•	Generally, pedestrian easements shall be 15 feet in width and be considered open to the public unless specifically declared otherwise.	Gallonida
•	All utilities shall be located underground.	
•	All subdivisions must be designed in accordance with the Stream Protection Corridor requirements of Section 744-205.	
741.310 Area):	9 – Common Areas, Open Space and Public Sites (Compact Context	
•	Required for subdivisions with more than 20 dwelling units.	
•	Access easements shall be provided to connect all common areas to a public street right-of-way. The minimum width of such access must be at least 15 feet.	Satisfied
•	Basic Open Space Requirements: Multi-purpose path, natural landscaping area, entrance landscaping.	Jatistieu
•	Additional Open Space Requirements: Community garden, dog park, game court, picnic area, playground, pool, etc. Additional component required for every 30 additional dwelling units overall.	
•	Reservation of land for public/semi-public purpose.	
741-312	? – Monuments	
•	Permanent reference monuments shall be placed in the subdivision by a Professional Surveyor. Where no existing permanent monuments are found, monuments must be installed no more than 600 feet apart in any straight line and in accordance with the schedule in Table 741-312-1.	Satisfied
741.313	B – Flood Control:	
•	All development shall comply with all provisions of Section 742-203 (Flood Control Zoning District).	
•	Floodway and Floodway Fringe zones shall be delineated and labeled on the primary plat and the plat to be recorded.	Satisfied
•	For Zone AE areas, the plat must show the BFE topographic line.	
•	For Zone A areas, the plat must show the delineation study with the floodway and floodway fringe lines shown on the FIRM maps.	
741.316	S – Street Lighting:	
•	All subdivisions must be designed and constructed in accordance with the Street Lighting requirements of Section 744-600 (Street and Exterior Lighting).	Satisfied



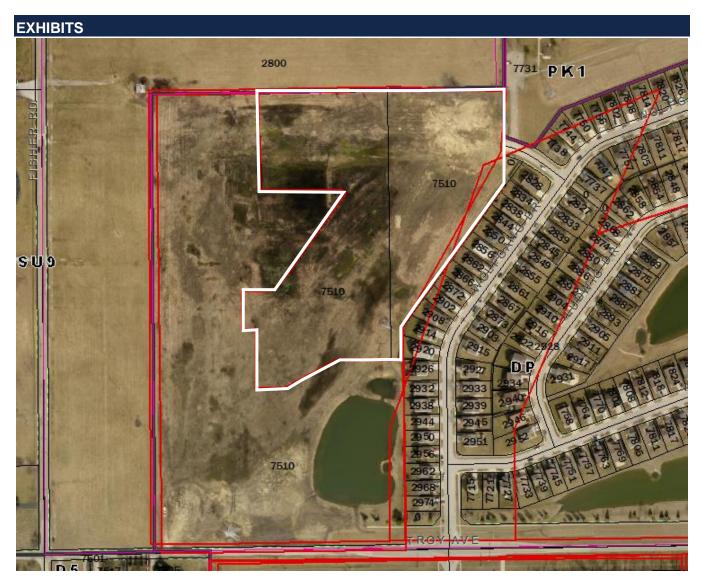




Preliminary Plat July 29, 2022

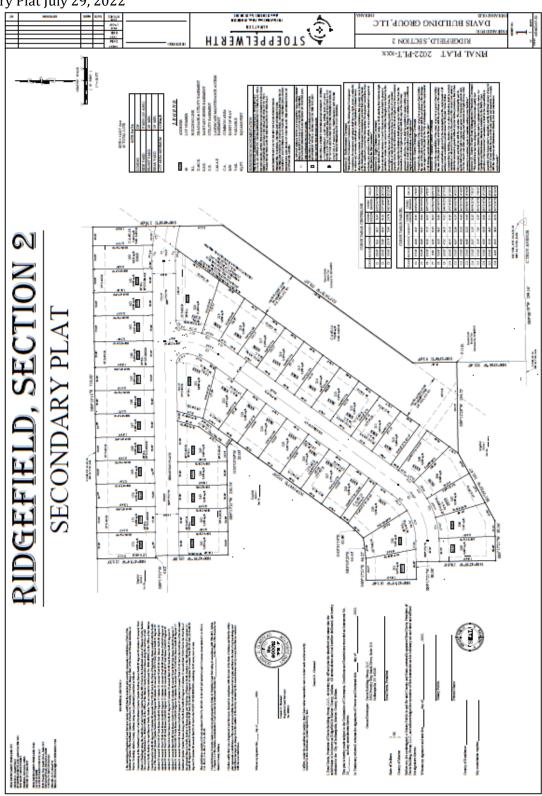




Preliminary Plan October 19, 2022

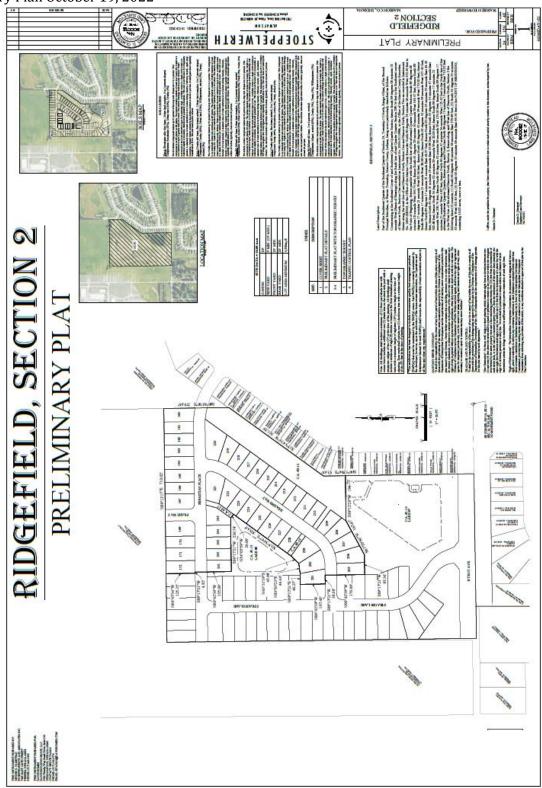




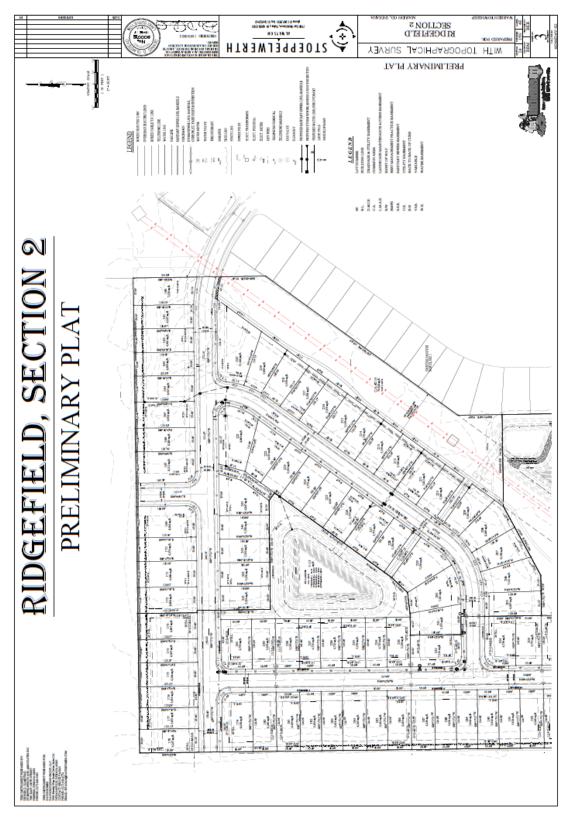






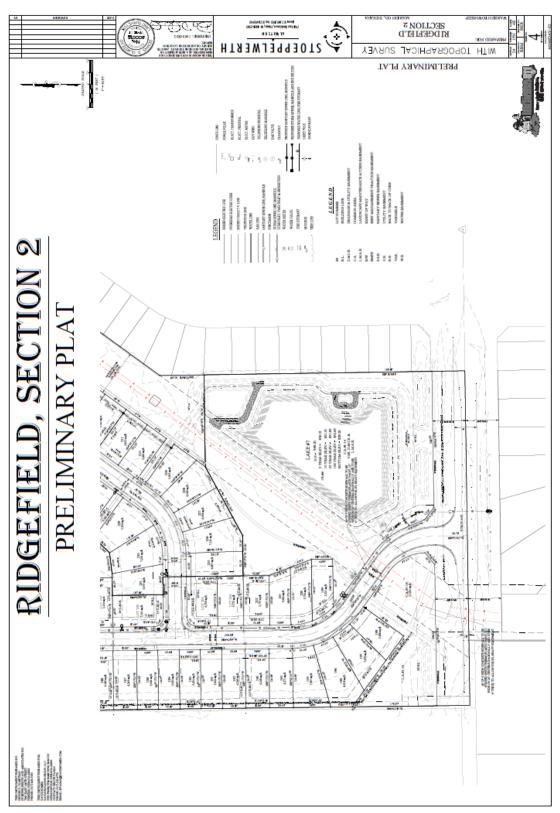



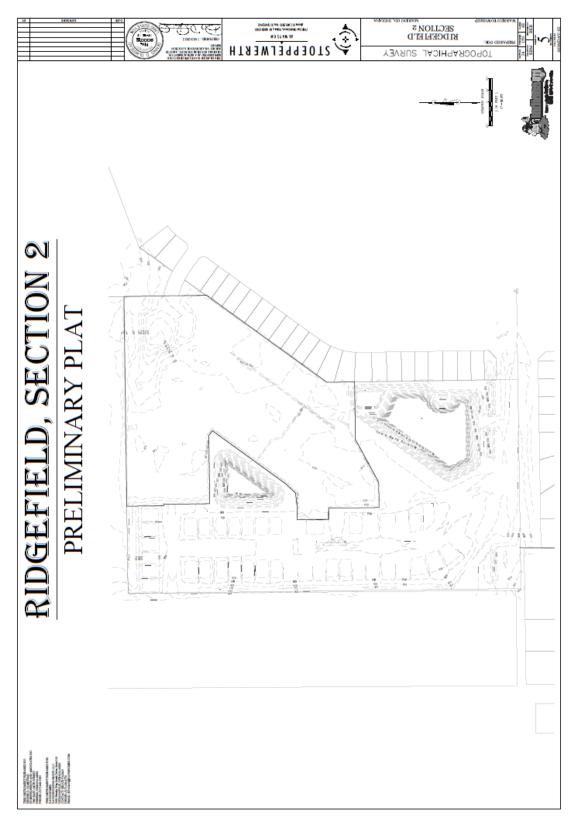







PHOTOS



1. Subject site looking northeast north toy Avenue

2. Looking east along Troy Avenue - subject site to left







3. Subject site looking south from Sebastian Place in Section Two



4. Stub of Sebastian Place looking west Photos courtesy of Linda Ahlbrand