

LANDSCAPE REQUIREMENTS


LOT LINE LANDSCAPING
1 TREE / 100 LF FRONTAGE FRONTAGE
(184 / 100) = 2 TREES

SHEET KEY NOTES:

- 1. 1.5" DIAMETER AUTUMN BLAZE MAPLE & 3" HARDWOOD MULCH. SEE DETAIL 'A' THIS SHEET


LANDSCAPE NOTES

- 1. DIAMETERS OF PLANT MATERIALS AS DRAWN ARE REPRESENTATIVE OF PLANTS AT OR NEAR MATURITY RATHER THAN AT INITIAL PLANTING SIZES.
- 2. THE PLANT LIST IS INTENDED AS A GUIDE FOR THE CONTRACTOR. IN THE EVENT OF DISCREPANCY BETWEEN THE NUMBER OF PLANTS ON THE PLANT LIST AND ON THE DRAWING, THE GREATER NUMBER SHALL APPLY.
- 3. ADJUSTMENTS IN LOCATIONS OF PLANT MATERIALS MAY BE NECESSARY DUE TO NEW OR EXISTING UTILITIES OR SITE OBSTRUCTIONS. REVIEW WITH ARCHITECT BEFORE ADJUSTMENTS ARE MADE.
- 4. ALL SHRUBS OCCURRING IN CONTINUOUS ROW OR FORMAL ARRANGEMENT SHALL HAVE UNIFORM HEIGHT, SPREAD AND HABIT OF GROWTH. FOR GROUND COVER LOCATIONS, FILL AREA WITH QUANTITY OF PLANTS DESIGNATED, EVENLY SPACED.
- 5. A MINIMUM OF 12" DEPTH OF 50% TOPSOIL AND 50% COMPOST SHALL BE PLACED IN ALL BED AREAS BY THE CONTRACTOR PRIOR TO PLANT INSTALLATION.
- 6. MULCH TREES WITH MIN. 3" DEPTH OF GRAVEL OR HARDWOOD MULCH AS NOTED ON PLAN AND PER DETAILS. MULCH SHALL EXTEND IN A CONTINUOUS LAYER WITHIN PLANTING BEDS FROM FACE TO FACE OF SITE STRUCTURES - WALKS, BUILDING, OR OTHER PLANT BED LIMITS.
- 7. PROTECT EXISTING LAWN AREAS. REPAIR ANY CONTRACT RELATED DAMAGE TO LAWN AREAS.
- 8. THE CONTRACTOR SHALL MAINTAIN ALL PLANTS AND BEDS FOR A 60 DAY PERIOD AFTER ACCEPTANCE OF THE WORK BY THE ARCHITECT. THIS INCLUDES REGULAR WATERING, WEEDING AND MOWING.
- 9. THE CONTRACTOR SHALL GUARANTEE ALL PLANT MATERIALS FOR ONE-YEAR FROM DATE OF ACCEPTANCE. BEFORE END OF WARRANTY PERIOD CONTRACTOR SHALL REPLACE ALL TREES, SHRUBS OR PLANTINGS NOT ALIVE OR IN A HEALTHY GROWING CONDITION.
- 10. SEED ALL DISTURBED AREAS WITH Wdof No. 40 GRASS MIX.

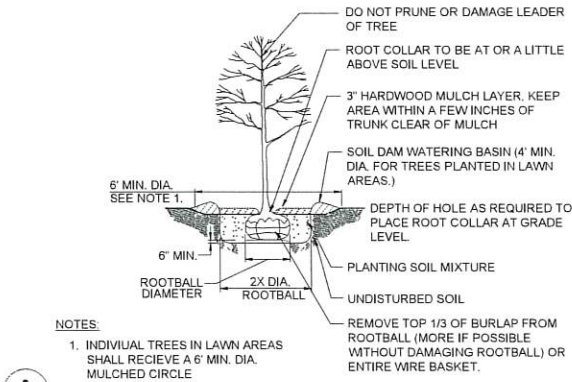

- NOTES:
- 1. INDIVIDUAL TREES IN LAWN AREAS SHALL RECEIVE A 6" MIN. DIA. MULCHED CIRCLE

TREE PLANTING DETAIL



MACH IV
ENGINEERING • SURVEYING • ENVIRONMENTAL

2260 Salscheider Court Green Bay, WI 54313
PH: 920-569-5765, Fax: 920-569-5767
www.mach-iv.com
Project Number: 2404-01-25
Date: NOVEMBER 26, 2025

DESIGN / BUILD
GENERAL CONTRACTING
STEEL FABRICATION

Schuh
CONSTRUCTION, INC.
Established 1976

State ID# 680499

Notice: These plans/electronic files are the exclusive property of Schuh Construction, Inc., and are loaned with that understanding. Plans/electronic files may not be copied, reproduced, or other use may not be made without the consent of Schuh Construction, Inc. Return upon request.

PROJECT: PETERS CONCRETE

380 FARMLAND COURT
KAUKAUNA, WI 54130

PROJECT NO.:

XX-XXX

SHEET NO.:

L1.0

LANDSCAPE PLAN