

# **ES-04**

CHANGE ORDER BREAKDOWN WORKSHEET				
JOB NAME: Kronenwetter Well				
ARCH JOB NO: 2021.022				
ELLIS JOB NO: <b>23061</b>				
CHANGE ORDER NUMBER:	ES-04			
DESCRIPTION:	RFP 02 - Ove	erhead Door		
DATE:	05/08/24			
ITEM		MATERIAL	LABOR	VENDOR/SUB
General Conditions		79	374	1,838
ECON Electric				3,811
Ellis Construction		1,588	7,485	
Lang Masonry		,	,	-2,100
Mavo Sawing				2,250
Precision Grading				660
RH Fischer Overhead Door				24,605
Steel Structures				2,400
-Minimum galv. charge included				
-Jamb plates are not guaranteed against warping, dedu	uct for			
primed jambs would be \$1,160.00				
Tri City Glass and Door				5,137
Please note all bid/quote qualifications and exlusions				
throughout attached pricing from subcontractors and s	uppliers			
SUB - TOTALS		1,667	7,859	38,601
SALES TAX ON MATERIAL	5.50%	92	1,000	50,001
TAX & INS ON LABOR	27.00%	52	2,122	
LIABILITY INS	0.600%	11	60	232
BOND	1.00%	18	100	
SUB - TOTALS	1.0070	1,787	10,142	39,221
PROFIT & OVERHEAD :		1,787	10,142	55,221
LAB & MAT =	5.00%	89	507	
SUBCONTRACTORS =	5.00%		507	1,961
SUB - TOTALS	5.0070	1,876	10,649	41,182
TOTAL CHANGE ORDER AMOUNT				
				\$53,707
CONTRACT TIME WILL BE INCREASED BY:		Work Days		/ )
SUBMITTED BY ELLIS STONE CONSTRUCTION: BY: Jour Johnson Date: 5/8/24			18/24	
ARCHITECT'S APPROVAL OF CHANGE:	BY:		DATE:	
OWNER'S APPROVAL CHANGE: BY: DATE:				

### Joe Kafczynski

From:	Zach Gilmaster <zach@elliswi.com></zach@elliswi.com>
Sent:	Tuesday, May 28, 2024 7:53 AM
To:	Joe Kafczynski
Cc:	Kenneth J. Ligman
Subject:	RE: Kronenwetter Well - Overhead Door Supplier Questions
Attachments:	ES-04 - RFP 02 - Overhead Door (revised - for approval).pdf
Follow Up Flag:	Follow up
Flag Status:	Flagged

Joe,

Good morning. As a follow up to my email below, please see the attached revised RFP 02 for approval. This should answer your questions. Let me know if you need anything else.

Thank you,

Zach Gilmaster Project Manager Zach@elliswi.com



3201 Stanley Street Stevens Point, WI 54481 Ph: 715-345-5000 ext. 133 • Fax: 715-345-5007 www.elliswi.com

From: Zach Gilmaster
Sent: Tuesday, May 21, 2024 12:26 PM
To: Joe Kafczynski <jkafczynski@becherhoppe.com>
Cc: Kenneth J. Ligman <kligman@becherhoppe.com>
Subject: RE: Kronenwetter Well - Overhead Door Supplier Questions

Joe,

Good afternoon. I am awaiting responses on items #2 & #4 from ECON and RH Fischer respectively.

- Item 1 I will send the other information when I have it.
- Item 3 I told Pete Lang to not include that, and after revising his change order, he only retyped the amount. Cutting the opening is by Mavo, as they did all of the concrete cutting for this project already.
- Item 5 Originally drawn door and frame for the knock out panel is already paid for and onsite. Returning this is not an option. Ellis was going to either provide it to the Village, or remove it from the site.

More to come.

### LANG MASONRY

149850 blackberry ct. wausau wis.54401

## Estimate

Date	Estimate #
4/30/2024	682

### Name / Address

P.O. BOX 366 STEVENS POINT, WIS. 54481

			Project
Description	Qty	Cost	Total
kronewetter well #2 change order for overhead door and walk door. block in for new walkdoor , and block in at 20'x 14' overhead door 4" block to 6" splitface at opening with this change order there will be a credit on blocking 20'x14" opening of \$7000.00 off original contract PETER N. LANG LANG MASONRY 4/29/24		4,900.00	4,900.00 0.00
Total CO amount=\$2100 deduct			\$4,900.00
		Total	



AN ASRC INDUSTRIAL SERVICES COMPANY



#### CHANGE ORDER REQUEST FOR: Ellis Construction 3201 Stanley Street

3201 Stanley Street
Stevens Point, WI 54481

OR:	MAVO JOB#	DATE
	23CW423	4/25/2024
	SUBCONTRACT #	DATE
	SC-23061-011	9/20/2023




Mavo Concrete Sawing will provide the Labor and Equipment Necessary to perform the work Specifically described below Subject to the conditions on the following pages:

CONTACT NAME	TERMS	PROJECT	PROJECT		IER PHONE
	DAYS		Village of Kronenwetter, WI		
Zach Gilmaster	NET 30	Well No.2 Water Treatment Fa		715-345-5000	
	DESC	RIPTION	QTY	COST	TOTAL
<b>RFP #2 Door D04</b> Wall sawing as laid out and directed for (1) 3'4" x 7'4" x 8" thick solid		1	\$1,750.00	\$1,750.00	
CMU. Including demo ar	nd removal	of saw cut materials off site.			
Mobilization charge per N	/lob, includi	ng travel and administration	1	\$500.00	\$500.00
<u></u>	ATUDE		-	TOTAL	\$2,250.00

### ACCEPTANCE SIGNATURE

Corporate Office: 4330 Centerville Road White Bear Lake, MN 55127	New Brighton Office: 80 Second Avenue SE New Brighton, MN 55112	Superior Office: 911 Ogden Avenue Superior, WI 54880	Edgar Office: 122839 Leroy Street Edgar, WI 54426	Wausau Office: (Abatement) 4455 Stewart Avenue Wausau, WI 54401
763.788.7713	651.289.8465	715.392.2463	715.352.2552	715.849.9754
www.mavo.com	An Equal Opportunity Emplo	oyer		



# Precision Grading and Utilities, Inc.

PO Box 79 Port Edwards, WI 54469-0079 Phone 715-887-2172 FAX 715-887-2062

April 30, 2024

Ellis Construction Co. Zach Gilmaster P.O. Box 366 Stevens Point, WI 54481-0366

Re: Kronenwetter Well No.2 RFP 02 – Overhead Door Kronenwetter, WI

The following modification to include:

1. Supply labor to prep for 110 SF service door slab

NOTES: Does not include paving.

Labor and materials to complete the previous items:

### **TOTAL MODIFICATION AMOUNT: ADD \$660.00**

If you have any questions, please feel free to call.

Respectfully, PRECISION GRADING & UTILITIES, INC.

r

Mark A. Schroeder President

### R.H. FISCHER OVERHEAD DOOR, LLC

### 7114 MORAINE VALLEY LN STEVENS POINT, WI 54482 (715) 445-4233

Date	Estimate #
5/24/2024	264

**Estimate** 

### Estimate For:

Ellis Construction Company 3201 Stanley St. Stevens Point, WI 54481

	Phone		Project
		Kron	enwetter Well
Part Description	Qty	Rate	Total
20'x13'4"' CHI Model 6242 Gray Rolling Steel, powder coat all components, powder coat color TBD, hot dipped galv guides, painted steel hood, mount to concrete, weatherseal package.	1	23,144.75	23,144.75
LiftMaster standard gear head 1HP GH101L5 RS 115/230V 1PH opener Material Labor, Loading, and Travel	24.75	59.00	1,460.25
Prices include installation and all necessary installation materials. Any and all electrical work by others Quote only valid for 30 days or until manufacture has price increase.			

Signature \_\_\_\_\_

Accepted: The above prices, specification, and conditions are satisfactory and are herey accepted. You are authorized to do the work as specified. Payment outlined above, estimate good for 30 days from above date. Permits not included. ANY AND ALL ELECTRICAL WORK BY OTHERS.

Total

### INSULATED

C.H.I.

1







### The 6000 Series

# VERSATILE AND CAPABLE FOR ALL CLIMATES.

These coiling doors are engineered and designed for maximum strength and durability. Manufactured to stringent code standards, the Series 6000 insulated coiling door is an industrial product built to provide a high degree of confidence for specifiers and end users. A wide variety of slat profiles, gauges, and color options are available.

### Powder Coat


Select powder coat options from a palette of 188 colors. RAL numbers are provided for each color to ensure that your selection is consistent.

### Hood

Half-hexagonal formed hoods deliver superior structural rigidity and aesthetic appeal.

### Windows

Clear acryllic glazed lites approximately 5" x 1-1/8" in size and spaced 7" on center. Pattern options include one or more full rows or groups of windows.



### Service Panel

Guides feature an easily removable 24" inside angle simplifying the replacement of damaged slats or bottom bar.







### SPECIFICATIONS AND OPTIONS

	6242	6222	6202	6182
CURTAIN	OL TE	OLLL	0202	UTUM.
Fiat slat	S	S	S	S
Exterior Skin				
24 gauge, Galvanized [G/W/T/B/U/P]	S	-	-	
22 gauge, Galvanized [G/W/T/B/U/P]	-	S	-	1
20 gauge, Galvanized [G/W/U/P]	_	_	S	
18 gauge, Galvanized [G/W/U/P]	_			S
Interior Skin				
24 gauge, Galvanized [G/W/T/B/U/P]	S	S	S	S
NSULATION				
Laid in Place [LIP] Polystyrene			_	S
Laid in Place [LIP] Urethane	-	-	-	0
Foamed in Place [FIP] Urethane	S	S	S	
R-Value	7.2	7.2	7.2	4.7 or 6.7
BOTTOM BAR				
11 gauge, Double angle [U]	S'	S1	S'	S1
Minimum 1/8" double angle steel [BK]	S <sup>2</sup>	S <sup>2</sup>	S²	S <sup>2</sup>
Extruded aluminum (maximum width 14'4") [C]	0	0	0	0
HOOD				
24 gauge, Galvanized [G/W/T/B/U/P]	S	S	S	S
GUIDES Fabricated from three (minimum 3/16") structural steel a	angles bolted together to form guid	de channel. Guide angles i	nclude curtain stops and fl	ared guides.
Painted steel [BK]	S	S	S	S
Hot dipped galvanized steel	0	0	0	0
Cold galvanized steel	0	0	0	0
DPERATION				
Chain hoist	S	S	S	S
Motor	0	O	0	0
WINDLOAD				
Windbreaker Series	0	О	0	
Impact Series	0	O	0	-
STANDARD DIMENSIONS Consult factory for larger sizes.				
Width	24'4"	24'4"	30'0"	30'0"
Height	16'4"	20'4"	24'0"	24'0"

LOCKING Manual push-up doors furnished with interior slide bolt locks with padlock provision standard. Chain hoist operated doors furnished with chain hoist keeper suitable for padlocking. Optional bottom bar cylinder locking available.

WARRANTY Manufacturer's standard 5-year from date of plant shipment against defects in materials or workmanship. Spring wire is warranted for one year. C.H.I.'s obligations are strictly limited to repair or replacement of defective parts and components during the warranty period.

INSTALLATION C.H.I. Rolling Steel Doors shall be installed and adjusted according to C.H.I. assembly instructions by trained door service technicians.

S = Standard O = Optional --- = Not available G = Gray W = White T = Tan B = Brown U = Unpainted galvanized C = Clear anodized P = Powder coat BK = Black 1 Standard on doors up to 14'4" wide. 2 Standard on doors over 14'4" wide.

#### CURTAIN PROFILES

Flat Slat F2.5 - Polystyrene / R-value= 4.7





White [W]

Flat Slat F2.5 - Urethane / R-value= 6.7



Flat Slat F2.7 - Urethane / R-value= 7.2






C.H.I. Overhead Doors developed the resilient Windbreaker Series garage doors to protect against high wind conditions. The super-resilient C.H.I. iSeries Impact Approved doors have strength designed to withstand direct collision of projectiles and other windborne debris at high speeds.

#### FINISHES



Tan [T] Brown [B]

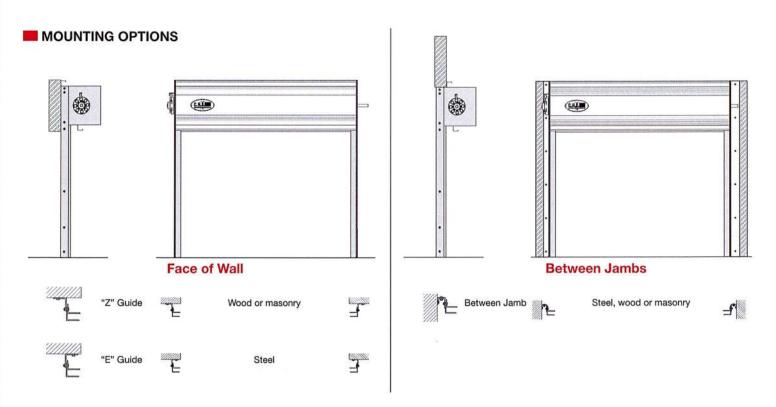

Standard service doors are built to order to fit specific dimensions up to 30'0" wide, 24'4" high. Consult factory for larger doors not listed. If headroom is critical, consult factory to determine headroom requirements for your application.

For downloadable specifications, please visit our website at www.chiohd.com or call our AIA hotline at, 800-590-0559.



# Steel Structures, Inc.

8105 Enterprise Drive Wausau, WI 54401 Ph: 715-849-8170 • Fax: 715-849-8321

MAY 7, 2024

ELLIS STONE CONSTRUCTION CO. 3201 STANLEY STREET STEVENS POINT, WI 54481 ATTN: ZACH GILMASTER

RE: VILLAGE OF KRONENWETTER WELL HOUSE 2 RFP 02 – GARAGE DOOR

WE ARE PLEASED TO QUOTE ON THE ABOVE PROJECT.

WE PROPOSE TO FURNISH (2) BENT PLATE DOOR JAMBS 14'-0 LONG WITH (7) COUNTERSUNK HOLES IN EACH. ALSO INCLUDED ARE (14)  ${}^{3}8^{0}x2^{3}4$  STAINLESS STEEL FLATHEAD SLEEVE ANCHORS. THE (2) BENT PLATE DOOR JAMBS WILL BE HOT DIPPED GALVANIZED.

ADD: \$2400.00 F.O.B. JOBSITE EXCLUDING TAX.

DEDUCT: \$1160.00 EXCLUDING TAX FOR PRIME PAINTED JAMBS IN LIEU OF GALVANIZED.

WE FURTHER QUALIFY OUR BID AS FOLLOWS:

- PREVIOUS QUALIFICATIONS STILL APPLY, UNLESS ADDRESSED BY THIS PRICE CHANGE.
- EXCLUDE LINTEL AT TOP OF OVERHEAD COILED GARAGE DOOR. THE EXISTING LINTEL HAS BEEN APPROVED.
- EXCLUDE THRU-BOLTS FOR JAMB PLATES. QUOTING (7) <sup>3</sup>8<sup>ø</sup> STAINLESS STEEL FLATHEAD SLEEVE ANCHORS IN EACH JAMB.
- EXCLUDE STRAP ANCHORS ON BENT PLATE JAMBS.
- EXCLUDE BRICK SUPPORT ANGLE AND ANCHORS AT NEW WALK DOOR. ASSUMED '1A1' THAT WAS PREVIOUSLY FURNISHED CAN BE CUT DOWN AND USED.
- QUOTING JAMB PLATES WITH 4" BENT LEG ON THE INSIDE OF THE BUILDING ONLY. JAMB PLATES WILL BE 14'-0 LONG.
- CANNOT GUARANTEE AGAINST JAMB PLATES WARPING OR TWISTING DURING GALVANIZING.
- PRICES ARE FOR FURNISH ONLY.
- TERMS NET 30 DAYS, NO RETAINAGE.

SHOP DRAWINGS WILL BE PROVIDED FOR YOUR APPROVAL PRIOR TO FABRICATION.

SHOULD YOU DESIRE TO PURCHASE SUCH MATERIAL, SIGN AND RETURN THIS PROPOSAL INDICATING ACCEPTANCE OF TERMS AND CONDITIONS.

BUYER:

SIGNATURE:

DATE:\_\_

RESPECTFULLY SUBMITTED,

Jun Krasselt

TROX RASSELT GENERAL MANAGER



www.tricityglass-door.com

May 8, 2024

### Change Order #001

**NOTE:** This change order becomes part of and in conformance with the existing contract.

Customer:	Ellis Construction	Job Name:	Kronenwetter Well
Contact:	Zach Gilmaster	Job Location:	Kronenwetter WI
Address:		Job #:	0223110 SP
		PO #:	

### WE PROPOSE THE FOLLOW FOR CHANGES PER RFP#02:

Add door opening D04: Supply 1 each 3070 flush FRP (fiberglass) door and FRP frame Supply 1 ea Vonduprin 98L x 996L x 630 rim exit device Supply 1 ea Schlage 20-057 x 626 FSIC rim cylinder Supply 1 ea LCN 4111HEDA x RH x 689 hold-open door closer

Customer to re-use hinges, kickplate, weatherstrip, door sweep, and door threshold from deleted paired opening D03 at new opening D04

### PLEASE ADD: \$5,137.00 TAX EXEMPT

**Authorized Signature:** 

Steve Pelishek

Date: 5/8/24

Date. 5,

(PROJECT MANAGER)

**ACCEPTED** ~ The above prices and specifications of this Change Order are satisfactory and are hereby accepted. All work to be performed under the same terms and conditions as specified in the original contract unless otherwise stipulated.

Signature:		Da	ate:	
	(OWNER)			

The Vonduprin would match what we supplied for the pair originally, but that was mortise panic, and now they want a rim panic. The Corbin or Precision options would be more expensive though as we would have to buy those 2nd source. I would think you should be ok, as VonDuprin is typically considered top of the line brand for exit devices anyway.

> 2801 N. Roemer Rd. • Appleton, WI 54911 • 920.734.9164 • f 920.734.1096 1811 E. Mason St. • Green Bay, WI 54302 • 920.468.7820 • f 920.468.5337



### CONTRACT: Village of Kronenwetter – Well #2 Treatment Facility

То:	From:
Zach Gilmaster	Joe Kafczynski
Ellis Construction	Becher-Hoppe Associates, Inc.
3201 Stanley Street	330 N. 4th Street
Stevens Point, WI 54481	Wausau, WI 54403
Phone: 715.345-5000, ext 133	Phone: 715.845.0436
Email: zach@elliswi.com	Email: jkafczynski@becherhoppe.com
-	

Received Date:

May 8, 2024

WE ARE RESPONDING TO THE FOLLOWING RFP:		
RFP # : 02		
Section:	N/A	
Description:	Proposal 2 Review Response	

### COMMENTS:

- 1. Please Revise and Resubmit.
- 2. Econ Electric Change Order states there is a list attached "1) RFP=001 Bid Summary Cost". Can you please provide this list if it is a breakdown of costs.
- 3. On the Lang Masonry estimate, "change order for walk door. Cut opening, dispose of block" but there is also an estimate from Mavo Systems to saw, demolish and remove from site CMU material. Does the Lang Masonry estimate already include the work provided under the Mavo Systems estimate? Please clarify.
- 4. R.H. Fischer Overhead Door, LLC estimate Please provide catalog cut/brochure of the door indicating compliance of materials, material thickness, and other parameters that specifications indicate. Please also provide a detailed cost proposal for this work including labor hours, cost of labor, subcontractor costs (also broken down into labor, hours, labor cost, and material costs) and supporting vendor pricing information.
- 5. Tri City Glass & Door RFP removes D03 (2)-3'-0" x 7'-0" and replaces it with (1) 3'-0" x 7'-0" door. Shouldn't this be a deduct in cost? Please clarify.

REVIEWER(S) J. Kafczynski

DATE 5-20-2024



# **ES-04**

CHANGE ORDEF	R BREAKDO	WN WORKSH	EET	
JOB NAME:	Kronenwett	er Well		
ARCH JOB NO:	2021.022			
ELLIS JOB NO:	23061			
CHANGE ORDER NUMBER:	ES-04			
DESCRIPTION:	RFP 02 - Ove	erhead Door		
DATE:	05/08/24			
ITEM		MATERIAL	LABOR	VENDOR/SUB
General Conditions		79	374	1,838
ECON Electric				3,811
Ellis Construction		1,588	7,485	
Lang Masonry				-2,100
Mavo Sawing				2,250
Precision Grading				660
RH Fischer Overhead Door				24,605
Steel Structures				2,400
-Minimum galv. charge included				
-Jamb plates are not guaranteed against warping, dedu	uct for			
primed jambs would be \$1,160.00				
Tri City Glass and Door				5,137
Please note all bid/quote qualifications and exlusions				
throughout attached pricing from subcontractors and s	uppliers			
			7.050	20.004
SUB - TOTALS	/	1,667	7,859	38,601
SALES TAX ON MATERIAL	5.50%	92		
TAX & INS ON LABOR	27.00%		2,122	
LIABILITY INS	0.600%	11	60	232
BOND	1.00%	18	100	388
SUB - TOTALS		1,787	10,142	39,221
PROFIT & OVERHEAD :				
LAB & MAT =	5.00%	89	507	
SUBCONTRACTORS =	5.00%			1,961
SUB - TOTALS		1,876	10,649	41,182
	Т	OTAL CHANGE OF	DER AMOUNT	\$53,707
CONTRACT TIME WILL BE INCREASED BY:		Work Days		. ,
	~		DATE. 5	12/04
SUBMITTED BY ELLIS STONE CONSTRUCTION:		- Arman	DATE: 💙	
ARCHITECT'S APPROVAL OF CHANGE:	BY:		DATE:	
OWNER'S APPROVAL CHANGE:	BY:		DATE:	

<b>E</b> CON Request for Chang	<u>le Order</u>
ELECTRIC, INC. Contract No: Kronenwetter Well	Request No: RFP-001 R1
Wisconsin Rapids, WI Requested by: Ellis Construction	Date: 5/7/2024
Brief Description: Garage Door	
Reason (Check one): X Additional Scope Correction to error / omission X	Engineering Revision to Contract Scope
Detailed Description: Provide and install 120V power from LP-1 Panel to new Garage Door C	
Energize. Install Gargage Door Controller (Furnished by others) . Install 3/4" Conduit with 5 #14 Con	
Controller to Door Operator	
Install door Sensor Conduits and wiring for Operation of Door Sensors	
Note: Door Sensors are to be supplied & installation by Door Provider.	
Subcontractors Involved: 1.) N/A 2.)	
T & M (markups per contract)	- 6
Estimated Manhours: Estimated Total Cost (Including ma	aterial):
Estimated Manhours: Estimated Total Cost (Including ma	aterial):
X Fixed Price: \$ \$3,810.78	
Cother:	
Estimated Schedule Delay (in Days): 0	
Other Impacts and Indirect Costs attributable to this Request:	
	<b>-</b> / <b>-</b> /000 /
Submitted by: Bryan Gawlik Date:	5/7/2024
Company: E-Con Electric, Inc.	
ATTACHMENTS: No X Yes (list below)	
1) RFP-001 Bid Summary Cost	
Contractor (is) (is not) to proceed with the work noted above. The change to the contract	will be determined as follows:
Request Acknowledged by: Construction Manager: Date:	
Owner: Date:	

### LANG MASONRY

149850 blackberry ct. wausau wis.54401

## Estimate

Date	Estimate #
4/30/2024	682

### Name / Address

P.O. BOX 366 STEVENS POINT, WIS. 54481

			Project
Description	Qty	Cost	Total
kronewetter well #2 change order for overhead door and walk door. cut opening, dispose of blok and block in for new walkdoor , and block in at 20'x 14' overhead door 4" block to 6" splitface at opening with this change order there will be a credit on blocking 20'x14" opening of \$7000.00 off original contract PETER N. LANG LANG MASONRY 4/29/24		4,900.00	4,900.00
Total CO amount=\$2100 deduct			\$4,900.00
		Total	



AN ASRC INDUSTRIAL SERVICES COMPANY



### CHANGE ORDER REQUEST FOR: Ellis Construction 3201 Stanley Street

3201 Stanley Street
Stevens Point, WI 54481

DR:	MAVO JOB#	DATE
	23CW423	4/25/2024
	SUBCONTRACT #	DATE
	SC-23061-011	9/20/2023




Mavo Concrete Sawing will provide the Labor and Equipment Necessary to perform the work Specifically described below Subject to the conditions on the following pages:

CONTACT NAME	TERMS	PROJECT		CUSTON	IER PHONE
	DAYS	Village of Kronenwetter, W			
Zach Gilmaster	NET 30	Well No.2 Water Treatment Fa		715-345-5000	
	DESC	RIPTION	QTY	COST	TOTAL
Wall sawing as laid out a		2 <b>Door D04</b> for (1) 3'4" x 7'4" x 8" thick solid	1	\$1,750.00	\$1,750.00
		of saw cut materials off site.		¢.,	¢ : ,: 00100
Mobilization charge per N	lob, includi	ng travel and administration	1	\$500.00	\$500.00
				TOTAL	\$2,250.00

### ACCEPTANCE SIGNATURE

Corporate Office: 4330 Centerville Road White Bear Lake, MN 55127	New Brighton Office: 80 Second Avenue SE New Brighton, MN 55112	Superior Office: 911 Ogden Avenue Superior, WI 54880	Edgar Office: 122839 Leroy Street Edgar, WI 54426	Wausau Office: (Abatement) 4455 Stewart Avenue Wausau, WI 54401
763.788.7713	651.289.8465	715.392.2463	715.352.2552	715.849.9754
www.mavo.com	An Equal Opportunity Emplo	yer		



# Precision Grading and Utilities, Inc.

PO Box 79 Port Edwards, WI 54469-0079 Phone 715-887-2172 FAX 715-887-2062

April 30, 2024

Ellis Construction Co. Zach Gilmaster P.O. Box 366 Stevens Point, WI 54481-0366

Re: Kronenwetter Well No.2 RFP 02 – Overhead Door Kronenwetter, WI

The following modification to include:

1. Supply labor to prep for 110 SF service door slab

NOTES: Does not include paving.

Labor and materials to complete the previous items:

### **TOTAL MODIFICATION AMOUNT: ADD \$660.00**

If you have any questions, please feel free to call.

Respectfully, PRECISION GRADING & UTILITIES, INC.

5

Mark . Schroeder President

### R.H. FISCHER OVERHEAD DOOR, LLC

### 7114 MORAINE VALLEY LN STEVENS POINT, WI 54482 (715) 445-4233

Date	Estimate #
5/7/2024	255

**Estimate** 

### Estimate For:

Ellis Construction Company 3201 Stanley St. Stevens Point, WI 54481

	Phone		Project		
			Kron	enwetter Well	
Part Description	Qty	F	Rate	Total	
20'x13'4"" CHI Model 6242 Gray Rolling Steel, powder coat all components, powder coat color TBD, hot dipped galv guides, painted steel hood, mount to concrete, weatherseal package. LiftMaster standard gear head 1HP GH101L5 RS 115/230V 1PH opener. Prices include installation and all necessary installation materials. Any and all electrical work by others Quote only valid for 30 days or until manufacture has price increase.	1		24,605.00	24,605.0	00

Signature

Accepted: The above prices, specification, and conditions are satisfactory and are herey accepted. You are authorized to do the work as specified. Payment outlined above, estimate good for 30 days from above date. Permits not included. ANY AND ALL ELECTRICAL WORK BY OTHERS.

Total

# Steel Structures, Inc.

8105 Enterprise Drive Wausau, WI 54401 Ph: 715-849-8170 • Fax: 715-849-8321

MAY 7, 2024

ELLIS STONE CONSTRUCTION CO. 3201 STANLEY STREET STEVENS POINT, WI 54481 ATTN: ZACH GILMASTER

RE: VILLAGE OF KRONENWETTER WELL HOUSE 2 RFP 02 – GARAGE DOOR

WE ARE PLEASED TO QUOTE ON THE ABOVE PROJECT.

WE PROPOSE TO FURNISH (2) BENT PLATE DOOR JAMBS 14'-0 LONG WITH (7) COUNTERSUNK HOLES IN EACH. ALSO INCLUDED ARE (14)  ${}^{3}8^{9}x2^{3}4$  STAINLESS STEEL FLATHEAD SLEEVE ANCHORS. THE (2) BENT PLATE DOOR JAMBS WILL BE HOT DIPPED GALVANIZED.

ADD: \$2400.00 F.O.B. JOBSITE EXCLUDING TAX.

DEDUCT: \$1160.00 EXCLUDING TAX FOR PRIME PAINTED JAMBS IN LIEU OF GALVANIZED.

WE FURTHER QUALIFY OUR BID AS FOLLOWS:

- PREVIOUS QUALIFICATIONS STILL APPLY, UNLESS ADDRESSED BY THIS PRICE CHANGE.
- EXCLUDE LINTEL AT TOP OF OVERHEAD COILED GARAGE DOOR. THE EXISTING LINTEL HAS BEEN APPROVED.
- EXCLUDE THRU-BOLTS FOR JAMB PLATES. QUOTING (7)  ${}^{3}8^{0}$  STAINLESS STEEL FLATHEAD SLEEVE ANCHORS IN EACH JAMB.
- EXCLUDE STRAP ANCHORS ON BENT PLATE JAMBS.
- EXCLUDE BRICK SUPPORT ANGLE AND ANCHORS AT NEW WALK DOOR. ASSUMED '1A1' THAT WAS PREVIOUSLY FURNISHED CAN BE CUT DOWN AND USED.
- QUOTING JAMB PLATES WITH 4" BENT LEG ON THE INSIDE OF THE BUILDING ONLY. JAMB PLATES WILL BE 14'-0 LONG.
- CANNOT GUARANTEE AGAINST JAMB PLATES WARPING OR TWISTING DURING GALVANIZING.
- PRICES ARE FOR FURNISH ONLY.
- TERMS NET 30 DAYS, NO RETAINAGE.

SHOP DRAWINGS WILL BE PROVIDED FOR YOUR APPROVAL PRIOR TO FABRICATION.

SHOULD YOU DESIRE TO PURCHASE SUCH MATERIAL, SIGN AND RETURN THIS PROPOSAL INDICATING ACCEPTANCE OF TERMS AND CONDITIONS.

BUYER:

SIGNATURE:\_\_\_\_\_

DATE:\_\_

RESPECTFULLY SUBMITTED,

Jun Krasselt

TROX RASSELT GENERAL MANAGER



www.tricityglass-door.com

May 8, 2024

### Change Order #001

**NOTE:** This change order becomes part of and in conformance with the existing contract.

Customer:	Ellis Construction	Job Name:	Kronenwetter Well
Contact:	Zach Gilmaster	Job Location:	Kronenwetter WI
Address:		Job #:	0223110 SP
		PO #:	

### WE PROPOSE THE FOLLOW FOR CHANGES PER RFP#02:

Add door opening D04: Supply 1 each 3070 flush FRP (fiberglass) door and FRP frame Supply 1 ea Vonduprin 98L x 996L x 630 rim exit device Supply 1 ea Schlage 20-057 x 626 FSIC rim cylinder Supply 1 ea LCN 4111HEDA x RH x 689 hold-open door closer

Customer to re-use hinges, kickplate, weatherstrip, door sweep, and door threshold from deleted paired opening D03 at new opening D04

### PLEASE ADD: \$5,137.00 TAX EXEMPT

**Authorized Signature:** 

Steve Pelishek

Date: 5/8/24

. 5/6/24

(PROJECT MANAGER)

**ACCEPTED** ~ The above prices and specifications of this Change Order are satisfactory and are hereby accepted. All work to be performed under the same terms and conditions as specified in the original contract unless otherwise stipulated.

Signature:		Date:	
	(OWNER)		

The Vonduprin would match what we supplied for the pair originally, but that was mortise panic, and now they want a rim panic. The Corbin or Precision options would be more expensive though as we would have to buy those 2nd source. I would think you should be ok, as VonDuprin is typically considered top of the line brand for exit devices anyway.

> 2801 N. Roemer Rd. • Appleton, WI 54911 • 920.734.9164 • f 920.734.1096 1811 E. Mason St. • Green Bay, WI 54302 • 920.468.7820 • f 920.468.5337