

# Lay Pave Professionals


Estimate No: 51  
Date: 10/31/2024  
For: City Of Loganville  
tjones@loganville-ga.gov  
Loganville GA

## Estimate

1942 Alcovy Station Rd Covington, GA, 30014-0734  
6784978617

Description	Quantity	Rate	Amount
cs Floyd and Logan dr level out asphalt to new drain and mill down to seem into existing asphalt	1	\$11,000.00	\$11,000.00
	Subtotal		\$11,000.00
	Total		\$11,000.00

**Total \$11,000.00**

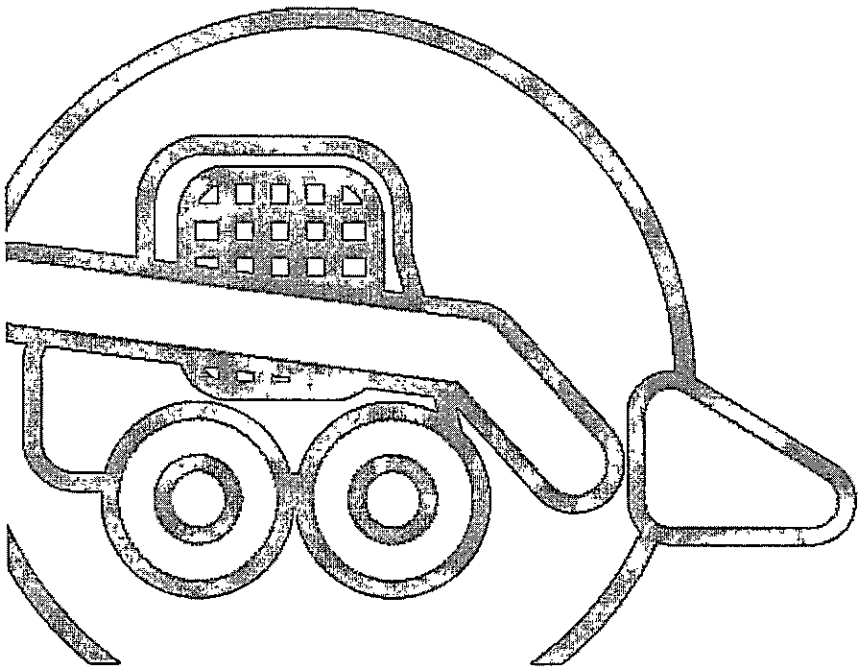

**Estimate**

ADDRESS  
City of Loganville  
4303 Lawrenceville Rd  
Loganville, GA 30052

ESTIMATE 1176  
DATE 10/29/2024  
EXPIRATION DATE 12/31/2024

JOB:  
Repair @ CS Floyd/Logan Dr

PERMIT AUTH:  
n/a

PERMIT NO:  
n/a

ACTIVITY	DESCRIPTION	QTY	RATE	AMOUNT
Demo Concrete (City of Loganville) - labor & equipment	Demo Concrete (City of Loganville) - labor & equipment. Saw Cut & Demo existing sidewalk, asphalt (as required), catch basin throat, and curb (as required). NOTE: ASSUMES CITY WILL PROVIDE EQUIPMENT/LABOR FOR DEMO WORK AND DISPOSAL OF CONCRETE DEBRIS. SCFCO WILL PROVIDE LABOR & MISC EQUIPMENT TO ASSIST/WORK WITH CITY.	1	950.00	950.00
Storm Water Catch Basin Repair	Storm Water Catch Basin Repair - labor, equipment & materials. THROAT: form, place & finish concrete for new throat. (NOTE - assumes that concrete/rebar will be able to structurally span across the open area of existing basin. If not, then may require angle iron and/or corrugated metal pan at an additional cost)	1	2,750.00	2,750.00
Hand Curb - Rolled 4-6"	Hand Curb - Header 4-6" - labor, equipment & materials. Approx 25 LF	50	32.00	1,600.00
Storm Water Catch Basin Repair	Storm Water Catch Basin Repair - labor, equipment & materials. TOP/SIDEWALK (ASSUMES 25 LF OF 5' WIDE SIDEWALK): form, place & finish concrete for new top/sidewalk. (NOTE - assumes that concrete/rebar will be able to structurally span across the open area of existing basin. If not, then may require angle iron and/or corrugated metal pan at an additional cost). NOTE: CITY TO PROVIDE IRON RING/TOP TO PROVIDE ACCESS TO PIPE JUNCTION BELOW NEW TOP/SIDEWALK.	1	4,600.00	4,600.00
Rebar #4	Rebar #4	36	14.00	504.00
Plywood - 3/4" CDX	Plywood - 3/4" CDX	3	75.00	225.00

THANK YOU FOR THE OPPORTUNITY TO EARN YOUR BUSINESS.

TOTAL

**\$10,629.00**

Accepted By

Accepted Date

SCFCo will not be liable for damage to work area and/or the finished product due to vandalism, sprinklers, animals, falling leaves/berries or foot/vehicle traffic. Additional work required due to undisclosed/unforeseen soil/sub-grade problems may require additional cost. SCFCo offers NO warranty, expressed or otherwise, that concrete will not crack.