

ALL SPRING MOUNTING PADS MUST BE FLUSH WITH JAMBS. FIELD CHECK AND VERIFY ALL DETAILS AND DIMENSIONS. JAMBS, HEADER, JAMB EXTENSIONS AND PADS (AS SHOWN) BY OTHER THAN DOOR CONTRACTOR THIS DRAWING IS CONSIDERED AS CONCLUSIVE AND FACTUAL AS POSSIBLE AT THE TIME IT WAS PRINTED. WE DO HOWEVER, RESERVE THE RIGHT TO MAKE PRODUCT CHANGES IN SPECIFICATIONS AND AVAILABILITY WITHOUT NOTICE.

DRAWING(S) MUST BE APPROVED AND RETURNED TO DOOR DISTRIBUTOR AND FORWARDED TO RAYNOR GARAGE DOORS BEFORE ORDER WILL BE ENTERED INTO PRODUCTION.
 SHOP DRAWING FAX NUMBER 800/323-7896.

| RAYNOR ORDER NUMBER | OPENING | | ACTUAL | | MODEL | JAMB | | MOUNTING | LOCK |
|---------------------|----------|----------|-----------|------------|-------|------|---|----------|-------|
| | QTY | WIDTH | HEIGHT | WIDTH | | W | S | | |
| 1 | 16' 0" | 14' 0" | 16'2" | 14' 0 3/4" | AV200 | X | | | X OML |
| | 4876.8MM | 4267.2MM | 4927.6 MM | 4286.25MM | | | | | |


JOB NAME: THE GRAND HOTEL
 DISTRIBUTOR: GARAGE DOOR SERVICES, INC
 CONTRACTOR:

ARCHITECT:
 CHECKED BY: WIKI GIPSON
 DATE: 6/21/2023

DOOR TAG

SHEET 1 OF 2
 DRAWING NUMBER 2285622 B

RAYNOR
 PROPOSAL
 DRAWING



1) Doors shall be commercial sectional AlumView series as manufactured by Raynor Garage Doors.

2) Sections - shall be 2 inches (51mm) thick, 8063-T8 aluminum stiles and rails joined together with screws. Aluminum panels .050 inch (1.3mm) thick or glazing (when specified) filling spaces between stiles and rails. Intermediate rails height to be 5 13/16 inches (87mm), end stiles minimum 5 3/8 inches (86mm) wide, center stiles 5 5/8 inches (82mm) wide, top rail height minimum 5 1/4 inches (83mm) and bottom rail height 5 1/4 inches (133mm). Aluminum frame and filler panels to have a clear anodize finish (unless noted). Bottom of door to have a flexible U-shape vinyl seal retained in an aluminum rail

3) Locking - Omitted.

4) Tracks - shall be 2 inches (50.8mm), hot-dipped galvanized steel per ASTM A653, fully adjustable for adequate seating of door to jamb. Horizontal track to be reinforced with a continuous painted steel angle.

Between-Jamb Bracket Mounting - sections mounted between door jambs, seal against exterior perimeter seal installed along vertical and top horizontal edges of jambs. Brackets to be galvanized steel.

Hardware - hinges and brackets shall be galvanized steel.

Counterbalance - to be torsion springs consisting of heavy-duty oil-tempered wire on a continuous ball-bearing cross-header shaft. Provided with aircraft-type, galvanized steel lifting cables with minimum factor of 5.

5) Pusher spring bumpers required.

6) Spring Shaft type - to be Solid O-keyed-Short.

ALL SPRING MOUNTING PADS MUST BE FLUSH WITH JAMBS. FIELD CHECK AND VERIFY ALL DETAILS AND DIMENSIONS. JAMBS, HEADER, JAMB EXTENSIONS AND PADS (AS SHOWN) BY OTHER THAN DOOR CONTRACTOR. THIS DRAWING WAS AS COMPLETE AND FACTUAL AS POSSIBLE AT THE TIME IT WAS PRINTED. WE DO HOWEVER, RESERVE THE RIGHT TO MAKE PRODUCT CHANGES IN SPECIFICATIONS AND AVAILABILITY WITHOUT NOTICE.


DRAWING(S) MUST BE APPROVED AND RETURNED TO DOOR DISTRIBUTOR AND FORWARDED TO RAYNOR GARAGE DOORS BEFORE ORDER WILL BE ENTERED INTO PRODUCTION.
SHOP DRAWING FAX NUMBER 800/323-7896.

| RAYNOR ORDER NUMBER | QTY | OPENING | | ACTUAL | | MODEL | JAMB MOUNTING | | LOCK |
|---------------------|-----|----------|----------|-----------|------------|-------|---------------|----------------|------|
| | | WIDTH | HEIGHT | WIDTH | HEIGHT | | W | S M ANGLE BRKT | |
| 1 | 1 | 16' 0" | 14' 0" | 16' 2" | 14' 0 3/4" | AV200 | X | | OML |
| | | 4876.8MM | 4267.2MM | 4927.6 MM | 4286.25MM | | | | |


JOB NAME: THE GRAND HOTEL
DISTRIBUTOR: GARAGE DOOR SERVICES, INC
CONTRACTOR:
ARCHITECT:
CHECKED BY:
DATE: 6/21/2023

SHEET 2 OF 2
DRAWING NUMBER 2285622 B

PROPOSAL
DRAWING

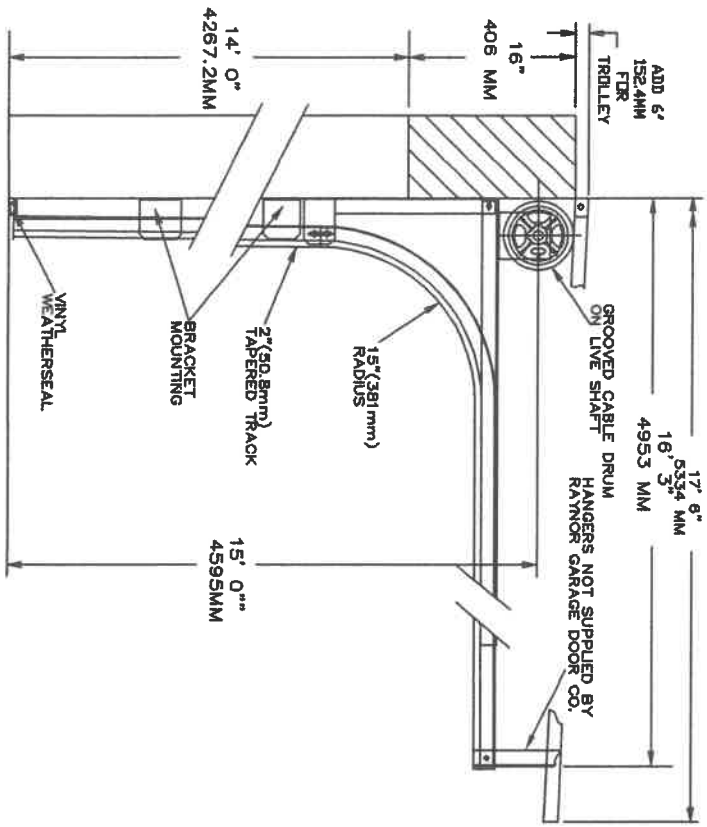

SECTION THRU OPENING

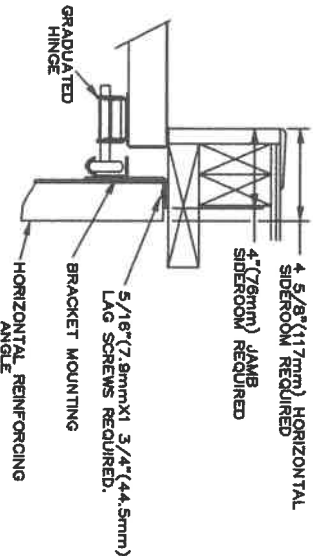

JAMB DETAIL

- 1) If Operator is mounted less than 8' 0" above finished floor, UL requires a guard or cover. Contact factory "CSJ" - 221
- 2) Controlhoist - Standard model "CSJ" - 221
jack-shaft Trolley type electric operator, solid state logic, with (1) three button control station. Transmission to be belt-drive with roller chain/sprocket reduction.
H.P.: 1/2 Voltage: 230 Phase: SINGLE
- 3) Warning, Raynor Garage Doors does not recommend or warrant the use of a jack-shaft operator on doors with 30 inches or less of headroom.
- 4) Optional electro-magnetic brake required.
- 5) Reversing Device - Monitored Photo-Electric Eyes, thru beam type with a range of 45 feet (NEMA 4) required.
- 6) Operator Modification - Operator to be dust-tight (NEMA 12)
- 7) Max Receiver Security + 2.0 with solid state controls
- 8) Max 3 Btn Security + 2.0 transmitter with solid state controls.

FAB NOTES:
ALL SECTIONS TO HAVE EXPANDED ALUMINUM METAL



From **Garage Door Services, Inc**
2550 Preston Drive
Traverse City MI 49684
(231) 947-5151
<http://garagedoorservicesinc.com>

Quote No. **2013459**

 Type Installation
Prepared By Kyle H
Created On 02/02/2023
Valid Until 03/03/2023

Quote For **Grand Hotel**

Back Receiving Area
286 GRAND AVE.
MACKINAC ISLAND MI
49757

Description of Work

Furnish and install Raynor Aspen AV200 Series garage doors.

Door Features: 2" Thick, Aluminum Door with solid panel on Top and Bottom with Expanded Metal Intermediate Sections

Door Style:

Size: 16'2" x 14'

Color: CLEAR ANODIZED

Design/Stamping/Model: ALL SECTIONS WITH EXPANDED METAL AND STRUTS

Windows: NONE

Radius: 15"

Weather Guard: WHITE

Furnish and install Raynor ControlHoist Standard operator.

Features: Continuous Duty, Overload Protected, LCD Screen for Easy Programming, Timer-to-Close Option, Open/Close/Stop Control Station, Exterior Radio Control Terminal, Photo Safety Eyes

Options:

Weatherproofing: NEMA12 DUST TIGHT

Motor: 1/2 hp 230 VOLT

Set up: SLAVE TROLLY, OPERATOR MOUNTED ON RIGHT

Services to be completed

Parts, labor, and fees

Remove & Dispose of Commercial Door and Operator

Quantity

1

Raynor Aspen 200 Series Door

1

| Parts, labor, and fees | Quantity |
|--|-----------------|
| Residential Door back hang kit with Punch and Hardware | 2 |
| Labor | 1 |
| Raynor Control Hoist Standard Commercial Operator | 1 |
| Labor to install Operator with Slave Trolley | 1 |
| Scissor Lift | 1 |
| Zone Charge | 1 |
| All Electrical and Framing Done by Others | 1 |
| CUSTOMER IS RESPONSABLE FOR HOUSING for 2 nights for 4 guys | 1 |
| **CUSTOMER IS RESPONSABLE FOR SAFE TRANSPORT OF 2021 DODGE RAM 3500 WITH ENCLOSED TRAILER WITH SCISSOR LIFT (TRUCK 25' TRAILER 19') AND PULLING PERMITS SO WE CAN DRIVE WORK TRUCK AND TRAILER TO JOB SITE | 1 |
| Note: This item(s) has been custom ordered for you. As such, there are no returns/exchanges/refunds available once this quote is signed. | 1 |
| Please submit Deposit of \$15,000.00. Remaining Balance will be due when job is complete | 1 |

Terms and Conditions

Quotes are based on completing the work in one trip, unless otherwise noted. Additional charges may be assessed if we are unable to complete work due to condition/cleanliness of garage or service access road.

The following work is to be done by others: jambs, spring pads, and all wiring to motors and control stations, unless stated above.

These items are being custom ordered for you. As such, there are no returns/exchanges/refunds available once this quote is signed.

If furnish only: Purchaser agrees that doors cannot be ordered and shall remain in Seller's possession until paid in full.

In the event Purchaser breaches or defaults under the terms of this Agreement, the Purchaser shall be responsible for the costs of collection, including attorney fees.

Payments are due as follows: A 50% non-refundable deposit is required with signed proposal. Balance due on installation.

There shall be 3.5% service charge per month for all payments due and owing after 30 days.

By my signature below, I authorize work to begin and agree to pay the Grand Total according to the terms and conditions of this agreement.

Name: _____ Date: _____

Signature: _____