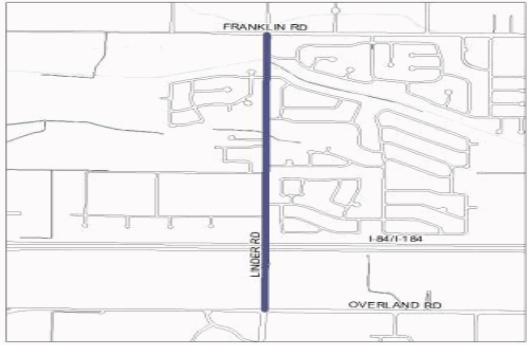


PRELIMINARY SCOPING SUMMARY

Project Name	Linder Rd, Overland Rd / Franklin Rd					Project ID	200399		
Program	Capital Investment Program		Sub-Program	Roads		GIS #	RC0207		
Scope Statement (Include overall project description, lane widths, bike/ped treatments/widths, drainage assumption, etc.)									
5-lanes (12.5' outside lanes, 11' inside lanes, and 10' path on both sides with 3' buffer). Replace bridge #1200 w/ stiff leg culvert w/ railing and culvert at Kennedy Lateral with a pre-cast box culvert. Narrow to 4-lanes at bridge. No access I-84 to Overland. Install PHB at Waltman and PHB with pedestrian island at Ten Mile Creek. Signalize Linder and Overland intersection. Replace culvert at Kennedy Lateral with pre-cast box culvert. At Franklin, install a NB RTL and SB through lane.									
Preliminary Scoping Team Recommendations						Cost Estimate			
Scoping Recommendation	Go		Defer Year			Concept	\$0		
Decision Details for No Go Recommendations						Design(705/704)	\$961,000		
						ROW(701/702/703)	\$2,246,000		
						Construction	\$12,008,000		
Concept Needed	☐	Purpose	N/A			CE	\$601,000		
Traffic Analysis Needed	☐	Purpose	N/A			Traffic Materials	\$155,000		
Geotech Needed	☐	Purpose	N/A			Utilities	\$250,000		
Scoping Complete	☒	Commission Review Year				Total	\$16,221,000		
Potential Sub-Projects	PHBs at Waltman and Ten Mile Creek, Bridge #1200, Overland and Linder Intersection					Funding Type	Standard		
Scoping Notes	ITD will build overpass. ACHD will construct approaches. Assume MSE wall with moment slab for bridge tie ins.								
Project Background									
Project Source	Capital Improvement Plan		Scoped Date	3/12/2019		Project Purpose			
Partner Agency Request Information						Widen Linder Rd to 5 lanes with 10' multiuse path on both sides of the road between Overland and Franklin including the approaches to construct an overpass over I-84. ITD Bridge estimated at \$5,000,000.			
Requestor		Rank		1st Request Yr					
Requested Cost Share Items									
ITD will build overpass.									
Master Street Map									
Street Typologies	Residential Arterial		Preservation Width(s)	96		MSM Planned Lanes	5		
Capital Improvement Plan						CIP Project	☒	CIP Year	2016
Roadway Projects	CIP Planned Lanes	5			Project Length				
Intersection Projects	Leg	N		S	E	W	Roundabouts		
	Planned Lanes						CIP Roundabout ☐		
	Project Extents						RAB Type		
Bike and Pedestrian Plans									
Neighborhood Plans	In a Plan	☒	# of Associated Projects		9		Associated Plan	Dtnw Meridian, North Meridian	
Bike Master Plan	On BMP Network	☒	Facility Level(s)	Level 3, State		Part of RLS Bikeway	☐	Bikeway Name	
ADA Transition Plan	Facilities to be Upgraded	Priority	High		Medium		Low		
		Ramps (#)	0		0		2		
		☒	Sidewalks (lf)	0		0			
Other Location Information									
ADT	7,883	PCI	83	Bus Stops		Impacted Parcel Count	68	SR2S	
ADT Date	5/9/2018	PCI Date	1/17/2020	Bus Routes		Expected Buyouts	3	☐	