


NOTES:

- 1. THIS FAÇADE PLAN IS FOR CONCEPTUAL PURPOSES ONLY. ALL BUILDING PLANS REQUIRE REVIEW AND APPROVAL FROM THE BUILDING INSPECTIONS DIVISION.
- 2. ALL MECHANICAL EQUIPMENT SHALL BE SCREENED FROM PUBLIC VIEW. ROOFTOP MOUNTED EQUIPMENT SHALL BE SCREENED BY A PARAPET WALL OR SCREENING WALL. SCREENING WALLS SHALL BE THE SPECIFICATIONS OF THE ZONING ORDINANCE.
- 3. WHEN PERMITTED, EXPOSED UTILITY BOXES AND CONDUITS SHALL BE PAINTED TO MATCH THE BUILDING.
- 4. ALL SIGNAGE AREAS AND LOCATIONS ARE SUBJECT TO APPROVAL BY THE BUILDING INSPECTIONS DIVISION.
- 5. WINDOWS SHALL HAVE A MAXIMUM EXTERIOR VISIBLE REFLECTIVITY OF TEN (10) PERCENT.
- 6. ANY DEVIATION FROM THE APPROVED FAÇADE PLAN WILL REQUIRE PRE-APPROVAL BY THE TOWN OF PROSPER.

BUILDING 1 - MATERIALS CALCULATION

	ELEVATION			
DESCRIPTION	NORTH	SOUTH	EAST	WEST
TOTAL SURFACE AREA	1458 SF	1213 SF	3324 SF	3324 SF
TOTAL SURFACE AREA MINUS GLAZING	1375 SF	1117 SF	2884 SF	2597 SF
MATERIALS, SQUARE FOOTAGE & PERCENTAGE	BRICK = (1099 SF = 80%) STONE = (161 SF = 11.7%) CERAMIC TILE PLANK = (38 SF = 2.8%) STUCCO = (35 SF = 2.5%) METALS = (42 SF = 3%)	BRICK = (1005 SF = 90%) STONE = (46 SF = 4%) CERAMIC STUCCO = (66 SF = 6%)	BRICK = (2854 SF = 99%) STONE = (0 SF = %) CERAMIC STUCCO = (30 SF = 1%)	BRICK = (1436 SF = 55%) STONE = (770 SF = 30%) CERAMIC TILE PLANK = (333 SF = 13%) STUCCO = (58 SF = 2%)
GLAZING AREA	GLAZING = 83 SF	GLAZING = 96 SF	GLAZING = 440 SF	GLAZING = 727 SF

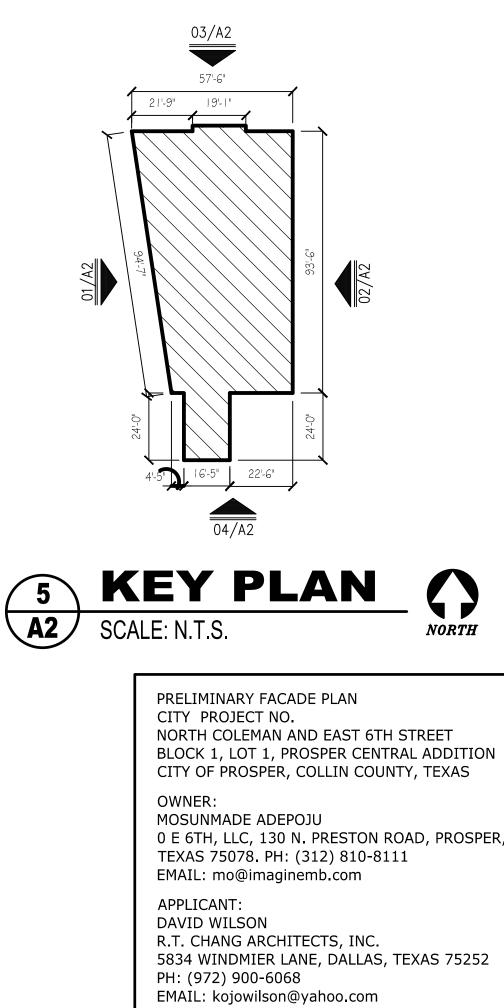

ARCHITECT: R.T. CHANG ARCHITECTS, INC. 5834 WINDMIER LANE, DALLAS, TEXAS 75252 PH: (214) 663-4735 EMAIL: rtcarch@gmail.com

