

A primary element of street maintenance is performance of crack routing and sealing projects, followed by seal coats and overlays as needed to maintain pavement conditions. The following projects are recommended to keep Sidney paved roads in optimal condition.

Table 4: Street Projects

Streets Projects	Project Year	Funding Sources	Priority (1-5)	Project Costs
Annual Mill & Overlay Projects	Annually	City Fuel Tax	1	\$100,000.00 - \$200,000.00
Cold Mix Patching Material (Annual Exp)	Annually	City Fuel Tax	2	\$50,000.00 - \$60,000.00
¾" Crushed Base Coarse Aggregate (Annual Exp)	Annually	City Fuel Tax	2	\$40,000.00
Hot Oil Emulsion (Annual Exp)	Annually	City Fuel Tax	2	\$30,000.00
Winter Street Sand (Annual Exp)	Annually	City Fuel Tax	2	\$10,000.00
Crack Routing, Sealing, or Mastic (Annual Exp)	Annually	City Fuel Tax	3	\$11,000.00

Water

Water projects include the water tower replacement and water lines that have either had a history of breaks, have exceeded their design life, or reflect the addition of a new water line.



Table 5: Water Projects

Water Project	Project Year	Funding Sources	Priority (1-5)	Project Costs
Water Tower Replacement	2025		1	\$7,100,000.00
12 th Ave. SW Water	2027		2	\$2,950,000.00
West Holly/Fairgrounds	2028		3	\$3,900,000.00
7 th Ave SW Replacement	2029		3	\$850,000.00
2 nd & 3 rd Street NE	Future		4	\$1,060,000.00
7 th Street SE	Future		5	\$1,650,000.00
6 th Avenue SE	Future		5	N/A
5 th Avenue SE	Future		5	N/A

Water Tower Replacement - \$7,100,000.00

Replacing the existing 1946, 300k gallon elevated tank with a 750k gallon tank

12th Ave. SW Water - \$2,950,000.00

10" Cast Iron water main replacement 100 block to 500 block on 12th Ave. SW & relocation of Water.

West Holly/Fairgrounds - \$3,900,000.00

Relocate 12" water main from 15th Ave. NW to 22nd Ave NW including USBR crossing.

7th Ave SW Replacement - \$850,00.00

Replacement of 4" and 6" AC mains and 10" CIP From 6th St. SW to 9.5th St. SW

2nd & 3rd Street NE - \$,060,000.00

Cast Iron Pipe (CIP) Replacement of water main on 2nd Street NE from 700 to 800 blocks and 3rd Street NE from 200 to 300 blocks.

7th Street SE

Replace and upsize water mains from Central Avenue to 6th Street SE


6th Ave. SE

Replace and Upsize water main from 7th Street to 14th Street SE

5th Ave. SE

Behind Sidney High School – Replace 3 blocks of 4" AC water main from 8th to 9th Street SE

Figure 2 - Map of Water Projects

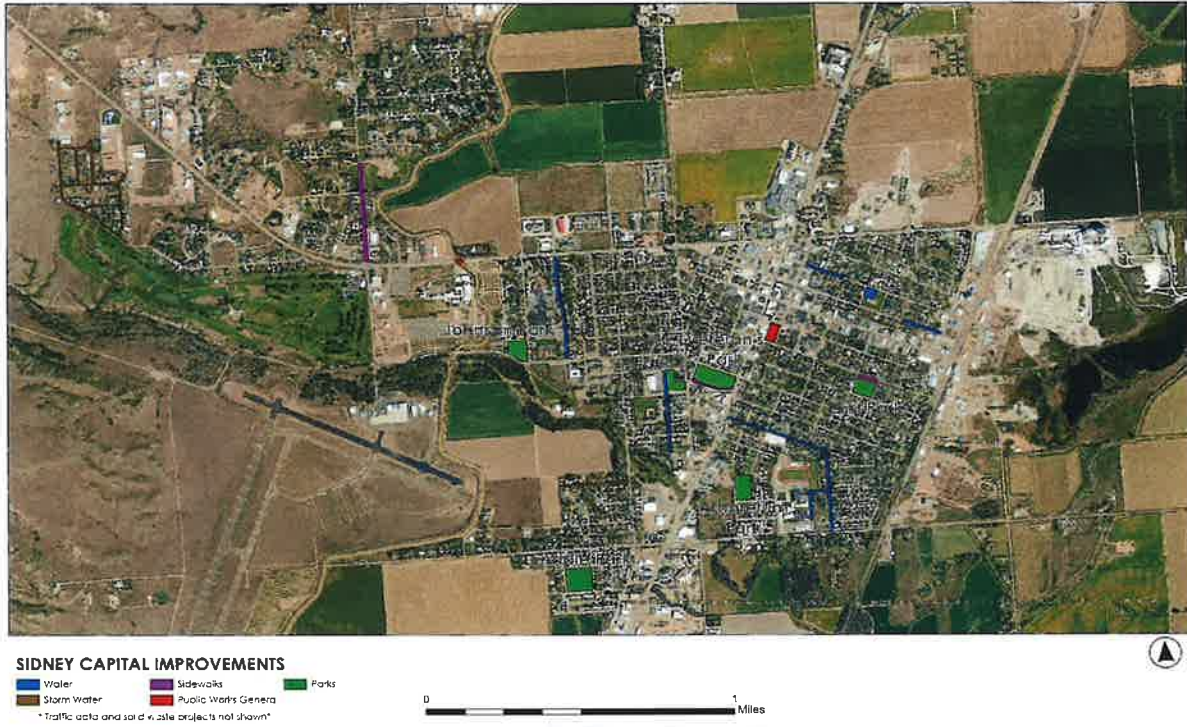

Wastewater

Wastewater projects address wastewater lines that have either had a history of breaks, have exceeded their design life, or reflect the addition of a new wastewater line. They also include wastewater treatment facility projects as required.

