
City of

## STAR, IDAHO

# FLOATING FEATHER TO STAR MIDDLE SCHOOL PATHWAY



SEPTEMBER 2023

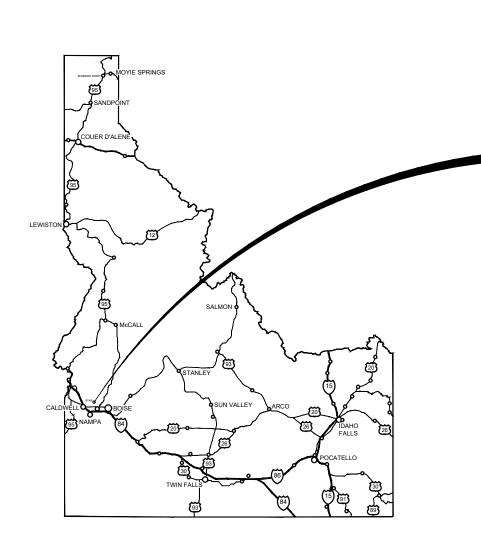


## PROJECT LOCATION

#### **OWNER**

CITY OF STAR 10769 WEST STATE STREET STAR, ID 83669 CONTACT: MAYOR TREVOR CHADWICK PHONE: 208.286.7247 EMAIL: tchadwick@staridaho.org

#### **ENGINEER**

CITY OF STAR 10769 WEST STATE STREET STAR, ID 83669 CONTACT: TIM CLARK, PE PHONE: 208.286.7247 EMAIL: tclark@staridaho.org

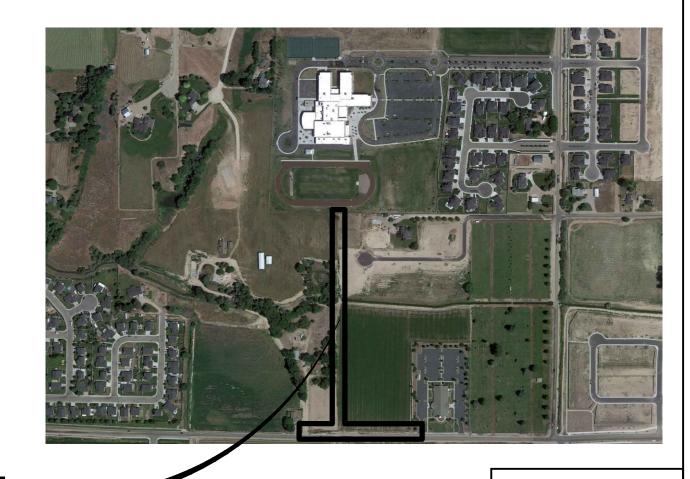


### PROJECT SITE

## FLOATING FEATHER TO STAR MIDDLE SCHOOL PATHWAY


COVER SHEET SHEET 1 OF 6



| SCALE:       | N/A      | REVISED |
|--------------|----------|---------|
| DATE:        | 09/12/23 |         |
| DESIGNED BY: | TRC      |         |

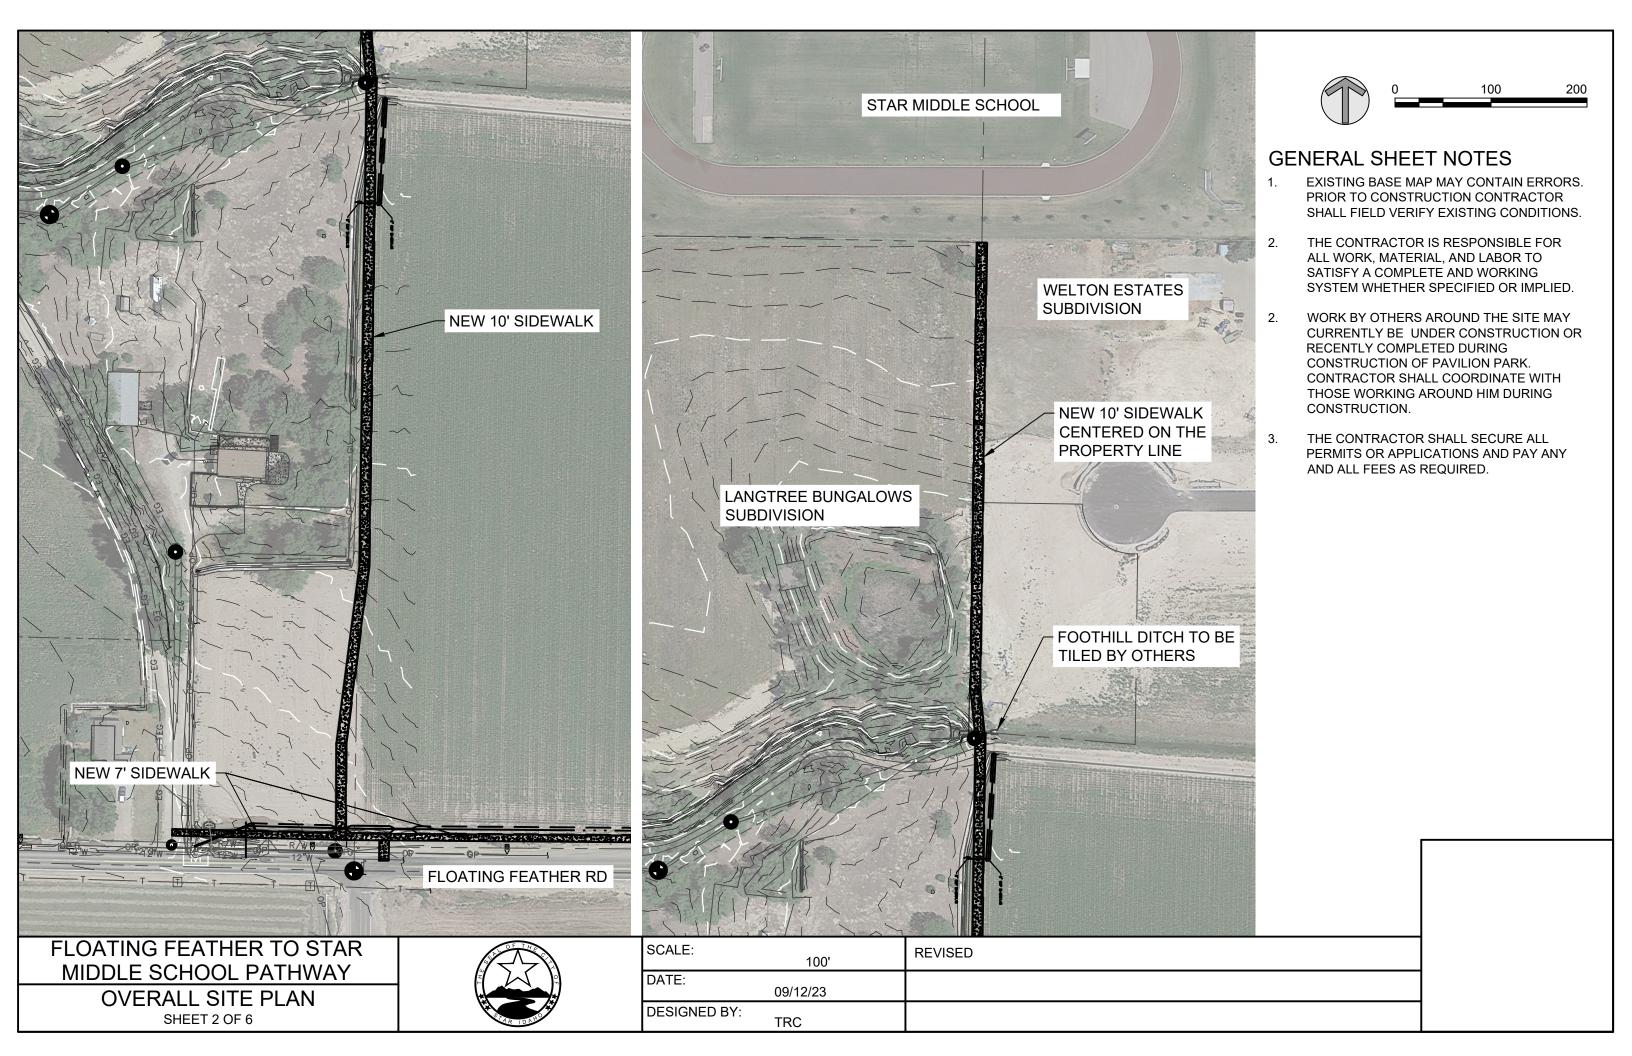



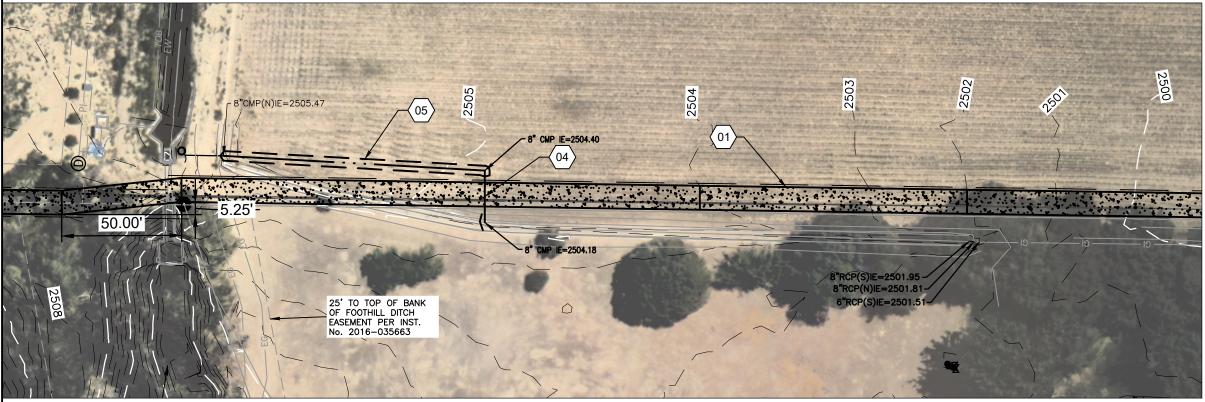

#### GENERAL SHEET NOTES

- EXISTING BASE MAP MAY CONTAIN ERRORS. PRIOR TO CONSTRUCTION CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.
- 2. THE CONTRACTOR IS RESPONSIBLE FOR ALL WORK, MATERIAL, AND LABOR TO SATISFY A COMPLETE AND WORKING SYSTEM WHETHER SPECIFIED OR IMPLIED.
- 3. WORK BY OTHERS AROUND THE SITE MAY CURRENTLY BE UNDER CONSTRUCTION OR RECENTLY COMPLETED.
- 4. THE CONTRACTOR SHALL SECURE ALL PERMITS OR APPLICATIONS AND PAY ANY AND ALL FEES AS REQUIRED.
- 5. CABLE RUNS ARE DIAGRAMMATICALLY SHOWN ON THE DRAWING. FINAL ROUTING SHALL BE DETERMINED BY THE ELECTRICAL CONTRACTOR AND APPROVED BY THE OWNER.

#### SHEET KEYNOTES

- 11 CONSTRUCT 10' CONCRETE SIDEWALK PER DETAIL 2, SHEET 6
- 2 CONSTRUCT 7' CONCRETE SIDEWALK AND DITCH PER DETAIL 1, SHEET 6
- O3 CONCRETE PEDESTRIAN RAMP, RE: ISPWC SD-712E
- 04 INSTALL APPROX 22' OF 8" CMP AT 1% SLOPE
- OS CONSTRUCT A NEW IRRIGATION DITCH, MATCH EXISTING DITCH CONSTRUCTION





FLOATING FEATHER TO STAR MIDDLE SCHOOL PATHWAY SIDEWALK PLAN

SHEET 3 OF 6



| SCALE:       | 1" = 40' | REVISED |
|--------------|----------|---------|
| DATE:        | 09/12/23 |         |
| DESIGNED BY: | TRC      |         |

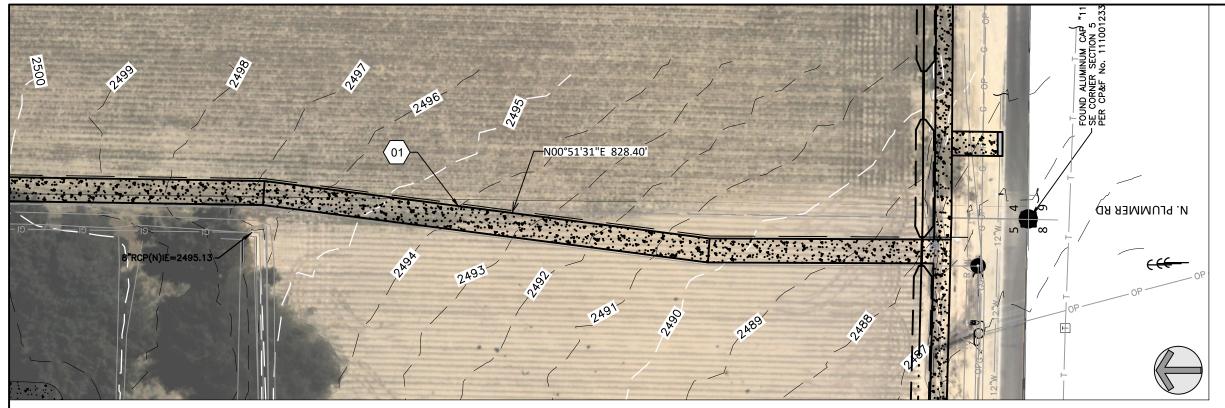

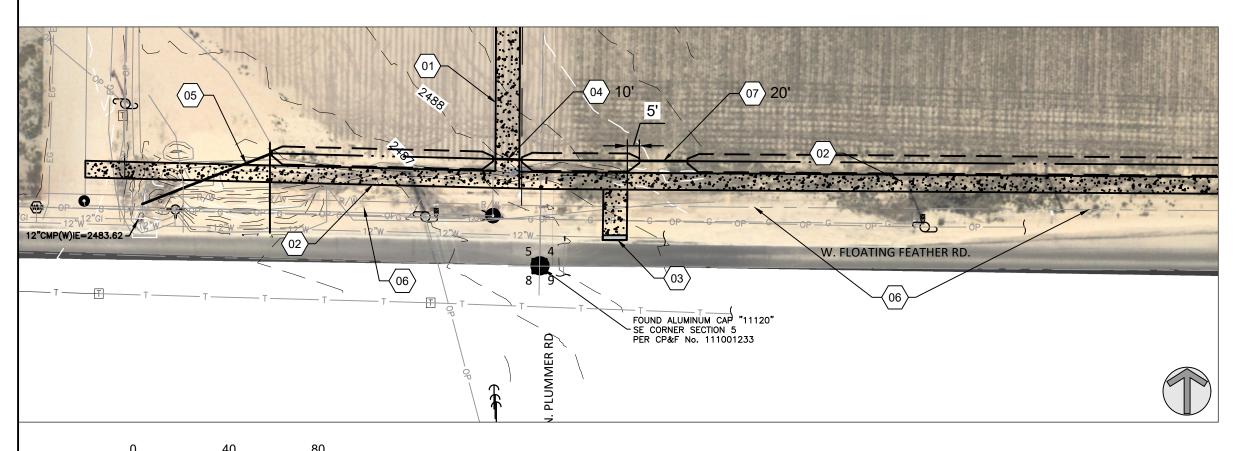

#### GENERAL SHEET NOTES

- EXISTING BASE MAP MAY CONTAIN ERRORS.
   PRIOR TO CONSTRUCTION CONTRACTOR
   SHALL FIELD VERIFY EXISTING CONDITIONS.
- 2. THE CONTRACTOR IS RESPONSIBLE FOR ALL WORK, MATERIAL, AND LABOR TO SATISFY A COMPLETE AND WORKING SYSTEM WHETHER SPECIFIED OR IMPLIED.
- 3. WORK BY OTHERS AROUND THE SITE MAY CURRENTLY BE UNDER CONSTRUCTION OR RECENTLY COMPLETED.
- 4. THE CONTRACTOR SHALL SECURE ALL PERMITS OR APPLICATIONS AND PAY ANY AND ALL FEES AS REQUIRED.
- 5. CABLE RUNS ARE DIAGRAMMATICALLY SHOWN ON THE DRAWING. FINAL ROUTING SHALL BE DETERMINED BY THE ELECTRICAL CONTRACTOR AND APPROVED BY THE OWNER.

#### SHEET KEYNOTES

- 01 CONSTRUCT 10' WIDE CONCRETE SIDEWALK PER DETAIL 2, SHEET 6.
- 2 CONSTRUCT 7' WIDE CONCRETE SIDEWALK AND DITCH PER DETAIL 1, SHEET 6.
- 03 DETECTABLE WARNING FOR PEDESTRIAN ACCESS PER ISPWC SD-712
- 04 INSTALL 12" PVC SDR 35 CULVERT UNDER THE SIDEWALK. THE CULVERT SHALL EXTEND 1' BEYOND EACH SIDE OF THE SIDEWALK.
- 05 INSTALL 12" PVC SDR 35 CULVERT UNDER THE EXISTING DRIVEWAY. COORDINATE WORK WITH PROPERTY OWNER/RESIDENT TO MAINTAIN ACCESS.
- 06 EXISTING BERM TO BE REMOVED AND DISPOSED OF
- 07 INSTALL 12" CULVERT

FLOATING FEATHER TO STAR MIDDLE SCHOOL PATHWAY SIDEWALK PLAN

SHEET 4 OF 6



| SCALE:       | 1" = 40' | REVISED |
|--------------|----------|---------|
| DATE:        | 09/12/23 |         |
| DESIGNED BY: | TPC      |         |



#### **GENERAL SHEET NOTES**

- EXISTING BASE MAP MAY CONTAIN ERRORS. PRIOR TO CONSTRUCTION CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS.
- 2. THE CONTRACTOR IS RESPONSIBLE FOR ALL WORK, MATERIAL, AND LABOR TO SATISFY A COMPLETE AND WORKING SYSTEM WHETHER SPECIFIED OR IMPLIED.
- 3. WORK BY OTHERS AROUND THE SITE MAY CURRENTLY BE UNDER CONSTRUCTION OR RECENTLY COMPLETED.
- 4. THE CONTRACTOR SHALL SECURE ALL PERMITS OR APPLICATIONS AND PAY ANY AND ALL FEES AS REQUIRED.
- 5. CABLE RUNS ARE DIAGRAMMATICALLY SHOWN ON THE DRAWING. FINAL ROUTING SHALL BE DETERMINED BY THE ELECTRICAL CONTRACTOR AND APPROVED BY THE OWNER.

#### 

- 01 CONSTRUCT 7' CONCRETE SIDEWALK AND DITCH PER DETAIL 1, SHEET 6
- DISPOSED OF
- 03 REMOVED EXISTING BARRICADE






FLOATING FEATHER TO STAR MIDDLE SCHOOL PATHWAY SIDEWALK PLAN

SHEET 5 OF 6



| SCALE:       | 1" = 40' | REVISED |
|--------------|----------|---------|
| DATE:        | 09/12/23 |         |
| DESIGNED BY: | TRC      |         |

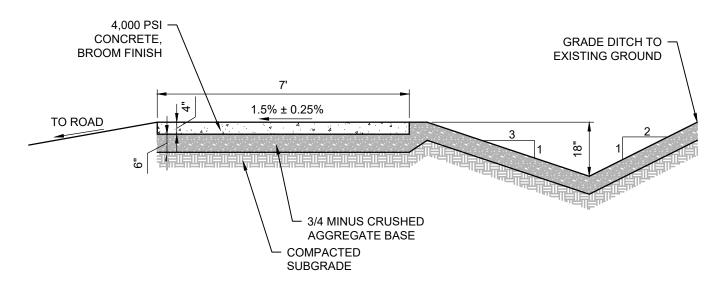


#### NOTES:

- PLACE EXPANSION JOINT MATERIAL ADJACENT TO STRUCTURES AND 60 FEET MAXIMUM SPACING.
- CONTINUOUS PLACEMENT PREFERRED, CONTROL JOINT INTERVALS AT 8 FEET MAXIMUM SPACING.
- . PREPARE SUBGRADE IN ACCORDANCE WITH ISPWC.
- STRAIGHT GRADE THE GROUND SURFACE FROM THE SIDEWALK TO THE ROAD.

#### 7' WIDE CONCRETE SIDEWALK

3/8" = 1'

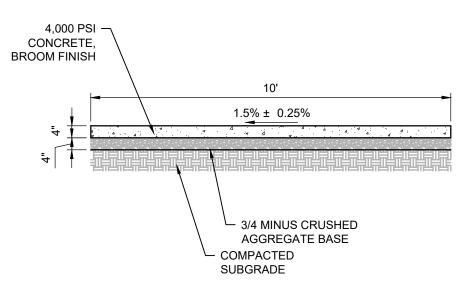

#### NOTES:

- PLACE EXPANSION JOINT MATERIAL ADJACENT TO STRUCTURES AND 60 FEET MAXIMUM SPACING.
- CONTINUOUS PLACEMENT PREFERRED, CONTROL JOINT INTERVALS AT 8 FEET MAXIMUM SPACING.
- 3. PREPARE SUBGRADE IN ACCORDANCE WITH ISPWC.
- STRAIGHT GRADE THE GROUND SURFACE FROM THE SIDEWALK TO THE ROAD.

#### 10' WIDE CONCRETE SIDEWALK

3/8" = 1

## FLOATING FEATHER TO STAR MIDDLE SCHOOL PATHWAY

SCHOOL PATHWAY

DETAILS

SHEET 6 OF 6



| SCALE:       |          | REVISED |
|--------------|----------|---------|
| DATE:        | 09/12/23 |         |
| DESIGNED BY: | TRC      |         |