RESPONSE
ENVIRONMENTAL & SITE SERVICES

P.O. Box 1404, Conyers, Georgia 30012
(P) 770-743-5277
www.responseenviro.com

# Stone Mountain, Georgia 30083
# DeKalb County


## Prepared for:

Nicole Wright
Stormwater Manager
875 Main Street, Stone Mountain, GA 30083
Cell: 678.707.6356
Office: 470.682.4115
nwright@stonemountaincity.org
Website| Facebook| Instagram| LinkedIn

## Estimate

## General Description of Work:
## Catch Basin Repairs (6 Locations)

| Date Estimate | Date Ordered | Date Started | Date Finished | Date Paid |
|---|---|---|---|---|
| 10-13-2026<br>Erin Hall | | | | |

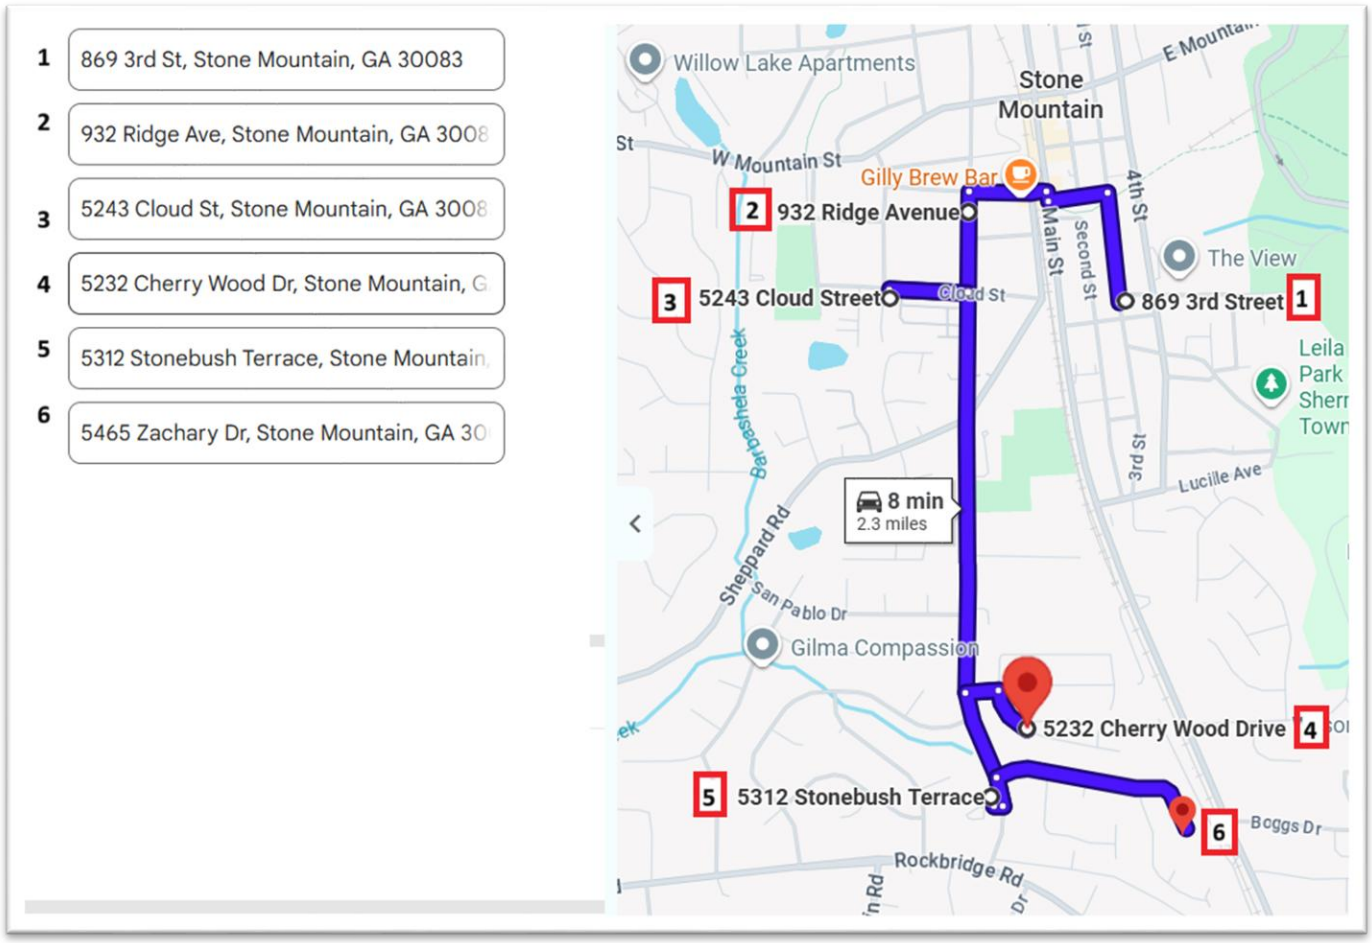


**Situational Analysis:** The City of Stone Mountain has requested a scope of work and cost to repair 6 damaged catch basins. Personnnel from Response Environmental & Site Services completed an inspection of all locations on October 12, 2026.

***Scope of Work and Cost to Complete***

**1) 932 Ridge Avenue (5301 Mimosa)**

- Locate utilities
- Saw cut and demo throat and top
- Form and pour new throat and top
- Install ring and cover

**Unit Pricing:**

| Equipment/Materials | Type | Units | Actual Units | Unit Price | Total | Actual Total |
|---|---|---|---|---|---|---|
| Demo throat and top | LS | 1 | | $ 750.00 | $ 750.00 | $ - |
| Replace throat and top | LS | 1 | | $ 3,950.00 | $ 3,950.00 | $ - |
| Ring and cover | EA | 1 | | $ 350.00 | $ 350.00 | $ - |
| | | | | **Total** | **$ 5,050.00** | |

**2) Corner of Third Street and Mackin Street (896 Third Street)**

- Locate utilities
- Saw cut and demo throat and top
- Form and pour new throat and top
- Repair curb
- Install ring and cover

**Unit Pricing:**

| Equipment/Materials | Type | Units | Actual Units | Unit Price | Total | Actual Total |
|---|---|---|---|---|---|---|
| Demo throat and top | LS | 1 | | $ 750.00 | $ 750.00 | $ - |
| Replace throat and top | LS | 1 | | $ 3,950.00 | $ 3,950.00 | $ - |
| Curb repair | LS | 1 | | $ 250.00 | $ 250.00 | $ - |
| Ring and cover | EA | 1 | | $ 350.00 | $ 350.00 | $ - |
| | | | | **Total** | **$ 5,300.00** | |

**3) Corner of Stonebush Terrace & Ridge Avenue (5312 Stonebush Terrace)**

- Locate utilities
- Saw cut and demo top
- Form and pour new top
- Reuse existing ring and cover

**Unit Pricing:**

| Equipment/Materials | Type | Units | Actual Units | Unit Price | Total | Actual Total |
|---|---|---|---|---|---|---|
| Demo top | LS | 1 | | $ 450.00 | $ 450.00 | $ - |
| Replace top | LS | 1 | | $ 2,000.00 | $ 2,000.00 | $ - |
| | | | | **Total** | **$ 2,450.00** | |

**4) 5465 Zachary Drive**

- Locate utilities
- Saw cut and demo throat and top
- Form and pour new throat and top
- Install ring and cover

**Unit Pricing:**

| Equipment/Materials | Type | Units | Actual Units | Unit Price | Total | Actual Total |
|---|---|---|---|---|---|---|
| Demo throat and top | LS | 1 | | $ 1,000.00 | $ 1,000.00 | $ - |
| Replace throat and top | LS | 1 | | $ 4,100.00 | $ 4,100.00 | $ - |
| Ring and cover | EA | 1 | | $ 350.00 | $ 350.00 | $ - |
| | | | | **Total** | **$ 5,450.00** | |

### 5) 5232 Cherry Wood Dr

- Locate utilities
- Saw cut and demo throat and top
- Form and pour new throat and top
- Reuse existing ring and cover

**Unit Pricing:**

| Equipment/Materials | Type | Units | Actual Units | Unit Price | Total | Actual Total |
|---|---|---|---|---|---|---|
| Demo throat and top | LS | 1 | | $ 750.00 | $ 750.00 | $ - |
| Replace throat and top | LS | 1 | | $ 3,950.00 | $ 3,950.00 | $ - |
| | | | | **Total** | **$ 4,700.00** | |

### 6) Corner of Cloud St & VFW Dr (5243 Cloud Street)

- Locate utilities
- Saw cut and demo top
- Form and pour new top
- Install ring and cover
- Reuse existing ring, install new cover

**Unit Pricing:**

| Equipment/Materials | Type | Units | Actual Units | Unit Price | Total | Actual Total |
|---|---|---|---|---|---|---|
| Demo top | LS | 1 | | $ 450.00 | $ 450.00 | $ - |
| Replace top | LS | 1 | | $ 2,000.00 | $ 2,000.00 | $ - |
| Cover | EA | 1 | | $ 250.00 | $ 250.00 | $ - |
| | | | | **Total** | **$ 2,700.00** | |

**Mobilization: $1,000**
**Traffic Control (flaggers) for 2 days: $1,900 x 2 = $3,800**
**Total for 6 Catch Basins: $30,450**

## Comments:

- Work is expected to take 2 days to complete.
- This quote is good for 30 days.
- Contact Erin Hall with questions, 770-743-5277 (cell) or erinhall@responseenviro.com

# Photograph Log




*Figure 1- 932 Ridge Avenue*




*Figure 2- 869 Third Street*




*Figure 3- 5312 Stonebush Terrace*




*Figure 4- 5465 Zachary Drive*




*Figure 5- 5232 Cherry Wood Dr*




*Figure 6- 5243 Cloud Street*