

ARCHITECT OF RECORD:
RALPH M. COLEMAN
GEORGIA REGISTERED
ARCHITECT
1100 COUNTRY TRAIL
GREENVILLE, SC 29601
PHONE: 864.451.5288
FAX: 864.451.5289

OWNERS REPRESENTATIVE:



COR3 Design, LLC
201 RiverPlace
Suite 401
Greenville, SC 29601
Phone: 864.451.5288
Fax: 864.990.3035
www.cor3design.com

CONSULTANTS:
STRUCTURAL
FABRICATOR
MECHANICAL
ELECTRICAL

PLUMBING
MECHANICAL
ELECTRICAL
TYRONE, GA - TAKE
FIVE CAR WASH
TYRONE, GA



Project No:
110007
CD
11/10/2021
Revised:
11/20/21

Project Number:
110007
CD
11/10/2021
Checked By:
Sheet Number:
A200

DATE
ELEVATIONS

ELEVATION KEYNOTES


1. PRECAST CONC WATERTABLE
2. BRICK VENEER
3. NOT USED
4. STEEL TUBE FRAME AT OVERHEAD DOORS, PAINT TO MATCH SW 7020 BLACK FOX
5. TPO MEMBRANE ROOF SYSTEM, REFER TO ROOF PLAN A04
6. 0.50 X 5.00 X 8.00 PARAPET CORING WITH PRE-FINISHED ALUM METAL COLLAR (W/ 4" X 1" PROF) BRONZE ANODIZED FINISH
7. CENTRAL PRE-FINISHED ALUMINUM CONCEALED FASTER SIDING COMPLETE W/ SW FLASHING AND CLOSURES
8. PREFORMED PRE-FINISHED ALUM. CORING WITH CONT. HOLD DOWN CLIPS ON EXPOSED SIDE OF PARAPET
9. PREFORMED PRE-FINISHED ALUM. GRAVEL STOP WITH BAKED ENAMEL FINISH AND CONT. HOLD DOWN CLIPS ON FRONT SIDE OF PARAPET
10. EXPOSED SPERMAL AT TOWER TO RECEIVE JAMES HARDIE FIBER CEMENT ARTISAN V GROOVE SIDING, 8.25" X 12" PRIMED, PAINT TO MATCH BRICK VENEER, DARK GRAY COLOR SEALANT BETWEEN BRICK AND SIDING
11. MITER CUT PRECAST CONC WATERTABLE TO FIT SLOPE
12. SOWWALL GRAPHIC STRIP FURNISHED BY OWNER INSTALLED BY CONTR.
13. ACM PANEL FINISH ON HODO BACKING SYSTEM, REFER TO SHEET A00 FOR ADDITIONAL DETAILS, FINISH BY MANUF.
14. NOT USED
15. 6" DIA PVC DOWNSPOUT, RELEASE MIN 6" ABOVE GRADE
16. TOWER BEYOND
17. SCENCE LIGHT, REF. FIXTURE SCHEDULE
18. GENERAL NOTES

GENERAL NOTES


- A. CONTRACTOR TO COORDINATE WITH FIRE MARSHAL FOR REQUIREMENTS OF ADDRESS NUMBER.
- B. BUILDING SIGNAGE UNDER SEPARATE PERMIT. CONTRACTOR TO OBTAIN FINAL SIGNAGE DRAWINGS FOR BUILDING SIGNAGE UNDER SEPARATE PERMIT. CONTRACTOR TO COORDINATE WITH FIRE MARSHAL FOR REQUIREMENTS OF ADDRESS NUMBER.
- C. REFER TO I-4 FOR SECURITY PLAN. COORDINATE FINAL LOCATIONS OF CAMERAS WITH THE OWNER PRIOR TO THE COMMENCEMENT OF WORK.
- D. UNLESS NOTED OTHERWISE, MASONRY CONTROL JOINTS SHALL BE LOCATED SUCH THAT NO STRAIGHT RUN OF MASONRY EXCEEDS 24'-0". REFER TO GENERAL STRUCTURAL NOTES ON S100.
- E. REFER TO DOOR AND WINDOW SCHEDULE ON A500 FOR DOOR AND FRAME FINISHES AND WINDOW GLASS TYPE AND FRAME FINISHES.

EXTERIOR FINISH SCHEDULE


NO.	AREA	COLOR
1	TOWER	BY MANUF. MATCH SW 609, SEDATE GRAY
2	METAL PANELS	BY MANUF. 1100 LIMESTONE
3	BRICK VENEER	MATCH SW COLOR #809, SEDATE GRAY
4	BRICK VENEER	MATCH SW COLOR # 7020, BLACK FOX

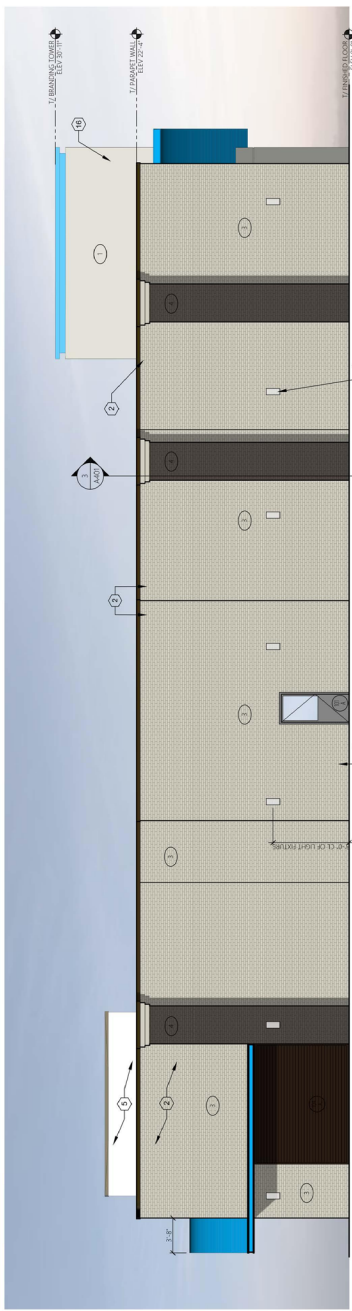

1 ELEVATION

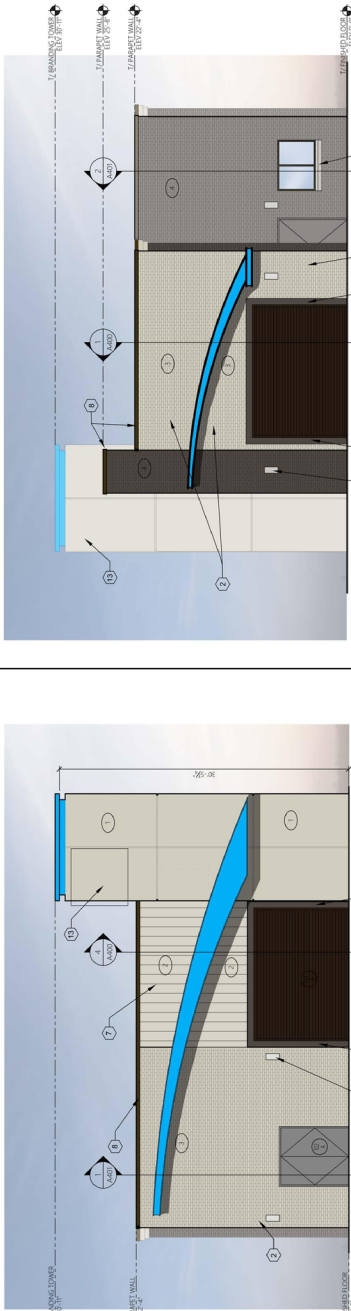

2 ELEVATION

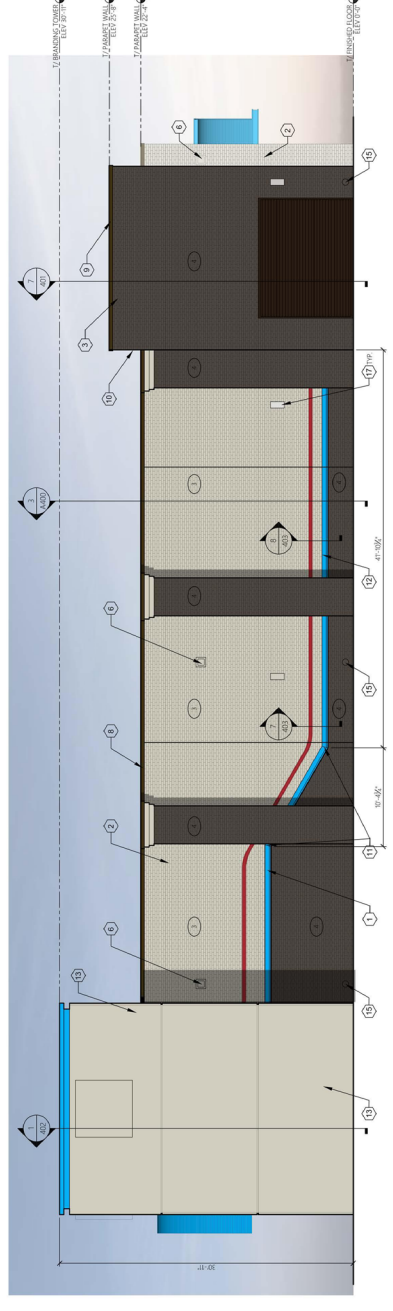

3 ELEVATION