



PROJECTED RAIN COLLECTION

Hays County Average Annual Rainfall	33.75"
8x5 Roof Surface	40.00 sq. ft.
Average Rainfall/month	24.8 gal.
Monthly Average of Collection	69.75 gal.
Average Collection Per Day	2.28 gal.



Rain Water Collection Budget Projection

Item Number	Description	Expected Cost Per Item	Number of Items Needed	Total Expected Cost
1	2x4x8 Southern Pine	\$ 2.79	8.00	\$ 22.32
2	4x4x8 Treated Pine	\$ 10.29	4.00	\$ 41.16
3	Sakrete (50lbs.)	\$ 6.99	5.00	\$ 34.95
4	Joist Hanger	\$ 1.79	9.00	\$ 16.11
5	Amerimax Gutter	\$ 20.99	1.00	\$ 20.99
6	Amerimax Gutter End (29206)	\$ 2.99	2.00	\$ 5.98
7	Amerimax Gutter End (29010)	\$ 11.49	1.00	\$ 11.49
8	Amerimax Down Spout (Front Elbow)	\$ 4.99	1.00	\$ 4.99
9	Amerimax Down Spout (10')	\$ 18.49	1.00	\$ 18.49
10	Amerimax Flex-A-Spout	\$ 8.99	1.00	\$ 8.99
11	Amerimax Gutter Hanger	\$ 17.49	1.00	\$ 17.49
12	Amerimax Wood Screws 1.5	\$ 5.99	2.00	\$ 11.98
13	Hillman Lag Bolt	\$ 0.47	8.00	\$ 3.76
14	Bar-Ox Red Paint	\$ 15.99	1.00	\$ 15.99
15	Play Sand (50lbs.)	\$ 5.99	10.00	\$ 59.90
16	Waterheater Pan	\$ 32.58	1.00	\$ 32.58
17	Dare-O-Matic Trans Float	\$ 32.58	1.00	\$ 32.58
18	8x11x2.5 Corrugated Sheet Metal	\$ 19.99	4.00	\$ 79.96
19	Hardware Cloth	\$ 19.99	1.00	\$ 19.99
20	Water Tank 200 gal (King Feed)	\$ 530.00	1.00	\$ 530.00
21	Gutter Guard 4ft GS-K5 4ft, 5 in	\$ 7.72	2.00	\$ 15.44
22	Roofing Screw #10 117901	\$ 14.99	1.00	\$ 14.99
23	Insect Screen	\$ 24.99	1.00	\$ 24.99

Total Estimated Project Costs

\$ 1,045.12

1 sq Ft

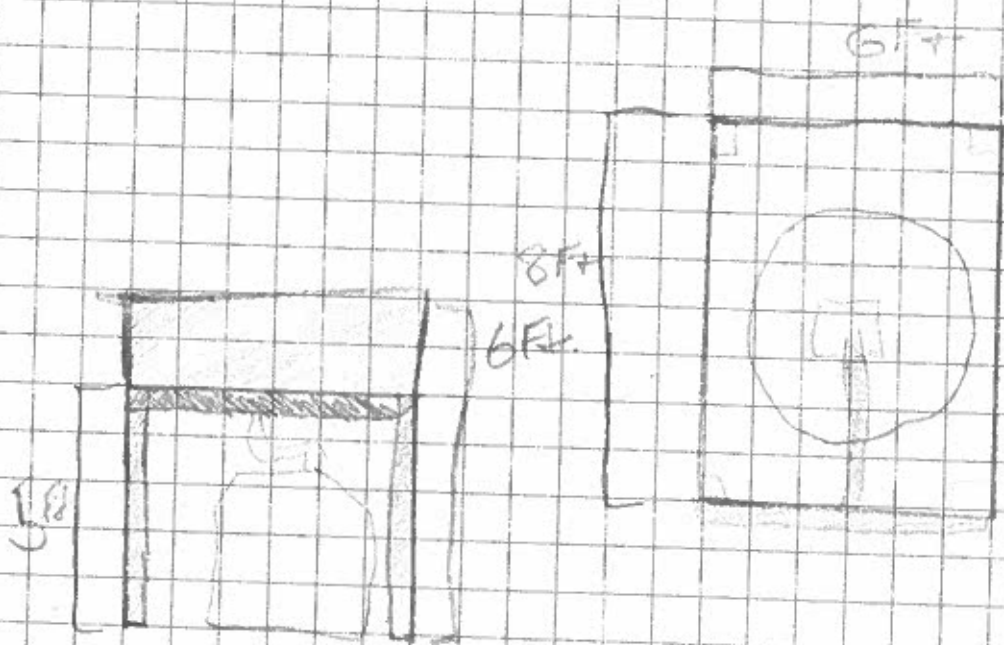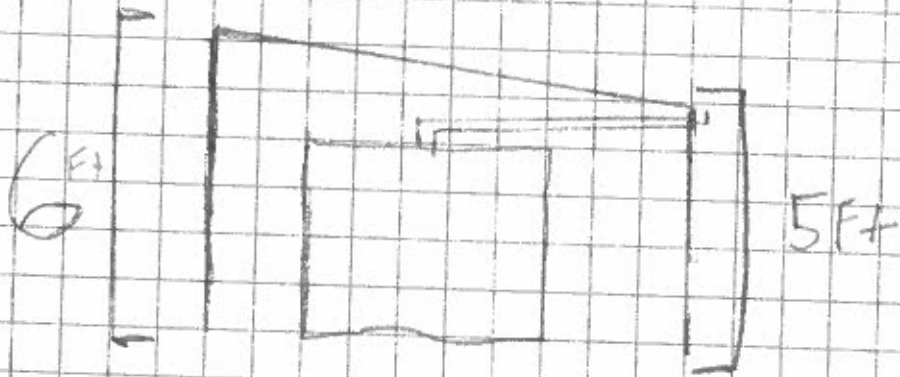


1F+


8F+

6F

6F+

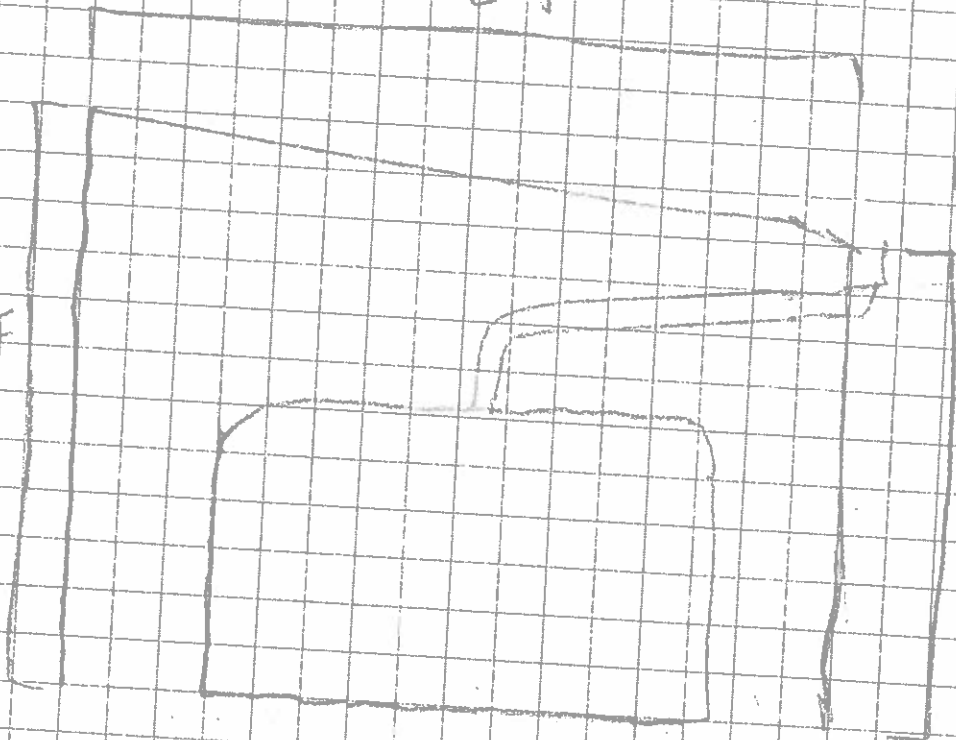

□ 1F+

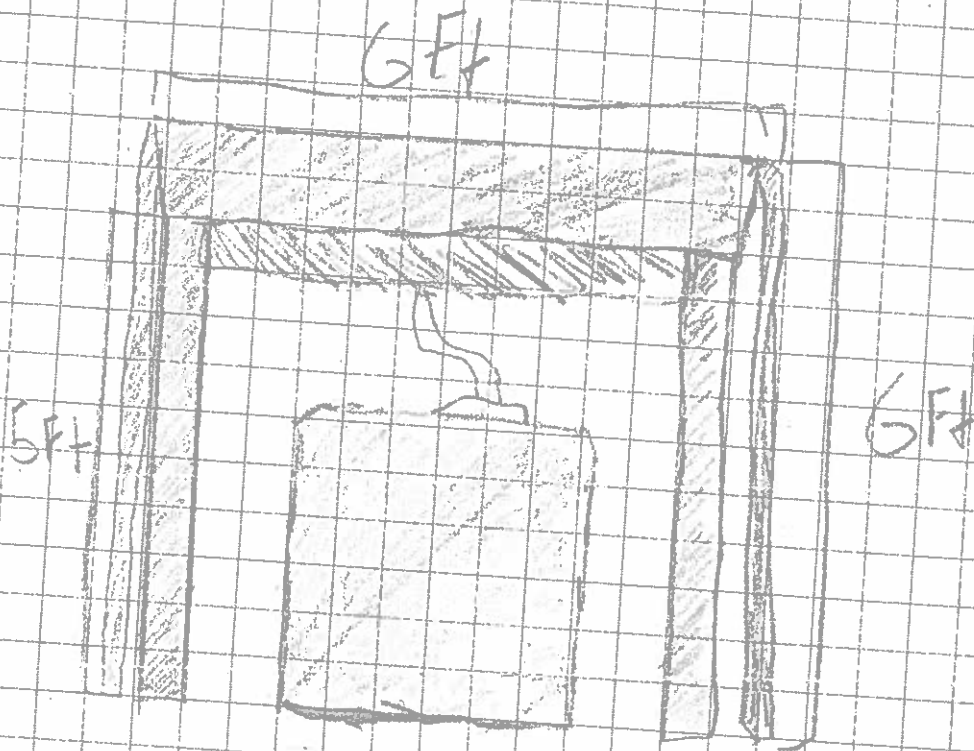

GF+

GF

