MOORE 1ST SUBDIVISION

A PARCEL OF LAND LOCATED IN THE SE1/4SW1/4 SECTION SIX (6) T139N, R95W, OF THE 5TH PRINCIPAL MERIDIAN

LEGAL DESCRIPTION

A PARCEL OF LAND LOCATED IN THE SOUTHEAST QUARTER OF THE SOUTHWEST QUARTER (SE1/4SW1/4) OF SECTION SIX (6), TOWNSHIP ONE-HUNDRED THIRTY-NINE NORTH (T139N), RANGE NINETY-FIVE WEST (R95W) OF THE FIFTH PRINCIPAL MERIDIAN (5TH.P.M.), STARK COUNTY, NORTH DAKOTA BEING MORE

BEGINNING AT THE SOUTHEAST CORNER OF A TRACT OF LAND AS RECORDED AT THE STARK COUNTY RECORDER'S OFFICE PER DOCUMENT NUMBER 3099394 BEING A FOUND REBAR AND CAP LS-5771 THENCE N 00°28'44" E ALONG THE EAST LINE OF SAID TRACT, A DISTANCE OF 262.27 FEET TO A SET REBAR AND CAP LS-5466; THENCE S 89°57'41" E PARALLEL TO THE SOUTH LINE OF SAID SECTION SIX (6), A DISTANCE OF 634.51 FEET TO A SET REBAR AND CAP LS-5466; THENCE S 00°05'45" E, A DISTANCE OF 475.27 FEET TO A SET REBAR AND CAP LS-5466 ON SAID SOUTH LINE OF SAID SECTION SIX (6); THENCE N 89°57'41" W ALONG SAID SOUTH LINE, DISTANCE OF 284.65 FEET TO A SET REBAR AND CAP LS-5466 AT THE SOUTHEAST CORNER OF A TRACT OF LAND AS RECORDED AT THE STARK COUNTY RECORDER'S OFFICE PER DOCUMENT NUMBER 3037698; THENCE N 00°05'45" W ALONG THE EAST LINE OF SAID TRACT, A DISTANCE OF 213.01 FEET TO A FOUND REBAR AND CAP LS-1225 AT THE NORTHEAST CORNER OF SAID TRACT; THENCE N 89°57'50" W ALONG THE NORTH LINE OF SAID TRACT, A DISTANCE OF 352.49 FEET TO THE POINT OF BEGINNING.

SAID PARCEL CONTAINS 5.22 ACRES, MORE OR LESS, AND IS SUBJECT TO ANY PREVIOUS EASEMENTS, AGREEMENTS, CONVEYANCES AND SURVEYS.

SURVEYOR'S CERTIFICATE

I, KC HOMISTON, REGISTERED PROFESSIONAL LAND SURVEYOR, LS-5466, FOR HIGHLANDS ENGINEERING AND SURVEYING, PLLC, RESIDING AT 319 24TH STREET EAST, DICKINSON, N.D., DO HEREBY CERTIFY THAT THE MOORE 1ST SUBDIVISION PLAT SHOWN HEREON IS A CORRECT REPRESENTATION OF THE SURVEY, THAT ALL DISTANCES ARE CORRECT, MONUMENTS ARE PLACED IN THE GROUND AS SHOWN, THAT THE OUTSIDE BOUNDARY LINES ARE CORRECTLY DESIGNATED ON THE PLAT AND WAS MADE BY ME, OR UNDER MY DIRECTION, AND IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

IN WITNESS WHEREOF, I HAVE HEREUNTO SUBSCRIBED MY NAME:

KC HOMISTON, LS-5466		
STATE OF	}}	00
COUNTY OF	}	SS

FOR SAID COUNTY AND STATE, PERSONALLY APPEARED KC HOMISTON, TO ME KNOWN TO BE THE SAME PERSONS DESCRIBED IN AND THAT EXECUTED THE WITHIN AND FOREGOING INSTRUMENT AND SEVERALLY ACKNOWLEDGED TO ME THAT THEY EXECUTED THE SAME.

	MY COMMISSION EXPIRES:	
NOTARY PUBLIC		
RESIDING AT COUNTY OF	, STATE OF	


PROPRIETOR'S CERTIFICATE

SECRETARY

I. DONALD L. GERBER. RESIDING AT 3983 EAST VILLARD STREET. DICKINSON, ND 58601, OWNER AND PROPRIETOR OF PROPERTY LYING IN THE SOUTHEAST QUARTER OF THE SOUTHWEST QUARTER (SEXSWX) OF SECTION SIX (6) TOWNSHIP ONE-HUNDRED THIRTY-NINE NORTH, RANGE NINETY-FIVE WEST

IN WITNESS WHEREOF, I HAVE HEREUN	ITO SURSCRIBED MV NAI	ME.
BY:DONALD L. GERBER		VIE.
STATE OF}	SS	
COUNTY OF		DEFORE ME A NOTARY BURLIC IN ANI
ON THIS DAY OF FOR SAID COUNTY AND STATE, PERSON SAME PERSONS DESCRIBED IN AND TH SEVERALLY ACKNOWLEDGED TO ME TH	AT EXECUTED THE WITH	IIN AND FOREGOING INSTRUMENT AND
	MY CO	OMMISSION EXPIRES:
NOTARY PUBLIC RESIDING AT COUNTY OF	, STATE OF	
	N APPROVAL	
CITY OF DICKINSON COMMISSION		DATE:
CITY OF DICKINSON COMMISSION PRESIDENT		DATE:
		DATE:



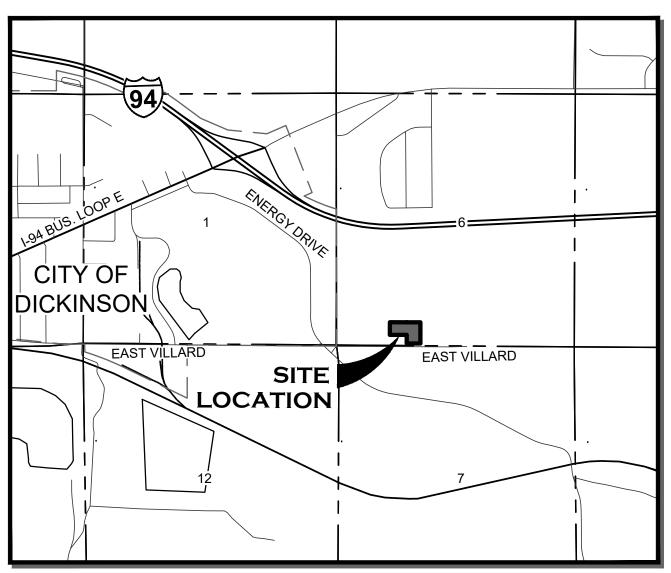

VICINITY MAP 1" = 2000

LEGEND

EXISTING LOTS FOUND MONUMENT SET #5, 18-INCH REBAR & CAP STAMPED "HIGHLANDS LS-5466" RIGHT-TO-TRAVEL PER NDCC 24-07-03 PROPOSED UTILITY EASEMENT **SECTION CORNER**

EXISTING OVERHEAD ELECTRIC

STATE PLANE COORDINATES NAD 83 (86), SOUTH ZONE, U.S. FOOT, GRID DISTANCE


	·	
POINT	NORTHING (FT)	EASTING (FT)
A	448,940.16	1,411,762.24
B	448,791.22	1,416,753.93
C	449,109.41	1,413,231.00
D	449,119.90	1,412,878.73
(E)	450,272.99	1,412,922.00

- 1) THIS SUBDIVISION IS LOCATED OUTSIDE OF THE 0.2% ANNUAL CHANCE FLOOD AREA AS SHOWN BY ZONE "X" OF FEMA FLOOD INSURANCE RATE MAP (FIRM) NUMBER 38089C0213F, PANEL 213 OF 850, WITH AN EFFECTIVE DATE OF
- 2) THIS PLAT DEDICATES A TOTAL OF 0.22 ACRES OF PUBLIC RIGHT-OF-WAY AS DEPICTED BY THIS PLAT.

SURVEY NOTES

- 1) DISTANCES SHOWN ARE MEASURED GROUND DISTANCES, INTERNATIONAL FOOT, DERIVED FROM A LOCAL COORDINATE SYSTEM.
- 2) THE BASIS OF BEARINGS FOR THIS SURVEY IS THE SOUTH LINE OF SAID SECTION SIX (6) WITH THE BEARING BEING N 89°57'41" W, THAT WAS LOCATED BY A GPS
- 3) SURVEY DATA HAS A CENTRAL MERIDIAN OF LATITUDE: N46°51'42.381242552", LONGITUDE: W102°47'24.249867155", SCALE FACTOR 1.0001132949. BEARINGS ARE BASED ON TRUE NORTH AT THIS LOCATION.
- 4) VERTICAL DATUM: NAVD 88, GEOID 03.
- 5) DATE OF LATEST FIELD WORK: DECEMBER 28, 2023







PROJECT NUMBER:	231254	SCALE: 1"=40'
DRAWN BY:	AJA	DATE: 08/01/24

MOORE 1ST SUBDIVISION

A PARCEL OF LAND LOCATED IN THE SE1/4SW1/4 SECTION SIX (6) T139N, R95W, OF THE 5TH PRINCIPAL MERIDIAN

LEGAL DESCRIPTION

A PARCEL OF LAND LOCATED IN THE SOUTHEAST QUARTER OF THE SOUTHWEST QUARTER (SE%SW%) OF SECTION SIX (6), TOWNSHIP ONE-HUNDRED THIRTY-NINE NORTH (T139N), RANGE NINETY-FIVE WEST (R95W) OF THE FIFTH PRINCIPAL MERIDIAN (5TH.P.M.), STARK COUNTY, NORTH DAKOTA BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGINNING AT THE SOUTHEAST CORNER OF A TRACT OF LAND AS RECORDED AT THE STARK COUNTY RECORDER'S OFFICE PER DOCUMENT NUMBER 3099394 BEING A FOUND REBAR AND CAP LS-5771 THENCE N 00°28'44" E ALONG THE EAST LINE OF SAID TRACT, A DISTANCE OF 262.27 FEET TO A SET REBAR AND CAP LS-5466; THENCE S 89°57'41" E PARALLEL TO THE SOUTH LINE OF SAID SECTION SIX (6), A DISTANCE OF 634.51 FEET TO A SET REBAR AND CAP LS-5466; THENCE S 00°05'45" E, A DISTANCE OF 475.27 FEET TO A SET REBAR AND CAP LS-5466 ON SAID SOUTH LINE OF SAID SECTION SIX (6); THENCE N 89°57'41" W ALONG SAID SOUTH LINE, DISTANCE OF 284.65 FEET TO A SET REBAR AND CAP LS-5466 AT THE SOUTHEAST CORNER OF A TRACT OF LAND AS RECORDED AT THE STARK COUNTY RECORDER'S OFFICE PER DOCUMENT NUMBER 3037698; THENCE N 00°05'45" W ALONG THE EAST LINE OF SAID TRACT, A DISTANCE OF 213.01 FEET TO A FOUND REBAR AND CAP LS-1225 AT THE NORTHEAST CORNER OF SAID TRACT; THENCE N 89°57'50" W ALONG THE NORTH LINE OF SAID TRACT, A DISTANCE OF 352.49 FEET TO THE POINT OF BEGINNING.

SAID PARCEL CONTAINS 5.22 ACRES, MORE OR LESS, AND IS SUBJECT TO ANY PREVIOUS EASEMENTS AGREEMENTS. CONVEYANCES AND SURVEYS.

SURVEYOR'S CERTIFICATE

I, KC HOMISTON, REGISTERED PROFESSIONAL LAND SURVEYOR, LS-5466, FOR HIGHLANDS ENGINEERING AND SURVEYING, PLLC, RESIDING AT 319 24TH STREET EAST, DICKINSON, N.D., DO HEREBY CERTIFY THAT THE MOORE 1ST SUBDIVISION PLAT SHOWN HEREON IS A CORRECT REPRESENTATION OF THE SURVEY, THAT ALL DISTANCES ARE CORRECT, MONUMENTS ARE PLACED IN THE GROUND AS SHOWN, THAT THE OUTSIDE BOUNDARY LINES ARE CORRECTLY DESIGNATED ON THE PLAT AND WAS MADE BY ME, OR UNDER MY DIRECTION, AND IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

IN WITNESS WHEREOF, I HAVE HEREUNTO SUBSCRIBED MY NAME:

KC HOMISTON, LS-5466

, BEFORE ME, A NOTARY PUBLIC IN AND FOR SAID COUNTY AND STATE, PERSONALLY APPEARED KC HOMISTON, TO ME KNOWN TO BE THE SAME PERSONS DESCRIBED IN AND THAT EXECUTED THE WITHIN AND FOREGOING INSTRUMENT AND SEVERALLY ACKNOWLEDGED TO ME THAT THEY EXECUTED THE SAME.

MY COMMISSION EXPIRES:

PROPRIETOR'S CERTIFICATE

RESIDING AT COUNTY OF

I. DONALD L. GERBER, RESIDING AT 3983 EAST VILLARD STREET, DICKINSON, ND 58601, OWNER AND PROPRIETOR OF PROPERTY LYING IN THE SOUTHEAST QUARTER OF THE SOUTHWEST QUARTER (SE½SW½) OF SECTION SIX (6), TOWNSHIP ONE-HUNDRED THIRTY-NINE NORTH, RANGE NINETY-FIVE WEST (95) OF THE FIFTH PRINCIPAL MERIDIAN (5TH P.M.), STARK COUNTY, NORTH DAKOTA, ON THIS PLAT SHOWN HEREON AND DESCRIBED IN THE SURVEYOR'S CERTIFICATE, DO HEREBY DECLARE THAT I HAVE CAUSED THE SAME TO BE SURVEYED AS SHOWN ON THE ACCOMPANYING PLAT, AND DO HEREBY DEDICATE ALL UTILITY EASEMENTS AND PUBLIC RIGHT OF WAY AS SHOWN TO PUBLIC USE FOREVER.

IN WITNESS WHEREOF, I HAVE HEREUNTO SUBSCRIBED MY NAME:

COUNTY OF

__, BEFORE ME, A NOTARY PUBLIC IN AND FOR SAID COUNTY AND STATE, PERSONALLY APPEARED DONALD L. GERBER, TO ME KNOWN TO BE THE SAME PERSONS DESCRIBED IN AND THAT EXECUTED THE WITHIN AND FOREGOING INSTRUMENT AND SEVERALLY ACKNOWLEDGED TO ME THAT THEY EXECUTED THE SAME.

MY COMMISSION EXPIRES: NOTARY PUBLIC RESIDING AT COUNTY OF _____

CITY OF DICKINSON COMMISSION APPROVAL

SW SECTION 6

FOUND REBAR & CAP

EAST VILLARD STREET

T139N, R95W


CITY ENGINEER APPROVAL


CITY ENGINEER

CITY PLANNING COMMISSION APPROVAL

SECRETARY


STARK COUNTY, NORTH DAKOTA

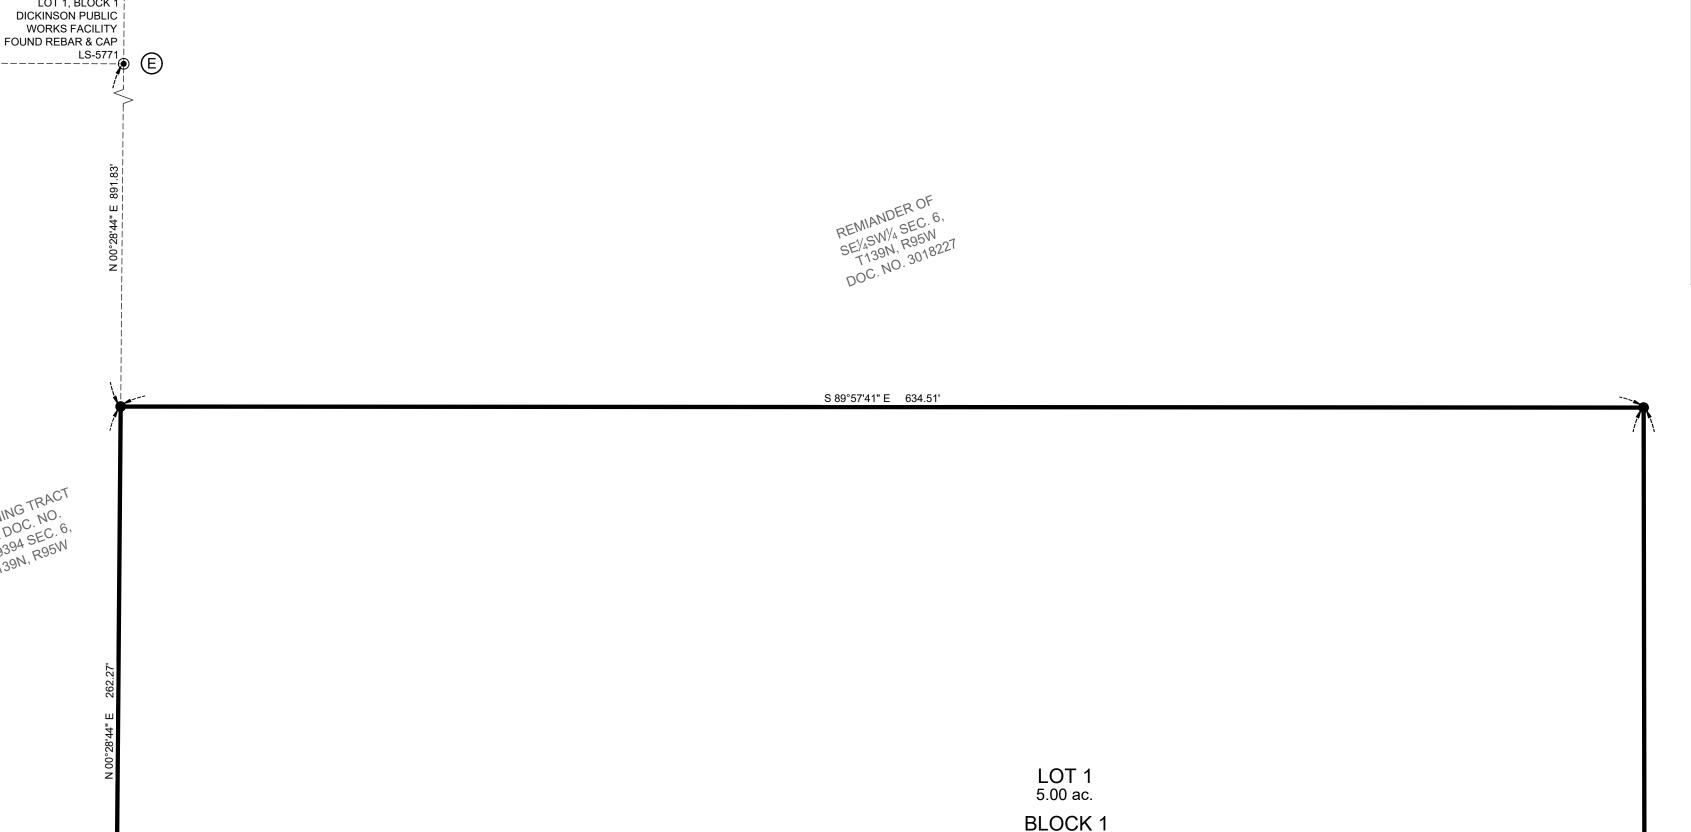

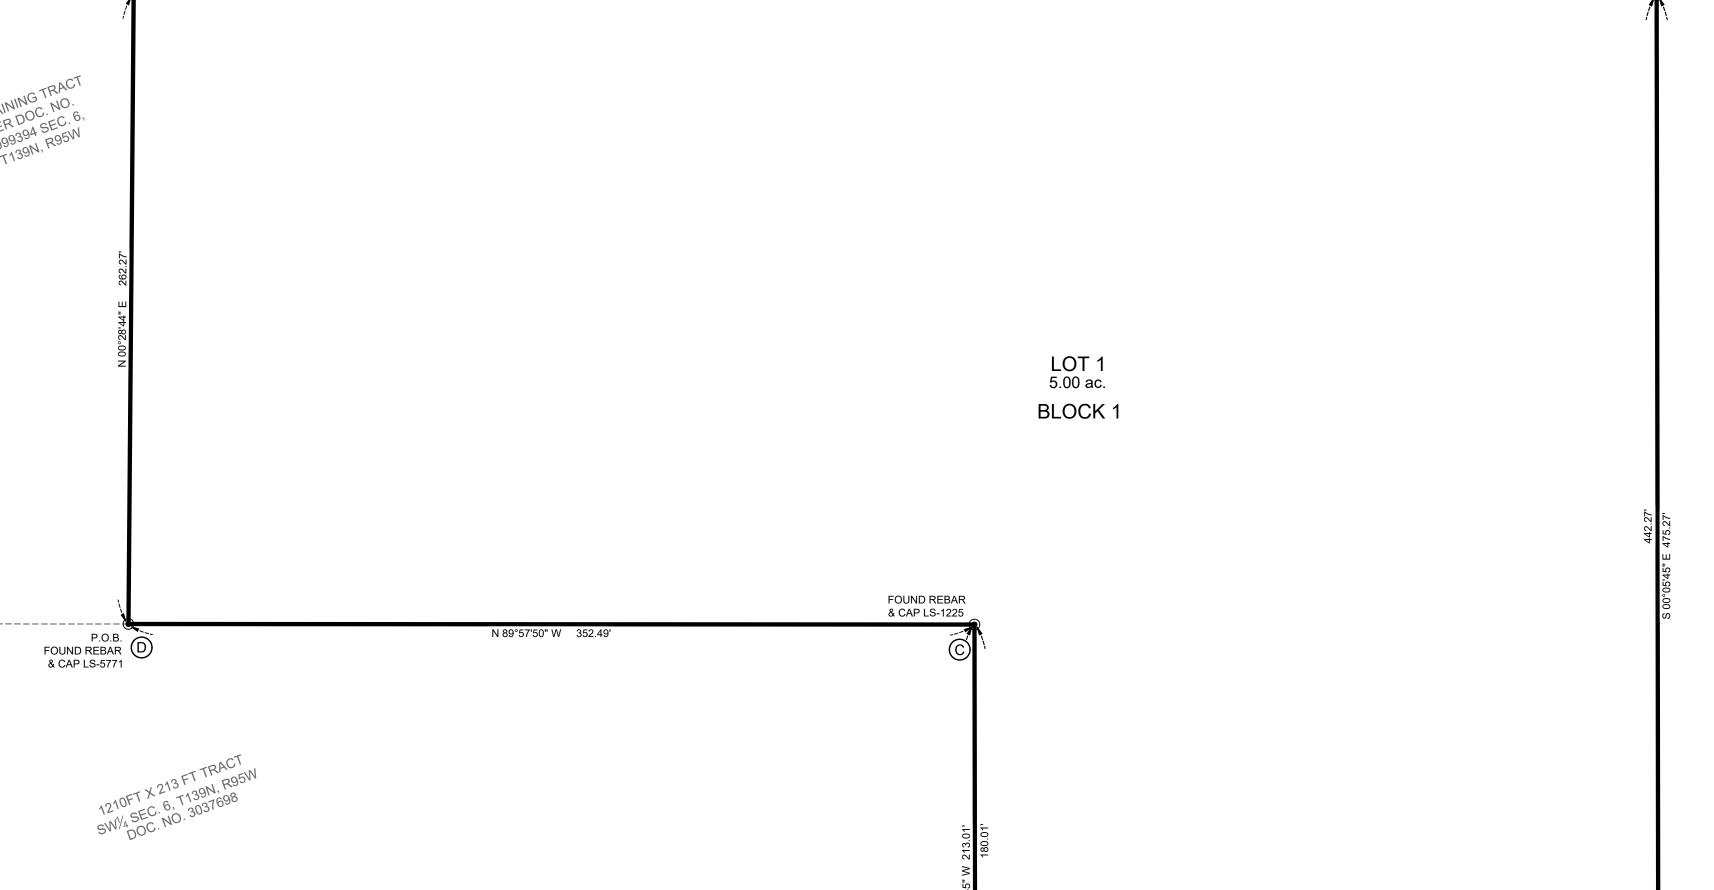

N 89°57'41" W 4994.81'

SECTION LINE (BASIS OF BEARINGS)

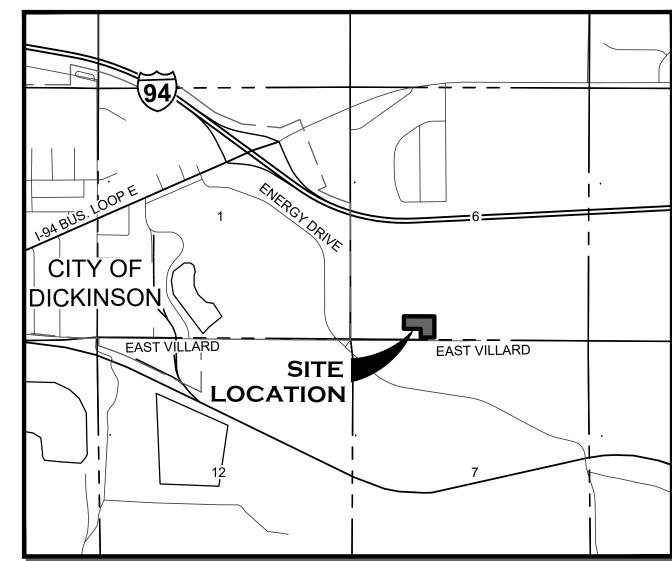

VICINITY MAP 1" = 2000

LEGEND

EXISTING LOTS FOUND MONUMENT

SET #5, 18-INCH REBAR & CAP STAMPED "HIGHLANDS LS-5466"

> SECTION LINE RIGHT-TO-TRAVEL PER NDCC 24-07-03

PROPOSED UTILITY EASEMENT


STATE PLANE COORDINATES U.S. FOOT, GRID DISTANCE


POINT	NORTHING (FT)	EASTING (FT)
A	448,940.16	1,411,762.24
B	448,791.22	1,416,753.93
C	449,109.41	1,413,231.00
D	449,119.90	1,412,878.73
E	450,272.99	1,412,922.00

- 1) THIS SUBDIVISION IS LOCATED OUTSIDE OF THE 0.2% ANNUAL CHANCE FLOOD AREA AS SHOWN BY ZONE "X" OF FEMA FLOOD INSURANCE RATE MAP (FIRM) NUMBER 38089C0213F, PANEL 213 OF 850, WITH AN EFFECTIVE DATE OF NOVEMBER 4, 2010.
- 2) THIS PLAT DEDICATES A TOTAL OF 0.22 ACRES OF PUBLIC RIGHT-OF-WAY AS DEPICTED BY THIS PLAT.

SURVEY NOTES

- 1) DISTANCES SHOWN ARE MEASURED GROUND DISTANCES, INTERNATIONAL FOOT, DERIVED FROM A LOCAL COORDINATE SYSTEM.
- 2) THE BASIS OF BEARINGS FOR THIS SURVEY IS THE SOUTH LINE OF SAID SECTION SIX (6) WITH THE BEARING BEING N 89°57'41" W, THAT WAS LOCATED BY A GPS
- 3) SURVEY DATA HAS A CENTRAL MERIDIAN OF LATITUDE: N46°51'42.381242552", LONGITUDE: W102°47'24.249867155", SCALE FACTOR 1.0001132949. BEARINGS ARE BASED ON TRUE NORTH AT THIS LOCATION.
- 4) VERTICAL DATUM: NAVD 88, GEOID 03.
- 5) DATE OF LATEST FIELD WORK: DECEMBER 28, 2023







PROJECT NUMBER: 231254 | SCALE: 1"=40'