Pavement Management Report

THE CITY OF COACHELLA, CA

Submitted: May 2024

Michael Baker International, Inc.
75-410 Gerald Ford Drive, Suite 100 | Palm Desert, CA 92211

TABLE OF CONTENTS

SECTION	PAGE
1.0 EXECUTIVE SUMMARY	**1**
2.0 METHODOLOGY	**2**
2.1 Pavement Management Principles	**2**
2.2 Pavement Data Collection Approach	**3**
3.0 FINDINGS	**5**
3.1 Current Inventory	**5**
3.2 Current Condition	**6**
4.0 PAVEMENT MANAGEMENT SYSTEM IMPLEMENTATION	**7**
4.1 GIS Mapping	**7**
4.2 Maintenance and Rehabilitation Records	**8**
4.3 Deterioration Curves	**8**
4.4 Maintenance Activities	**10**
4.5 Maintenance Policy	**11**
4.6 AtlasView Public Dashboard	**12**
5.0 PAVEMENT MANAGEMENT ANALYSIS	**13**
5.1 Scenario 1: Unlimited Budget	**13**
5.2 Scenario 2: Backlog Elimination	**15**
5.3 Scenario 3: Do Nothing	**17**
5.4 Scenario 4: Maintain Current Condition	**19**
5.5 Scenario 5: Reach PCI of 70	**21**
5.6 Scenario 6: Current Budget	**23**
6.0 RECOMMENDATIONS	**25**

APPENDICES

SECTION
APPENDIX A - Road Inventory with 2023 Inspection
APPENDIX B - Work Plan for Scenario 1: Unlimited Budget
APPENDIX C - Work Plan for Scenario 2: Backlog Elimination
APPENDIX D - Work Plan for Scenario 4: Maintain Current Condition
APPENDIX E - Work Plan for Scenario 5: Reach PCI of 70
APPENDIX F - Work Plan for Scenario 6: Current Budget

1.0 EXECUTIVE SUMMARY

The City of Coachella, CA (City) contracted Michael Baker International, Inc. (Michael Baker) to perform a detailed pavement condition evaluation of the City's roadway network and implement a modern and updated pavement management system. The project included evaluating the pavement condition of the City's approximately 140 miles of roadways, implementing the AtlasView pavement management system with updated roadway details and conditions, and performing various 10-year scenario forecasting analyses to evaluate the impacts of different infrastructure maintenance investment strategies. The project also included the deployment of the AtlasView Public Dashboard to facilitate transparency by enabling residents to have real-time access to the City's roadway network condition information.

The citywide pavement condition evaluation was conducted in November 2023, and the results show that the average Pavement Condition Index (PCI) of the City's roads is 63.4 out of 100, corresponding to a "Fair" condition rating. The 10-year investment scenario forecasting analyses suggest that the City would need to invest an average of $4.6 million annually to maintain a network-average PCI of 63.4.

This report includes details about the methodology used for pavement evaluations, pavement management system implementation details, and the results of six 10-year investment scenario forecasting analyses that the City can use to prepare informed pavement maintenance and rehabilitation projects

2.0 METHODOLOGY

2.1 Pavement Management Principals

Roadway networks are one of the most critical infrastructure assets that municipal agencies manage because roads facilitate transportation, making them vital to the local and regional economy. As municipalities such as the City of Coachella experience population growth, the demand on their roadway network also grows. However, many municipal agencies do not have sufficient funds to maintain their full roadway network in a state of good repair. Often, these municipal agencies focus their maintenance and rehabilitation activities on those segments of the roadway network that are in the worst condition. Unfortunately, this “worst-first” maintenance strategy falls short of improving the network-level condition because the majority of available funds are invested in expensive rehabilitation and reconstruction projects for only a few roads.

Modern pavement management systems focus on optimizing maintenance and rehabilitation investments across entire roadway networks with the goal of maximizing the average pavement condition of the road network. This is done by balancing the desire for reconstruction or rehabilitation of roads in poorer conditions with the need to prioritize the preservation of roads in relatively good condition. Municipal agencies achieve this by utilizing lower-cost pavement preservation applications. As shown in Figure 1, early intervention and investment in pavement preservation activities could have a Return on Investment (ROI) of up to 1,000% by delaying or eliminating more expensive reconstruction.

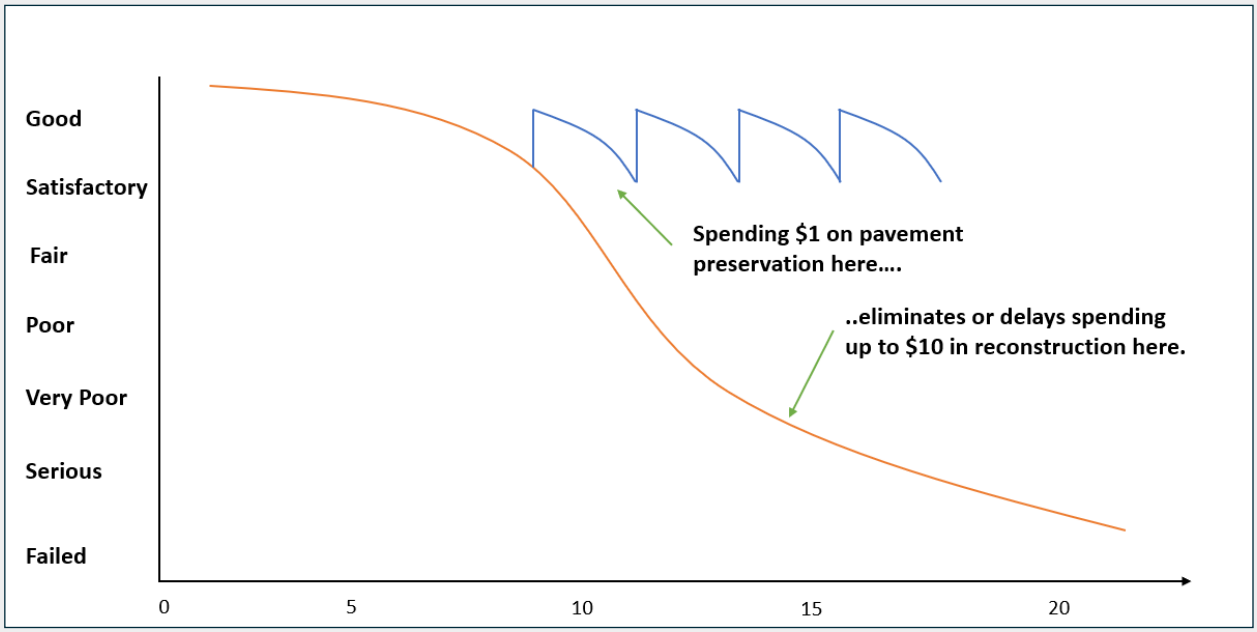

Figure 1: Benefits of Pavement Preservation

2.2 Pavement Data Collection Approach

Michael Baker performed the citywide pavement condition and roadway information data collection using the Network Survey Vehicle (NSV). The NSV used to capture data on the City's roads was equipped with the following:

- LCMS-2 pavement surface scanners to collect full-lane pavement scans with enough detail to identify rutting, surface distresses, and cracking as small as 1 mm wide.
- Line-laser inertial profilers that meet ASTM E950 Class 1 specifications and that measure and calculate accurate International Roughness Index (IRI).
- Four 9-megapixel high-definition right-of-way (ROW) cameras.
- One 75-megapixel spherical camera that provides an industry-leading continuous 360-degree view of the roadway network.
- Distance Measuring Instruments (DMI).
- Differentially corrected GPS that spatially references (latitude, longitude, elevation) all collected data.
- Inertial navigation with an Inertial Measurement Unit (IMU).

Michael Baker used the data collected by the NSV to calculate a PCI for each roadway segment in accordance with the ASTM D6433 standard. To calculate the PCI, Michael Baker used the continuous, detailed, and precise 3D pavement scans collected by the NSV to process and generate a database of pavement defects that include location, type, severity, and quantity of each pavement defect on 100% of the lane where data was collected. Michael Baker Pavement Analysts utilized the Distress Selector application to review 3D pavement frames for quality control and assurance and to verify that all distresses were correctly identified and quantified.

Figure 2: Network Survey Vehicle (NSV)

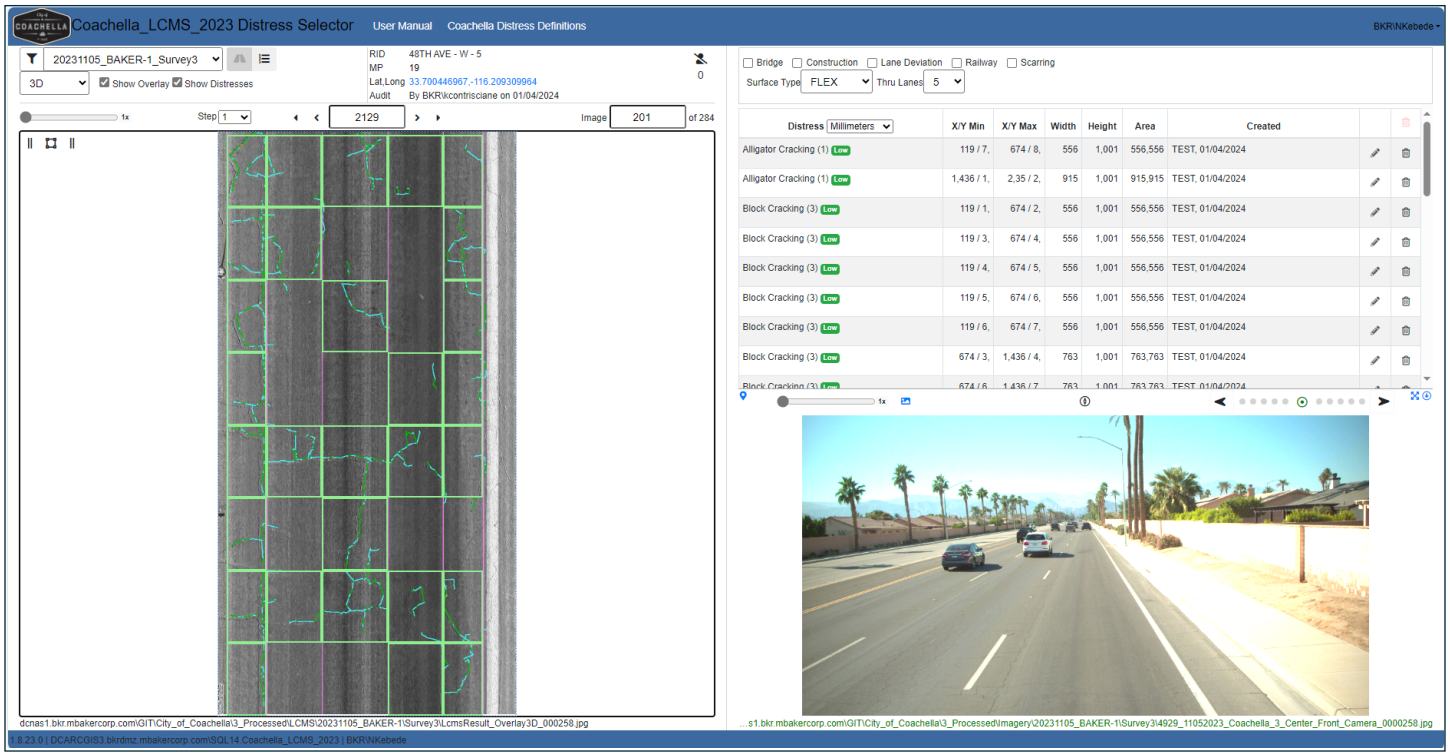

Figure 3: Distress Selector Application Used for Pavement Data Quality Control

The detailed pavement distress and defect information was uploaded into the PAVER software to calculate PCIs for each road segment per the ASTM D6433 standards.

3.0 FINDINGS

3.1 Current Inventory

The City's roadway network has approximately 140 miles of roads divided into five functional classifications. At 43%, Residential roads make up the majority of the City's roadway network. The total infrastructure asset replacement value of the City's roadway network is approximately $580.6 million, making the roadway infrastructure one of the most valuable physical infrastructure the City manages.

Table 1 and Table 2 provide additional details about the City's roadway network inventory. A full inventory of the City's roadway network, including results of the pavement condition evaluation, is included in Appendix A.

Functional Classification	Miles	Percent of Network
Arterial	35.6	25.5%
Collector	31.2	22.4%
Residential	60.3	43.2%
Rural	11.5	8.2%
Alley	0.9	0.6%
Total	**139.5 Miles**	

Table 1: Roadway Network Miles

Functional Classification	Area (sq ft)	Replacement Cost
Arterial	8,126,906	$162,538,120
Collector	7,556,157	$151,123,140
Residential	11,718,267	$234,365,340
Rural	1,528,383	$30,567,660
Alley	104,420	$2,088,400
Total	**29,034,133**	**$580,682,660**

Table 2: Roadway Network Asset Value

3.2 Current Condition

Based on the pavement condition evaluation conducted in November 2023, the average (area-weighted) PCI of the City's roadway network is 63.4. Approximately 68% of the roadway pavement (by area) is in Good, Satisfactory, or Fair condition, while approximately 28% of the roadway pavement is in Poor, Very Poor, or Serious condition. Approximately 1.5% of the roadway pavement area was found to be in a Failed condition, while another 1.5% had no reported PCI because they were not surfaced with asphalt or concrete pavement.

Table 3 provides the different condition categories, their respective PCI ranges, and the quantity of pavement area found in each condition category. Figure 4 shows the City's pavement network in each condition category.

Condition Category	Area (sq ft)	Percent of Network	PCI Range
Good	4,196,307.20	14.5%	PCI 86-100
Satisfactory	8,316,602.34	28.6%	PCI 71-85
Fair	7,336,076.54	25.3%	PCI 56-70
Poor	4,307,604	14.8%	PCI 41-55
Very Poor	3,036,178	10.5%	PCI 26-40
Serious	1,288,994	4.4%	PCI 11-25
Failed	440,578	1.5%	PCI 0-10
No Inspection	440,578	1.5%	Brick/Gravel

Table 3: Condition Categories of the City's Roads

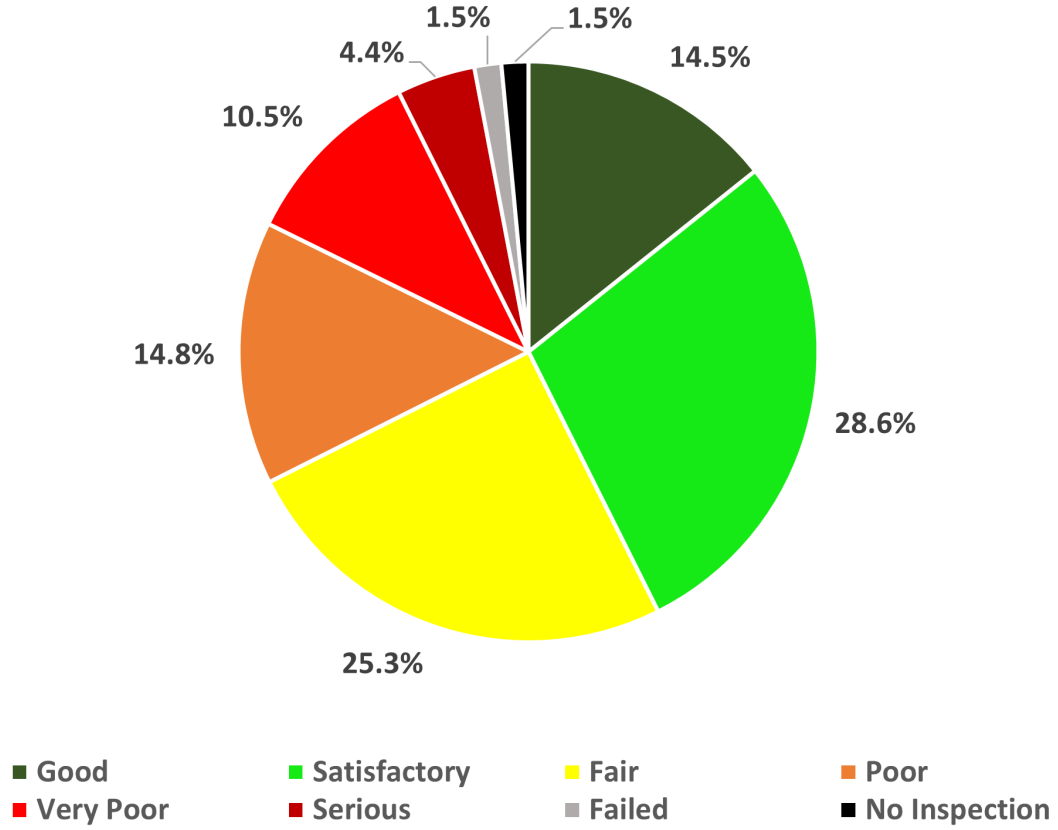

Figure 4: The City's Pavement Condition by Area

4.0 PAVEMENT MANAGEMENT SYSTEM IMPLEMENTATION

In addition to capturing updated pavement condition data for the City's roadway network, this project had a critical objective to implement a modern and functional pavement management system. The City selected the AtlasView Pavement Management (AtlasView) application because of its ease of use, ease of access, GIS integration, and complex pavement management analysis capabilities. AtlasView is a web-based pavement management application implemented as a centralized source of pavement condition reporting and pavement management planning.

4.1 GIS Mapping

Michael Baker used existing publicly available GIS map sources, including a GIS map file provided by the City, to create an updated GIS map of the City's roadway network. The updated map was used during the field data collection. The map was further revised based on the collected roadway inspection data, and it was uploaded to the City's AtlasView account as part of the pavement management system implementation task. AtlasView provides access to the City to update the GIS map directly within the pavement management system, and it can also download the GIS map as a shape file at any time.

Figure 5 shows the color-coded pavement condition of the City's roadway network map.

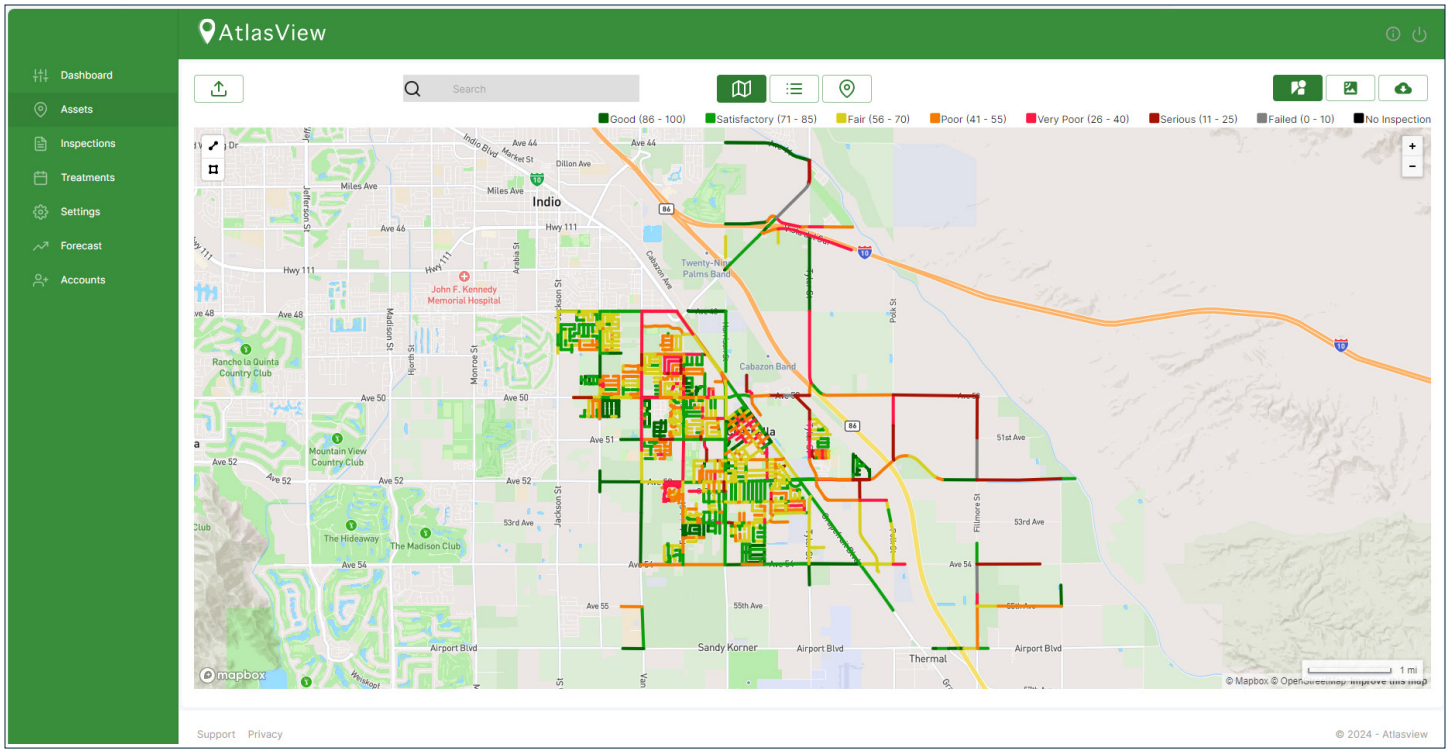

Figure 5: AtlasView Pavement Network Map Module

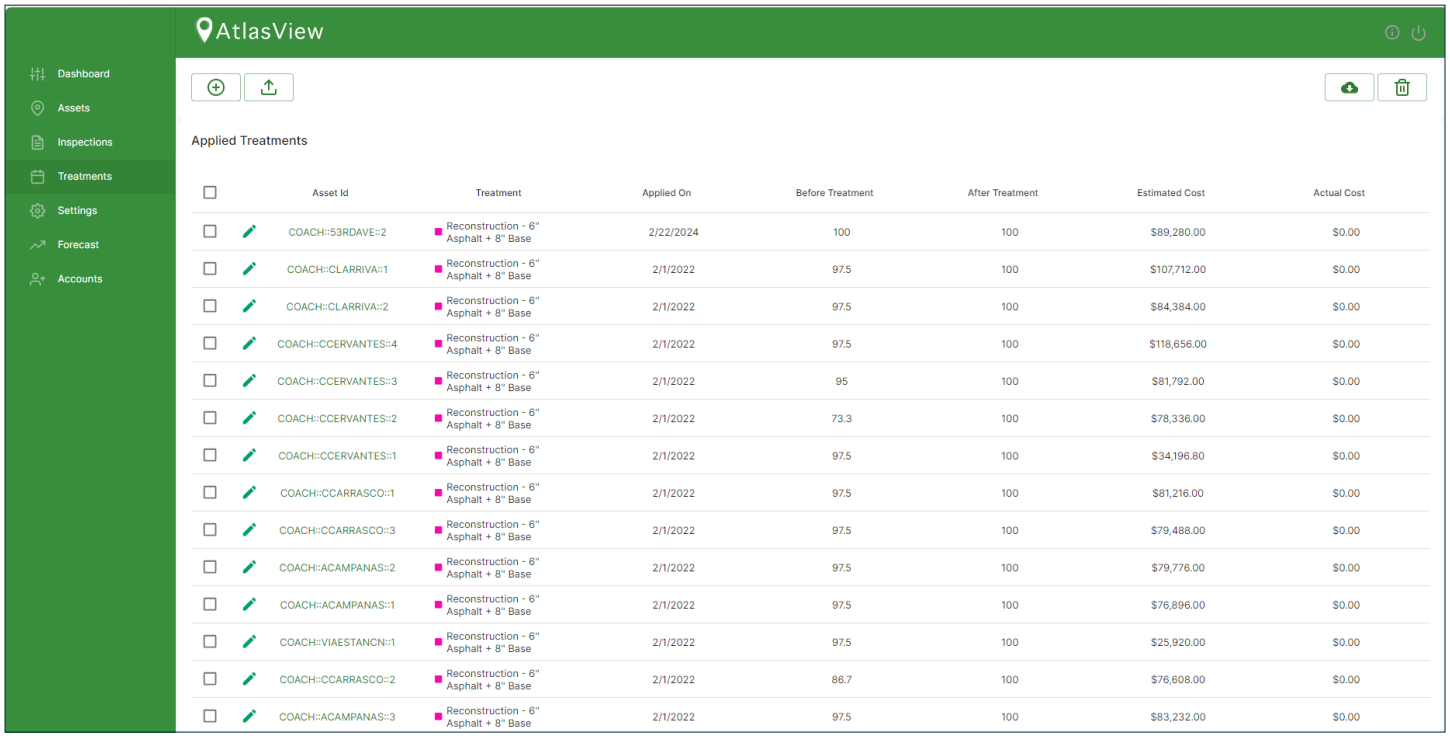

Asset Id	Treatment	Applied On	Before Treatment	After Treatment	Estimated Cost	Actual Cost
COACH::53RDAVE::2	Reconstruction - 6" Asphalt + 8" Base	2/22/2024	100	100	$89,280.00	$0.00
COACH::CLARRIVA::1	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	97.5	100	$107,712.00	$0.00
COACH::CLARRIVA::2	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	97.5	100	$84,384.00	$0.00
COACH::CCERVANTES::4	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	97.5	100	$118,656.00	$0.00
COACH::CCERVANTES::3	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	95	100	$81,792.00	$0.00
COACH::CCERVANTES::2	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	73.3	100	$78,336.00	$0.00
COACH::CCERVANTES::1	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	97.5	100	$34,196.80	$0.00
COACH::CCARRASCO::1	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	97.5	100	$81,216.00	$0.00
COACH::CCARRASCO::3	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	97.5	100	$79,488.00	$0.00
COACH::ACAMPANAS::2	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	97.5	100	$79,776.00	$0.00
COACH::ACAMPANAS::1	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	97.5	100	$76,896.00	$0.00
COACH::VIAESTANCN::1	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	97.5	100	$25,920.00	$0.00
COACH::CCARRASCO::2	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	86.7	100	$76,608.00	$0.00
COACH::ACAMPANAS::3	Reconstruction - 6" Asphalt + 8" Base	2/1/2022	97.5	100	$83,232.00	$0.00

Figure 6: AtlasView Pavement Maintenance Record Module

4.2 Maintenance and Rehabilitation Records

Michael Baker collected historical maintenance, rehabilitation, and reconstruction records from available sources within the City and updated the pavement database in AtlasView. These historical maintenance records date back to 2017 and have been associated with each affected pavement segment in AtlasView. Additionally, AtlasView offers an easy way for the City to track all future maintenance records associated with each affected pavement segment. By maintaining updated maintenance records for each pavement segment in AtlasView, the City ensures that current pavement condition information is always available. This is because AtlasView recalculates the PCI of pavement segments, incorporating the positive impacts of maintenance activities.

Figure 6 above shows the maintenance record module in AtlasView.

4.3 Deterioration Curves

AtlasView uses deterioration curves to estimate future pavement conditions. Accurate deterioration modeling is critical to generating reliable budget and condition forecasts used for pavement management programming.

Three deterioration curves were established for the City's roadway network. Figure 7, Figure 8, and Figure 9 show the deterioration models created and adopted for asphalt-surfaced pavements, surface-treated pavements, and concrete-surfaced pavements, respectively. The deterioration curves were developed based on a review of local and regional pavement performance information and pavement performance observations from the City staff. The City can review and update these deterioration models directly in AtlasView as more relevant performance data is acquired; however, it is not recommended to change models frequently.

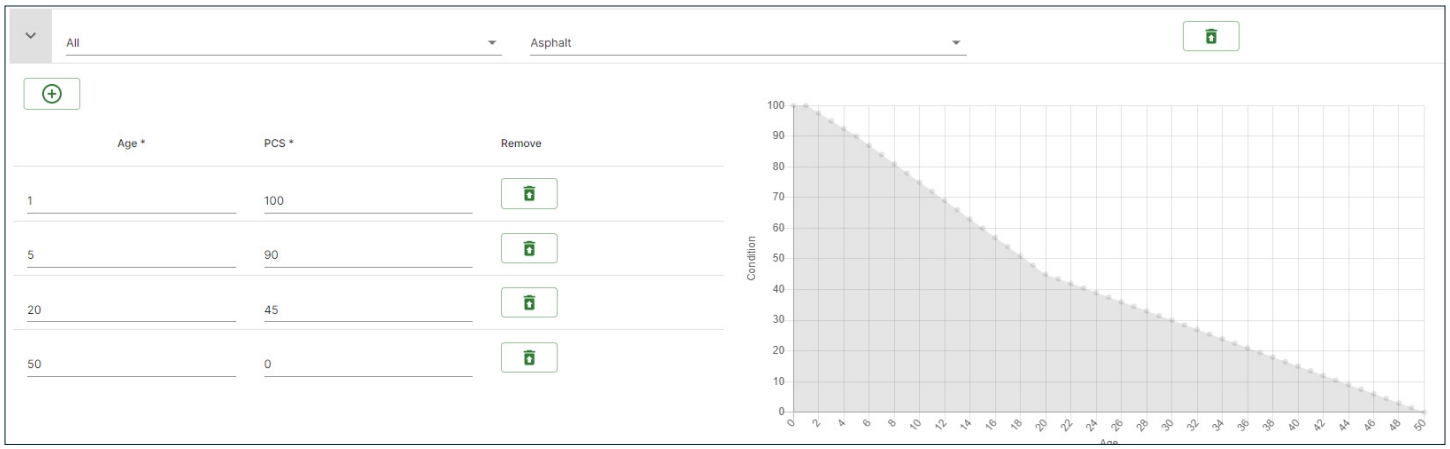

Figure 7: Asphalt Pavement Deterioration Curve in AtlasView

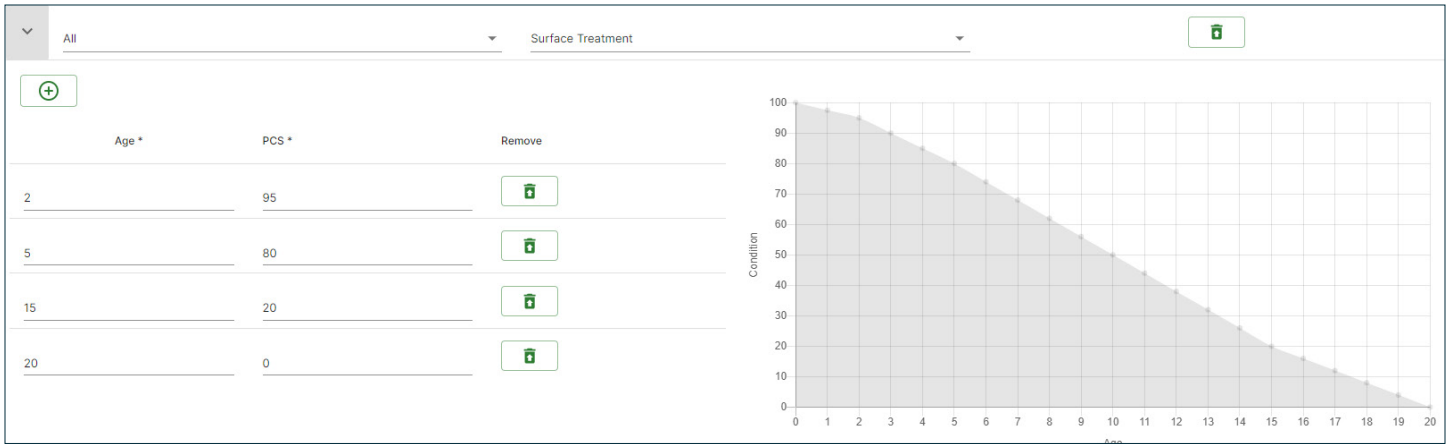

Figure 8: Surface Treatment Deterioration Curve in AtlasView

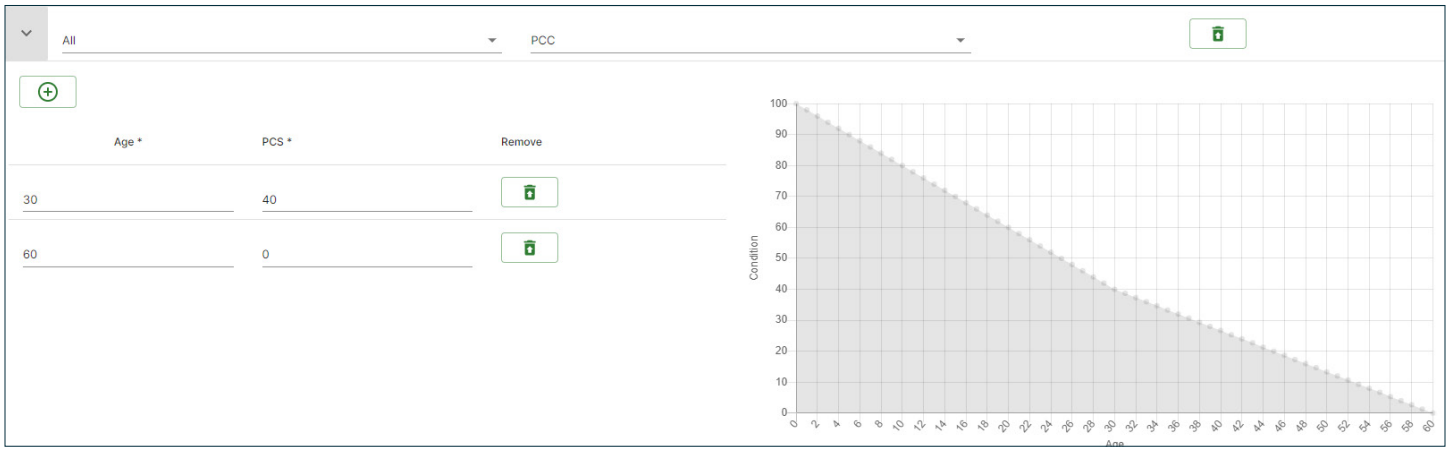

Figure 9: Concrete Pavement Deterioration Curve in AtlasView

4.4 Maintenance Activities

After a detailed discussion with City staff to review the different types of pavement maintenance and rehabilitation activities and their performance, Michael Baker developed a list of recommended activities along with their expected impact on PCI and unit cost. Table 4 shows the Maintenance and Rehabilitation Options that have been entered into the City's AtlasView account.

Activity Name	Condition Impact	Unit Cost
Reconstruction – 6" Asphalt + 8" Base	Reset PCI	$20/sq ft
1.5" Thin Overlay	Reset PCI	$5/sq ft
3" Mill & Overlay	Reset PCI	$9/sq ft
Chip Seal	Increase PCI by 30	$0.8/sq ft
High-Density Mineral Bond	Increase PCI by 30	$0.5/sq ft
Microsurfacing	Increase PCI by 30	$1/sq ft
Slurry Seal	Increase PCI by 30	$0.5/sq ft

Table 4: Maintenance and Rehabilitation Options

Pavement Preservation

The further adoption of pavement preservation activities is highly recommended to the City because pavement preservation is relatively less expensive and helps extend the functional life of the pavement surface by preserving it in good condition. It is important to note that pavement preservation does not add additional structural capacity to roads, rather, it performs best when used on roads that are in Satisfactory Condition or better. While the City has used slurry seals extensively, information from the City suggests that Class-3 slurry seals have not always performed well on the City's roads. However, the City has reported positive experiences with the use of rubberized slurry seals, which perform better in the high temperatures that are common in the City during the summer months.

The pavement preservation activities incorporated in the City's Maintenance and Rehabilitation Options include slurry seals, microsurfacing, and chip seals. High-density mineral bonds and alternatives to slurry seals have also been added as an option for potential use on residential roads. Although the City does not have prior experience with high-density mineral bonds, these preservation applications are increasingly being adopted by municipalities with similar climates in Arizona, Utah, and Texas. The City may elect to perform small-scale demonstration projects to further assess the performance of high-density mineral bonds compared to slurry seals. Furthermore, it is also recommended that the City use microsurfacing on higher-traffic roads, such as Arterials and Collectors, while using chip seals on rural roads.

When used appropriately, these pavement preservation activities can extend the functional life of the roadway pavement surface by up to 10 years.

Rehabilitation

Once roadway pavement conditions fall out of the preservation range (below a PCI of 70), it is recommended to initiate rehabilitation activities to restore the roadway pavement surface. Two rehabilitation options have been included in the City's Maintenance and Rehabilitation Options: thin overlays and thick overlays. Thin overlays are recommended to be no more than 1.5 inches thick while thick overlays can be up to 3 inches thick with some milling of the existing surface. In some instances, patching repairs may be needed before rehabilitation to address any localized issue that may compromise the performance of the rehabilitation. Additionally, it is recommended that crack sealing be performed prior to rehabilitation, especially for think overlay applications, to reduce the probability of existing cracks reflecting and forming on the surface of the rehabilitated pavement.

The City is encouraged to consider the use of geosynthetic and asphalt interlayers to enhance asphalt overlays by arresting existing cracks below the overlay surface, especially for projects where there is extensive cracking on the existing pavement surface. Additionally, the City is encouraged to consider the use of in-place recycling (cold in-place and hot in-place recycling) as a way to preserve the existing pavement by reusing it for rehabilitation. In-place recycling involves the milling of the top 2 to 5 inches of pavement and mixing it with a binder to re-pave it immediately. In-place recycling is performed by using a "train" of milling, paving, and compacting equipment, significantly reducing construction time since roads can usually be opened immediately after construction, and reducing virgin material needed for the construction project.

Reconstruction

Once roadway pavement conditions drop below a PCI of 30, the City should consider reconstruction. Besides restoring the roadway pavement, reconstruction also offers an opportunity for the City to reconfigure lanes, realign geometries, and implement "Complete Streets" designs. The reconstruction option in the City's Maintenance and Rehabilitation Options includes 6 inches of asphalt concrete over 8 inches base course.

Ongoing Maintenance

Ongoing roadway maintenance such as crack sealing and pothole filling is expected to occur as needed. Because they should be part of the regular roadway maintenance operations, these activities are not added to the Maintenance and Rehabilitation Options list. The City is encouraged to continue regular crack sealing operations on roads that are in Fair condition or better. Crack sealing reduces the amount of moisture and debris that enter the pavement structure through surface cracks and increases the performance and functional life of the pavement. Potholes should also be filled as soon as observed so that they do not pose any safety risks for the traveling public and delay further deterioration of the pavement surface around the pothole.

4.5 Maintenance Policy

A maintenance policy was developed and uploaded into the City's AtlasView account that includes a decision tree detailing the condition range that warrants the application of preservation, rehabilitation, and reconstruction activities discussed in the previous section.

Table 5 describes the recommended PCI range for the application of each maintenance and rehabilitation activity for the City's roadway network. The City can update or revise the maintenance policy directly in AtlasView. It is recommended that the City reviews the maintenance policy at least every two years to make sure it aligns with field observations and maintenance objectives.

Activity Type	Functional Classification	PCI Range
Reconstruction – 6” Asphalt + 8” Base	All	Less than or equal to 30
1.5” Thin Overlay	All	Between 55 and 65
3” Mill & Overlay	All	Between 35 and 45
Chip Seal	Rural	Between 70 and 85
Microsurfacing	Arterial & Collector	Between 70 and 85
Slurry Seal	Residential	Between 70 and 85
Slurry Seal	Increase PCI by 30	$0.5/sq ft

Table 5: Maintenance Policy Decision Matrix

4.6 AtlasView Public Dashboard

One of the project’s objectives was to increase transparency and facilitate easy access to roadway condition information for all City residents. To achieve this, Michael Baker implemented AtlasView’s Public Dashboard (Dashboard) for the City alongside the new pavement management system. The Dashboard is web-based and can be accessed through a URL (Infrastructure Management (atlasview.co)) which can be provided for public access on the City’s website. The Dashboard can also be embedded into the City’s website for added functionality.

The Dashboard is connected to the City’s pavement management system in real-time and provides up-to-date pavement condition information of the City’s roadway network. The Dashboard includes a color-coded map that shows the condition of the City’s roadway network. Users can zoom in and select a specific street to learn about the condition of that street segment. Figure 10 provides an image of the City’s Dashboard.

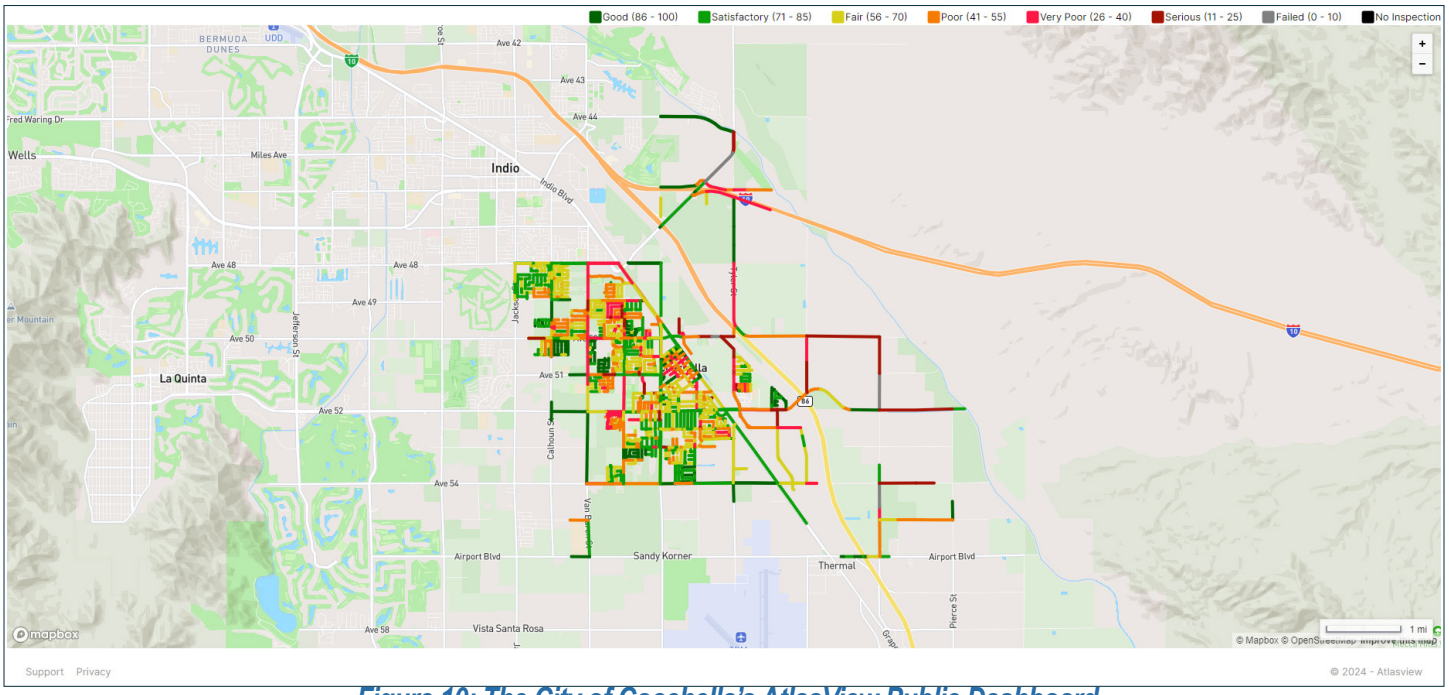

Figure 10: The City of Coachella’s AtlasView Public Dashboard

5.0 PAVEMENT MANAGEMENT ANALYSIS

After uploading pavement condition data, deterioration models, maintenance activities, and the maintenance policy, Michael Baker performed a pavement management analysis that included six scenarios. These scenarios were analyzed for a period of ten years and show the expected roadway network condition as a result of six distinct annual investment plans over the analysis period. The findings and observations of these analyses are described in the following sections.

5.1 Scenario 1: Unlimited Budget

The Unlimited Budget scenario analyzes a hypothetical scenario in which the City has a "blank check" to perform all necessary pavement maintenance, rehabilitation, and reconstruction based on the established maintenance policy. While it is unlikely that any municipal agency would have access to funding that enables this scenario, the results provide an opportunity to review how much funding would be needed to "do everything."

The results of the analysis show that the City needs to invest approximately $18 million annually, on average, over the next 10 years to perform all recommended maintenance rehabilitation tasks. The average roadway PCI after 10 years is expected to be 99.9. Figure 11 shows annual fluctuations of the budget and condition over the analysis period.

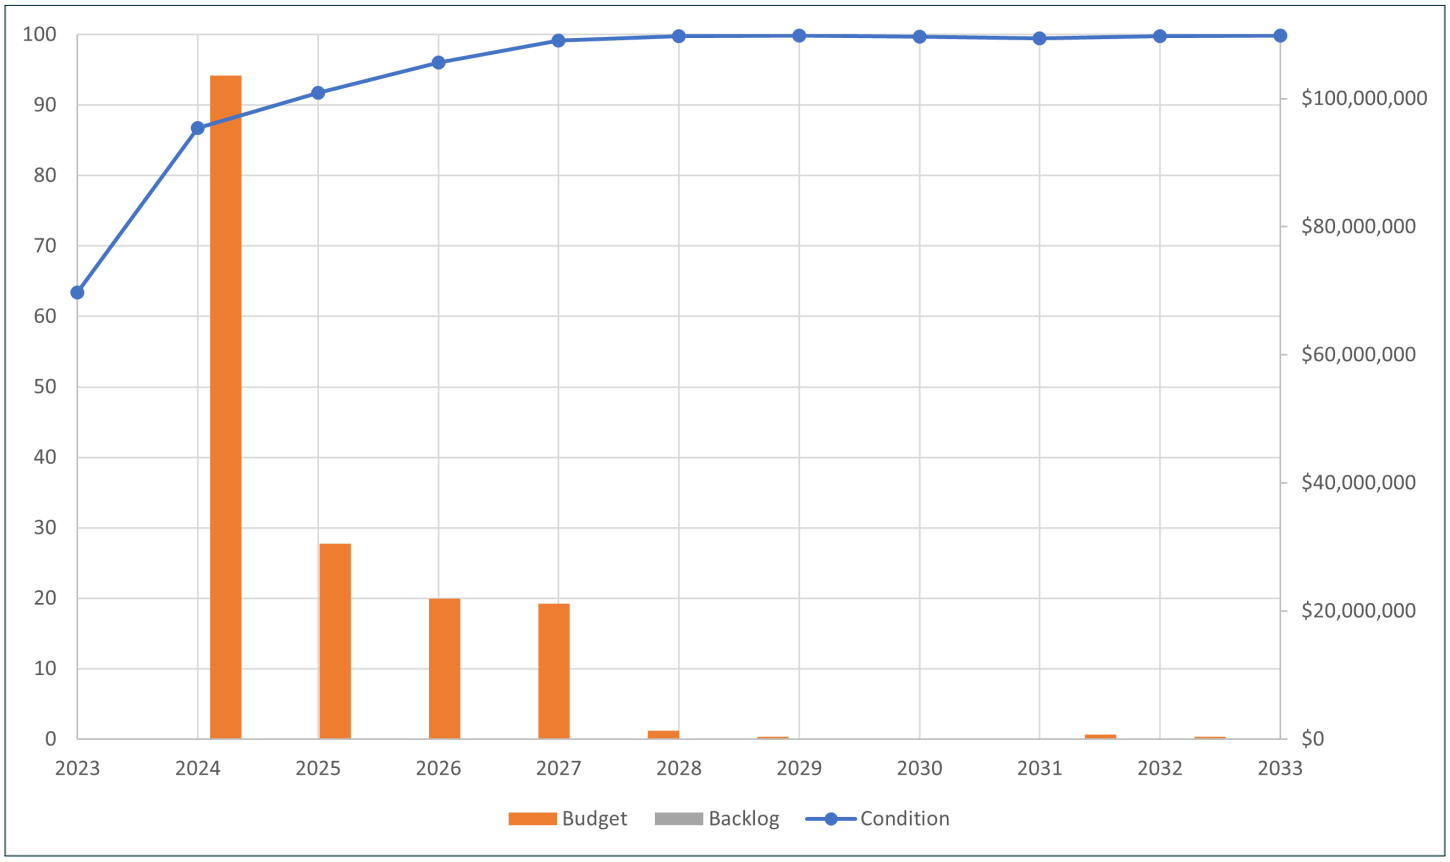

Figure 11: Annual Budget, Backlog, and Condition for the "Unlimited Budget" Scenario

As seen in Figure 11, this scenario includes a high investment of approximately $130.6 million in the first year to perform all activities that are currently in backlog; the following three years require a relatively reduced annual investment ranging approximately from $30.5 million to $31 million. The final six years have low annual investment requirements ranging from $24,000 to $1.3 million. Figure 12 shows how the network condition is expected to change for the analysis period.

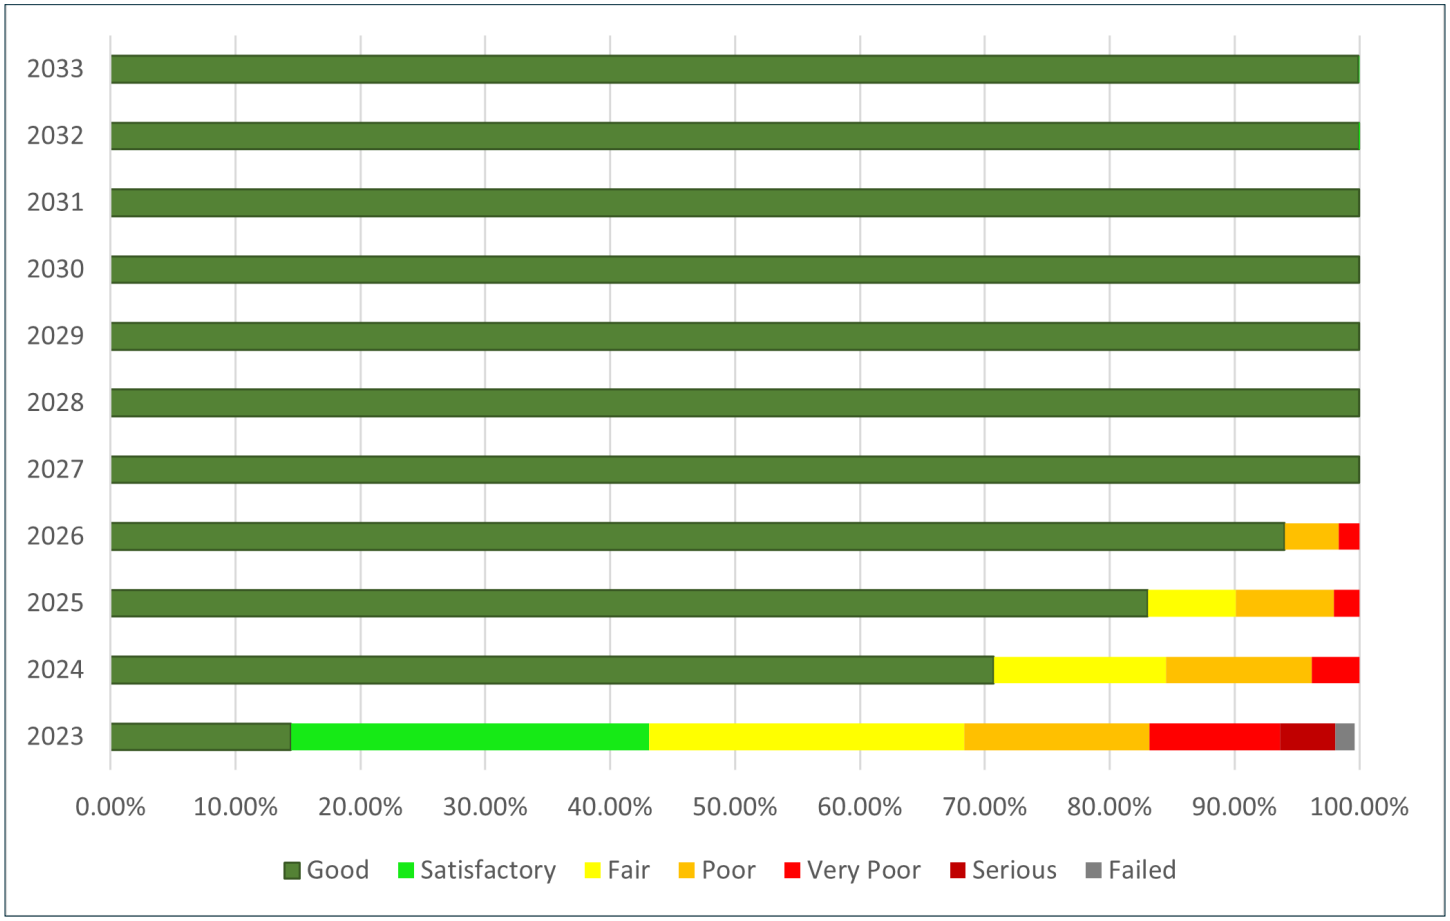

Figure 12: Changes in Network Pavement Condition for the "Unlimited Budget" Scenario

Appendix B includes the detailed annual work plan generated as part of this scenario analysis.

5.2 Scenario 2: Backlog Elimination

The Backlog Elimination scenario analyzes a hypothetical scenario in which the City has the needed funds to perform all necessary pavement maintenance, rehabilitation, and reconstruction based on the established maintenance policy with the goal of eliminating all backlog in 10 years. Similarly to the Unlimited Budget scenario, few municipal agencies would realistically have access to the level of funding that enables this scenario; however, this analysis provides an opportunity to review how much funding would be needed to gradually reduce the backlog of pavement maintenance work in the City.

The results of the analysis show that the City needs to invest approximately $20.2 million annually, on average, over the next 10 years to perform all recommended maintenance rehabilitation tasks. The average roadway PCI after 10 years is expected to be 98.6. Figure 13 shows annual fluctuations of the budget, backlog, and condition over the analysis period.

Figure 13: Annual Budget, Backlog, and Condition for the "Backlog Elimination" Scenario

As seen in Figure 13, this scenario includes a relatively stable annual budget ranging from approximately $20.7 million to $18.7 million, while the backlog gradually and consistently decreases over the analysis period. While the end network condition for the Backlog Elimination scenario is similar to the Unlimited Budget scenario (a difference of only 1.3 PCI points), the average annual budget and total investment for the two scenarios are different. The Backlog Elimination scenario requires an additional $2.2 million of investment per year resulting in over $22.1 million more in investments over the analysis period. This difference reflects the increasing cost of deferred work. Deferring work increases backlog and addressing it in the future often requires even more funds due to the expected continual condition deterioration of roadway pavements. Therefore, it is critical to consider managing and reducing the backlog of work in addition to aiming to improve the roadway network condition.

Figure 14 shows how the network condition is expected to change for the analysis period.

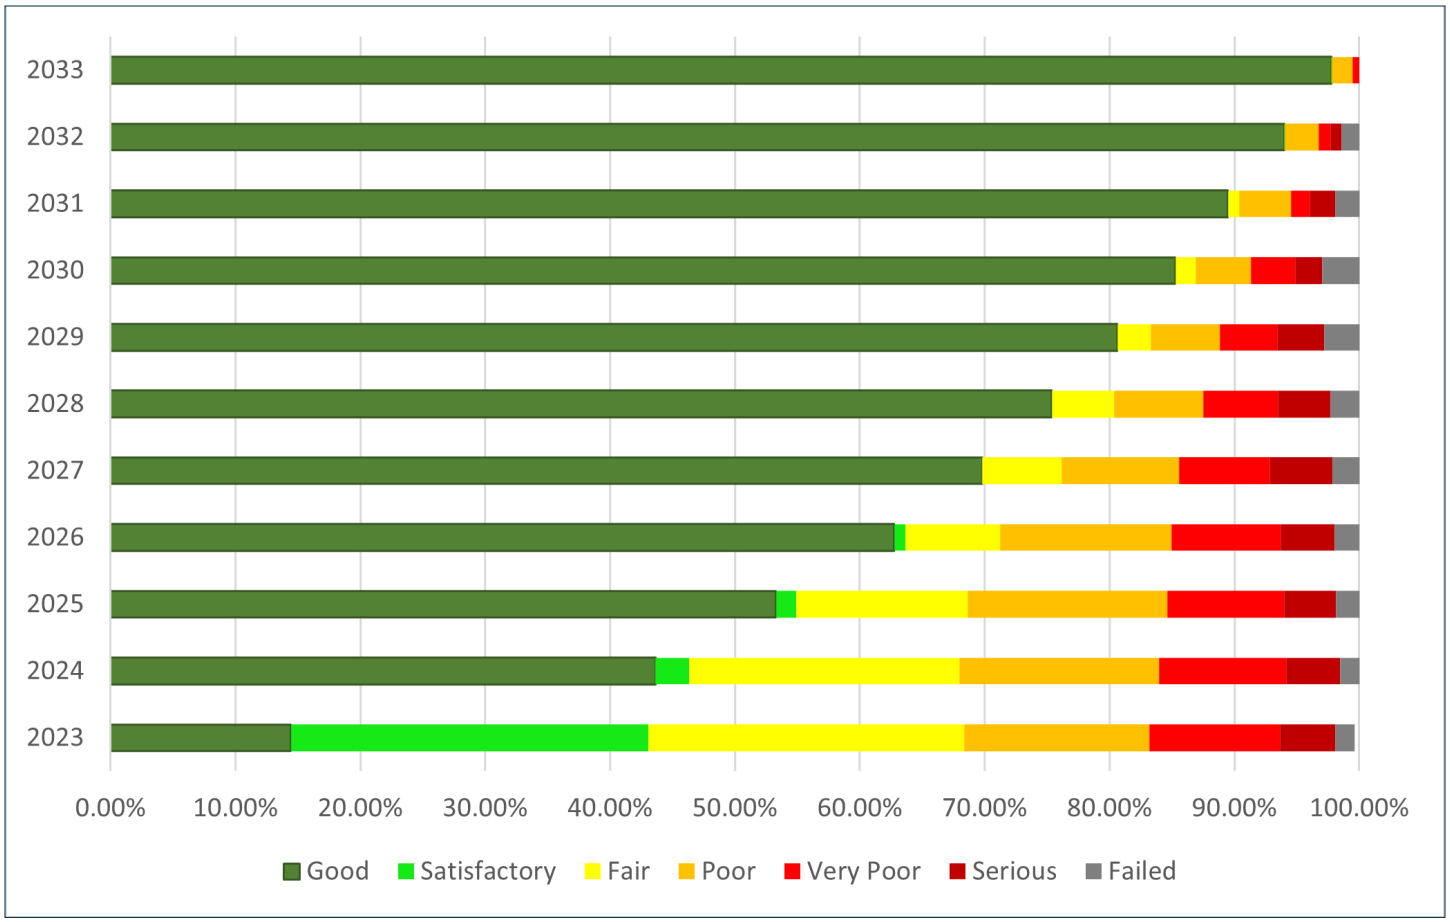

Figure 14: Changes in Network Pavement Condition for the "Backlog Elimination" Scenario

Appendix C includes the detailed annual work plan generated as part of this scenario analysis.

5.3 Scenario 3: Do Nothing

The Do Nothing scenario analyzes a hypothetical scenario in which the City has no funds to perform any of the necessary pavement maintenance, rehabilitation, and reconstruction based on the established maintenance policy over the next 10 years. Similarly to the previous two scenarios, few municipal agencies would find themselves in a situation where there is no roadway maintenance funding available for a decade; however, this analysis provides an opportunity to review the impact of a sustained lack of maintenance of the roadway pavement infrastructure.

The results of the analysis show that the City's average roadway PCI is expected to fall to 40.3 after 10 years. Figure 15 shows annual fluctuations of the backlog and condition over the analysis period.

Figure 15: Annual Budget, Backlog, and Condition for the "Do Nothing" Scenario

As seen in Figure 15, the backlog gradually and consistently grows over the analysis period and reaches over $244.1 million at the end of the analysis period.

Figure 16 shows how the network condition is expected to change for the analysis period.

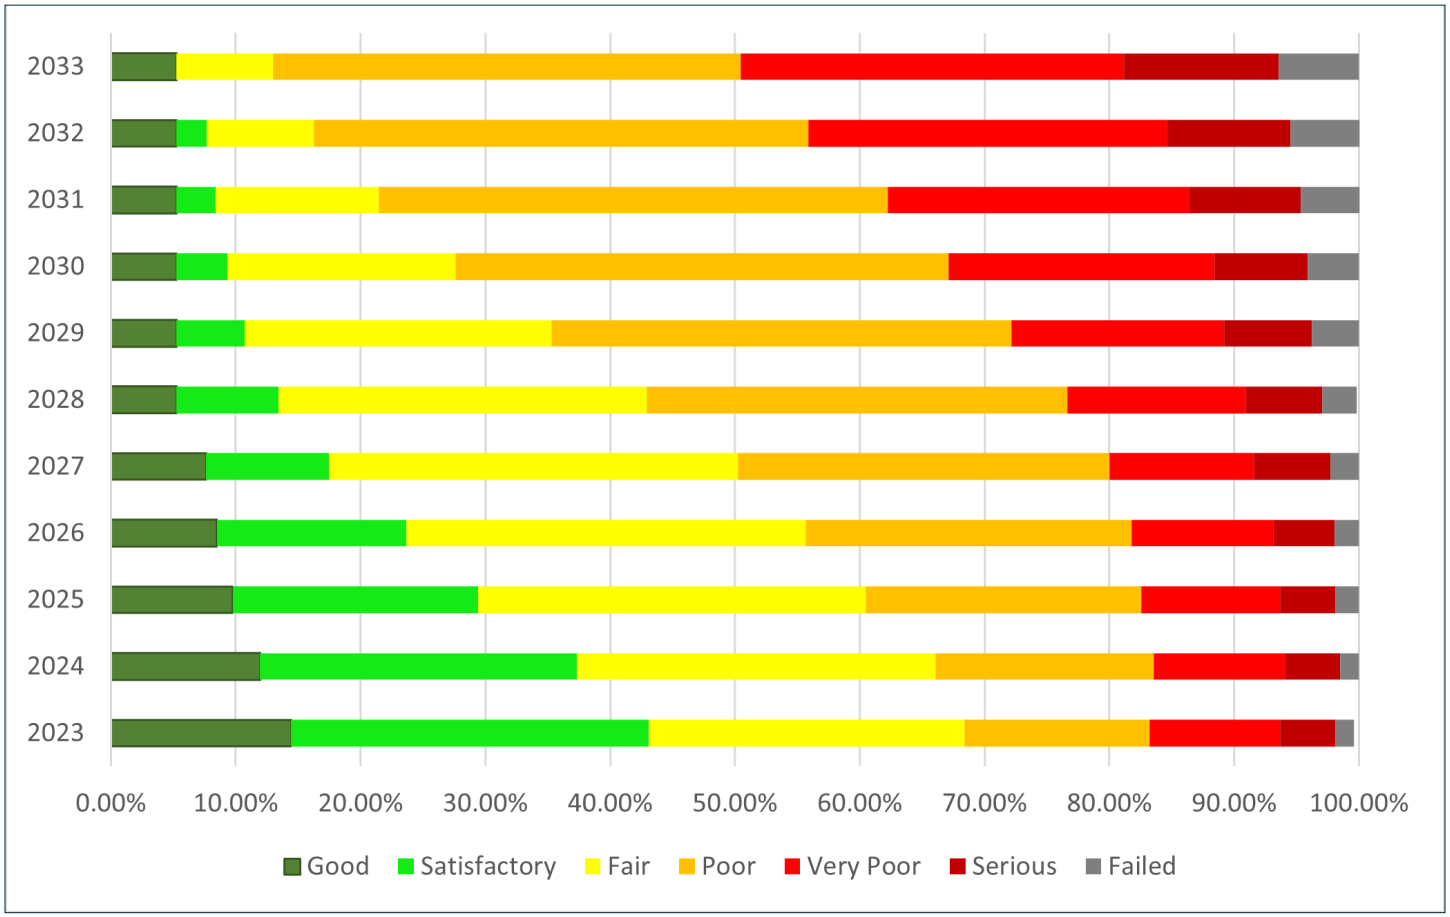

Figure 16: Changes in Network Pavement Condition for the "Backlog Elimination" Scenario

5.4 Scenario 4: Maintain Current Condition

The Maintain Current Condition scenario forecasts the necessary investment for the City to maintain the current average condition of its roadway network over the analysis period. The results of the analysis show that the City needs to invest approximately $4.6 million annually, on average, over the next 10 years to perform all recommended maintenance rehabilitation tasks. After 10 years, the average roadway pavement condition is expected to remain the same (PCI of 63.4). However, the PCI will fluctuate between 63.2 and 66 over the analysis period.

Figure 17 shows annual budget fluctuations, backlog, and condition over the analysis period.

Figure 18 shows how the network condition is expected to change for the analysis period.

Appendix D includes the detailed annual work plan generated as part of this scenario analysis.

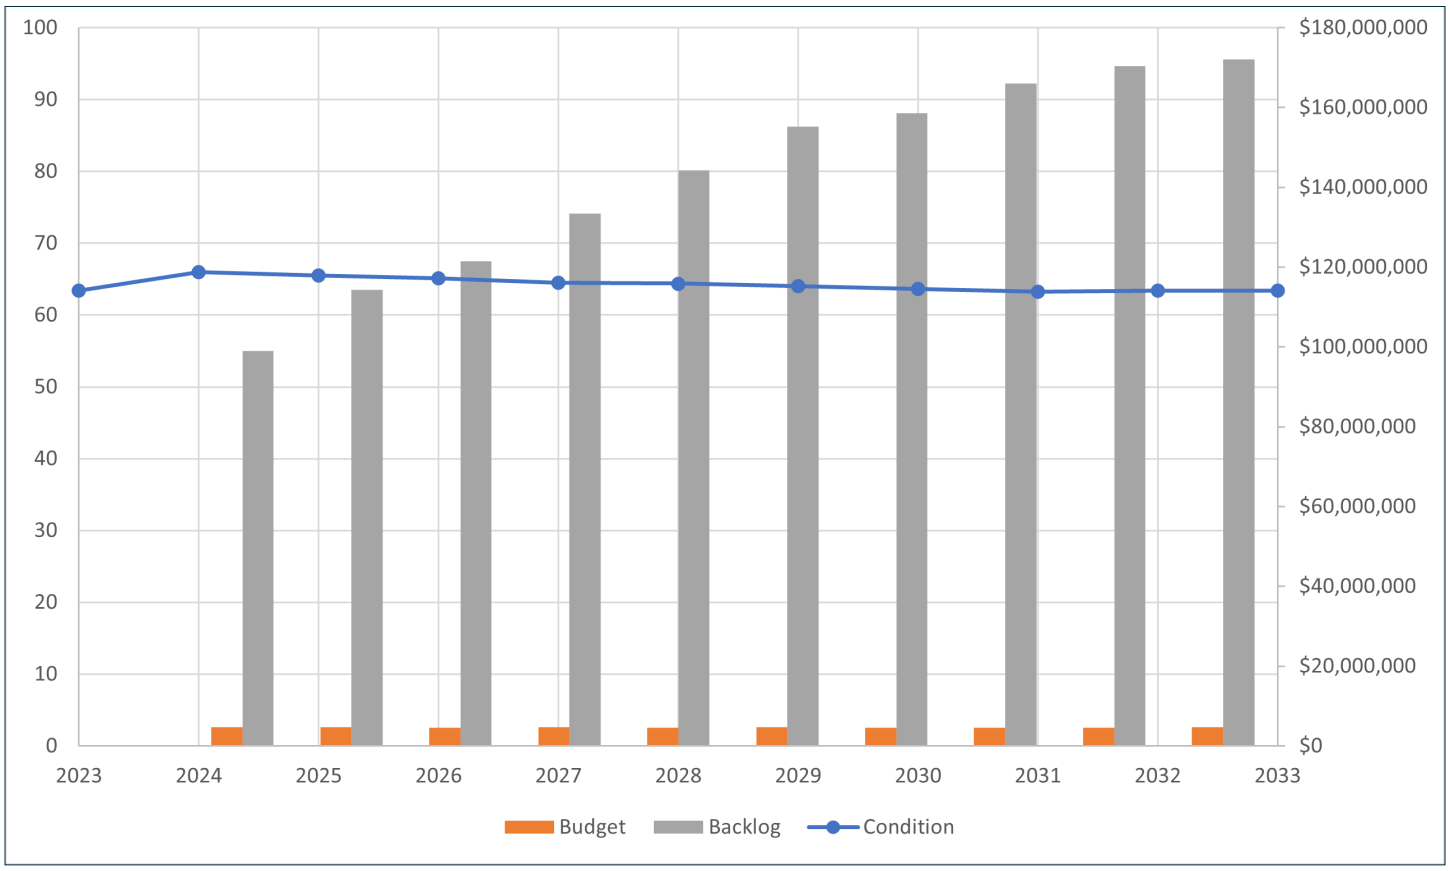

Figure 17: Annual Budget, Backlog, and Condition for the "Maintain Current Condition" Scenario

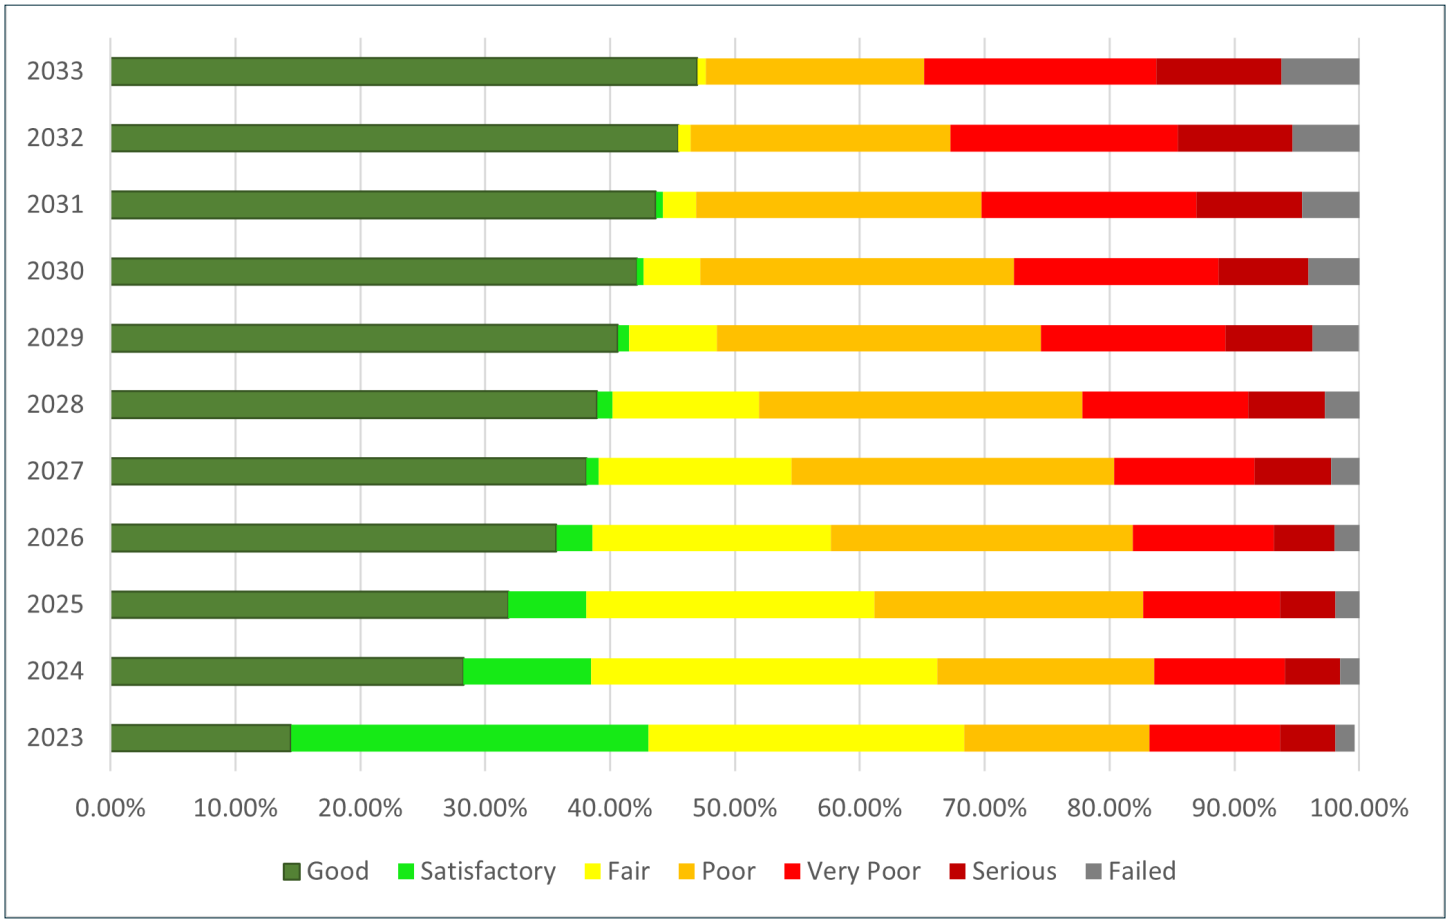

Figure 18: Changes in Network Pavement Condition for the "Maintain Current Condition" Scenario

5.5 Scenario 5: Reach PCI of 70

The Reach PCI of 70 scenario forecasts how much investment the City needs to make so that the roadway network average condition reaches a PCI of 70 over the analysis period. The results of the analysis show that the City needs to invest approximately $6.9 million annually, on average, over the next 10 years to perform all recommended maintenance rehabilitation tasks. The average roadway pavement condition after 10 years is expected to reach a PCI of 70; however, the PCI will have values ranging between 66.9 and 70 over the analysis period.

Figure 19 shows annual budget fluctuations, backlog, and condition over the analysis period.

Figure 20 shows how the network condition is expected to change for the analysis period.

Appendix E includes the detailed annual work plan generated as part of this scenario analysis.

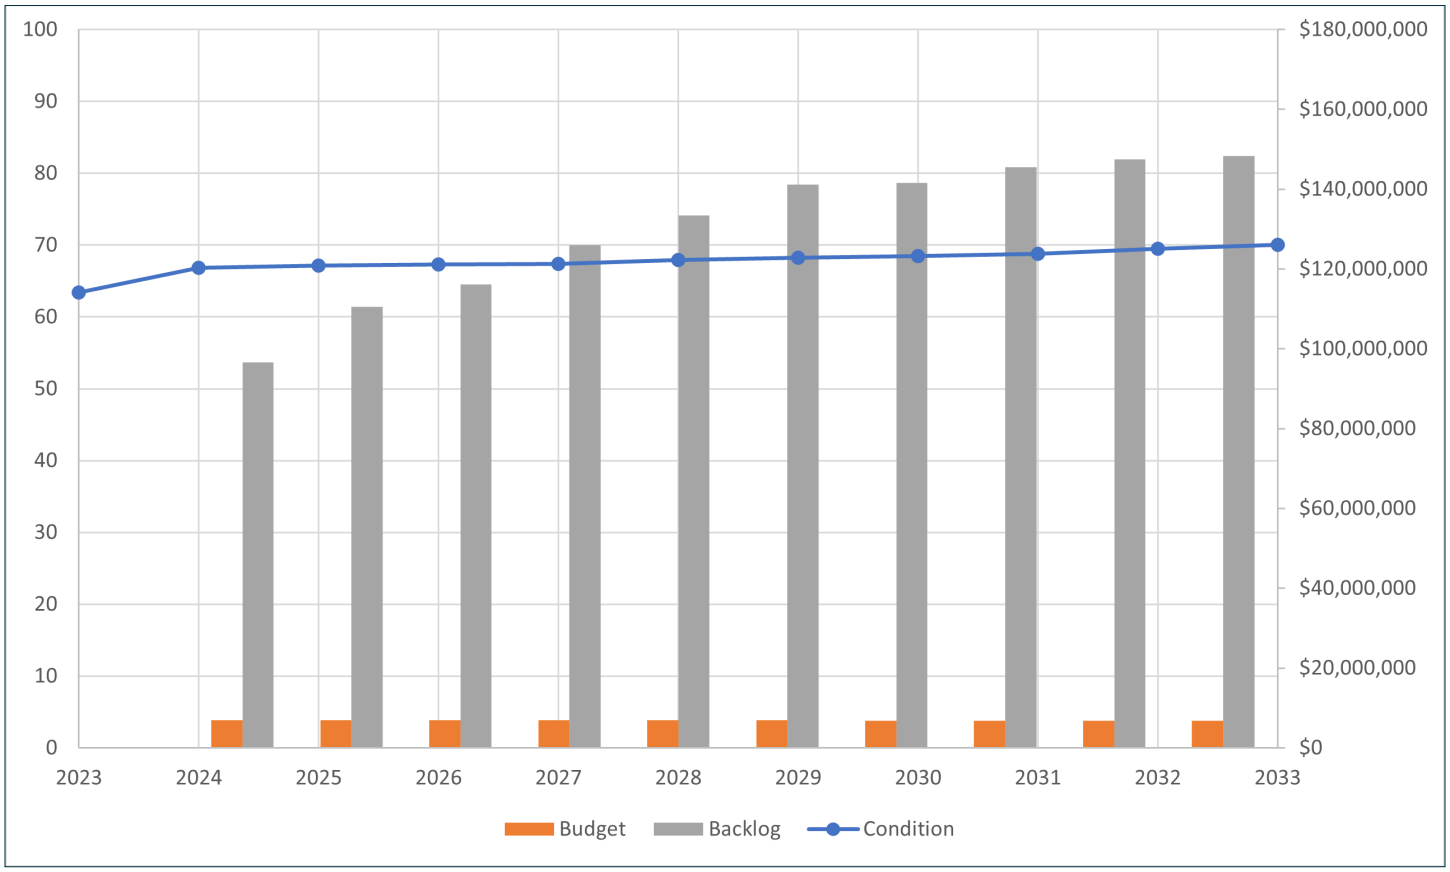

Figure 19: Annual Budget, Backlog, and Condition for the "Reach PCI of 70" Scenario

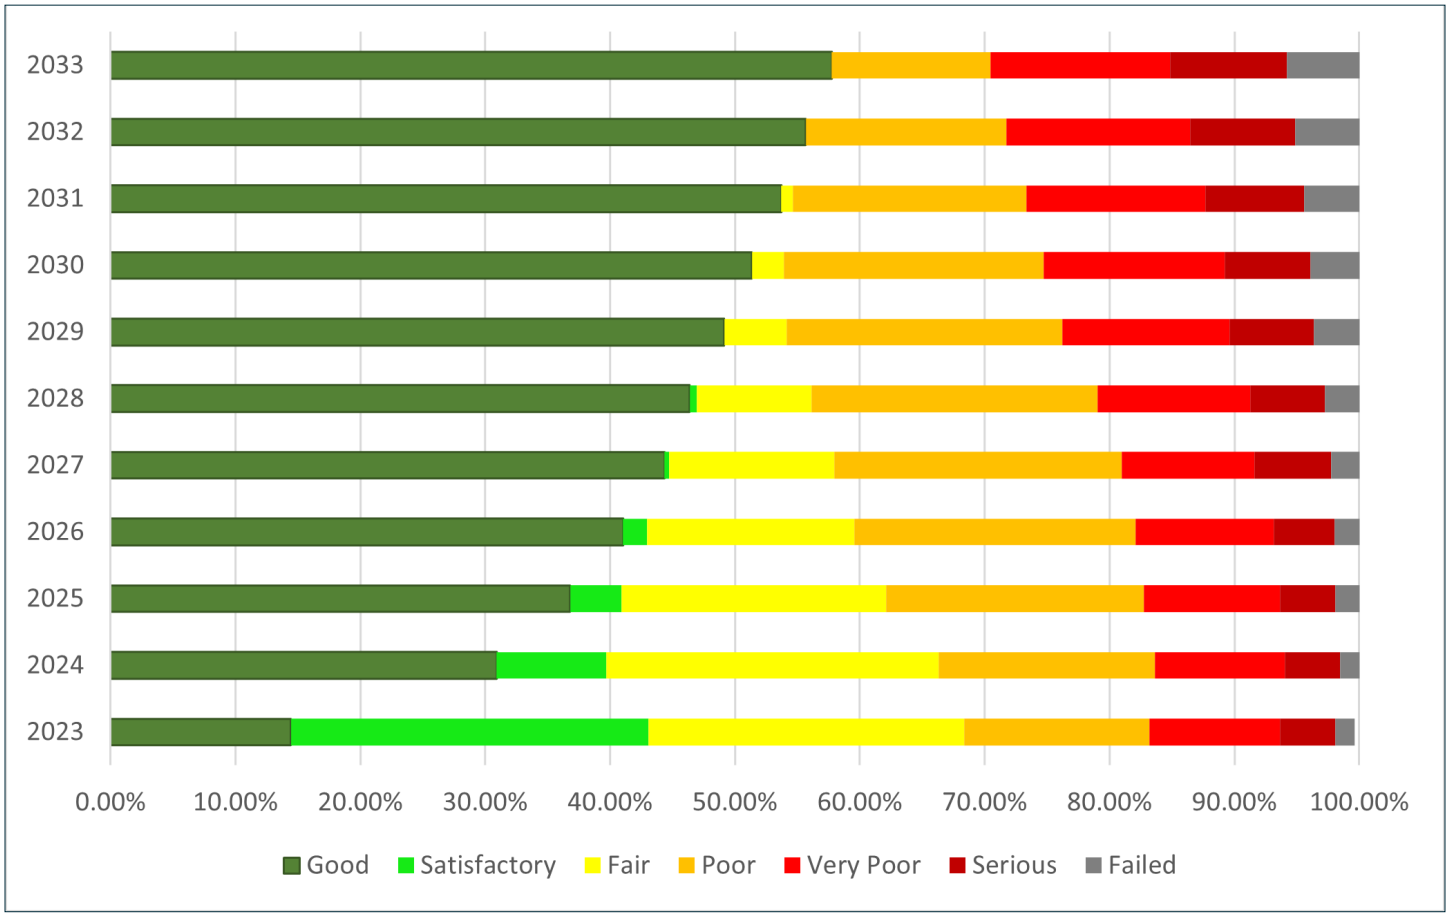

Figure 20: Changes in Network Pavement Condition for the "Reach PCI of 70" Scenario

5.6 Scenario 6: Current Budget

The Current Budget scenario forecasts how the network's average pavement condition changes over the analysis period if the City continues to invest at the current annual budget level of $1 million. The results of the analysis show that the City's average roadway network condition will reduce by approximately 14 points and reach a PCI of 49.6 at the end of the analysis period. Based on the results of this analysis, the City's current budget is insufficient to maintain the status quo and will ultimately lead to severe pavement condition degradation.

Figure 21 shows annual budget fluctuations, backlog, and condition over the analysis period.

Figure 22 shows how the network condition is expected to change for the analysis period.

Appendix F includes the detailed annual work plan generated as part of this scenario analysis.

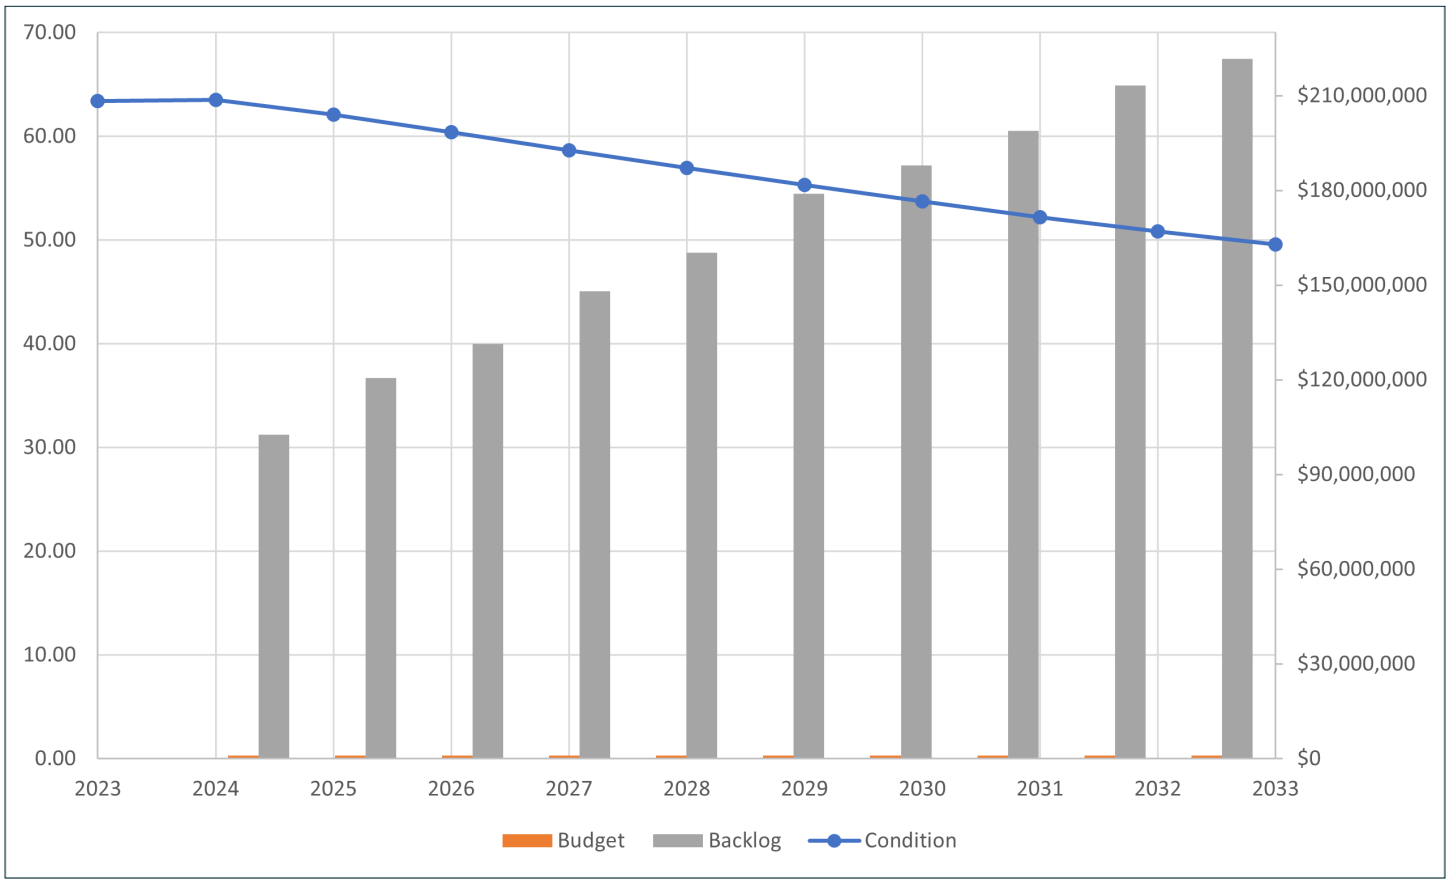

Figure 21: Annual Budget, Backlog, and Condition for the "Current Budget" Scenario

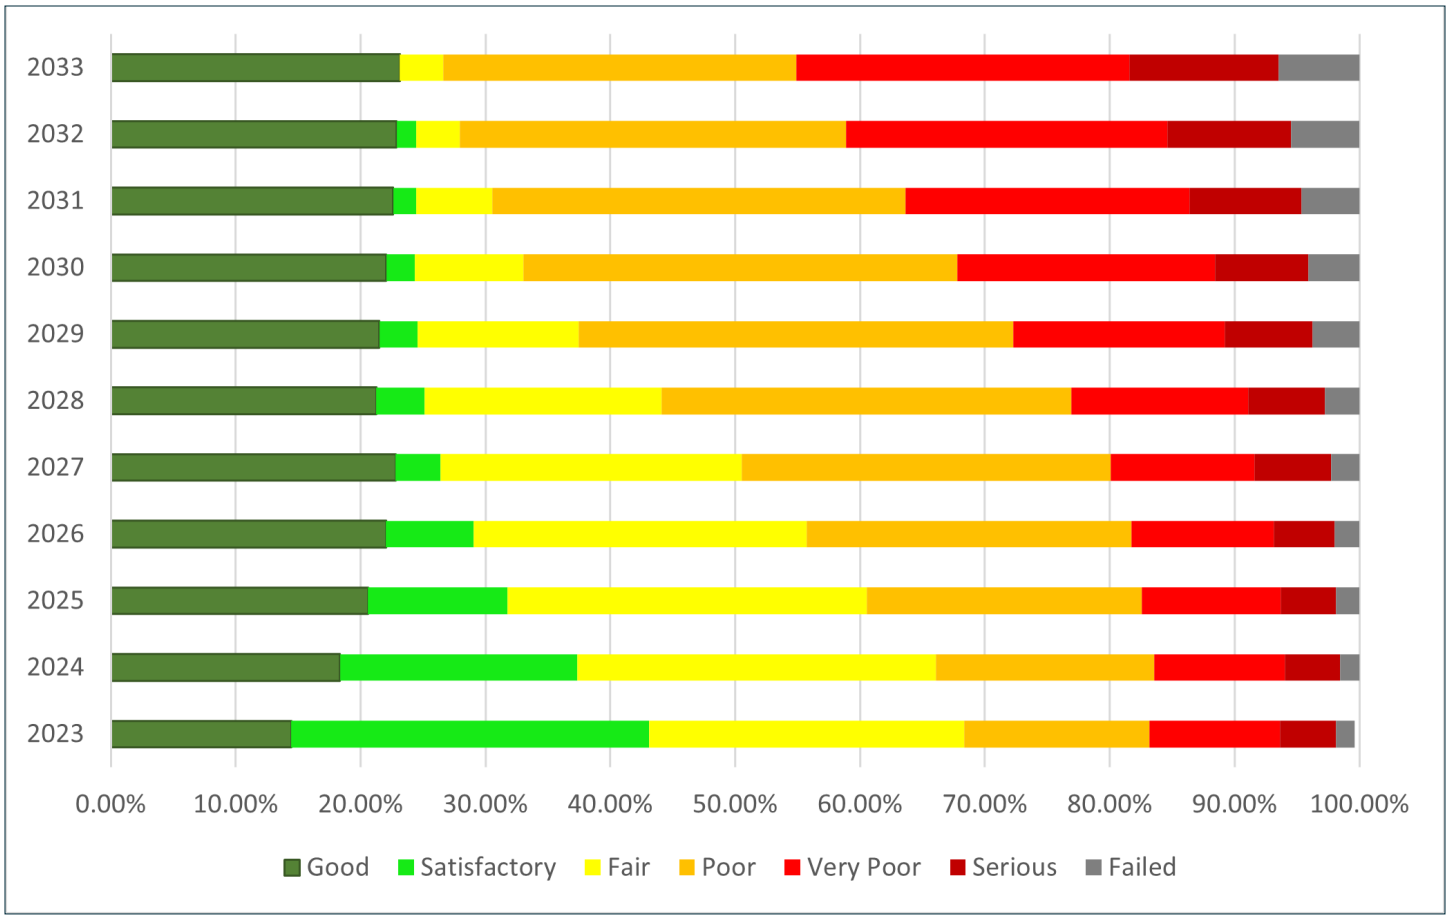

Figure 22: Changes in Network Pavement Condition for the "Current Budget" Scenario

6.0 RECOMMENDATIONS

By gathering objective and accurate pavement condition data and implementing a modern and functional pavement management system, the City has taken a critical step towards understanding how its roadway pavement network condition changes over time and determining the investment levels needed to achieve network condition targets. It is also commendable that the City has increased transparency of the roadway network condition by implementing the AtlasView Public Dashboard. Below are some recommendations from Michael Baker for the City's consideration:

1. Prior to the pavement condition evaluation in November 2023, the last cycle of pavement inspection was conducted seven years ago. It is recommended that the City conduct objective and accurate pavement condition evaluations every three to five years.
2. The City should review the list of maintenance options and the maintenance policy annually to make sure that they are applicable. The review and update can be done directly in the City's AtlasView account.
3. The City should regularly update AtlasView with relevant information such as maintenance records and GIS map updates. A pavement management system, such as the City's AtlasView system implemented as part of this project, remains reliable and accurate only when the underlying data is up to date.
4. The City should find a balance between pavement preservation activities and major rehabilitation or reconstruction activities. It is much more cost-effective to maintain good pavements in good condition through pavement preservation rather than waiting for pavements to reach poor conditions before intervening.

6.1 Budget and Financing

The City's current annual maintenance budget of $1 million is not sufficient to continue maintaining the current condition. It is recommended that the City, at minimum, adopt the findings and recommendations of Scenario 4 (Maintain Current Condition) discussed in Section 5.4, which

suggests that the City increases pavement maintenance and rehabilitation funding to $4.6 million annually so that the current average PCI of 63.4 is maintained over the next 10 years. Increasing the annual pavement maintenance and rehabilitation budget by almost 400% will require the City to look for new revenue sources. Below are further recommendations for the City to consider implementing to secure sufficient and sustainable revenue sources for funding the City's pavement maintenance and rehabilitation budget.

1. **Home Owners' Associations (HOA):** as the City continues to grow, more residential housing developments are expected to come to the City to expand the real estate inventory. The City should consider requiring new housing developments to establish HOAs responsible for managing and maintaining all residential roads within the boundaries of each HOA. This approach will enable the City to continue expanding its roadway network without having the maintenance and rehabilitation responsibility that comes with a growing roadway network.

2. **Community Facility Districts (CFD):** CFDs are independent entities that can levy taxes for the purpose of infrastructure development and maintenance. CFDs can be established by municipal governments; however, all debts and financial obligations of CFDs are typically not liabilities of the municipal government that established the CFDs. The City should consider establishing a CFD for all new developments to fund their roadway repair and maintenance needs. This CFD can also serve as a taxing entity that raises funds for other infrastructure development and maintenance fund such as water/wastewater facilities, park improvement, school facilities, and landscaping improvements. Additionally, the City should also consider establishing a CFD to raise funds for citywide pavement maintenance and rehabilitation needs.

3. **Tax:** an alternative method to raise additional funds for roadway maintenance is to levy tax. A common approach is to levy additional sales tax or gasoline tax that would be indexed to the Consumer Pricing Index and be dedicated to citywide pavement rehabilitation and preservation. For example, Washoe County (Nevada) has implemented a voter approved gasoline tax that directly funds the countywide pavement preservation projects; this dedicated and sustainable funding has enabled Washoe County to have one of the best implemented pavement preservation programs in the country. The City should consider implementing an additional tax measure through sales and gasoline tax to establish a dedicated, consistent, and sustainable funding source for roadway maintenance and rehabilitation.

4. **Grants:** regional entities (such as CVAG and RCTC), state government, and federal agencies have grants that municipal governments and local agencies can have access to for roadway improvement projects. These grants are usually targeted towards projects that improve existing roadways through implementations of "complete streets", updated transit corridors, multiuse paths, and other roadway features that expand the use of the roadway. While meeting the primary grant requirements, these funds could also help pay for roadway pavement improvements. There usually are limited amount of grants available; however, the City should consider seeking out and applying for applicable grants to help fund some of the major roadway rehabilitation projects while also addressing other associated road use challenges.

5. **Riverside County Transportation Commission (RCTC) Tax Relief Plan:** The RCTC has proposed a Traffic Relief Plan that seeks to raise funds through a sales tax measure to help with regional transportation projects. This tax measure is expected to be on the ballot later in 2024 and, if approved, could be managed and administered through CVAG. The City should continue to work closely with CVAG to ensure that the City's pavement maintenance and preservation needs are known, and actively work towards securing a consistent funding stream from this tax measure for the City's pavement maintenance budget.

APPENDIX A:
ROAD INVENTORY WITH 2023 INSPECTION

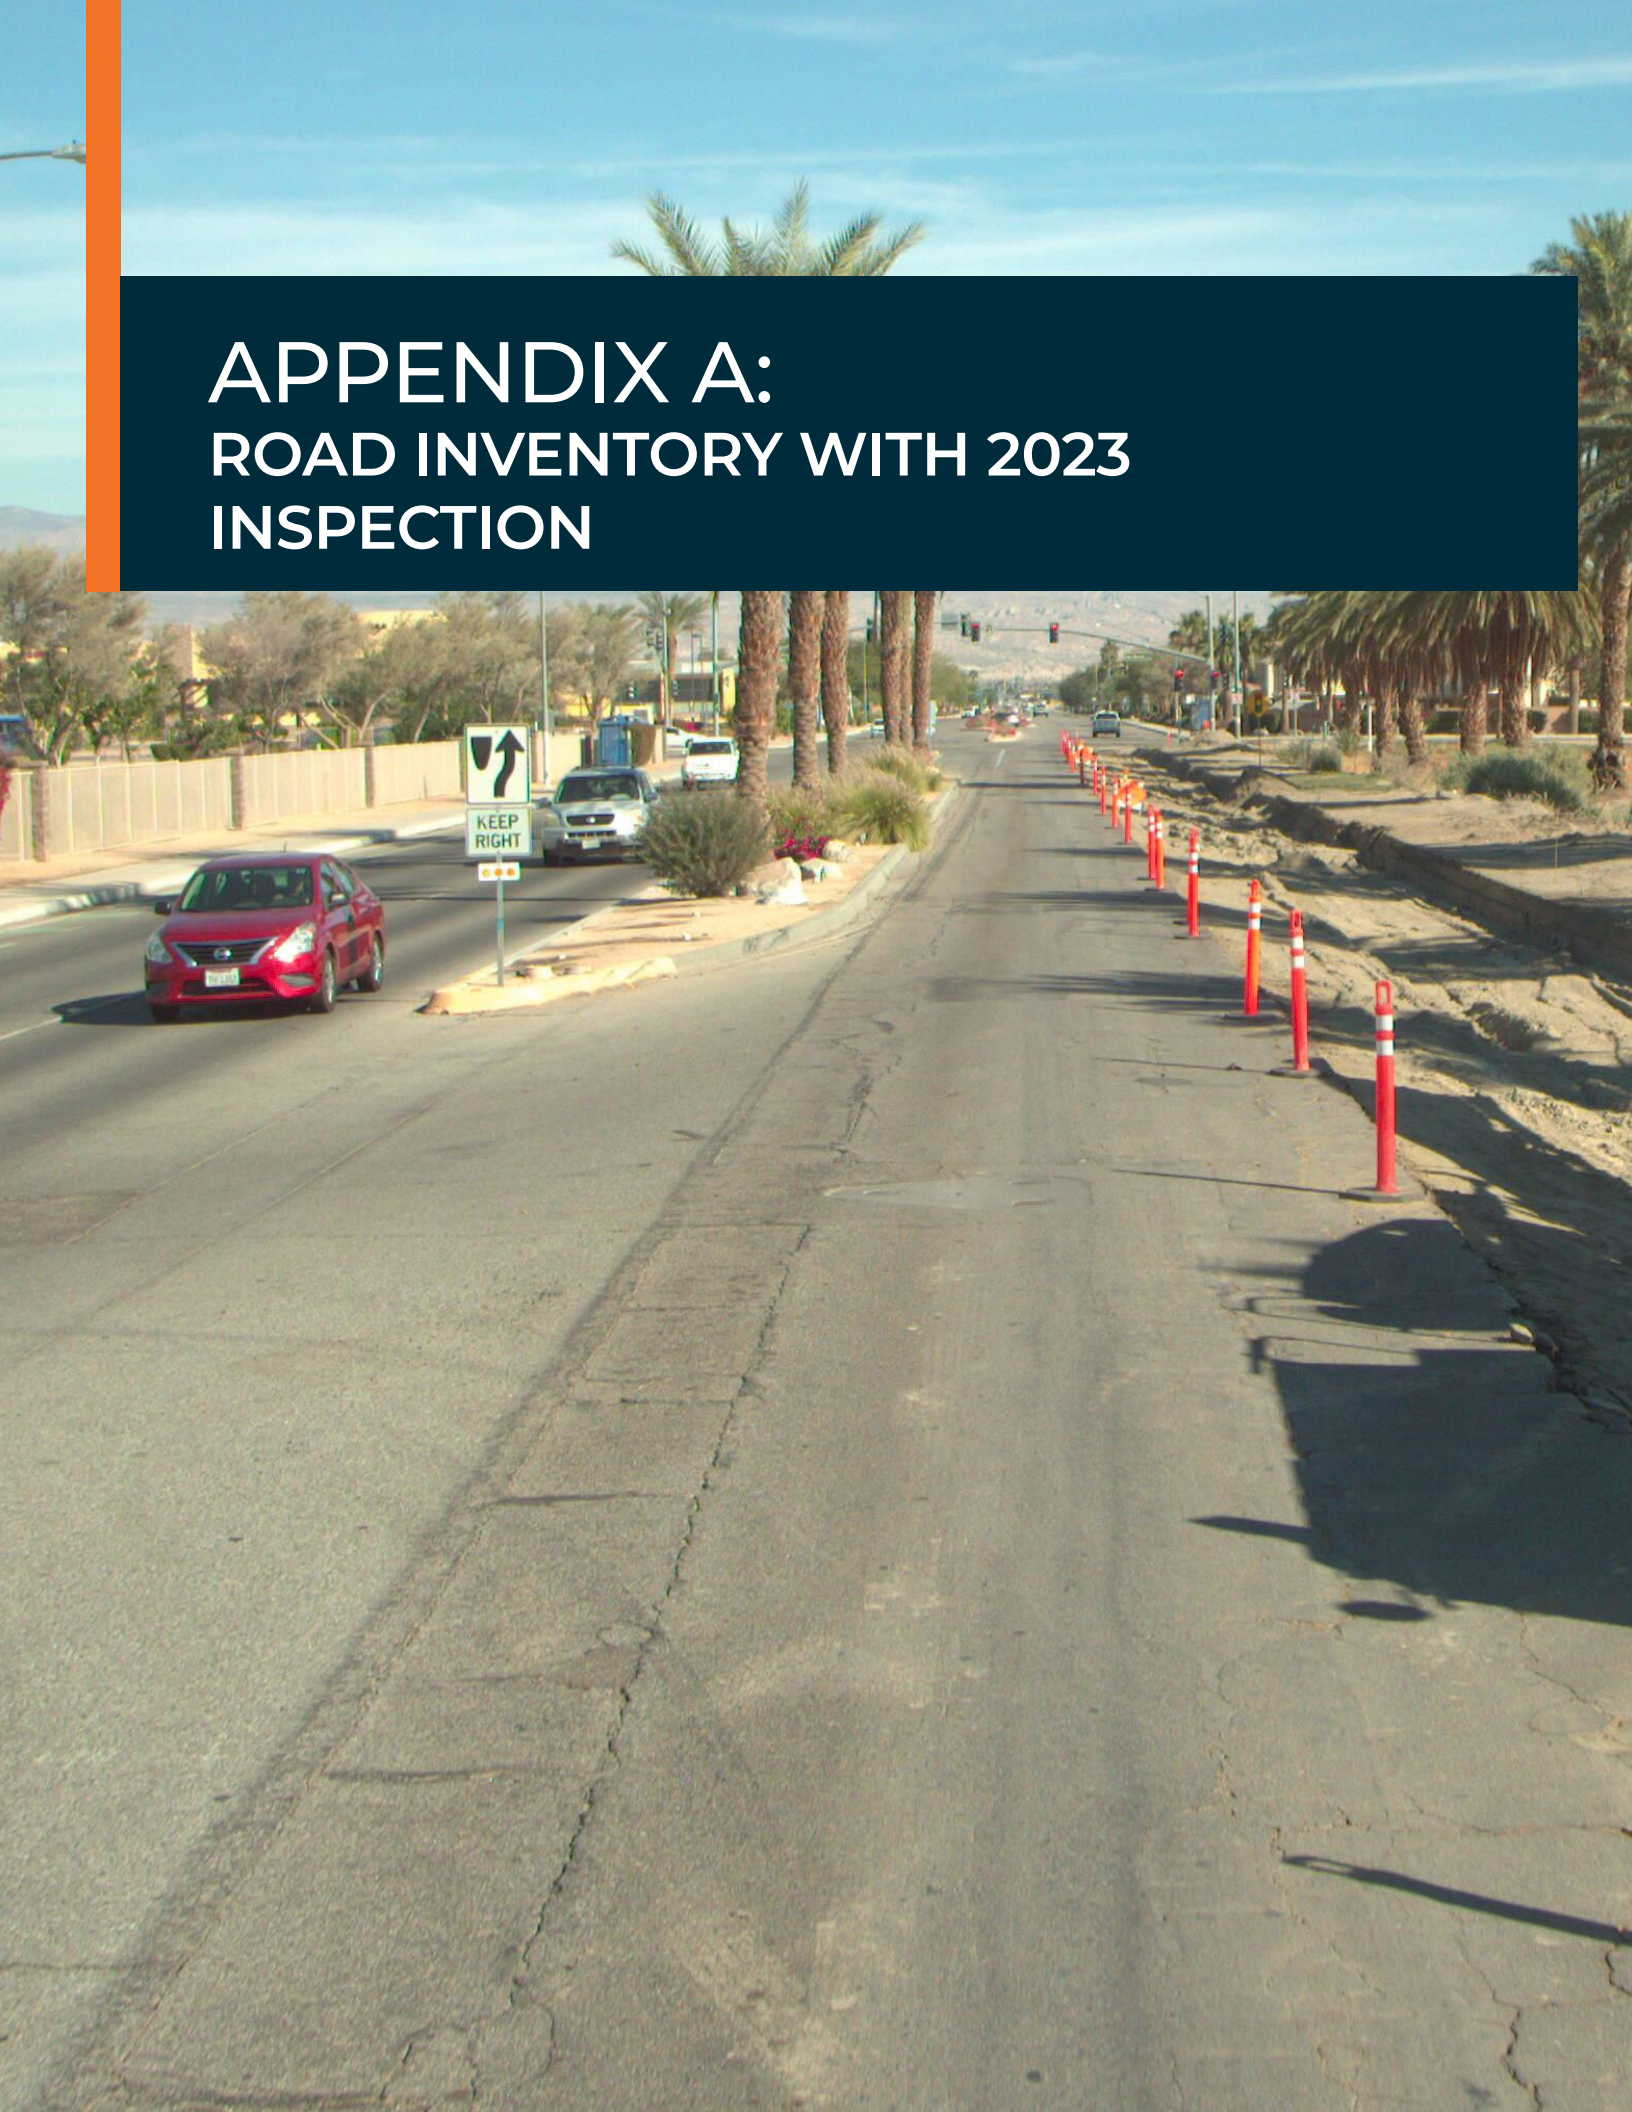

Asset Id	Name	Start Location	End Location	Length	Width	Area	Functional Classification	Pavement Type	Last Inspection PCI	Last Inspection Date
COACH::1STST::1	1ST ST	SH-86	PALM AVE	183	57	10431	Collector	Asphalt	60	11/6/2023
COACH::1STST::2	1ST ST	PALM AVE	ORCHARD AVE	426	57	24282	Collector	Asphalt	65	11/6/2023
COACH::1STST::3	1ST ST	ORCHARD AVE	VINE AVE	425	57	24225	Collector	Asphalt	82	11/6/2023
COACH::1STST::4	1ST ST	VINE AVE	SH-111	454	57	25878	Collector	Asphalt	79	11/6/2023
COACH::2NDST::1	2ND ST	D/E	PALM AVE	387	56	21672	Collector	Asphalt	54	11/6/2023
COACH::2NDST::2	2ND ST	PALM AVE	ORCHARD AVE	426	56	23856	Collector	Asphalt	49	11/6/2023
COACH::2NDST::3	2ND ST	ORCHARD AVE	VINE AVE	425	56	23800	Collector	Asphalt	45	11/6/2023
COACH::2NDST::4	2ND ST	VINE AVE	ALLEY	245	56	13720	Collector	Asphalt	50	11/6/2023
COACH::2NDST::5	2ND ST	ALLEY	SH-111	206	56	11536	Collector	Asphalt	58	11/6/2023
COACH::3RDST::1	3RD ST	D/E	PALM AVE	387	56	21672	Collector	Asphalt	49	11/6/2023
COACH::3RDST::2	3RD ST	PALM AVE	ORCHARD AVE	425	56	23800	Collector	Asphalt	38	11/6/2023
COACH::3RDST::3	3RD ST	ORCHARD AVE	VINE AVE	425	56	23800	Collector	Asphalt	36	11/6/2023
COACH::3RDST::4	3RD ST	VINE AVE	ALLEY	245	56	13720	Collector	Asphalt	54	11/6/2023
COACH::3RDST::5	3RD ST	ALLEY	SH-111	207	56	11592	Collector	Asphalt	49	11/6/2023
COACH::44THAVEE::1	44TH AVE	HARRISON ST	DILLON RD	5550	13	72150	Arterial	Asphalt	96	11/6/2023
COACH::44THAVEW::1	44TH AVE	HARRISON ST	DILLON RD	5557	13	72241	Arterial	Asphalt	98	11/6/2023
COACH::48THAVEE::1	48TH AVE	JACKSON ST	CIELO VICTORIA ST	1335	40	53400	Arterial	Asphalt	62	11/6/2023
COACH::48THAVEE::2	48TH AVE	CIELO VICTORIA ST	CALHOUN ST	1327	40	53080	Arterial	Asphalt	69	11/6/2023
COACH::48THAVEE::3	48TH AVE	CALHOUN ST	CHAPARROSA ST	710	40	28400	Arterial	Asphalt	78	11/6/2023
COACH::48THAVEE::4	48TH AVE	CHAPARROSA ST	VAN BUREN ST	1940	40	77600	Arterial	Asphalt	81	11/6/2023
COACH::48THAVEE::5	48TH AVE	VAN BUREN ST	SH-111	2210	20	44200	Arterial	Asphalt	31	11/6/2023
COACH::48THAVEE::6	48TH AVE	CITY LIMITS	HARRISON ST	2395	24	57480	Arterial	Asphalt	92	11/6/2023
COACH::48THAVEW::1	48TH AVE	HARRISON ST	CITY LIMITS	2385	24	57240	Arterial	Asphalt	97	11/6/2023
COACH::48THAVEW::2	48TH AVE	SH-111	VAN BUREN ST	2209	20	44180	Arterial	Asphalt	30	11/6/2023
COACH::48THAVEW::3	48TH AVE	VAN BUREN ST	CHAPARROSA ST	1940	40	77600	Arterial	Asphalt	74	11/6/2023
COACH::48THAVEW::4	48TH AVE	CHAPARROSA ST	CALHOUN ST	710	40	28400	Arterial	Asphalt	76	11/6/2023
COACH::48THAVEW::5	48TH AVE	CALHOUN ST	CIELO VICTORIA ST	1327	40	53080	Arterial	Asphalt	71	11/6/2023
COACH::48THAVEW::6	48TH AVE	CIELO VICTORIA ST	JACKSON ST	1335	40	53400	Arterial	Asphalt	79	11/6/2023
COACH::49THAVE::1	49TH AVE	VAN BUREN ST	PRIMA VERA	849	38	32262	Collector	Asphalt	60	11/6/2023
COACH::49THAVE::2	49TH AVE	PRIMA VERA	JAZMIN ST	611	38	23218	Collector	Asphalt	47	11/6/2023
COACH::49THAVE::3	49TH AVE	JAZMIN ST	FREDERICK ST	1199	66	79134	Collector	Asphalt	45	11/6/2023
COACH::49THAVE::4	49TH AVE	FREDERICK ST	LAS CRUCES ST	1158	66	76428	Collector	Asphalt	28	11/6/2023
COACH::49THAVE::5	49TH AVE	LAS CRUCES ST	SH-111	406	66	26796	Collector	Asphalt	22	11/6/2023
COACH::4THST::1	4TH ST	SH-86	PALM AVE	972	56	54432	Collector	Asphalt	34	11/6/2023
COACH::4THST::2	4TH ST	PALM AVE	ORCHARD AVE	425	56	23800	Collector	Asphalt	49	11/6/2023
COACH::4THST::3	4TH ST	ORCHARD AVE	VINE AVE	425	56	23800	Collector	Asphalt	26	11/6/2023
COACH::4THST::4	4TH ST	VINE AVE	SH-111	452	56	25312	Collector	Asphalt	37	11/6/2023
COACH::50THAVE::1	50TH AVE	SH-86	PETER RABBIT LN	1679	40	67160	Arterial	Asphalt	80	11/6/2023
COACH::50THAVE::2	50TH AVE	PETER RABBIT LN	1660' W/O TYLER ST	1062	40	42480	Arterial	Asphalt	43	11/6/2023
COACH::50THAVE::3	50TH AVE	660' W/O TYLER ST	1660' W/O TYLER ST	1000	40	40000	Arterial	Asphalt	21	11/6/2023
COACH::50THAVE::4	50TH AVE	TYLER ST	660' W/O TYLER ST	658	40	26320	Arterial	Asphalt	7	11/6/2023
COACH::50THAVE::5	50TH AVE	940' E/O TYLER ST	TYLER ST	934	30	28020	Rural	Asphalt	12	11/6/2023
COACH::50THAVE::6	50TH AVE	TYLER ST	50TH AVE	1063	30	31890	Rural	Asphalt	79	11/6/2023
COACH::50THAVE::7	50TH AVE	50TH AVE	POLK ST	4426	30	132780	Rural	Asphalt	49	11/6/2023
COACH::50THAVE::8	50TH AVE	POLK ST	FILLMORE ST	5310	26	138060	Rural	Asphalt	18	11/6/2023
COACH::50THAVEE::1	50TH AVE	CITY LIMITS	COLONIA DR	1123	30	33690	Arterial	Asphalt	18	11/6/2023
COACH::50THAVEE::10	50TH AVE	FREDERICK ST	PAVON PALMA	375	33	12375	Arterial	Asphalt	18	11/6/2023
COACH::50THAVEE::11	50TH AVE	PAVON PALMA	AVENIDA DEL PARQUE	416	33	13728	Arterial	Asphalt	55	11/6/2023
COACH::50THAVEE::12	50TH AVE	AVENIDA DEL PARQUE	AVENIDA DE ORO	541	33	17853	Arterial	Asphalt	59	11/6/2023
COACH::50THAVEE::13	50TH AVE	AVENIDA DE ORO	BALBOA ST	132	33	4356	Arterial	Asphalt	46	11/6/2023
COACH::50THAVEE::14	50TH AVE	BALBOA ST	AVENIDA DE PLATA	132	33	4356	Arterial	Asphalt	51	11/6/2023
COACH::50THAVEE::15	50TH AVE	AVENIDA DE PLATA	CORONADO ST	132	33	4356	Arterial	Asphalt	56	11/6/2023
COACH::50THAVEE::16	50TH AVE	CORONADO ST	AVENIDA DE PLATINA	133	33	4389	Arterial	Asphalt	58	11/6/2023
COACH::50THAVEE::17	50TH AVE	AVENIDA DE PLATINA	KENMORE ST	131	33	4323	Arterial	Asphalt	56	11/6/2023
COACH::50THAVEE::18	50TH AVE	KENMORE ST	SH-86	673	33	22209	Arterial	Asphalt	85	11/6/2023
COACH::50THAVEE::2	50TH AVE	COLONIA DR	CALHOUN ST	521	30	15630	Arterial	Asphalt	24	11/6/2023
COACH::50THAVEE::3	50TH AVE	CALHOUN ST	HORNBLEND ST	731	32	23392	Arterial	Asphalt	99	11/6/2023
COACH::50THAVEE::4	50TH AVE	HORNBLEND ST	CALLE PUERTA DEL SOL	1240	32	39680	Arterial	Asphalt	58	11/6/2023
COACH::50THAVEE::5	50TH AVE	CALLE PUERTA DEL SOL	VAN BUREN ST	679	32	21728	Arterial	Asphalt	46	11/6/2023
COACH::50THAVEE::6	50TH AVE	VAN BUREN ST	WASHINGTONIA AVE	1203	41	49323	Arterial	Asphalt	39	11/6/2023
COACH::50THAVEE::7	50TH AVE	WASHINGTONIA AVE	CALLE QUINTERRA	705	41	28905	Arterial	Asphalt	30	11/6/2023
COACH::50THAVEE::8	50TH AVE	CALLE QUINTERRA	MAZATLAN DR	506	41	20746	Arterial	Asphalt	55	11/6/2023
COACH::50THAVEE::9	50TH AVE	MAZATLAN DR	FREDERICK ST	253	41	10373	Arterial	Asphalt	53	11/6/2023
COACH::50THAVEW::1	50TH AVE	SH-86	KENMORE ST	673	33	22209	Arterial	Asphalt	64	11/6/2023
COACH::50THAVEW::10	50TH AVE	FREDERICK ST	MAZATLAN DR	253	41	10373	Arterial	Asphalt	65	11/6/2023
COACH::50THAVEW::11	50TH AVE	MAZATLAN DR	CALLE QUINTERRA	506	41	20746	Arterial	Asphalt	72	11/6/2023
COACH::50THAVEW::12	50TH AVE	CALLE QUINTERRA	WASHINGTONIA AVE	705	41	28905	Arterial	Asphalt	52	11/6/2023
COACH::50THAVEW::13	50TH AVE	VAN BUREN ST	CALLE PUERTA DEL SOL	679	32	21728	Arterial	Asphalt	65	11/6/2023
COACH::50THAVEW::14	50TH AVE	WASHINGTONIA AVE	VAN BUREN ST	1203	41	49323	Arterial	Asphalt	22	11/6/2023
COACH::50THAVEW::15	50TH AVE	CALLE PUERTA DEL SOL	HORNBLEND ST	1240	32	39680	Arterial	Asphalt	71	11/6/2023
COACH::50THAVEW::16	50TH AVE	HORNBLEND ST	CALHOUN ST	731	32	23392	Arterial	Asphalt	86	11/6/2023
COACH::50THAVEW::17	50TH AVE	CALHOUN ST	COLONIA DR	521	30	15630	Arterial	Asphalt	59	11/6/2023
COACH::50THAVEW::18	50TH AVE	COLONIA DR	CITY LIMITS	1123	30	33690	Arterial	Asphalt	58	11/6/2023
COACH::50THAVEW::2	50TH AVE	KENMORE ST	AVENIDA DE PLATINA	131	33	4323	Arterial	Asphalt	49	11/6/2023
COACH::50THAVEW::3	50TH AVE	AVENIDA DE PLATINA	CORONADO ST	133	33	4389	Arterial	Asphalt	37	11/6/2023
COACH::50THAVEW::4	50TH AVE	CORONADO ST	AVENIDA DE PLATA	132	33	4356	Arterial	Asphalt	36	11/6/2023
COACH::50THAVEW::5	50TH AVE	AVENIDA DE PLATA	BALBOA ST	132	33	4356	Arterial	Asphalt	33	11/6/2023
COACH::50THAVEW::6	50TH AVE	BALBOA ST	AVENIDA DE ORO	132	33	4356	Arterial	Asphalt	73	11/6/2023
COACH::50THAVEW::7	50TH AVE	AVENIDA DE ORO	AVENIDA DEL PARQUE	541	33	17853	Arterial	Asphalt	54	11/6/2023
COACH::50THAVEW::8	50TH AVE	AVENIDA DEL PARQUE	PAVON PALMA	416	33	13728	Arterial	Asphalt	39	11/6/2023
COACH::50THAVEW::9	50TH AVE	PAVON PALMA	FREDERICK ST	375	33	12375	Arterial	Asphalt	46	11/6/2023
COACH::51STAVE::1	51ST AVE	CITY LIMITS	VAN BUREN ST	1312	30	39360	Collector	Asphalt	91	11/6/2023
COACH::51STAVE::2	51ST AVE	VAN BUREN ST	ZUMA DR	1166	42	48972	Collector	Asphalt	52	11/6/2023
COACH::51STAVE::3	51ST AVE	ZUMA DR	CHIAPAS DR	799	42	33558	Collector	Asphalt	20	11/6/2023
COACH::51STAVE::4	51ST AVE	CHIAPAS DR	FREDERICK ST	694	72	49968	Collector	Asphalt	85	11/6/2023
COACH::51STAVE::5	51ST AVE	FREDERICK ST	690' E/O FREDRICK ST	689	62	42718	Collector	Asphalt	75	11/6/2023
COACH::51STAVE::6	51ST AVE	400' W/O AVENIDA ADOBE	AVENIDA ADOBE	402	62	24924	Collector	Asphalt	73	11/6/2023
COACH::51STAVE::7	51ST AVE	AVENIDA ADOBE	MECCA LANE	238	62	14756	Collector	Asphalt	73	11/6/2023
COACH::51STAVE::8	51ST AVE	MECCA LANE	SUNCREST ST	969	60	58140	Collector	Asphalt	81	11/6/2023
COACH::51STAVE::9	51ST AVE	SUNCREST ST	SH-86	360	60	21600	Collector	Asphalt	75	11/6/2023
COACH::52NDAVE::1	52ND AVE	CALHOUN ST	VAN BUREN ST	2637	60	158220	Arterial	Asphalt	97	11/6/2023
COACH::52NDAVE::16	52ND AVE	SH-86	TIJSSELING CT	348	44	15312	Arterial	Asphalt	61	11/6/2023
COACH::52NDAVE::17	52ND AVE	TIJSSELING CT	JENNIFER WAY	39	44	1716	Arterial	Asphalt	79	11/6/2023
COACH::52NDAVE::18	52ND AVE	JENNIFER WAY	ALLEY	115	44	5060	Arterial	Asphalt	53	11/6/2023
COACH::52NDAVE::19	52ND AVE	ALLEY	TRIPOLI WAY	140	44	6160	Arterial	Asphalt	54	11/6/2023
COACH::52NDAVE::2	52ND AVE	VAN BUREN ST	PRIMITIVO DR	1325	60	79500	Arterial	Asphalt	58	11/6/2023
COACH::52NDAVE::20	52ND AVE	TRIPOLI WAY	MORGAN AVE	274	50	13700	Arterial	Asphalt	71	11/6/2023
COACH::52NDAVE::21	52ND AVE	MORGAN AVE	NELSON ST	276	50	13800	Arterial	Asphalt	77	11/6/2023
COACH::52NDAVE::22	52ND AVE	NELSON ST	DATE AVE	110	50	5500	Arterial	Asphalt	76	11/6/2023
COACH::52NDAVE::23	52ND AVE	DATE AVE	LAS PALMAS ST	158	44	6952	Arterial	Asphalt	82	11/6/2023
COACH::52NDAVE::24	52ND AVE	LAS PALMAS ST	OASIS PALM AVE	259	44	11396	Arterial	Asphalt	74	11/6/2023
COACH::52NDAVE::25	52ND AVE	OASIS PALM AVE	DOS PALMAS AVE	260	44	11440	Arterial	Asphalt	75	11/6/2023
COACH::52NDAVE::26	52ND AVE	DOS PALMAS AVE	CYPRESS ST	260	44	11440	Arterial	Asphalt	80	11/6/2023
COACH::52NDAVE::27	52ND AVE	CYPRESS ST	SHADY LN	260	44	11440	Arterial	Asphalt	80	11/6/2023
COACH::52NDAVE::28	52ND AVE	SHADY LN	SHADY LN	142	44	6248	Arterial	Asphalt	96	11/6/2023
COACH::52NDAVE::37	52ND AVE	HERNANDEZ ST	POLK ST	1999	30	59970	Arterial	Asphalt	47	11/6/2023
COACH::52NDAVE::38	52ND AVE	POLK ST	1030' E/O POLK ST	1030	30	30900	Rural	Asphalt	56	11/6/2023
COACH::52NDAVE::39	52ND AVE	1030' E/O POLK ST	2700' W/O FILLMORE ST	2109	30	63270	Rural	Asphalt	61	11/6/2023
COACH::52NDAVE::40	52ND AVE	2700' W/O FILLMORE ST	2200' W/O FILLMORE ST	505	30	15150	Rural	Asphalt	57	11/6/2023
COACH::52NDAVE::41	52ND AVE	2200' W/O FILLMORE ST	FILLMORE ST	2180	30	65400	Rural	Asphalt	89	11/6/2023
COACH::52NDAVE::42	52ND AVE	FILLMORE ST	5300' E/O FILLMORE ST	5302	15	79530	Rural	Asphalt	19	11/6/2023
COACH::52NDAVE::43	52ND AVE	5300' E/O FILLMORE ST	CITY LIMITS	901	15	13515	Rural	Asphalt	77	11/6/2023
COACH::52NDAVEE::10	52ND AVE	CALLE TECHA	CALLE TECHA	121	26	3146	Arterial	Asphalt	59	11/6/2023
COACH::52NDAVEE::11	52ND AVE	CALLE TECHA	CALLE AVILA	203	26	5278	Arterial	Asphalt	63	11/6/2023
COACH::52NDAVEE::12	52ND AVE	CALLE AVILA	CALLE AVILA	58	26	1508	Arterial	Asphalt	68	11/6/2023
COACH::52NDAVEE::13	52ND AVE	CALLE AVILA	CALLE CAMACHO	266	26	6916	Arterial	Asphalt	71	11/6/2023
COACH::52NDAVEE::14	52ND AVE	CALLE CAMACHO	CESAR CHAVEZ ST	313	26	8138	Arterial	Asphalt	52	11/6/2023
COACH::52NDAVEE::15	52ND AVE	CESAR CHAVEZ ST	SH-86	86	26	2236	Arterial	Asphalt	56	11/6/2023
COACH::52NDAVEE::29	52ND AVE	SHADY LN	GENOA ST	525	45	23625	Arterial	Asphalt	89	11/6/2023
COACH::52NDAVEE::3	52ND AVE	PRIMITIVO DR	FREDERICK ST	1288	30	38640	Arterial	Asphalt	30	11/6/2023
COACH::52NDAVEE::30	52ND AVE	GENOA ST	CALLE LIMON	547	45	24615	Arterial	Asphalt	69	11/6/2023
COACH::52NDAVEE::31	52ND AVE	CALLE LIMON	SUNSET DR	335	45	15075	Arterial	Asphalt	70	11/6/2023
COACH::52NDAVEE::32	52ND AVE	SUNSET DR	SH-111	606	45	27270	Arterial	Asphalt	78	11/6/2023
COACH::52NDAVEE::33	52ND AVE	SH-111	TYLER ST	1106	45	49770	Arterial	Asphalt	83	11/6/2023
COACH::52NDAVEE::34	52ND AVE	TYLER ST	LA PONDEROSA DR	2319	45	104355	Arterial	Asphalt	35	11/6/2023
COACH::52NDAVEE::35	52ND AVE	LA PONDEROSA DR	ENTERPRISE WAY	418	45	18810	Arterial	Asphalt	12	11/6/2023
COACH::52NDAVEE::36	52ND AVE	ENTERPRISE WAY	HERNANDEZ ST	634	45	28530	Arterial	Asphalt	6	11/6/2023
COACH::52NDAVEE::4	52ND AVE	FREDERICK ST	DOUMA ST	703	26	18278	Arterial	Asphalt	73	11/6/2023
COACH::52NDAVEE::5	52ND AVE	DOUMA ST	DOUMA CT	362	26	9412	Arterial	Asphalt	74	11/6/2023
COACH::52NDAVEE::6	52ND AVE	DOUMA CT	CALLE TORRES ORDUNO	204	26	5304	Arterial	Asphalt	69	11/6/2023
COACH::52NDAVEE::7	52ND AVE	CALLE TORRES ORDUNO	CALLE EMPALME	56	26	1456	Arterial	Asphalt	59	11/6/2023
COACH::52NDAVEE::8	52ND AVE	CALLE EMPALME	CALLE EMPALME	184	26	4784	Arterial	Asphalt	57	11/6/2023
COACH::52NDAVEE::9	52ND AVE	CALLE EMPALME	CALLE TECHA	140	26	3640	Arterial	Asphalt	52	11/6/2023
COACH::52NDAVEW::1	52ND AVE	HERNANDEZ ST	ENTERPRISE WAY	631	45	28395	Arterial	Asphalt	20	11/6/2023

Asset Id	Name	Start Location	End Location	Length	Width	Area	Functional Classification	Pavement Type	Last Inspection PCI	Last Inspection Date
COACH::52NDAVEW::10	52ND AVE	CESAR CHAVEZ ST	CALLE CAMACHO	313	26	8138	Arterial	Asphalt	49	11/6/2023
COACH::52NDAVEW::11	52ND AVE	CALLE CAMACHO	CALLE AVILA	266	26	6916	Arterial	Asphalt	69	11/6/2023
COACH::52NDAVEW::12	52ND AVE	CALLE AVILA	CALLE AVILA	58	26	1508	Arterial	Asphalt	55	11/6/2023
COACH::52NDAVEW::13	52ND AVE	CALLE AVILA	CALLE TECHA	203	26	5278	Arterial	Asphalt	61	11/6/2023
COACH::52NDAVEW::14	52ND AVE	CALLE TECHA	CALLE TECHA	121	26	3146	Arterial	Asphalt	66	11/6/2023
COACH::52NDAVEW::15	52ND AVE	CALLE TECHA	CALLE EMPALME	140	26	3640	Arterial	Asphalt	60	11/6/2023
COACH::52NDAVEW::16	52ND AVE	CALLE EMPALME	CALLE EMPALME	184	26	4784	Arterial	Asphalt	57	11/6/2023
COACH::52NDAVEW::17	52ND AVE	CALLE EMPALME	CALLE TORRES ORDUNO	57	26	1482	Arterial	Asphalt	61	11/6/2023
COACH::52NDAVEW::18	52ND AVE	CALLE TORRES ORDUNO	DOUMA CT	203	26	5278	Arterial	Asphalt	74	11/6/2023
COACH::52NDAVEW::19	52ND AVE	DOUMA CT	DOUMA ST	362	26	9412	Arterial	Asphalt	68	11/6/2023
COACH::52NDAVEW::2	52ND AVE	ENTERPRISE WAY	LA PONDEROSA DR	418	45	18810	Arterial	Asphalt	15	11/6/2023
COACH::52NDAVEW::20	52ND AVE	DOUMA ST	FREDERICK ST	703	26	18278	Arterial	Asphalt	71	11/6/2023
COACH::52NDAVEW::21	52ND AVE	FREDERICK ST	PRIMITIVO DR	1286	30	38580	Arterial	Asphalt	22	11/6/2023
COACH::52NDAVEW::3	52ND AVE	LA PONDEROSA DR	TYLER ST	2319	45	104355	Arterial	Asphalt	55	11/6/2023
COACH::52NDAVEW::4	52ND AVE	TYLER ST	SH-111	1126	45	50670	Arterial	Asphalt	77	11/6/2023
COACH::52NDAVEW::5	52ND AVE	SH-111	SUNSET DR	587	45	26415	Arterial	Asphalt	77	11/6/2023
COACH::52NDAVEW::6	52ND AVE	SUNSET DR	CALLE LIMON	335	45	15075	Arterial	Asphalt	73	11/6/2023
COACH::52NDAVEW::7	52ND AVE	CALLE LIMON	GENOA ST	547	45	24615	Arterial	Asphalt	70	11/6/2023
COACH::52NDAVEW::8	52ND AVE	GENOA ST	SHADY LN	525	45	23625	Arterial	Asphalt	82	11/6/2023
COACH::52NDAVEW::9	52ND AVE	SH-86	CESAR CHAVEZ ST	86	26	2236	Arterial	Asphalt	46	11/6/2023
COACH::53RDAVE::1	53RD AVE	FREDERICK ST	CALLE LEANDRO	950	42	39900	Collector	Asphalt	98	11/6/2023
COACH::53RDAVE::11	53RD AVE	SH-86	CALLE BONITA	643	60	38580	Collector	Asphalt	25	11/6/2023
COACH::53RDAVE::12	53RD AVE	CALLE BONITA	ADAM LN	282	60	16920	Collector	Asphalt	64	11/6/2023
COACH::53RDAVE::13	53RD AVE	ADAM LN	LEE LN	272	60	16320	Collector	Asphalt	75	11/6/2023
COACH::53RDAVE::14	53RD AVE	LEE LN	CALLE LA PAZ	327	60	19620	Collector	Asphalt	68	11/6/2023
COACH::53RDAVE::15	53RD AVE	CALLE LA PAZ	CALLE SOLEDAD	272	60	16320	Collector	Asphalt	69	11/6/2023
COACH::53RDAVE::16	53RD AVE	CALLE SOLEDAD	SHADY LN	714	60	42840	Collector	Asphalt	68	11/6/2023
COACH::53RDAVE::17	53RD AVE	SHADY LN	SHADY LN	155	57	8835	Collector	Asphalt	62	11/6/2023
COACH::53RDAVE::18	53RD AVE	SHADY LN	CDS	1121	32	35872	Collector	Asphalt	53	11/6/2023
COACH::53RDAVE::19	53RD AVE	FREDERICK ST	CALLE LEANDRO	921	42	38668	Collector	Asphalt	60	11/6/2023
COACH::53RDAVE::2	53RD AVE	CALLE LEANDRO	CALLE EMPALME	372	42	15624	Collector	Asphalt	100	11/6/2023
COACH::53RDAVE::20	53RD AVE	CALLE LEANDRO	CALLE EMPALME	360	42	15110	Collector	Asphalt	57	11/6/2023
COACH::53RDAVE::3	53RD AVE	CALLE EMPALME	CALLE TECHA	371	57	21147	Collector	Asphalt	87	11/6/2023
COACH::53RDAVE::4	53RD AVE	CALLE TECHA	CALLE AVILA	370	57	21090	Collector	Asphalt	73	11/6/2023
COACH::53RDAVE::5	53RD AVE	CALLE AVILA	130' E/O CALLE AVILA	135	37	4995	Collector	Asphalt	33	11/6/2023
COACH::53RDAVE::6	53RD AVE	130' W/O CALLE CAMACHO	CALLE CAMACHO	135	37	4995	Collector	Asphalt	31	11/6/2023
COACH::53RDAVE::7	53RD AVE	CALLE CAMACHO	130' E/O CALLE CAMACHO	135	37	4995	Collector	Asphalt	39	11/6/2023
COACH::53RDAVE::8	53RD AVE	115' W/O CESAR CHAVEZ ST	CESAR CHAVEZ ST	115	37	4255	Collector	Asphalt	64	11/6/2023
COACH::53RDAVE::9	53RD AVE	CESAR CHAVEZ ST	50' W/O CESAR CHAVEZ ST	85	37	3145	Collector	Asphalt	71	11/6/2023
COACH::54THAVE::11	54TH AVE	FILLMORE ST	2645' E/O FILLMORE ST	2646	20	52920	Rural	Asphalt	16	11/6/2023
COACH::54THAVE::12	54TH AVE	2645' E/O FILLMORE ST	CITY LIMITS	1341	20	26820	Rural	Asphalt	21	11/6/2023
COACH::54THAVEE::1	54TH AVE	VAN BUREN ST	SLATE DR	1864	15	27960	Arterial	Asphalt	52	11/6/2023
COACH::54THAVEE::10	54TH AVE	POLK ST	CITY LIMITS	738	30	22140	Arterial	Asphalt	31	11/6/2023
COACH::54THAVEE::2	54TH AVE	SLATE DR	FREDERICK ST	828	15	12420	Arterial	Asphalt	54	11/6/2023
COACH::54THAVEE::3	54TH AVE	FREDERICK ST	SH-86	2639	15	39585	Arterial	Asphalt	66	11/6/2023
COACH::54THAVEE::4	54TH AVE	SH-86	CALLE BALDERAS	1107	15	16605	Arterial	Asphalt	89	11/6/2023
COACH::54THAVEE::5	54TH AVE	CALLE BALDERAS	SHADY LN	1399	15	20985	Arterial	Asphalt	89	11/6/2023
COACH::54THAVEE::6	54TH AVE	SHADY LN	TYLER ST	2831	12	33972	Arterial	Asphalt	77	11/6/2023
COACH::54THAVEE::7	54TH AVE	TYLER ST	SH-111	3232	25	80800	Arterial	Asphalt	97	11/6/2023
COACH::54THAVEE::8	54TH AVE	SH-111	ENTERPRISE WAY	1082	36	38952	Arterial	Asphalt	58	11/6/2023
COACH::54THAVEE::9	54TH AVE	ENTERPRISE WAY	POLK ST	1014	36	36504	Arterial	Asphalt	70	11/6/2023
COACH::54THAVEW::1	54TH AVE	POLK ST	CITY LIMITS	738	30	22140	Arterial	Asphalt	51	11/6/2023
COACH::54THAVEW::10	54TH AVE	SLATE DR	VAN BUREN ST	1864	15	27960	Arterial	Asphalt	39	11/6/2023
COACH::54THAVEW::2	54TH AVE	ENTERPRISE WAY	POLK ST	1014	36	36504	Arterial	Asphalt	60	11/6/2023
COACH::54THAVEW::3	54TH AVE	SH-111	ENTERPRISE WAY	1093	36	39348	Arterial	Asphalt	58	11/6/2023
COACH::54THAVEW::4	54TH AVE	SH-111	TYLER ST	3221	25	80525	Arterial	Asphalt	93	11/6/2023
COACH::54THAVEW::5	54TH AVE	TYLER ST	SHADY LN	2831	12	33972	Arterial	Asphalt	92	11/6/2023
COACH::54THAVEW::6	54TH AVE	SHADY LN	CALLE BALDERAS	1399	15	20985	Arterial	Asphalt	51	11/6/2023
COACH::54THAVEW::7	54TH AVE	CALLE BALDERAS	SH-86	1107	15	16605	Arterial	Asphalt	72	11/6/2023
COACH::54THAVEW::8	54TH AVE	SH-86	FREDERICK ST	2639	15	39585	Arterial	Asphalt	52	11/6/2023
COACH::54THAVEW::9	54TH AVE	FREDERICK ST	SLATE DR	828	15	12420	Arterial	Asphalt	55	11/6/2023
COACH::55THAVE::1	55TH AVE	CITY LIMITS	VAN BUREN ST	1321	10	13210	Collector	Asphalt	44	11/6/2023
COACH::55THAVE::2	55TH AVE	FILLMORE ST	1330' E/O FILLMORE ST	1327	20	26540	Rural	Asphalt	61	11/6/2023
COACH::55THAVE::3	55TH AVE	1330' E/O FILLMORE ST	2660' E/O FILLMORE ST	1329	20	26580	Rural	Asphalt	47	11/6/2023
COACH::55THAVE::4	55TH AVE	2675' W/O PEIRCE ST	PIERCE ST	2672	20	53440	Rural	Asphalt	47	11/6/2023
COACH::5THST::1	5TH ST	D/E	PALM AVE	387	56	21672	Collector	Asphalt	35	11/6/2023
COACH::5THST::2	5TH ST	PALM AVE	ORCHARD AVE	425	56	23800	Collector	Asphalt	56	11/6/2023
COACH::5THST::3	5TH ST	VINE AVE	SH-111	453	56	25368	Collector	Asphalt	43	11/6/2023
COACH::6THST::1	6TH ST	SH-86	TRIPOLI WAY	358	56	20048	Collector	Asphalt	43	11/6/2023
COACH::6THST::2	6TH ST	TRIPOLI WAY	DATE AVE	366	56	20496	Collector	Asphalt	99	11/6/2023
COACH::6THST::3	6TH ST	DATE AVE	PALM AVE	787	56	44072	Collector	Asphalt	98	11/6/2023
COACH::6THST::4	6TH ST	PALM AVE	ORCHARD AVE	425	56	23800	Collector	Asphalt	57	11/6/2023
COACH::6THST::5	6TH ST	ORCHARD AVE	VINE AVE	425	56	23800	Collector	Asphalt	71	11/6/2023
COACH::6THST::6	6TH ST	VINE AVE	SH-111	453	56	25368	Collector	Asphalt	69	11/6/2023
COACH::7THST::1	7TH ST	TRIPOLI WAY	DATE AVE	366	56	20496	Collector	Asphalt	57	11/6/2023
COACH::7THST::2	7TH ST	DATE AVE	PALM AVE	788	56	44128	Collector	Asphalt	60	11/6/2023
COACH::7THST::3	7TH ST	PALM AVE	ORCHARD AVE	424	56	23744	Collector	Asphalt	54	11/6/2023
COACH::7THST::4	7TH ST	ORCHARD AVE	VINE AVE	424	56	23744	Collector	Asphalt	36	11/6/2023
COACH::7THST::5	7TH ST	VINE AVE	SH-111	454	56	25424	Collector	Asphalt	54	11/6/2023
COACH::8THST::1	8TH ST	DATE AVE	PENDLETON WAY	400	56	22400	Collector	Asphalt	65	11/6/2023
COACH::8THST::2	8TH ST	ORCHARD AVE	VINE AVE	424	56	23744	Collector	Asphalt	51	11/6/2023
COACH::8THST::3	8TH ST	VINE AVE	SH-111	454	56	25424	Collector	Asphalt	51	11/6/2023
COACH::9THST::1	9TH ST	BAGDAD AVE	ORCHARD AVE	1029	56	57624	Collector	Asphalt	62	11/6/2023
COACH::9THST::2	9TH ST	ORCHARD AVE	VINE AVE	424	56	23744	Collector	Asphalt	87	11/6/2023
COACH::9THST::3	9TH ST	VINE AVE	SHADY LN	105	56	5880	Collector	Asphalt	86	11/6/2023
COACH::9THST::4	9TH ST	SHADY LN	SH-111	333	56	18648	Collector	Asphalt	100	11/6/2023
COACH::ADAMLN::1	ADAM LN	53RD AVE	CDS	603	40	24120	Residential	Asphalt	54	11/6/2023
COACH::ADRIANACT::1	ADRIANA CT	AVENIDA ALEENAH	CDS	234	36	8424	Residential	Asphalt	65	11/6/2023
COACH::AGUABLANCA::1	AGUA BLANCA AVE	AGUA CALIENTE ST	LUNA DE NICOLETA ST	290	36	10440	Residential	Asphalt	73	11/6/2023
COACH::AGUABLANCA::2	AGUA BLANCA AVE	LUNA DE NICOLETA ST	CAMINO MAYA	280	36	10080	Residential	Asphalt	73	11/6/2023
COACH::AGUABLANCA::3	AGUA BLANCA AVE	CAMINO MAYA	CAMINO REAL	280	36	10080	Residential	Asphalt	72	11/6/2023
COACH::AGUABLANCA::4	AGUA BLANCA AVE	CAMINO REAL	CHICHEN ITZA RD	280	36	10080	Residential	Asphalt	77	11/6/2023
COACH::AGUACALIEN::1	AGUA CALIENTE ST	AGUA BLANCA AVE	CAMINO LAS BRISAS	180	37	6660	Residential	Asphalt	63	11/6/2023
COACH::AGUACALIEN::2	AGUA CALIENTE ST	CAMINO LAS BRISAS	CALLE COLIMA	546	37	20202	Residential	Asphalt	75	11/6/2023
COACH::AIRPORTBL::1	AIRPORT BLVD	CITY LIMITS	VAN BUREN ST	1321	43	56803	Collector	Asphalt	100	11/6/2023
COACH::AIRPORTBL::2	AIRPORT BLVD	CITY LIMITS	2640' W/O FILLMORE ST	185	50	9250	Collector	Asphalt	91	11/6/2023
COACH::AIRPORTBL::3	AIRPORT BLVD	2640' W/O FILLMORE ST	1830' W/O FILLMORE ST	809	50	40450	Collector	Asphalt	83	11/6/2023
COACH::AIRPORTBL::4	AIRPORT BLVD	1830' W/O FILLMORE ST	1395' W/O FILLMORE ST	435	50	21750	Collector	Asphalt	90	11/6/2023
COACH::AIRPORTBL::5	AIRPORT BLVD	1395' W/O FILLMORE ST	1215' W/O FILLMORE ST	178	50	8900	Collector	Asphalt	84	11/6/2023
COACH::AIRPORTBL::6	AIRPORT BLVD	1215' W/O FILLMORE ST	1085' W/O FILLMORE ST	130	50	6500	Collector	PCC	100	11/6/2023
COACH::AIRPORTBL::7	AIRPORT BLVD	1085' W/O FILLMORE ST	860' W/O FILLMORE ST	226	50	11300	Collector	Asphalt	88	11/6/2023
COACH::AIRPORTBL::8	AIRPORT BLVD	860' W/O FILLMORE ST	FILLMORE ST	858	28	24024	Collector	Asphalt	67	11/6/2023
COACH::AIRPORTBL::9	AIRPORT BLVD	FILLMORE ST	CITY LIMITS	670	28	18760	Collector	Asphalt	82	11/6/2023
COACH::ALLENDEDR::1	ALLENDE DR	D/E	PROSECCO WAY	251	32	8032	Residential	Asphalt	42	11/6/2023
COACH::ALLENDEDR::2	ALLENDE DR	PROSECCO WAY	SOLARCE ST	293	32	9376	Residential	Asphalt	55	11/6/2023
COACH::ALLENDEDR::3	ALLENDE DR	SOLARCE ST	ALLENDE DR	469	32	15008	Residential	Asphalt	41	11/6/2023
COACH::ALLENDEDR::4	ALLENDE DR	ALLENDE DR	VERMOUTH DR	99	32	3168	Residential	Asphalt	15	11/6/2023
COACH::ALLENDEDR::5	ALLENDE DR	ALLENDE DR	VERMOUTH DR	347	32	11104	Residential	Asphalt	30	11/6/2023
COACH::ALLEY::1	ALLEY	3RD ST	ALLEY	188	20	3760	Alley	Gravel	N/A	
COACH::ALLEY::10	ALLEY	ALLEY	TRIPOLI WAY	140	20	2800	Residential	Gravel	N/A	
COACH::ALLEY::11	ALLEY	PALM AVE	ORCHARD AVE	425	20	8500	Alley	Gravel	N/A	
COACH::ALLEY::12	ALLEY	ORCHARD AVE	VINE AVE	425	20	8500	Alley	Gravel	N/A	
COACH::ALLEY::13	ALLEY	ORCHARD AVE	VINE AVE	425	20	8500	Alley	Gravel	N/A	
COACH::ALLEY::14	ALLEY	VINE AVE	ALLEY	244	16	3904	Alley	Gravel	N/A	
COACH::ALLEY::15	ALLEY	VINE AVE	ALLEY	244	20	4880	Alley	Gravel	N/A	
COACH::ALLEY::16	ALLEY	ALLEY	2ND ST	188	24	4512	Alley	Gravel	N/A	
COACH::ALLEY::17	ALLEY	2ND ST	ALLEY	188	20	3760	Alley	Gravel	N/A	
COACH::ALLEY::2	ALLEY	52ND AVE	ALLEY	545	30	16350	Alley	PCC	63	11/6/2023
COACH::ALLEY::3	ALLEY	SH-86	ALLEY	521	26	13546	Alley	Gravel	N/A	
COACH::ALLEY::4	ALLEY	SH-86	PALM AVE	380	18	6840	Alley	Gravel	N/A	
COACH::ALLEY::5	ALLEY	CAIRO AVE	'150 N/O CAIRO AVE	149	20	2980	Alley	Gravel	N/A	
COACH::ALLEY::6	ALLEY	'150 S/O DEMASCUS AVE	DAMASCUS AVE	149	20	2980	Alley	Gravel	N/A	
COACH::ALLEY::7	ALLEY	DAMASCUS AVE	'200 N/O DAMASCUS AVE	199	20	3980	Residential	Gravel	N/A	
COACH::ALLEY::8	ALLEY	D\E	PALM AVE	387	20	7740	Alley	Gravel	N/A	
COACH::ALLEY::9	ALLEY	PALM AVE	ORCHARD AVE	426	18	7668	Alley	Gravel	N/A	
COACH::AMAPOLALN::1	AMAPOLA LN	CDS	HIBISCO ST	344	37	12728	Residential	Asphalt	49	11/6/2023
COACH::AMARONECIR::1	AMARONE CIR	MALVASIA WAY	CDS	180	32	5760	Residential	Asphalt	56	11/6/2023
COACH::AMETHYSTCT::1	AMETHYST CT	CDS	SCARLET WAY	410	36	14760	Residential	Asphalt	83	11/6/2023
COACH::ANDREALN::1	ANDREA LN	JULIA DR	LINDA AVE	260	37	9620	Residential	Asphalt	86	11/6/2023
COACH::ANDREALN::2	ANDREA LN	LINDA AVE	CHRISTINA RD	259	37	9583	Residential	Asphalt	69	11/6/2023
COACH::ANDREALN::3	ANDREA LN	CHRISTINA RD	'45' N/O CHRISTINA RD	45	37	1665	Residential	Asphalt	100	11/6/2023
COACH::ANDREALN::4	ANDREA LN	'45' N/O CHRISTINA RD	CDS	377	37	13949	Residential	Asphalt	85	11/6/2023
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	660	38	25080	Residential	Surface Treatment	75	11/6/2023
COACH::ARABYAVE::2	ARABY AVE	DATE AVE	SHADY LN	1338	39	52182	Residential	Surface Treatment	72	11/6/2023

Asset Id	Name	Start Location	End Location	Length	Width	Area	Functional Classification	Pavement Type	Last Inspection PCI	Last Inspection Date
COACH::ARICADR::1	ARICA DR	MCCOY PEAK AVE	QUAIL MOUNTAIN TER	616	36	22176	Residential	Asphalt	68	11/6/2023
COACH::ASHLERCT::1	ASHLER CT	COPPERIDGE ST	CDS	337	37	12469	Residential	Asphalt	41	11/6/2023
COACH::AADOBE::1	AVENIDA ADOBE	51ST AVE	CALLE CATHRON	174	40	6960	Residential	Asphalt	12	11/6/2023
COACH::AADOBE::10	AVENIDA ADOBE	215' S/O CHRISTINA RD	CHRISTINA RD	214	36	7704	Residential	Asphalt	33	11/6/2023
COACH::AADOBE::11	AVENIDA ADOBE	CHRISTINA RD	45' N/O CHRISTINA RD	45	36	1620	Residential	Asphalt	45	11/6/2023
COACH::AADOBE::12	AVENIDA ADOBE	45' N/O CHRISTINA RD	PEDRO DR	408	36	14688	Residential	Asphalt	65	11/6/2023
COACH::AADOBE::2	AVENIDA ADOBE	CALLE CATHRON	CORTE CINDARELLA	239	40	9560	Residential	Asphalt	55	11/6/2023
COACH::AADOBE::3	AVENIDA ADOBE	CORTE CINDARELLA	CORTE BERNARDO	289	40	11560	Residential	Asphalt	49	11/6/2023
COACH::AADOBE::4	AVENIDA ADOBE	CORTE BERNARDO	VIA ZAHIDI	256	40	10240	Residential	Asphalt	52	11/6/2023
COACH::AADOBE::5	AVENIDA ADOBE	VIA ZAHIDI	CORTE ALTURIAN	258	40	10320	Residential	Asphalt	60	11/6/2023
COACH::AADOBE::6	AVENIDA ADOBE	CORTE ALTURIAN	WESTERFIELD WAY	128	40	5120	Residential	Asphalt	57	11/6/2023
COACH::AADOBE::7	AVENIDA ADOBE	WESTERFIELD WAY	JULIA DR	149	36	5364	Residential	Asphalt	36	11/6/2023
COACH::AADOBE::8	AVENIDA ADOBE	JULIA DR	LINDA AVE	259	36	9324	Residential	Asphalt	58	11/6/2023
COACH::AADOBE::9	AVENIDA ADOBE	LINDA AVE	215' S/O CHRISTINA RD	45	36	1620	Residential	Asphalt	46	11/6/2023
COACH::AALEENAH::1	AVENIDA ALEENAH	GENOA ST	'150 E/O GENOA ST	149	36	5364	Residential	Asphalt	52	11/6/2023
COACH::AALEENAH::2	AVENIDA ALEENAH	'150 E/O GENOA ST	ADRIANA CT	148	36	5328	Residential	Asphalt	60	11/6/2023
COACH::AALEENAH::3	AVENIDA ALEENAH	ADRIANA CT	JULIA CT	392	36	14112	Residential	Asphalt	58	11/6/2023
COACH::AALEENAH::4	AVENIDA ALEENAH	JULIA CT	'160 W/O CALLE FLORENA	99	36	3564	Residential	Asphalt	58	11/6/2023
COACH::AALEENAH::5	AVENIDA ALEENAH	'160 W/O CALLE FLORENA	CALLE FLORENA	160	36	5760	Residential	Asphalt	62	11/6/2023
COACH::AALEENAH::6	AVENIDA ALEENAH	CALLE FLORENA	'150 E/O CALLE FLORENA	148	36	5328	Residential	Asphalt	74	11/6/2023
COACH::AALEENAH::7	AVENIDA ALEENAH	'150 E/O CALLE FLORENA	CALLE EMELIA	1021	36	36756	Residential	Asphalt	57	11/6/2023
COACH::ACAMPANAS::1	AVENIDA CAMPANAS	CALLE FRONTERA	CAMINO CONVENTO	267	36	9612	Residential	Asphalt	100	11/6/2023
COACH::ACAMPANAS::2	AVENIDA CAMPANAS	CAMINO CONVENTO	CAMINO ROSARIO	277	36	9972	Residential	Asphalt	100	11/6/2023
COACH::ACAMPANAS::3	AVENIDA CAMPANAS	CAMINO ROSARIO	CAMINO MAGDALENA	289	36	10404	Residential	Asphalt	100	11/6/2023
COACH::ACAMPANAS::4	AVENIDA CAMPANAS	CAMINO MAGDALENA	CALLE XAVIER	176	36	6336	Residential	Asphalt	100	11/6/2023
COACH::ACEDRUS::1	AVENIDA CEDRUS	CALLE CARMELLO	CALLE TECOMARIA	560	36	20160	Residential	Asphalt	54	11/6/2023
COACH::ACORTEZ::1	AVENIDA CORTEZ	VERA CRUZ	VIA HERMOSA	238	36	8568	Residential	Asphalt	100	11/6/2023
COACH::ACORTEZ::2	AVENIDA CORTEZ	VIA HERMOSA	VIA DURANGO	243	36	8748	Residential	Asphalt	68	11/6/2023
COACH::ACORTEZ::3	AVENIDA CORTEZ	VIA DURANGO	PASEO LAREDO	239	36	8604	Residential	Asphalt	77	11/6/2023
COACH::ACORTEZ::4	AVENIDA CORTEZ	PASEO LAREDO	CALLE LEON	332	36	11952	Residential	Asphalt	77	11/6/2023
COACH::ACRYSTAL::1	AVENIDA CRYSTAL	CALLE DANIELLE	CALLE ANABELLA	472	30	14160	Residential	Asphalt	66	11/6/2023
COACH::ADEORO::1	AVENIDA DE ORO	50TH AVE	AVENIDA DEL PARQUE	695	37	25715	Collector	Asphalt	87	11/6/2023
COACH::ADEORO::2	AVENIDA DE ORO	AVENIDA DEL PARQUE	GUITRON ST	810	37	29970	Collector	Asphalt	87	11/6/2023
COACH::ADEPLATA::1	AVENIDA DE PLATA	50TH AVE	VIA CONCHILLA	553	40	22120	Residential	Asphalt	32	11/6/2023
COACH::ADEPLATINA::1	AVENIDA DE PLATINA	50TH AVE	VIA CONCHILLA	554	40	22160	Residential	Asphalt	40	11/6/2023
COACH::ADELPARQUE::1	AVENIDA DEL PARQUE	PEDRO DR	50TH AVE	200	40	8000	Residential	Asphalt	61	11/6/2023
COACH::ADELPARQUE::2	AVENIDA DEL PARQUE	50TH AVE	COURTE DEL PARQUE	574	40	22960	Residential	Asphalt	99	11/6/2023
COACH::ADELPARQUE::3	AVENIDA DEL PARQUE	COURTE DEL PARQUE	AVENIDA DE ORO	472	40	18880	Residential	Asphalt	86	11/6/2023
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	927	38	35226	Residential	Surface Treatment	93	11/6/2023
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	923	38	35074	Residential	Surface Treatment	91	11/6/2023
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	240	38	9120	Residential	Surface Treatment	88	11/6/2023
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	240	36	8640	Residential	Surface Treatment	88	11/6/2023
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	240	36	8640	Residential	Surface Treatment	86	11/6/2023
COACH::AEUROPA::1	AVENIDA EUROPA	D\E	CALLE CARMELLO	137	36	4932	Residential	Asphalt	51	11/6/2023
COACH::AEUROPA::2	AVENIDA EUROPA	CALLE CARMELLO	CALLE TECOMARIA	560	36	20160	Residential	Asphalt	52	11/6/2023
COACH::AFLORABUND::1	AVENIDA FLORABUNDA	CALLE CARMELLO	CALLE ABELIA	124	36	4464	Residential	Asphalt	47	11/6/2023
COACH::AFLORABUND::2	AVENIDA FLORABUNDA	CALLE ABELIA	CALLE TECOMARIA	437	36	15732	Residential	Asphalt	41	11/6/2023
COACH::AFLORABUND::3	AVENIDA FLORABUNDA	CALLE TECOMARIA	CALLE ELDARICA	280	36	10080	Residential	Asphalt	61	11/6/2023
COACH::AFLORABUND::4	AVENIDA FLORABUNDA	CALLE ELDARICA	CALLE CANTARA	280	36	10080	Residential	Asphalt	58	11/6/2023
COACH::AGRACE::1	AVENIDA GRACE	CALLE JOYCE	CALLE FLORENA	666	36	23976	Residential	Asphalt	64	11/6/2023
COACH::AGRACE::2	AVENIDA GRACE	CALLE FLORENA	150' E/O CALLE FLORENA	150	36	5400	Residential	Asphalt	56	11/6/2023
COACH::AGRACE::3	AVENIDA GRACE	150' E/O CALLE FLORENA	CALLE EMELIA	1022	36	36792	Residential	Asphalt	40	11/6/2023
COACH::AHALAWAY::1	AVENIDA HALAWAY	FREDERICK ST	AVENIDA RAZON	174	36	6264	Residential	Asphalt	61	11/6/2023
COACH::ALALUNA::1	AVENIDA LA LUNA	CALLE OCASO	CALLE EL SOL	957	37	35409	Residential	Asphalt	52	11/6/2023
COACH::AMARIA::1	AVENIDA MARIA	GENOA ST	CALLE DANIELLE	509	33	16797	Residential	Asphalt	58	11/6/2023
COACH::AMARIA::2	AVENIDA MARIA	CALLE DANIELLE	CALLE ANABELLA	497	33	16401	Residential	Asphalt	74	11/6/2023
COACH::AMARIA::3	AVENIDA MARIA	CALLE ANABELLA	CALLE ALICIA	190	33	6270	Residential	Asphalt	68	11/6/2023
COACH::ANERIUM::1	AVENIDA NERIUM	CALLE CARMELLO	CALLE GLORIOSA	330	36	11880	Residential	Asphalt	47	11/6/2023
COACH::ANERIUM::2	AVENIDA NERIUM	CALLE GLORIOSA	CALLE TECOMARIA	230	36	8280	Residential	Asphalt	65	11/6/2023
COACH::ANERIUM::3	AVENIDA NERIUM	CALLE TECOMARIA	CALLE ELDARICA	280	36	10080	Residential	Asphalt	65	11/6/2023
COACH::ANERIUM::4	AVENIDA NERIUM	CALLE ELDARICA	CALLE CANTARA	280	36	10080	Residential	Asphalt	64	11/6/2023
COACH::ANICOLE::1	AVENIDA NICOLE	CALLE ALICIA	CATARINA CT	287	36	10332	Residential	Asphalt	68	11/6/2023
COACH::ANICOLE::2	AVENIDA NICOLE	CATARINA CT	MICHELLE DR	287	36	10332	Residential	Asphalt	70	11/6/2023
COACH::ARAYLYNN::1	AVENIDA RAYLYNN	GENOA ST	CALLE JOYCE	280	36	10080	Residential	Asphalt	59	11/6/2023
COACH::ARAYLYNN::2	AVENIDA RAYLYNN	CALLE JOYCE	CALLE FLORENA	673	36	24228	Residential	Asphalt	54	11/6/2023
COACH::ARAYLYNN::3	AVENIDA RAYLYNN	CALLE FLORENA	150' E/O CALLE FLORENA	144	36	5184	Residential	Asphalt	25	11/6/2023
COACH::ARAYLYNN::4	AVENIDA RAYLYNN	150' E/O CALLE FLORENA	CALLE EMELIA	1022	36	36792	Residential	Asphalt	47	11/6/2023
COACH::ARAZON::1	AVENIDA RAZON	CALLE CATHRON	CORTE YAGER	255	37	9435	Residential	Asphalt	71	11/6/2023
COACH::ARAZON::2	AVENIDA RAZON	CORTE YAGER	CORTE GILLAN	250	37	9250	Residential	Asphalt	60	11/6/2023
COACH::ARAZON::3	AVENIDA RAZON	CORTE GILLAN	AVENIDA HALAWAY	125	37	4625	Residential	Asphalt	57	11/6/2023
COACH::ARAZON::4	AVENIDA RAZON	AVENIDA HALAWAY	VIA ZAHIDI	130	37	4810	Residential	Asphalt	68	11/6/2023
COACH::ARAZON::5	AVENIDA RAZON	VIA ZAHIDI	CDS	220	37	8140	Residential	Asphalt	62	11/6/2023
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	925	36	33300	Residential	Surface Treatment	90	11/6/2023
COACH::ASANDOMING::1	AVENIDA SAN DOMINGO	CAMINO FRONTERA	CAMINO CORAS	267	37	9879	Residential	Asphalt	94	11/6/2023
COACH::ASANDOMING::2	AVENIDA SAN DOMINGO	CAMINO CORAS	CAMINO EL FARO	277	37	10249	Residential	Asphalt	100	11/6/2023
COACH::ASANDOMING::3	AVENIDA SAN DOMINGO	CAMINO EL FARO	CAMINO LORETO	289	37	10693	Residential	Asphalt	66	11/6/2023
COACH::ASANDOMING::4	AVENIDA SAN DOMINGO	CAMINO LORETO	CALLE XAVIER	169	37	6253	Residential	Asphalt	100	11/6/2023
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	923	37	34151	Residential	Surface Treatment	92	11/6/2023
COACH::AVERANO::1	AVENIDA VERANO	CALLE OCASO	CALLE PUERTA DEL SOL	484	37	17908	Residential	Asphalt	71	11/6/2023
COACH::AVERANO::2	AVENIDA VERANO	CALLE PUERTA DEL SOL	CALLE EL SOL	475	37	17575	Residential	Asphalt	54	11/6/2023
COACH::AVERONICA::1	AVENIDA VERONICA	GENOA ST	CALLE FLORENA	947	37	35039	Residential	Asphalt	52	11/6/2023
COACH::AVESTAGO::1	AVENIDA VESTAGO	REDONDO ESTE	FREDERICK ST	201	46	9246	Residential	Asphalt	55	11/6/2023
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	680	37	25160	Residential	Surface Treatment	90	11/6/2023
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	241	37	8917	Residential	Surface Treatment	93	11/6/2023
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	240	36	8640	Residential	Surface Treatment	92	11/6/2023
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	240	36	8640	Residential	Surface Treatment	91	11/6/2023
COACH::AVENUE49::1	AVENUE 49	CALHOUN ST	GARNET RIDGE ST	468	38	17784	Collector	Asphalt	79	11/6/2023
COACH::AVENUE49::2	AVENUE 49	GARNET RIDGE ST	D/E	854	38	32452	Collector	Asphalt	100	11/6/2023
COACH::AVENUE53::1	AVENUE 53	SHADY LN	1000' E/O CALLE EMELIA	1663	57	94791	Collector	Asphalt	68	11/6/2023
COACH::AVENUE53::2	AVENUE 53	1000' E/O CALLE EMELIA	CALLE EMELIA	995	57	56715	Collector	Asphalt	61	11/6/2023
COACH::AVENUE53::3	AVENUE 53	CALLE EMELIA	TYLER ST	316	57	18012	Collector	Asphalt	73	11/6/2023
COACH::BAGDADAVE::1	BAGDAD AVE	DOUMA ST	LIBNAN ST	664	40	26560	Residential	Asphalt	61	11/6/2023
COACH::BAGDADAVE::10	BAGDAD AVE	TRIPOLI WAY	DATE AVE	311	40	12440	Collector	Asphalt	58	11/6/2023
COACH::BAGDADAVE::11	BAGDAD AVE	DATE AVE	DATE AVE	312	40	12480	Collector	Asphalt	69	11/6/2023
COACH::BAGDADAVE::12	BAGDAD AVE	DATE AVE	9TH ST	59	40	2360	Collector	Asphalt	100	11/6/2023
COACH::BAGDADAVE::13	BAGDAD AVE	9TH ST	SHADY LN	1258	40	50320	Collector	Asphalt	56	11/6/2023
COACH::BAGDADAVE::14	BAGDAD AVE	SHADY LN	SHADY LN	20	40	800	Collector	Asphalt	100	11/6/2023
COACH::BAGDADAVE::15	BAGDAD AVE	SHADY LN	GENOA ST	523	40	20920	Collector	Asphalt	69	11/6/2023
COACH::BAGDADAVE::16	BAGDAD AVE	GENOA ST	SH-111	528	40	21120	Collector	Asphalt	56	11/6/2023
COACH::BAGDADAVE::2	BAGDAD AVE	LIBNAN ST	MECCA LANE	130	40	5200	Residential	Asphalt	68	11/6/2023
COACH::BAGDADAVE::3	BAGDAD AVE	MECCA LANE	CALLE AVILA	537	40	21480	Residential	Asphalt	58	11/6/2023
COACH::BAGDADAVE::4	BAGDAD AVE	CALLE AVILA	CALLE CAMACHO	313	40	12520	Residential	Asphalt	25	11/6/2023
COACH::BAGDADAVE::5	BAGDAD AVE	CALLE CAMACHO	SUEZ RD	156	40	6240	Residential	Asphalt	54	11/6/2023
COACH::BAGDADAVE::6	BAGDAD AVE	SUEZ RD	SH-86	214	40	8560	Residential	Asphalt	59	11/6/2023
COACH::BAGDADAVE::7	BAGDAD AVE	SH-86	ALLEY	214	40	8560	Collector	Asphalt	91	11/6/2023
COACH::BAGDADAVE::8	BAGDAD AVE	PARKING LOT ENTRANCE	TRIPOLI WAY	444	40	17760	Collector	Asphalt	65	11/6/2023
COACH::BAGDADAVE::9	BAGDAD AVE	TRIPOLI WAY	TRIPOLI WAY	38	40	1520	Collector	Asphalt	100	11/6/2023
COACH::BAJAWAY::1	BAJA WAY	CHIAPAS DR	FREDERICK ST	250	30	7500	Residential	Asphalt	60	11/6/2023
COACH::BALBOAST::1	BALBOA ST	D/E	50TH AVE	671	40	26840	Residential	Asphalt	72	11/6/2023
COACH::BELLAROMA::1	BELLA ROMA LN	D/E	BELLISSIMA AVE	809	32	25888	Residential	Asphalt	59	11/6/2023
COACH::BELLISSIMA::1	BELLISSIMA AVE	FREDERICK ST	MODENA TER	176	35	6160	Residential	Asphalt	69	11/6/2023
COACH::BELLISSIMA::2	BELLISSIMA AVE	MODENA TER	BELLA ROMA LN	688	35	24080	Residential	Asphalt	57	11/6/2023
COACH::BELLISSIMA::3	BELLISSIMA AVE	BELLA ROMA LN	CALLE EMPALME	454	35	15890	Residential	Asphalt	54	11/6/2023
COACH::BIGBEARPL::1	BIG BEAR PL	CHARLTON PEAK ST	CHIRIACO SUMMIT ST	260	36	9360	Residential	Asphalt	67	11/6/2023
COACH::BRENDALN::1	BRENDA LN	CDS	SHADY LN	634	38	24092	Residential	Surface Treatment	55	11/6/2023
COACH::BRIANNELN::1	BRIANNE LN	CALENDULA AVE	CALENDULA AVE	5	37	185	Residential	Asphalt	100	11/6/2023
COACH::BRIANNELN::2	BRIANNE LN	CALENDULA AVE	MAGNOLIA ST	253	37	9361	Residential	Asphalt	63	11/6/2023
COACH::BRIANNELN::3	BRIANNE LN	MAGNOLIA ST	FIESTA RD	255	37	9435	Residential	Asphalt	64	11/6/2023
COACH::BRIANNELN::4	BRIANNE LN	FIESTA RD	TERA VISTA	256	37	9472	Residential	Asphalt	67	11/6/2023
COACH::BRIANNELN::5	BRIANNE LN	TERA VISTA	MEADOWS LN	258	37	9546	Residential	Asphalt	65	11/6/2023
COACH::CAIROAVE::1	CAIRO AVE	CALLE EMPALME	CALLE TECHA	264	40	10560	Residential	Asphalt	48	11/6/2023
COACH::CAIROAVE::2	CAIRO AVE	CALLE TECHA	CALLE AVILA	261	40	10440	Residential	Asphalt	43	11/6/2023
COACH::CAIROAVE::3	CAIRO AVE	CALLE AVILA	CALLE CAMACHO	313	40	12520	Residential	Asphalt	44	11/6/2023
COACH::CAIROAVE::4	CAIRO AVE	CALLE CAMACHO	SUEZ RD	156	40	6240	Residential	Asphalt	51	11/6/2023
COACH::CAIROAVE::5	CAIRO AVE	SH-86	ALLEY	214	44	9416	Residential	Surface Treatment	43	11/6/2023
COACH::CAIROAVE::6	CAIRO AVE	SUEZ RD	SH-86	214	40	8560	Residential	Asphalt	55	11/6/2023
COACH::CAIROAVE::7	CAIRO AVE	ALLEY	TRIPOLI WAY	447	37	16539	Residential	Surface Treatment	68	11/6/2023
COACH::CAIROAVE::8	CAIRO AVE	TRIPOLI WAY	DATE AVE	660	38	25080	Residential	Surface Treatment	70	11/6/2023
COACH::CAIROAVE::9	CAIRO AVE	DATE AVE	SHADY LN	1338	40	53520	Residential	Surface Treatment	72	11/6/2023
COACH::CALENDULA::1	CALENDULA AVE	SUMMER ST	BRIANNE LN	977	37	36149	Residential	Asphalt	67	11/6/2023
COACH::CALENDULA::2	CALENDULA AVE	BRIANNE LN	JAZMIN ST	271	37	10027	Residential	Asphalt	68	11/6/2023
COACH::CALENDULA::3	CALENDULA AVE	JAZMIN ST	TULIPAN ST	259	37	9583	Residential	Asphalt	16	11/6/2023
COACH::CALENDULA::4	CALENDULA AVE	TULIPAN ST	ORQUIDEA LN	253	37	9361	Residential	Asphalt	44	11/6/2023
COACH::CALENDULA::5	CALENDULA AVE	ORQUIDEA LN	NARCISO LN	255	37	9435	Residential	Asphalt	28	11/6/2023

Asset Id	Name	Start Location	End Location	Length	Width	Area	Functional Classification	Pavement Type	Last Inspection PCI	Last Inspection Date
COACH::CALENDULA::6	CALENDULA AVE	NARCISO LN	HIBISCO ST	264	37	9768	Residential	Asphalt	32	11/6/2023
COACH::CALHOUNST::1	CALHOUN ST	CITY LIMITS	52ND AVE	629	24	15096	Collector	Asphalt	99	11/6/2023
COACH::CALHOUNST::10	CALHOUN ST	EAGLE AVE	EL MAR AVE	425	62	26350	Collector	Asphalt	63	11/6/2023
COACH::CALHOUNST::11	CALHOUN ST	EL MAR AVE	48TH AVE	655	62	40610	Collector	Asphalt	78	11/6/2023
COACH::CALHOUNST::12	CALHOUN ST	CITY LIMITS	VIA PICON	527	30	15817	Collector	Asphalt	57	11/6/2023
COACH::CALHOUNST::13	CALHOUN ST	VIA PICON	50TH AVE	775	30	23250	Collector	Asphalt	57	11/6/2023
COACH::CALHOUNST::2	CALHOUN ST	52ND AVE	CITY LIMITS	686	24	16464	Collector	Asphalt	99	11/6/2023
COACH::CALHOUNST::3	CALHOUN ST	CITY LIMITS	VIA PICON	542	30	16260	Collector	Asphalt	96	11/6/2023
COACH::CALHOUNST::4	CALHOUN ST	VIA PICON	50TH AVE	794	30	23820	Collector	Asphalt	97	11/6/2023
COACH::CALHOUNST::5	CALHOUN ST	50TH AVE	SHADOWROCK DR	777	62	48174	Collector	Asphalt	69	11/6/2023
COACH::CALHOUNST::6	CALHOUN ST	SHADOWROCK DR	LAS PLUMAS CT	317	62	19654	Collector	Asphalt	52	11/6/2023
COACH::CALHOUNST::7	CALHOUN ST	LAS PLUMAS CT	AVENUE 49	1685	62	104470	Collector	Asphalt	88	11/6/2023
COACH::CALHOUNST::8	CALHOUN ST	AVENUE 49	SAN IGNACIO AVE	763	62	47306	Collector	Asphalt	75	11/6/2023
COACH::CALHOUNST::9	CALHOUN ST	SAN IGNACIO AVE	EAGLE AVE	787	62	48794	Collector	Asphalt	82	11/6/2023
COACH::CABELIA::1	CALLE ABELIA	49TH AVE	AVENIDA FLORABUNDA	290	48	13920	Residential	Asphalt	59	11/6/2023
COACH::CALICIA::1	CALLE ALICIA	AVENIDA NICOLE	MICHELLE DR	535	30	16050	Residential	Asphalt	62	11/6/2023
COACH::CALICIA::2	CALLE ALICIA	MICHELLE DR	AVENIDA MARIA	109	30	3270	Residential	Asphalt	72	11/6/2023
COACH::CAMIGOS::1	CALLE AMIGOS	CALLE LA PAZ	CDS	429	36	15444	Residential	Asphalt	70	11/6/2023
COACH::CANABELLA::1	CALLE ANABELLA	AVENIDA MARIA	AVENIDA CRYSTAL	330	30	9900	Residential	Asphalt	74	11/6/2023
COACH::CAVILA::1	CALLE AVILA	D/E	CALLE NOGAL	126	40	5040	Residential	Asphalt	87	11/6/2023
COACH::CAVILA::2	CALLE AVILA	CALLE NOGAL	CALLE PINO	349	40	13960	Residential	Asphalt	84	11/6/2023
COACH::CAVILA::3	CALLE AVILA	CALLE PINO	53RD AVE	185	40	7400	Residential	Asphalt	84	11/6/2023
COACH::CAVILA::4	CALLE AVILA	53RD AVE	CALLE ZAMORA	661	40	26440	Residential	Asphalt	74	11/6/2023
COACH::CAVILA::5	CALLE AVILA	CALLE VERDE	CALLE ROJO	648	40	25920	Residential	Asphalt	71	11/6/2023
COACH::CAVILA::6	CALLE AVILA	CALLE ROJO	52ND AVE	607	40	24280	Residential	Asphalt	47	11/6/2023
COACH::CAVILA::7	CALLE AVILA	52ND AVE	CAIRO AVE	678	40	27120	Residential	Asphalt	37	11/6/2023
COACH::CAVILA::8	CALLE AVILA	CAIRO AVE	BAGDAD AVE	666	40	26640	Residential	Asphalt	70	11/6/2023
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	783	36	28188	Residential	Surface Treatment	88	11/6/2023
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	502	36	18072	Residential	Surface Treatment	82	11/6/2023
COACH::CBELLA::1	CALLE BELLA	CALLE NINOS	CDS	429	36	15444	Residential	Asphalt	51	11/6/2023
COACH::CBERNARDO::1	CALLE BERNARDO	CDS	CALLE LEANDRO	559	34	19006	Residential	Asphalt	65	11/6/2023
COACH::CBERNARDO::3	CALLE BERNARDO	CALLE LEANDRO	CDS	301	34	10234	Residential	Asphalt	64	11/6/2023
COACH::CBONITA::1	CALLE BONITA	CALLE NINOS	CALLE FELIZ	312	36	11232	Residential	Asphalt	47	11/6/2023
COACH::CBONITA::2	CALLE BONITA	CALLE FELIZ	CALLE ROSA	632	36	22752	Residential	Asphalt	61	11/6/2023
COACH::CBONITA::3	CALLE BONITA	CALLE ROSA	53RD AVE	179	36	6444	Residential	Asphalt	56	11/6/2023
COACH::CBOUGANVIL::1	CALLE BOUGANVILIA	TYLER ST	CALLE CLAVEL	541	36	19476	Residential	Asphalt	63	11/6/2023
COACH::CBOUGANVIL::2	CALLE BOUGANVILIA	CALLE CLAVEL	EL SOL ST	179	36	6444	Residential	Asphalt	71	11/6/2023
COACH::CBOUGANVIL::3	CALLE BOUGANVILIA	EL SOL ST	CALLE GARDENIA	452	36	16272	Residential	Asphalt	75	11/6/2023
COACH::CCAMACHO::1	CALLE CAMACHO	D/E	53RD AVE	660	40	26400	Residential	Asphalt	84	11/6/2023
COACH::CCAMACHO::2	CALLE CAMACHO	53RD AVE	CALLE ZAMORA	661	40	26440	Residential	Asphalt	82	11/6/2023
COACH::CCAMACHO::3	CALLE CAMACHO	CALLE ZAMORA	CALLE VERDE	661	40	26440	Residential	Asphalt	80	11/6/2023
COACH::CCAMACHO::4	CALLE CAMACHO	CALLE VERDE	CALLE ROJO	648	40	25920	Residential	Asphalt	78	11/6/2023
COACH::CCAMACHO::5	CALLE CAMACHO	CALLE ROJO	52ND AVE	607	40	24280	Residential	Asphalt	61	11/6/2023
COACH::CCAMACHO::6	CALLE CAMACHO	52ND AVE	CAIRO AVE	337	40	13480	Residential	Asphalt	62	11/6/2023
COACH::CCAMACHO::7	CALLE CAMACHO	CAIRO AVE	BAGDAD AVE	667	40	26680	Residential	Asphalt	72	11/6/2023
COACH::CCANTARA::1	CALLE CANTARA	AVENIDA FLORABUNDA	AVENIDA NERIUM	859	36	30924	Residential	Asphalt	63	11/6/2023
COACH::CCARMELLO::1	CALLE CARMELLO	AVENIDA FLORABUNDA	AVENIDA EUROPA	286	36	10296	Residential	Asphalt	68	11/6/2023
COACH::CCARMELLO::2	CALLE CARMELLO	AVENIDA EUROPA	AVENIDA CEDRUS	286	36	10296	Residential	Asphalt	56	11/6/2023
COACH::CCARMELLO::3	CALLE CARMELLO	AVENIDA CEDRUS	AVENIDA NERIUM	286	36	10296	Residential	Asphalt	45	11/6/2023
COACH::CCARRASCO::1	CALLE CARRASCO	CALLE LARRIVA	CALLE CHAVEZ	282	36	10152	Residential	Asphalt	100	11/6/2023
COACH::CCARRASCO::2	CALLE CARRASCO	CALLE CHAVEZ	CALLE YSIANO	266	36	9576	Residential	Asphalt	89	11/6/2023
COACH::CCARRASCO::3	CALLE CARRASCO	CALLE YSIANO	CALLE RODRIGUEZ	276	36	9936	Residential	Asphalt	100	11/6/2023
COACH::CCATHRON::1	CALLE CATHRON	AVENIDA RAZON	AVENIDA ADOBE	918	40	36720	Residential	Asphalt	57	11/6/2023
COACH::CCEBRINO::1	CALLE CEBRINO	CALLE CHAVEZ	CDS	686	36	24696	Residential	Asphalt	93	11/6/2023
COACH::CCERVANTES::1	CALLE CERVANTES	51ST AVE	CALLE LARRIVA	214	20	4275	Residential	Asphalt	100	11/6/2023
COACH::CCERVANTES::2	CALLE CERVANTES	CALLE LARRIVA	CALLE CHAVEZ	272	36	9792	Residential	Asphalt	74	11/6/2023
COACH::CCERVANTES::3	CALLE CERVANTES	CALLE CHAVEZ	CALLE YSIANO	284	36	10224	Residential	Asphalt	97	11/6/2023
COACH::CCERVANTES::4	CALLE CERVANTES	CALLE YSIANO	CALLE RODRIGUEZ	412	36	14832	Residential	Asphalt	99	11/6/2023
COACH::CCERVANTES::5	CALLE CERVANTES	51ST AVE	CALLE LARRIVA	214	20	4283	Residential	Asphalt	100	11/6/2023
COACH::CCHAVEZ::1	CALLE CHAVEZ	CALLE CARRASCO	CALLE CERVANTES	378	36	13608	Residential	Asphalt	100	11/6/2023
COACH::CCHAVEZ::2	CALLE CHAVEZ	CALLE CERVANTES	CALLE CEBRINO	339	36	12204	Residential	Asphalt	100	11/6/2023
COACH::CCLAVEL::1	CALLE CLAVEL	CALLE GERANIO	CALLE VIOLETA	256	33	8448	Residential	Asphalt	73	11/6/2023
COACH::CCLAVEL::2	CALLE CLAVEL	CALLE VIOLETA	CALLE BOUGANVILIA	255	33	8415	Residential	Asphalt	79	11/6/2023
COACH::CCOLIMA::1	CALLE COLIMA	AGUA CALIENTE ST	LUNA DE NICOLETA ST	290	36	10440	Residential	Asphalt	74	11/6/2023
COACH::CCOLIMA::2	CALLE COLIMA	LUNA DE NICOLETA ST	CAMINO MAYA	280	36	10080	Residential	Asphalt	74	11/6/2023
COACH::CCOLIMA::3	CALLE COLIMA	CAMINO MAYA	CAMINO REAL	280	36	10080	Residential	Asphalt	76	11/6/2023
COACH::CCOLIMA::4	CALLE COLIMA	CAMINO REAL	LA PLAYA ST	280	36	10080	Residential	Asphalt	74	11/6/2023
COACH::CDANIELLE::1	CALLE DANIELLE	AVENIDA MARIA	AVENIDA CRYSTAL	324	30	9720	Residential	Asphalt	70	11/6/2023
COACH::CDEVEGA::1	CALLE DE VEGA	PASEO LAREDO	CALLE LEON	332	40	13280	Residential	Asphalt	100	11/6/2023
COACH::CDIEGO::1	CALLE DIEGO	VIA SANTIAGO	CALLE GREGORIO	582	34	19788	Residential	Asphalt	70	11/6/2023
COACH::CDIEGO::2	CALLE DIEGO	VIA SANTIAGO	CALLE LEANDRO	696	34	23664	Residential	Asphalt	83	11/6/2023
COACH::CDIEGO::3	CALLE DIEGO	CALLE LEANDRO	150' E/O CALLE LEANDRO	153	34	5202	Residential	Asphalt	54	11/6/2023
COACH::CDIEGO::4	CALLE DIEGO	150' E/O CALLE LEANDRO	CDS	92	34	3128	Residential	Asphalt	77	11/6/2023
COACH::CELSOL::1	CALLE EL SOL	AVENIDA VERANO	CORTE EL ALBA	280	37	10360	Residential	Asphalt	50	11/6/2023
COACH::CELSOL::2	CALLE EL SOL	CORTE EL ALBA	CORTE LA MORADA	280	37	10360	Residential	Asphalt	68	11/6/2023
COACH::CELSOL::3	CALLE EL SOL	CORTE LA MORADA	CORTE SOLEADO	280	37	10360	Residential	Asphalt	59	11/6/2023
COACH::CELSOL::4	CALLE EL SOL	CORTE SOLEADO	AVENIDA LA LUNA	280	37	10360	Residential	Asphalt	61	11/6/2023
COACH::CELDARICA::1	CALLE ELDARICA	AVENIDA FLORABUNDA	AVENIDA NERIUM	859	36	30924	Residential	Asphalt	68	11/6/2023
COACH::CEMELIA::1	CALLE EMELIA	AVENUE 53	AVENIDA RAYLYNN	197	36	7092	Residential	Asphalt	56	11/6/2023
COACH::CEMELIA::2	CALLE EMELIA	AVENIDA RAYLYNN	AVENIDA GRACE	258	36	9288	Residential	Asphalt	37	11/6/2023
COACH::CEMELIA::3	CALLE EMELIA	AVENIDA GRACE	AVENIDA ALEENAH	291	36	10476	Residential	Asphalt	48	11/6/2023
COACH::CEMPALME::1	CALLE EMPALME	BELLISSIMA AVE	53RD AVE	936	20	18720	Residential	Asphalt	90	11/6/2023
COACH::CEMPALME::2	CALLE EMPALME	53RD AVE	CALLE ZAMORA	661	36	23796	Residential	Asphalt	79	11/6/2023
COACH::CEMPALME::3	CALLE EMPALME	CALLE VERDE	CALLE ROJO	648	40	25920	Residential	Asphalt	77	11/6/2023
COACH::CEMPALME::4	CALLE EMPALME	CALLE ROJO	52ND AVE	607	40	24280	Residential	Asphalt	58	11/6/2023
COACH::CEMPALME::5	CALLE EMPALME	52ND AVE	CAIRO AVE	677	44	29788	Residential	Asphalt	53	11/6/2023
COACH::CESTRELLA::1	CALLE ESTRELLA	CDS	CALLE ROSA	242	36	8712	Residential	Asphalt	72	11/6/2023
COACH::CFELIZ::1	CALLE FELIZ	CALLE LOS HERMANOS	CALLE BONITA	261	36	9396	Residential	Asphalt	73	11/6/2023
COACH::CFLORENA::1	CALLE FLORENA	AVENIDA RAYLYNN	AVENIDA GRACE	282	36	10152	Residential	Asphalt	61	11/6/2023
COACH::CFLORENA::2	CALLE FLORENA	AVENIDA ALEENAH	110' N/O AVENIDA ALEENAH	109	36	3924	Residential	Asphalt	66	11/6/2023
COACH::CFLORENA::3	CALLE FLORENA	AVENIDA GRACE	AVENIDA ALEENAH	280	36	10080	Residential	Asphalt	75	11/6/2023
COACH::CFLORENA::4	CALLE FLORENA	110' N/O AVENIDA ALEENAH	AVENIDA VERONICA	394	36	14184	Residential	Asphalt	46	11/6/2023
COACH::CFRONTERA::1	CALLE FRONTERA	AVENIDA SAN DOMINGO	AVENIDA CAMPANAS	1010	36	36360	Residential	Asphalt	98	11/6/2023
COACH::CGARDENIA::1	CALLE GARDENIA	CALLE GERANIO	CALLE VIOLETA	257	33	8481	Residential	Asphalt	76	11/6/2023
COACH::CGARDENIA::2	CALLE GARDENIA	CALLE VIOLETA	CALLE BOUGANVILIA	256	33	8448	Residential	Asphalt	74	11/6/2023
COACH::CGERANIO::1	CALLE GERANIO	CALLE CLAVEL	CALLE GARDENIA	633	33	20889	Residential	Asphalt	73	11/6/2023
COACH::CGLORIOSA::1	CALLE GLORIOSA	AVENIDA NERIUM	D/E	153	36	5508	Residential	Asphalt	77	11/6/2023
COACH::CGRANADA::1	CALLE GRANADA	PASEO MADRID	PASEO CORDOVA	300	36	10800	Residential	Surface Treatment	97	11/6/2023
COACH::CGREGORIO::1	CALLE GREGORIO	FREDERICK ST	CALLE DIEGO	182	38	6916	Residential	Asphalt	60	11/6/2023
COACH::CGREGORIO::2	CALLE GREGORIO	CALLE DIEGO	CALLE LEANDRO	666	38	25308	Residential	Asphalt	56	11/6/2023
COACH::CJOYCE::1	CALLE JOYCE	AVENIDA RAYLYNN	AVENIDA GRACE	295	36	10620	Residential	Asphalt	68	11/6/2023
COACH::CLAPAZ::1	CALLE LA PAZ	CALLE NINOS	CALLE ROSA	946	36	34056	Residential	Asphalt	61	11/6/2023
COACH::CLAPAZ::2	CALLE LA PAZ	CALLE ROSA	53RD AVE	179	36	6444	Residential	Asphalt	50	11/6/2023
COACH::CLARRIVA::1	CALLE LARRIVA	CALLE CARRASCO	CALLE CERVANTES	374	36	13464	Residential	Asphalt	100	11/6/2023
COACH::CLARRIVA::2	CALLE LARRIVA	CALLE CERVANTES	CDS	293	36	10548	Residential	Asphalt	100	11/6/2023
COACH::CLEANDRO::1	CALLE LEANDRO	53RD AVE	CALLE DIEGO	211	40	8440	Residential	Asphalt	55	11/6/2023
COACH::CLEANDRO::2	CALLE LEANDRO	CALLE DIEGO	CALLE BERNARDO	282	40	11280	Residential	Asphalt	56	11/6/2023
COACH::CLEANDRO::3	CALLE LEANDRO	CALLE BERNARDO	CALLE GREGORIO	389	40	15560	Residential	Asphalt	70	11/6/2023
COACH::CLEANDRO::4	CALLE LEANDRO	CALLE GREGORIO	CDS	339	40	13560	Residential	Asphalt	62	11/6/2023
COACH::CLEON::1	CALLE LEON	CALLE DE VEGA	AVENIDA CORTEZ	382	40	15280	Residential	Asphalt	85	11/6/2023
COACH::CLIMON::1	CALLE LIMON	GENOA ST	CAMINO CORTO	219	30	6570	Residential	Asphalt	68	11/6/2023
COACH::CLIMON::2	CALLE LIMON	52ND AVE	CAMINO CORTO	581	30	17430	Residential	Asphalt	59	11/6/2023
COACH::CLINDA::1	CALLE LINDA	CDS	CALLE ROSA	242	30	7260	Residential	Asphalt	74	11/6/2023
COACH::CLOSHERMAN::1	CALLE LOS HERMANOS	CALLE FELIZ	CALLE ROSA	626	36	22536	Residential	Asphalt	68	11/6/2023
COACH::CLYA::1	CALLE LYA	CALLE TECHA	CDS	362	30	10860	Residential	Asphalt	71	11/6/2023
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	338	33	11154	Residential	Surface Treatment	93	11/6/2023
COACH::CMENDOZA::1	CALLE MENDOZA	TYLER ST	CORTE OLIVIA	635	33	20955	Residential	Asphalt	67	11/6/2023
COACH::CMENDOZA::2	CALLE MENDOZA	CORTE OLIVIA	CALLE PIZANO	560	33	18480	Residential	Asphalt	72	11/6/2023
COACH::CMENDOZA::3	CALLE MENDOZA	LAS FLORES AVE	CALLE PIZANO	463	33	15279	Residential	Asphalt	66	11/6/2023
COACH::CNINOS::1	CALLE NINOS	CALLE BONITA	50' W/O CALLE BONITA	43	36	1548	Residential	Asphalt	72	11/6/2023
COACH::CNINOS::2	CALLE NINOS	50' W/O CALLE BONITA	CALLE BELLA	235	36	8460	Residential	Asphalt	66	11/6/2023
COACH::CNINOS::3	CALLE NINOS	CALLE BELLA	140' W/O CALLE BELLA	143	36	5148	Residential	Asphalt	66	11/6/2023
COACH::CNINOS::4	CALLE NINOS	140' W/O CALLE BELLA	CALLE AMIGOS	143	36	5148	Residential	Asphalt	60	11/6/2023
COACH::CNINOS::5	CALLE NINOS	CALLE AMIGOS	CALLE LA PAZ	277	36	9972	Residential	Asphalt	61	11/6/2023
COACH::CNOGAL::1	CALLE NOGAL	CALLE OLIVO	CALLE AVILA	465	36	16740	Residential	Asphalt	85	11/6/2023
COACH::COCASO::1	CALLE OCASO	AVENIDA VERANO	CORTE ECLIPSE	280	37	10360	Residential	Asphalt	79	11/6/2023
COACH::COCASO::2	CALLE OCASO	CORTE ECLIPSE	CORTE ESTIVO	280	37	10360	Residential	Asphalt	74	11/6/2023
COACH::COCASO::3	CALLE OCASO	CORTE ESTIVO	CORTE SOLIS	280	37	10360	Residential	Asphalt	61	11/6/2023
COACH::COCASO::4	CALLE OCASO	CORTE SOLIS	AVENIDA LA LUNA	280	37	10360	Residential	Asphalt	52	11/6/2023
COACH::COLIVO::1	CALLE OLIVO	CALLE NOGAL	CALLE PINO	348	30	10440	Residential	Asphalt	92	11/6/2023
COACH::CPERA::1	CALLE PERA	HILL DR	CDS	209	32	6688	Residential	Asphalt	65	11/6/2023
COACH::CPINO::1	CALLE PINO	CALLE OLIVO	CALLE AVILA	465	36	16740	Residential	Asphalt	85	11/6/2023
COACH::CPIZANO::1	CALLE PIZANO	TYLER ST	COURTE STELLA	560	33	18480	Residential	Asphalt	70	11/6/2023
COACH::CPIZANO::2	CALLE PIZANO	COURTE STELLA	CALLE MENDOZA	468	33	15444	Residential	Asphalt	74	11/6/2023

Asset Id	Name	Start Location	End Location	Length	Width	Area	Functional Classification	Pavement Type	Last Inspection PCI	Last Inspection Date
COACH::CPUERTADEL::1	CALLE PUERTA DEL SOL	50TH AVE	AVENIDA VERANO	214	48	10272	Residential	Asphalt	80	11/6/2023
COACH::CQUINTERRA::1	CALLE QUINTERRA	50TH AVE	REDONDO SUR	212	37	7844	Residential	Asphalt	48	11/6/2023
COACH::CQUINTERRA::2	CALLE QUINTERRA	REDONDO SUR	CORTE SANTOS	159	37	5883	Residential	Asphalt	59	11/6/2023
COACH::CQUINTERRA::3	CALLE QUINTERRA	CORTE SANTOS	CORTE LORETO	370	37	13690	Residential	Asphalt	32	11/6/2023
COACH::CQUINTERRA::4	CALLE QUINTERRA	CORTE LORETO	REDONDO NORTE	158	37	5846	Residential	Asphalt	46	11/6/2023
COACH::CROBERTO::1	CALLE ROBERTO	CALLE TECHA	CDS	351	32	11232	Residential	Asphalt	64	11/6/2023
COACH::CRODRIGUEZ::1	CALLE RODRIGUEZ	CALLE CARRASCO	CALLE CERVANTES	441	36	15876	Residential	Asphalt	100	11/6/2023
COACH::CRODRIGUEZ::2	CALLE RODRIGUEZ	CALLE CERVANTES	CALLE CEBRINO	274	36	9864	Residential	Asphalt	100	11/6/2023
COACH::CROJO::1	CALLE ROJO	260' W/O CALLE EMPALME	D/E	660	40	26400	Residential	Asphalt	38	11/6/2023
COACH::CROJO::2	CALLE ROJO	170 W/O CALLE EMPALME	260' W/O CALLE EMPALME	88	40	3520	Residential	Asphalt	33	11/6/2023
COACH::CROJO::3	CALLE ROJO	85' W/O CALLE EMPALME	170' W/O CALLE EMPALME	88	40	3520	Residential	Asphalt	38	11/6/2023
COACH::CROJO::4	CALLE ROJO	85' W/O CALLE EMPALME	CALLE EMPALME	85	40	3400	Residential	Asphalt	41	11/6/2023
COACH::CROJO::5	CALLE ROJO	CALLE EMPALME	CALLE TECHA	324	40	12960	Residential	Asphalt	72	11/6/2023
COACH::CROJO::6	CALLE ROJO	CALLE TECHA	CALLE AVILA	324	40	12960	Residential	Asphalt	70	11/6/2023
COACH::CROJO::7	CALLE ROJO	CALLE AVILA	CALLE CAMACHO	324	40	12960	Residential	Asphalt	78	11/6/2023
COACH::CROJO::8	CALLE ROJO	CALLE CAMACHO	CESAR CHAVEZ ST	308	40	12320	Residential	Asphalt	82	11/6/2023
COACH::CROJO::9	CALLE ROJO	CESAR CHAVEZ ST	SH-86	107	40	4280	Residential	Asphalt	33	11/6/2023
COACH::CROSA::1	CALLE ROSA	CALLE LOS HERMANOS	CALLE BONITA	260	36	9360	Residential	Asphalt	73	11/6/2023
COACH::CROSA::2	CALLE ROSA	CALLE BONITA	CALLE LINDA	287	36	10332	Residential	Asphalt	73	11/6/2023
COACH::CROSA::3	CALLE ROSA	CALLE LINDA	140' W/O CALLE ESTRELLA	143	36	5148	Residential	Asphalt	78	11/6/2023
COACH::CROSA::4	CALLE ROSA	140' W/O CALLE ESTRELLA	CALLE ESTRELLA	143	36	5148	Residential	Asphalt	70	11/6/2023
COACH::CROSA::5	CALLE ROSA	CALLE ESTRELLA	CALLE LA PAZ	303	36	10908	Residential	Asphalt	70	11/6/2023
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	240	36	8640	Residential	Surface Treatment	91	11/6/2023
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	179	36	6444	Residential	Surface Treatment	87	11/6/2023
COACH::CRUIZ::3	CALLE RUIZ	AVENIDA ZOCALO	AVENIDA REFORMA	179	36	6444	Residential	Surface Treatment	98	11/6/2023
COACH::CRUIZ::4	CALLE RUIZ	AVENIDA REFORMA	AVENIDA DEL PRADO	240	36	8640	Residential	Surface Treatment	99	11/6/2023
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	80	36	2880	Residential	Surface Treatment	82	11/6/2023
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	661	36	23796	Residential	Surface Treatment	84	11/6/2023
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	500	36	18000	Residential	Surface Treatment	89	11/6/2023
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	152	44	6688	Residential	Surface Treatment	89	11/6/2023
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	148	44	6512	Residential	Surface Treatment	86	11/6/2023
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	300	36	10800	Residential	Surface Treatment	78	11/6/2023
COACH::CSOLEDAD::1	CALLE SOLEDAD	VIA MISIONERO	VIA TEPEYAC	868	36	31248	Residential	Asphalt	76	11/6/2023
COACH::CSOLEDAD::2	CALLE SOLEDAD	VIA TEPEYAC	53RD AVE	329	36	11844	Residential	Asphalt	72	11/6/2023
COACH::CTECHA::1	CALLE TECHA	53RD AVE	CALLE ZAMORA	661	40	26440	Residential	Asphalt	81	11/6/2023
COACH::CTECHA::2	CALLE TECHA	CALLE ZAMORA	CALLE LYA	155	40	6200	Residential	Asphalt	59	11/6/2023
COACH::CTECHA::3	CALLE TECHA	CALLE LYA	CALLE ROBERTO	251	40	10040	Residential	Asphalt	70	11/6/2023
COACH::CTECHA::4	CALLE TECHA	CALLE ROBERTO	CALLE VERDE	256	40	10240	Residential	Asphalt	73	11/6/2023
COACH::CTECHA::6	CALLE TECHA	CALLE VERDE	CALLE ROJO	648	40	25920	Residential	Asphalt	75	11/6/2023
COACH::CTECHA::7	CALLE TECHA	CALLE ROJO	52ND AVE	607	40	24280	Residential	Asphalt	53	11/6/2023
COACH::CTECHA::8	CALLE TECHA	52ND AVE	CAIRO AVE	678	40	27120	Residential	Asphalt	50	11/6/2023
COACH::CTECOMARIA::1	CALLE TECOMARIA	AVENIDA FLORABUNDA	AVENIDA EUROPA	286	36	10296	Residential	Asphalt	55	11/6/2023
COACH::CTECOMARIA::2	CALLE TECOMARIA	AVENIDA EUROPA	AVENIDA CEDRUS	286	36	10296	Residential	Asphalt	42	11/6/2023
COACH::CTECOMARIA::3	CALLE TECOMARIA	AVENIDA CEDRUS	AVENIDA NERIUM	287	36	10332	Residential	Asphalt	55	11/6/2023
COACH::CTOLOSA::1	CALLE TOLOSA	SAN ASIS DR	SANTO LN	385	37	14245	Residential	Asphalt	66	11/6/2023
COACH::CTOLOSA::2	CALLE TOLOSA	SANTO LN	SAN REY DR	616	37	22792	Residential	Asphalt	63	11/6/2023
COACH::CTORRESORD::1	CALLE TORRES ORDUNO	52ND AVE	DOUMA CT	685	34	23290	Residential	Asphalt	53	11/6/2023
COACH::CTORRESORD::2	CALLE TORRES ORDUNO	DOUMA CT	DAMASCUS AVE	336	34	11424	Residential	Asphalt	50	11/6/2023
COACH::CVERDE::1	CALLE VERDE	CALLE EMPALME	CALLE TECHA	324	40	12960	Collector	Asphalt	80	11/6/2023
COACH::CVERDE::2	CALLE VERDE	CALLE TECHA	CALLE AVILA	324	40	12960	Collector	Asphalt	77	11/6/2023
COACH::CVERDE::3	CALLE VERDE	CALLE AVILA	CALLE CAMACHO	324	40	12960	Collector	Asphalt	68	11/6/2023
COACH::CVERDE::4	CALLE VERDE	CALLE CAMACHO	CESAR CHAVEZ ST	302	40	12080	Collector	Asphalt	61	11/6/2023
COACH::CVERDE::5	CALLE VERDE	CESAR CHAVEZ ST	SH-86	85	40	3400	Collector	Asphalt	67	11/6/2023
COACH::CVIOLETA::1	CALLE VIOLETA	CALLE CLAVEL	CALLE GARDENIA	632	33	20856	Residential	Asphalt	78	11/6/2023
COACH::CXAVIER::1	CALLE XAVIER	AVENIDA SAN DOMINGO	AVENIDA CAMPANAS	1006	36	36216	Residential	Asphalt	99	11/6/2023
COACH::CYSIANO::1	CALLE YSIANO	CALLE CARRASCO	CALLE CERVANTES	439	36	15804	Residential	Asphalt	100	11/6/2023
COACH::CZAMORA::1	CALLE ZAMORA	CALLE EMPALME	CALLE TECHA	371	36	13356	Residential	Asphalt	75	11/6/2023
COACH::CZAMORA::2	CALLE ZAMORA	CALLE TECHA	CALLE AVILA	370	36	13320	Residential	Asphalt	72	11/6/2023
COACH::CZAMORA::3	CALLE ZAMORA	CALLE AVILA	CALLE CAMACHO	270	36	9720	Residential	Asphalt	69	11/6/2023
COACH::CZAMORA::4	CALLE ZAMORA	CALLE CAMACHO	CESAR CHAVEZ ST	256	36	9216	Residential	Asphalt	55	11/6/2023
COACH::CZAMORA::5	CALLE ZAMORA	CESAR CHAVEZ ST	SH-86	107	36	3852	Residential	Asphalt	68	11/6/2023
COACH::CBAHIAAVE::1	CAMINO BAHIA AVE	PLAYA DEL AMOR ST	CAMINO ROSARITO	680	36	24480	Residential	Asphalt	74	11/6/2023
COACH::CBONITOAVE::1	CAMINO BONITO AVE	ESTRELLA TOMAS ST	ESTRELLA PEDRO ST	280	36	10080	Residential	Asphalt	72	11/6/2023
COACH::CCONVENTO::1	CAMINO CONVENTO	CDS	AVENIDA CAMPANAS	434	36	15624	Residential	Asphalt	100	11/6/2023
COACH::CCORAS::1	CAMINO CORAS	AVENIDA SAN DOMINGO	CDS	436	36	15696	Residential	Asphalt	98	11/6/2023
COACH::CCORTEZ::1	CAMINO CORTEZ	PUERTO ESCONDIDO AVE	LOS CABOS AVE	280	36	10080	Residential	Asphalt	52	11/6/2023
COACH::CCORTEZ::2	CAMINO CORTEZ	LOS CABOS AVE	TODOS SANTOS AVE	280	36	10080	Residential	Asphalt	49	11/6/2023
COACH::CCORTO::1	CAMINO CORTO	CALLE LIMON	CDS	175	30	5250	Residential	Asphalt	59	11/6/2023
COACH::CELFARO::1	CAMINO EL FARO	AVENIDA SAN DOMINGO	CDS	434	36	15624	Residential	Asphalt	98	11/6/2023
COACH::CLASBRISAS::1	CAMINO LAS BRISAS	EL CASTILLO RD	AGLIA CALIENTE ST	766	36	27576	Residential	Asphalt	76	11/6/2023
COACH::CAMLORETO::1	CAMINO LORETO	AVENIDA SAN DOMINGO	CDS	433	36	15588	Residential	Asphalt	100	11/6/2023
COACH::CMAGDALENA::1	CAMINO MAGDALENA	CDS	AVENIDA CAMPANAS	434	36	15624	Residential	Asphalt	98	11/6/2023
COACH::CMAYA::1	CAMINO MAYA	AGUA BLANCA AVE	CALLE COLIMA	726	36	26136	Residential	Asphalt	73	11/6/2023
COACH::CPELICANO::1	CAMINO PELICANO	CAMINO REAL	LA PLAYA ST	280	36	10080	Residential	Asphalt	71	11/6/2023
COACH::CREAL::1	CAMINO REAL	AGUA BLANCA AVE	CAMINO PELICANO	280	36	10080	Residential	Asphalt	72	11/6/2023
COACH::CREAL::2	CAMINO REAL	CAMINO PELICANO	CALLE COLIMA	446	36	16056	Residential	Asphalt	81	11/6/2023
COACH::CROSARIO::1	CAMINO ROSARIO	CDS	AVENIDA CAMPANAS	434	36	15624	Residential	Asphalt	100	11/6/2023
COACH::CROSARITO::1	CAMINO ROSARITO	D/E	CAMINO BAHIA AVE	161	40	6440	Residential	Asphalt	78	11/6/2023
COACH::CROSARITO::2	CAMINO ROSARITO	CAMINO BAHIA AVE	LOS CABOS AVE	280	40	11200	Residential	Asphalt	77	11/6/2023
COACH::CAMPCT::1	CAMP CT	CDS	VISTA DEL SUR	892	44	39248	Collector	Asphalt	59	11/6/2023
COACH::CAPITOLAAV::1	CAPITOLA AVE	CDS	MONARCH RD	361	36	12996	Residential	Asphalt	70	11/6/2023
COACH::CAPITOLAAV::2	CAPITOLA AVE	MONARCH RD	LAGUNA LN	281	36	10116	Residential	Asphalt	66	11/6/2023
COACH::CAPITOLAAV::3	CAPITOLA AVE	LAGUNA LN	VENENTA BLVD	330	36	11880	Residential	Asphalt	30	11/6/2023
COACH::CAPITOLAAV::4	CAPITOLA AVE	VENENTA BLVD	NEWPORT ST	252	36	9072	Residential	Asphalt	32	11/6/2023
COACH::CAPITOLAAV::5	CAPITOLA AVE	NEWPORT ST	OCEANO RD	373	36	13428	Residential	Asphalt	45	11/6/2023
COACH::CARDELINAD::1	CARDELINA DR	PALMERAS CIR	PALMERAS CIR	458	36	16488	Residential	Asphalt	47	11/6/2023
COACH::CARDINALDR::1	CARDINAL DR	TYLER ST	PALMERAS CIR	145	48	6960	Residential	Asphalt	56	11/6/2023
COACH::CATALINAAV::1	CATALINA AVE	NEWPORT ST	OCEANO RD	373	36	13428	Residential	Asphalt	46	11/6/2023
COACH::CATARINACT::1	CATARINA CT	AVENIDA NICOLE	CDS	260	36	9360	Residential	Asphalt	63	11/6/2023
COACH::CESARCHAVE::1	CESAR CHAVEZ ST	53RD AVE	CALLE ZAMORA	661	37	24457	Residential	Asphalt	75	11/6/2023
COACH::CESARCHAVE::2	CESAR CHAVEZ ST	CALLE VERDE	CALLE ROJO	648	37	23976	Collector	Asphalt	74	11/6/2023
COACH::CESARCHAVE::3	CESAR CHAVEZ ST	CALLE ROJO	52ND AVE	607	37	22459	Collector	Asphalt	13	11/6/2023
COACH::CHANNINGCT::1	CHANNING CT	AVENIDA MARIA	CDS	270	36	9720	Residential	Asphalt	73	11/6/2023
COACH::CHAPARROSA::1	CHAPARROSA ST	SAN MATEO AVE	MECCA HILLS AVE	270	36	9720	Residential	Asphalt	56	11/6/2023
COACH::CHAPARROSA::2	CHAPARROSA ST	MECCA HILLS AVE	GLENDORA RIDGE AVE	268	36	9648	Residential	Asphalt	58	11/6/2023
COACH::CHAPARROSA::3	CHAPARROSA ST	GLENDORA RIDGE AVE	GRANITE PASS TRL	262	36	9432	Residential	Asphalt	56	11/6/2023
COACH::CHAPARROSA::4	CHAPARROSA ST	GRANITE PASS TRL	COXCOMB DR	260	36	9360	Residential	Asphalt	57	11/6/2023
COACH::CHAPARROSA::5	CHAPARROSA ST	COXCOMB DR	EAGLE AVE	311	36	11196	Residential	Asphalt	64	11/6/2023
COACH::CHAPARROSA::6	CHAPARROSA ST	EAGLE AVE	MCCOY PEAK AVE	270	36	9720	Residential	Asphalt	68	11/6/2023
COACH::CHAPARROSA::7	CHAPARROSA ST	MCCOY PEAK AVE	48TH AVE	825	36	29700	Residential	Asphalt	65	11/6/2023
COACH::CHARDONNAY::1	CHARDONNAY CIR	MALVASIA WAY	CDS	180	32	5760	Residential	Asphalt	52	11/6/2023
COACH::CHARLTONPK::1	CHARLTON PEAK ST	SAN MATEO AVE	MECCA HILLS AVE	260	36	9360	Residential	Asphalt	64	11/6/2023
COACH::CHARLTONPK::2	CHARLTON PEAK ST	MECCA HILLS AVE	BIG BEAR PL	895	36	32220	Residential	Asphalt	64	11/6/2023
COACH::CHIAPASDR::1	CHIAPAS DR	51ST AVE	500' N/O 51ST AVE	506	28	14168	Residential	Asphalt	55	11/6/2023
COACH::CHIAPASDR::2	CHIAPAS DR	500' N/O 51ST AVE	TABASCO CT	264	28	7392	Residential	Asphalt	67	11/6/2023
COACH::CHIAPASDR::3	CHIAPAS DR	TABASCO CT	500' E/O TABASCO CT	499	28	13972	Residential	Asphalt	64	11/6/2023
COACH::CHIAPASDR::4	CHIAPAS DR	500' E/O TABASCO CT	BAJA WAY	369	28	10332	Residential	Asphalt	69	11/6/2023
COACH::CHIAPASDR::5	CHIAPAS DR	315' E/O BAJA WAY	BAJA WAY	316	28	8848	Residential	Asphalt	60	11/6/2023
COACH::CHIAPASDR::6	CHIAPAS DR	220' S/O SALTILLO CT	315' E/O BAJA WAY	288	28	8064	Residential	Asphalt	49	11/6/2023
COACH::CHIAPASDR::7	CHIAPAS DR	220' S/O SALTILLO CT	SALTILLO CIR	221	28	6188	Residential	Asphalt	69	11/6/2023
COACH::CHICHENITZ::1	CHICHEN ITZA RD	PUERTO ESCONDIDO AVE	IXTAPA AVE	280	36	10080	Residential	Asphalt	73	11/6/2023
COACH::CHICHENITZ::2	CHICHEN ITZA RD	IXTAPA AVE	SAN IGNACIO AVE	249	36	8964	Residential	Asphalt	53	11/6/2023
COACH::CHICHENITZ::4	CHICHEN ITZA RD	SAN IGNACIO AVE	AGUA BLANCA AVE	311	36	11196	Residential	Asphalt	87	11/6/2023
COACH::CHIHUAHUA::1	CHIHUAHUA CT	CDS	MAZATLAN DR	236	28	6608	Residential	Asphalt	61	11/6/2023
COACH::CHIRIACOSU::1	CHIRIACO SUMMIT ST	GLENDORA RIDGE AVE	BIG BEAR PL	618	36	22248	Residential	Asphalt	68	11/6/2023
COACH::CHRISTINA::1	CHRISTINA RD	FREDERICK ST	ANDREA LN	180	36	6480	Residential	Asphalt	90	11/6/2023
COACH::CHRISTINA::3	CHRISTINA RD	ANDREA LN	TOMAS LN	254	36	9144	Residential	Asphalt	84	11/6/2023
COACH::CHRISTINA::4	CHRISTINA RD	TOMAS LN	RIGO CT	253	36	9108	Residential	Asphalt	77	11/6/2023
COACH::CHRISTINA::5	CHRISTINA RD	RIGO CT	MARY CT	256	36	9216	Residential	Asphalt	52	11/6/2023
COACH::CHRISTINA::6	CHRISTINA RD	MARY CT	AVENIDA ADOBE	258	36	9288	Residential	Asphalt	63	11/6/2023
COACH::CHUPAROSA::1	CHUPAROSA DR	PALMERAS CIR	PALMERAS CIR	458	36	16488	Residential	Asphalt	40	11/6/2023
COACH::CIELOVICTR::1	CIELO VICTORIA ST	MARIANA AVE	48TH AVE	200	46	9200	Residential	Asphalt	73	11/6/2023
COACH::CINNABARLN::1	CINNABAR LN	JADEROCK RD	NICKLECREEK DR	280	37	10360	Residential	Asphalt	44	11/6/2023
COACH::CINNABARLN::2	CINNABAR LN	NICKLECREEK DR	SHADOWROCK DR	280	37	10360	Residential	Asphalt	51	11/6/2023
COACH::CINNABARLN::3	CINNABAR LN	SHADOWROCK DR	LAPIS DR	280	37	10360	Residential	Asphalt	54	11/6/2023
COACH::CINNABARLN::4	CINNABAR LN	LAPIS DR	SERPENTINE WAY	275	37	10175	Residential	Asphalt	51	11/6/2023
COACH::COLONIADR::1	COLONIA DR	SAN REY DR	50TH AVE	213	48	10224	Residential	Brick	N/A	
COACH::COPPERIDGE::1	COPPERIDGE ST	JADEROCK RD	NICKLECREEK DR	280	37	10360	Residential	Asphalt	60	11/6/2023
COACH::COPPERIDGE::2	COPPERIDGE ST	NICKLECREEK DR	SHADOWROCK DR	280	37	10360	Residential	Asphalt	33	11/6/2023
COACH::COPPERIDGE::3	COPPERIDGE ST	SHADOWROCK DR	LAPIS DR	280	37	10360	Residential	Asphalt	31	11/6/2023
COACH::COPPERIDGE::4	COPPERIDGE ST	LAPIS DR	ASHLER CT	275	37	10175	Residential	Asphalt	52	11/6/2023
COACH::CORONADOST::1	CORONADO ST	D/E	50TH AVE	671	40	26840	Residential	Asphalt	78	11/6/2023
COACH::CALTURIAN::1	CORTE ALTURIAN	CDS	AVENIDA ADOBE	654	40	26160	Residential	Asphalt	60	11/6/2023
COACH::CBERNO::1	CORTE BERNARDO	CDS	AVENIDA ADOBE	360	40	14400	Residential	Asphalt	65	11/6/2023

Asset Id	Name	Start Location	End Location	Length	Width	Area	Functional Classification	Pavement Type	Last Inspection PCI	Last Inspection Date
COACH::CCINDARELA::1	CORTE CINDARELLA	CDS	AVENIDA ADOBE	334	40	13360	Residential	Asphalt	87	11/6/2023
COACH::CDELPARQUE::1	CORTE DEL PARQUE	CDS	AVENIDA DEL PARQUE	162	28	4536	Residential	Asphalt	99	11/6/2023
COACH::CECLIPSE::1	CORTE ECLIPSE	CALLE OCASO	CDS	382	37	14134	Residential	Asphalt	75	11/6/2023
COACH::CELALBA::1	CORTE EL ALBA	CDS	CALLE EL SOL	416	37	15392	Residential	Asphalt	80	11/6/2023
COACH::CESTIVO::1	CORTE ESTIVO	CALLE OCASO	CDS	382	37	14134	Residential	Asphalt	71	11/6/2023
COACH::CGILLAN::1	CORTE GILLAN	AVENIDA RAZON	CDS	360	40	14400	Residential	Asphalt	71	11/6/2023
COACH::CLAMIRADAE::1	CORTE LA MIRADA	CALLE EL SOL	VAN BUREN ST	218	37	8066	Residential	Asphalt	72	11/6/2023
COACH::CLAMIRADAW::1	CORTE LA MIRADA	VAN BUREN ST	CALLE EL SOL	217	37	8029	Residential	Asphalt	69	11/6/2023
COACH::CLAMORADA::1	CORTE LA MORADA	CDS	CALLE EL SOL	416	37	15392	Residential	Asphalt	58	11/6/2023
COACH::CLORETO::1	CORTE LORETO	CALLE QUINTERRA	CDS	227	36	8172	Residential	Asphalt	72	11/6/2023
COACH::CMOLINO::1	CORTE MOLINO	CDS	REDONDO NORTE	165	40	6600	Residential	Asphalt	69	11/6/2023
COACH::COLIVIA::1	CORTE OLIVIA	CDS	CALLE MENDOZA	339	33	11187	Residential	Asphalt	70	11/6/2023
COACH::CPERCEBE::1	CORTE PERCEBE	REDONDO SUR	CDS	164	36	5904	Residential	Asphalt	61	11/6/2023
COACH::CSANTOS::1	CORTE SANTOS	CDS	CALLE QUINTERRA	243	36	8748	Residential	Asphalt	67	11/6/2023
COACH::CSOLEADO::1	CORTE SOLEADO	CDS	CALLE EL SOL	415	37	15355	Residential	Asphalt	60	11/6/2023
COACH::CSOLIS::1	CORTE SOLIS	CALLE OCASO	CDS	382	37	14134	Residential	Asphalt	60	11/6/2023
COACH::CSTELLA::1	CORTE STELLA	CALLE PIZANO	CDS	121	33	3993	Residential	Asphalt	65	11/6/2023
COACH::CYAGER::1	CORTE YAGER	AVENIDA RAZON	CDS	360	40	14400	Residential	Asphalt	72	11/6/2023
COACH::CORTINAPL::1	CORTINA PLACE	BELLISSIMA AVE	SIENO LN	259	36	9324	Residential	Asphalt	99	11/6/2023
COACH::CORTINAPL::2	CORTINA PLACE	SIENO LN	PALERMO CT	255	36	9180	Residential	Asphalt	100	11/6/2023
COACH::CORTINAPL::3	CORTINA PLACE	PALERMO CT	MONZA LANE	233	36	8388	Residential	Asphalt	100	11/6/2023
COACH::COXCOMBDR::1	COXCOMB DR	CHAPARROSA ST	RED MOUNTAIN PL	434	36	15624	Residential	Asphalt	60	11/6/2023
COACH::COZUMELST::1	COZUMEL ST	IXTAPA AVE	TODOS SANTOS AVE	280	36	10080	Residential	Asphalt	46	11/6/2023
COACH::CRESCENTW::1	CRESCENT WAY	MOONLIT DR	FIESTA RD	364	36	13104	Residential	Asphalt	60	11/6/2023
COACH::CYPRESSST::1	CYPRESS ST	VALENCIA LN	VALLEY RD	294	38	11172	Residential	Surface Treatment	62	11/6/2023
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	1313	38	49894	Residential	Surface Treatment	88	11/6/2023
COACH::DAMASCUSAV::1	DAMASCUS AVE	DOUMA ST	CALLE TORRES ORDUNO	514	38	19532	Residential	Asphalt	58	11/6/2023
COACH::DAMASCUSAV::2	DAMASCUS AVE	CALLE TORRES ORDUNO	LIBNAN ST	150	38	5700	Residential	Asphalt	74	11/6/2023
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	192	38	7296	Residential	Surface Treatment	88	11/6/2023
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	445	38	16910	Residential	Surface Treatment	75	11/6/2023
COACH::DAMASCUSAV::5	DAMASCUS AVE	TRIPOLI WAY	DATE AVE	660	38	25080	Residential	Surface Treatment	74	11/6/2023
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	280	36	10080	Residential	Surface Treatment	68	11/6/2023
COACH::DATEAVE::10	DATE AVE	7TH ST	6TH ST	325	36	11700	Collector	Asphalt	59	11/6/2023
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	56	36	2016	Residential	Surface Treatment	58	11/6/2023
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	214	36	7704	Residential	Surface Treatment	63	11/6/2023
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	130	36	4680	Residential	Surface Treatment	78	11/6/2023
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	140	36	5040	Residential	Surface Treatment	75	11/6/2023
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	270	36	9720	Residential	Surface Treatment	76	11/6/2023
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	270	36	9720	Residential	Surface Treatment	65	11/6/2023
COACH::DATEAVE::8	DATE AVE	BAGDAD AVE	8TH ST	195	36	7020	Collector	Asphalt	45	11/6/2023
COACH::DATEAVE::9	DATE AVE	8TH ST	7TH ST	376	36	13536	Collector	Asphalt	55	11/6/2023
COACH::DIEGOCT::1	DIEGO CT	CDS	SHADY LN	434	36	15624	Residential	Asphalt	82	11/6/2023
COACH::DILLONRD::1	DILLON RD	CITY LIMITS	HARRISON ST	209	96	20064	Arterial	Asphalt	91	11/6/2023
COACH::DILLONRD::10	DILLON RD	800' S/O VISTA DEL NORTE	650' S/O VISTA DEL NORTE	148	96	14208	Arterial	Asphalt	82	11/6/2023
COACH::DILLONRD::11	DILLON RD	650' S/O VISTA DEL NORTE	450' S/O VISTA DEL NORTE	194	96	18624	Arterial	Asphalt	50	11/6/2023
COACH::DILLONRD::12	DILLON RD	450' S/O VISTA DEL NORTE	VISTA DEL NORTE	453	96	43488	Arterial	Asphalt	80	11/6/2023
COACH::DILLONRD::13	DILLON RD	VISTA DEL NORTE	DILLON RD	2921	96	280416	Arterial	Asphalt	4	11/6/2023
COACH::DILLONRD::5	DILLON RD	3135' S/O VISTA DEL SUR	VISTA DEL SUR	3136	96	301056	Arterial	Asphalt	73	11/6/2023
COACH::DILLONRD::7	DILLON RD	VISTA DEL SUR	1070' S/O VISTA DEL NORTE	232	96	22272	Arterial	Asphalt	87	11/6/2023
COACH::DILLONRD::8	DILLON RD	1070' S/O VISTA DEL NORTE	800' S/O VISTA DEL NORTE	269	96	25824	Arterial	Asphalt	91	11/6/2023
COACH::DILLONRDN::14	DILLON RD	DILLON RD	44TH AVE	1526	33	50358	Arterial	Asphalt	37	11/6/2023
COACH::DILLONRDS::1	DILLON RD	44TH AVE	DILLON RD	1510	33	49830	Arterial	Asphalt	24	11/6/2023
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	1312	38	49856	Residential	Surface Treatment	84	11/6/2023
COACH::DOUMACT::1	DOUMA CT	52ND AVE	DOUMA CT	693	36	24948	Residential	Asphalt	42	11/6/2023
COACH::DOUMACT::2	DOUMA CT	DOUMA CT	CALLE TORRES ORDUNO	185	36	6660	Residential	Asphalt	28	11/6/2023
COACH::DOUMAST::1	DOUMA ST	52ND AVE	DAMASCUS AVE	1025	38	38950	Residential	Asphalt	65	11/6/2023
COACH::DOUMAST::2	DOUMA ST	DAMASCUS AVE	BAGDAD AVE	333	38	12654	Residential	Asphalt	69	11/6/2023
COACH::ESIENNACIR::1	E SIENNA CIR	SCARLET WAY	INDIGO CT	291	36	10476	Residential	Asphalt	82	11/6/2023
COACH::ESIENNACIR::2	E SIENNA CIR	INDIGO CT	N SIENNA CIR	264	36	9504	Residential	Asphalt	62	11/6/2023
COACH::EAGLEAVE::1	EAGLE AVE	CALHOUN ST	SAN GORGONIO ST	188	38	7144	Residential	Asphalt	54	11/6/2023
COACH::EAGLEAVE::2	EAGLE AVE	SAN GORGONIO ST	CHAPARROSA ST	435	38	16530	Residential	Asphalt	69	11/6/2023
COACH::EAGLEAVE::3	EAGLE AVE	CHAPARROSA ST	PINTO LN	541	38	20558	Residential	Asphalt	62	11/6/2023
COACH::EDMITCHELL::1	ED MITCHELL DR	VAN BUREN ST	MITCHELL DR	2880	26	74880	Collector	Asphalt	55	11/6/2023
COACH::ELARCOST::1	EL ARCO ST	LOS CABOS AVE	TODOS SANTOS AVE	280	38	10640	Residential	Asphalt	81	11/6/2023
COACH::ELARCOST::2	EL ARCO ST	TODOS SANTOS AVE	PUEBLO BONITO AVE	728	38	27664	Residential	Asphalt	72	11/6/2023
COACH::ELCASTILLO::1	EL CASTILLO RD	TODOS SANTOS AVE	CAMINO LAS BRISAS	280	38	10640	Residential	Asphalt	81	11/6/2023
COACH::ELCASTILLO::2	EL CASTILLO RD	CAMINO LAS BRISAS	PUEBLO BONITO AVE	448	38	17024	Residential	Asphalt	81	11/6/2023
COACH::ELGRECOAVE::1	EL GRECO AVE	PLAYA DEL AMOR ST	TAXCO AVE	866	38	32908	Residential	Asphalt	78	11/6/2023
COACH::ELMARAVE::1	EL MAR AVE	LA PLAYA ST	CALHOUN ST	194	44	8536	Residential	Asphalt	63	11/6/2023
COACH::ELSOLST::1	EL SOL ST	CALLE BOUGANVILIA	LAS FLORES AVE	266	33	8778	Residential	Asphalt	71	11/6/2023
COACH::ENTERPRISE::1	ENTERPRISE WAY	D/E	54TH AVE	509	45	22905	Collector	Asphalt	66	11/6/2023
COACH::ENTERPRISE::2	ENTERPRISE WAY	54TH AVE	INDUSTRIAL WAY	4334	45	195030	Collector	Asphalt	71	11/6/2023
COACH::ENTERPRISE::3	ENTERPRISE WAY	INDUSTRIAL WAY	52ND AVE	1311	45	58995	Collector	Asphalt	12	11/6/2023
COACH::ESTRELLAPE::1	ESTRELLA PEDRO ST	CAMINO BONITO AVE	LA COSTA AVE	350	36	12600	Residential	Asphalt	61	11/6/2023
COACH::ESTRELLATO::1	ESTRELLA TOMAS ST	CAMINO BONITO AVE	MARIANA AVE	350	36	12600	Residential	Asphalt	71	11/6/2023
COACH::FIESTARD::1	FIESTA RD	CRESCENT WAY	VALLE POSADA	957	36	34452	Residential	Asphalt	57	11/6/2023
COACH::FIESTARD::2	FIESTA RD	VALLE POSADA	VAN BUREN ST	214	36	7704	Residential	Asphalt	51	11/6/2023
COACH::FIESTARD::3	FIESTA RD	VAN BUREN ST	SUMMER ST	205	36	7380	Residential	Asphalt	40	11/6/2023
COACH::FIESTARD::4	FIESTA RD	SUMMER ST	SIERRA ST	287	36	10332	Residential	Asphalt	71	11/6/2023
COACH::FIESTARD::5	FIESTA RD	SIERRA ST	BRIANNE LN	691	36	24876	Residential	Asphalt	74	11/6/2023
COACH::FILLMOREST::1	FILLMORE ST	AIRPORT BLVD	55TH AVE	2660	24	63840	Rural	Asphalt	53	11/6/2023
COACH::FILLMOREST::2	FILLMORE ST	55TH AVE	900' N/O 55TH AVE	900	24	21600	Rural	Asphalt	33	11/6/2023
COACH::FILLMOREST::3	FILLMORE ST	1750' S/O 54TH AVE	54TH AVE	1739	24	41736	Rural	Asphalt	3	11/6/2023
COACH::FILLMOREST::4	FILLMORE ST	54TH AVE	CITY LIMIT	1320	24	31680	Rural	Asphalt	81	11/6/2023
COACH::FILLMOREST::5	FILLMORE ST	52ND AVE	2650' N/O 52ND AVE	2649	24	63576	Rural	Asphalt	8	11/6/2023
COACH::FILLMOREST::6	FILLMORE ST	2650' S/O 50TH AVE	50TH AVE	2630	24	63120	Rural	Asphalt	17	11/6/2023
COACH::FREDERICK::1	FREDERICK ST	54TH AVE	SCARLET WAY	632	36	22752	Collector	Asphalt	73	11/6/2023
COACH::FREDERICK::11	FREDERICK ST	BAJA WAY	520' N/O BAJA WAY	516	66	34056	Collector	Asphalt	82	11/6/2023
COACH::FREDERICK::12	FREDERICK ST	660' S/O CHRISTINA RD	JALISCO AVE	669	66	44154	Collector	Asphalt	79	11/6/2023
COACH::FREDERICK::13	FREDERICK ST	JALISCO AVE	50TH AVE	651	66	42966	Collector	Asphalt	76	11/6/2023
COACH::FREDERICK::14	FREDERICK ST	50TH AVE	AVENIDA VESTAGO	537	66	35442	Collector	Asphalt	27	11/6/2023
COACH::FREDERICK::15	FREDERICK ST	AVENIDA VESTAGO	PASEO LAREDO	347	66	22902	Collector	Asphalt	26	11/6/2023
COACH::FREDERICK::16	FREDERICK ST	PASEO LAREDO	PHOENIX AVE	467	66	30822	Collector	Asphalt	23	11/6/2023
COACH::FREDERICK::17	FREDERICK ST	PHOENIX AVE	GUITRON ST	146	66	9636	Collector	Asphalt	57	11/6/2023
COACH::FREDERICK::18	FREDERICK ST	GUITRON ST	IRIS AVE	276	66	18216	Collector	Asphalt	52	11/6/2023
COACH::FREDERICK::19	FREDERICK ST	IRIS AVE	150' N/O IRIS AVE	150	66	9900	Collector	Asphalt	60	11/6/2023
COACH::FREDERICK::2	FREDERICK ST	SCARLET WAY	BELLISSIMA AVE	1079	36	38844	Collector	Asphalt	50	11/6/2023
COACH::FREDERICK::20	FREDERICK ST	140' S/O LAS LUNAS AVE	LAS LUNAS AVE	142	66	9372	Residential	Asphalt	86	11/6/2023
COACH::FREDERICK::21	FREDERICK ST	LAS LUNAS AVE	49TH AVE	647	66	42702	Collector	Asphalt	71	11/6/2023
COACH::FREDERICK::3	FREDERICK ST	BELLISSIMA AVE	53RD AVE	936	30	28080	Collector	Asphalt	100	11/6/2023
COACH::FREDERICK::4	FREDERICK ST	53RD AVE	CALLE GREGORIO	863	30	25890	Collector	Asphalt	43	11/6/2023
COACH::FREDERICK::5	FREDERICK ST	CALLE GREGORIO	SOLARCE ST	926	30	27780	Collector	Asphalt	47	11/6/2023
COACH::FREDERICK::6	FREDERICK ST	SOLARCE ST	52ND AVE	778	66	51348	Collector	Asphalt	63	11/6/2023
COACH::FREDERICK::7	FREDERICK ST	52ND AVE	1330' N/O 52ND AVE	1326	43	57018	Collector	Asphalt	40	11/6/2023
COACH::FREDERICK::8	FREDERICK ST	1350' S/O 51ST AVE	51ST AVE	1350	43	58050	Collector	Asphalt	40	11/6/2023
COACH::FREDERICK::9	FREDERICK ST	51ST AVE	AVENIDA HALAWAY	804	66	53064	Collector	Asphalt	82	11/6/2023
COACH::GARNETRIDG::1	GARNET RIDGE ST	AVENUE 49	SAN MATEO AVE	210	36	7560	Residential	Asphalt	69	11/6/2023
COACH::GENOAST::1	GENOA ST	AVENUE 53	AVENIDA RAYLYNN	334	37	12358	Residential	Asphalt	51	11/6/2023
COACH::GENOAST::10	GENOA ST	CALLE LIMON	VINETA LN	126	37	4662	Residential	Asphalt	66	11/6/2023
COACH::GENOAST::11	GENOA ST	VINETA LN	SYLMAR LN	250	37	9250	Residential	Asphalt	60	11/6/2023
COACH::GENOAST::12	GENOA ST	SYLMAR LN	NAPOLI LN	250	37	9250	Residential	Asphalt	47	11/6/2023
COACH::GENOAST::13	GENOA ST	NAPOLI LN	BAGDAD ST	275	37	10175	Residential	Asphalt	68	11/6/2023
COACH::GENOAST::2	GENOA ST	AVENIDA RAYLYNN	AVENIDA ALEENAH	560	37	20720	Residential	Asphalt	45	11/6/2023
COACH::GENOAST::3	GENOA ST	AVENIDA ALEENAH	150' N/O AVENIDA ALEENAH	143	37	5291	Residential	Asphalt	24	11/6/2023
COACH::GENOAST::4	GENOA ST	380' S/O AVENIDA VERONICA	AVENIDA VERONICA	382	37	14134	Residential	Asphalt	33	11/6/2023
COACH::GENOAST::5	GENOA ST	AVENIDA VERONICA	150' N/O AVENIDA VERONICA	148	37	5476	Residential	Asphalt	30	11/6/2023
COACH::GENOAST::6	GENOA ST	200' S/O AVENIDA MARIA	AVENIDA MARIA	204	37	7548	Residential	Asphalt	70	11/6/2023
COACH::GENOAST::7	GENOA ST	AVENIDA MARIA	52ND AVE	576	37	21312	Residential	Asphalt	65	11/6/2023
COACH::GENOAST::8	GENOA ST	52ND AVE	NILE LN	279	37	10323	Residential	Asphalt	51	11/6/2023
COACH::GENOAST::9	GENOA ST	NILE LN	CALLE LIMON	124	37	4588	Residential	Asphalt	56	11/6/2023
COACH::GLENDORARG::1	GLENDORA RIDGE AVE	CHIRIACO SUMMIT ST	CHAPARROSA ST	286	36	10296	Residential	Asphalt	64	11/6/2023
COACH::GLENDORARG::2	GLENDORA RIDGE AVE	CHAPARROSA ST	CDS	425	36	15300	Residential	Asphalt	69	11/6/2023
COACH::GRANITEPAS::1	GRANITE PASS TRL	CHAPARROSA ST	RED MOUNTAIN PL	429	36	15444	Residential	Asphalt	63	11/6/2023
COACH::GRAPEFRUIT::1	GRAPEFRUIT BLVD	CITY LIMITS	3310' S/O 54TH AVE	271	55	14905	Arterial	Asphalt	79	11/6/2023
COACH::GRAPEFRUIT::2	GRAPEFRUIT BLVD	3310' S/O 54TH AVE	1660' S/O 54TH AVE	1646	55	90530	Arterial	Asphalt	85	11/6/2023
COACH::GRAPEFRUIT::3	GRAPEFRUIT BLVD	1660' S/O 54TH AVE	54TH AVE	1657	55	91135	Arterial	Asphalt	82	11/6/2023
COACH::GUADALUPAN::1	GUADALUPANA CT	CDS	SHADY LN	434	36	15624	Residential	Asphalt	75	11/6/2023
COACH::GUITRONST::1	GUITRON ST	FREDERICK ST	REYES ST	181	34	6154	Residential	Asphalt	33	11/6/2023
COACH::GUITRONST::2	GUITRON ST	REYES ST	NIETO ST	997	34	33898	Residential	Asphalt	43	11/6/2023
COACH::GUITRONST::3	GUITRON ST	NIETO ST	AVENIDA DE ORO	145	34	4930	Residential	Asphalt	60	11/6/2023
COACH::HARRISONST::1	HARRISON ST	D/E	48TH AVE	3789	30	113670	Collector	Asphalt	74	11/6/2023
COACH::HARRISONST::2	HARRISON ST	CITY LIMITS	CITY LIMITS	1322	96	126912	Residential	Asphalt	72	11/6/2023
COACH::HEATHERLN::1	HEATHER LN	OASIS PALM AVE	SHADY LN	785	38	29830	Residential	Surface Treatment	58	11/6/2023
COACH::HERMOSABL::1	HERMOSA BLVD	HUNTINGTON AVE	LA JOLLA AVE	256	36	9216	Residential	Asphalt	79	11/6/2023

Asset Id	Name	Start Location	End Location	Length	Width	Area	Functional Classification	Pavement Type	Last Inspection PCI	Last Inspection Date
COACH::HERNANDEZ::1	HERNANDEZ ST	LA PONDEROSA DR	PEREZ ST	398	40	15920	Residential	Asphalt	97	11/6/2023
COACH::HERNANDEZ::2	HERNANDEZ ST	PEREZ ST	ORTIZ ST	483	40	19320	Residential	Asphalt	96	11/6/2023
COACH::HERNANDEZ::3	HERNANDEZ ST	52ND AVE	ORTIZ ST	1076	40	43040	Residential	Asphalt	94	11/6/2023
COACH::HIBISCOST::1	HIBISCO ST	PHOENIX AVE	CALENDULA AVE	162	37	5994	Residential	Asphalt	50	11/6/2023
COACH::HIBISCOST::2	HIBISCO ST	CALENDULA AVE	IRIS AVE	256	37	9472	Residential	Asphalt	25	11/6/2023
COACH::HIBISCOST::3	HIBISCO ST	IRIS AVE	AMAPOLA LN	266	37	9842	Residential	Asphalt	23	11/6/2023
COACH::HIBISCOST::4	HIBISCO ST	AMAPOLA LN	ROSAL AVE	251	37	9287	Residential	Asphalt	37	11/6/2023
COACH::HIBISCOST::5	HIBISCO ST	ROSAL AVE	MARGARITA AVE	254	37	9398	Residential	Asphalt	24	11/6/2023
COACH::HILLDR::1	HILL DR	GENOA ST	CALLE PERA	253	40	10120	Residential	Asphalt	56	11/6/2023
COACH::HILLDR::2	HILL DR	CALLE PERA	SUNSET DR	204	40	8160	Residential	Asphalt	58	11/6/2023
COACH::HILLDR::3	HILL DR	SUNSET DR	240' W/O SH-111	141	40	5640	Residential	Asphalt	19	11/6/2023
COACH::HILLDR::4	HILL DR	240' W/O SH-111	SH-111	236	40	9440	Residential	Asphalt	58	11/6/2023
COACH::HORNBLEND::1	HORNBLEND ST	50TH AVE	JADEROCK RD	228	37	8436	Residential	Asphalt	89	11/6/2023
COACH::HUNTINGTON::1	HUNTINGTON AVE	VENICE LN	MONARCH RD	400	36	14400	Residential	Asphalt	82	11/6/2023
COACH::HUNTINGTON::2	HUNTINGTON AVE	MONARCH RD	HERMOSA BLVD	250	36	9000	Residential	Asphalt	74	11/6/2023
COACH::HUNTINGTON::3	HUNTINGTON AVE	HERMOSA BLVD	VENENTA BLVD	361	36	12996	Residential	Asphalt	49	11/6/2023
COACH::HUXLEYCT::1	HUXLEY CT	MICHELLE DR	CDS	224	36	8064	Residential	Asphalt	78	11/6/2023
COACH::INDIGOCT::1	INDIGO CT	CDS	E SIENNA CIR	304	36	10944	Residential	Asphalt	81	11/6/2023
COACH::INDUSTRIAL::1	INDUSTRIAL WAY	TYLER ST	ENTERPRISE WAY	3581	45	161145	Collector	Asphalt	50	11/6/2023
COACH::INDUSTRIAL::2	INDUSTRIAL WAY	ENTERPRISE WAY	POLK ST	1684	45	75780	Collector	Asphalt	39	11/6/2023
COACH::IRISAVE::1	IRIS AVE	HIBISCO ST	FREDERICK ST	188	37	6956	Residential	Asphalt	37	11/6/2023
COACH::IXTAPAAVE::1	IXTAPA AVE	CDS	COZUMEL ST	535	36	19260	Residential	Asphalt	54	11/6/2023
COACH::IXTAPAAVE::2	IXTAPA AVE	COZUMEL ST	CHICHEN ITZA RD	280	36	10080	Residential	Asphalt	46	11/6/2023
COACH::JACKSONST::1	JACKSON ST	CITY LIMITS	PUERTECITOS AVE	524	66	34584	Arterial	Asphalt	70	11/6/2023
COACH::JACKSONST::2	JACKSON ST	PUERTECITOS AVE	LOS MOCHIS AVE	810	66	53460	Arterial	Asphalt	75	11/6/2023
COACH::JACKSONST::3	JACKSON ST	LOS MOCHIS AVE	48TH AVE	1298	66	85668	Arterial	Asphalt	58	11/6/2023
COACH::JADEROCKRD::1	JADEROCK RD	COPPERIDGE ST	HORNBLEND ST	509	37	18833	Residential	Asphalt	43	11/6/2023
COACH::JADEROCKRD::2	JADEROCK RD	HORNBLEND ST	CINNABAR LN	480	37	17760	Residential	Asphalt	55	11/6/2023
COACH::JALISCOAVE::1	JALISCO AVE	SALTILLO CIR	JALISCO AVE	167	28	4676	Residential	Asphalt	65	11/6/2023
COACH::JALISCOAVE::2	JALISCO AVE	SALTILLO CIR	JALISCO AVE	164	28	4592	Residential	Asphalt	39	11/6/2023
COACH::JALISCOAVE::3	JALISCO AVE	JALISCO AVE	JALISCO ACE PARKING LOOP	206	28	5768	Residential	Asphalt	62	11/6/2023
COACH::JALISCOAVE::4	JALISCO AVE	JALISCO ACE PARKING LOOP	100' S/O TAXCO WAY	693	28	19404	Residential	Asphalt	61	11/6/2023
COACH::JALISCOAVE::5	JALISCO AVE	100' S/O TAXCO WAY	TAXCO WAY	108	28	3024	Residential	Asphalt	52	11/6/2023
COACH::JALISCOAVE::6	JALISCO AVE	TAXCO WAY	FREDERICK ST	252	28	7056	Residential	Asphalt	38	11/6/2023
COACH::JAZMINST::1	JAZMIN ST	CALENDULA AVE	MARGARITA AVE	1029	36	37044	Residential	Asphalt	40	11/6/2023
COACH::JAZMINST::2	JAZMIN ST	MARGARITA AVE	49TH AVE	177	37	6549	Residential	Asphalt	25	11/6/2023
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	1304	38	49552	Residential	Surface Treatment	75	11/6/2023
COACH::JULIACT::1	JULIA CT	AVENIDA ALEENAH	CDS	230	36	8280	Residential	Asphalt	75	11/6/2023
COACH::JULIADR::1	JULIA DR	ANDREA LN	AVENIDA ADOBE	1021	36	36756	Residential	Asphalt	76	11/6/2023
COACH::KENMOREST::1	KENMORE ST	D/E	50TH AVE	672	40	26880	Residential	Asphalt	77	11/6/2023
COACH::KENTIACT::1	KENTIA CT	CDS	PHOENIX AVE	208	32	6656	Residential	Asphalt	67	11/6/2023
COACH::KINGCT::1	KING CT	CDS	WASHINGTONIA AVE	313	32	10016	Residential	Asphalt	81	11/6/2023
COACH::LACOSTAAVE::1	LA COSTA AVE	ESTRELLA PEDRO ST	LA PLAYA ST	280	34	9520	Residential	Asphalt	76	11/6/2023
COACH::LAJOLLAAVE::1	LA JOLLA AVE	CDS	HERMOSA BLVD	355	36	12780	Residential	Asphalt	77	11/6/2023
COACH::LAJOLLAAVE::2	LA JOLLA AVE	HERMOSA BLVD	ZUMA DR	326	36	11736	Residential	Asphalt	74	11/6/2023
COACH::LAJOLLAAVE::3	LA JOLLA AVE	ZUMA DR	NEWPORT ST	287	36	10332	Residential	Asphalt	51	11/6/2023
COACH::LAJOLLAAVE::4	LA JOLLA AVE	NEWPORT ST	CDS	99	36	3564	Residential	Asphalt	49	11/6/2023
COACH::LAPLAYAST::1	LA PLAYA ST	CAMINO PELICANO	CALLE COLIMA	446	36	16056	Residential	Asphalt	67	11/6/2023
COACH::LAPLAYAST::2	LA PLAYA ST	CALLE COLIMA	140' N/O CALLE COLIMA	140	36	5040	Residential	Asphalt	62	11/6/2023
COACH::LAPLAYAST::3	LA PLAYA ST	50' S/O EL MAR AVE	EL MAR AVE	35	36	1260	Residential	Asphalt	81	11/6/2023
COACH::LAPLAYAST::4	LA PLAYA ST	EL MAR AVE	LA COSTA AVE	455	36	16380	Residential	Asphalt	79	11/6/2023
COACH::LAPONDEROS::1	LA PONDEROSA DR	52ND AVE	NAOMI CT	339	36	12204	Residential	Asphalt	83	11/6/2023
COACH::LAPONDEROS::2	LA PONDEROSA DR	NAOMI CT	HERNANDEZ ST	1167	36	42012	Residential	Asphalt	92	11/6/2023
COACH::LAPONDEROS::3	LA PONDEROSA DR	HERNANDEZ ST	CDS	115	36	4140	Residential	Asphalt	89	11/6/2023
COACH::LAGUNALN::1	LAGUNA LN	CDS	LAGUNA LN	643	36	23148	Residential	Asphalt	73	11/6/2023
COACH::LAGUNALN::2	LAGUNA LN	LAGUNA LN	CAPITOLA AVE	259	36	9324	Residential	Asphalt	58	11/6/2023
COACH::LAPISDR::1	LAPIS DR	COPPERIDGE ST	CINNABAR LN	989	37	36593	Residential	Asphalt	46	11/6/2023
COACH::LASCRUCES::2	LAS CRUCES ST	LA LUNAS AVE	49TH AVE	647	36	23292	Residential	Asphalt	81	11/6/2023
COACH::LASFLORES::1	LAS FLORES AVE	TYLER ST	EL SOL ST	719	33	23727	Residential	Asphalt	69	11/6/2023
COACH::LASFLORES::2	LAS FLORES AVE	EL SOL ST	CALLE MENDOZA	409	33	13497	Residential	Asphalt	69	11/6/2023
COACH::LASFLORES::3	LAS FLORES AVE	CALLE MENDOZA	CDS	196	33	6468	Residential	Asphalt	69	11/6/2023
COACH::LASLUNASAV::1	LAS LUNAS AVE	FREDERICK ST	SEDONA CT	199	36	7164	Residential	Asphalt	74	11/6/2023
COACH::LASLUNASAV::2	LAS LUNAS AVE	SEDONA CT	MESA CT	316	36	11376	Residential	Asphalt	77	11/6/2023
COACH::LASLUNASAV::3	LAS LUNAS AVE	MESA CT	RIO RANCHO CT	316	36	11376	Residential	Asphalt	69	11/6/2023
COACH::LASLUNASAV::4	LAS LUNAS AVE	RIO RANCHO CT	LAS CRUCES ST	321	36	11556	Residential	Asphalt	77	11/6/2023
COACH::LASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	1309	38	49742	Residential	Surface Treatment	77	11/6/2023
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	153	27	4137	Residential	Surface Treatment	78	11/6/2023
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	153	27	4137	Residential	Surface Treatment	78	11/6/2023
COACH::LEELN::1	LEE LN	53RD AVE	CDS	604	40	24160	Residential	Asphalt	55	11/6/2023
COACH::LIBNANST::1	LIBNAN ST	DAMASCUS AVE	BAGDAD AVE	333	14	4662	Residential	Asphalt	100	11/6/2023
COACH::LINDAAVE::1	LINDA AVE	ANDREA LN	AVENIDA ADOBE	1021	36	36756	Residential	Asphalt	79	11/6/2023
COACH::LIVISTONA::1	LIVISTONA CT	CDS	PHOENIX AVE	208	32	6656	Residential	Asphalt	49	11/6/2023
COACH::LOOP::1	LOOP	4TH ST	SH-86	541	30	16230	Collector	Asphalt	100	11/6/2023
COACH::LOSCABOSAV::1	LOS CABOS AVE	EL ARCO ST	CAMINO ROSARITO	400	36	14400	Residential	Asphalt	71	11/6/2023
COACH::LOSCABOSAV::2	LOS CABOS AVE	CAMINO ROSARITO	CAMINO CORTEZ	501	36	18036	Residential	Asphalt	71	11/6/2023
COACH::LOSMOCHIS::1	LOS MOCHIS AVE	JACKSON ST	PLAYA DEL AMOR ST	196	44	8624	Residential	Asphalt	79	11/6/2023
COACH::LUNADENICO::1	LUNA DE NICOLETA ST	AGUA BLANCA AVE	CALLE COLIMA	726	36	26136	Residential	Asphalt	76	11/6/2023
COACH::LUNADENICO::2	LUNA DE NICOLETA ST	CALLE COLIMA	140' N/O CALLE COLIMA	141	36	5076	Residential	Asphalt	81	11/6/2023
COACH::LUNADENICO::3	LUNA DE NICOLETA ST	140' S/O PLAZA DE ORO AVE	PLAZA DE ORO AVE	140	36	5040	Residential	Asphalt	67	11/6/2023
COACH::LUNADENICO::4	LUNA DE NICOLETA ST	PLAZA DE ORO AVE	MARIANA AVE	350	36	12600	Residential	Asphalt	70	11/6/2023
COACH::MAGNOLIAST::1	MAGNOLIA ST	SUMMER ST	BRIANNE LN	977	37	36149	Residential	Asphalt	66	11/6/2023
COACH::MAHOGANYCT::1	MAHOGANY CT	CDS	SCARLET WAY	343	36	12348	Residential	Asphalt	70	11/6/2023
COACH::MALIBUAVE::1	MALIBU AVE	NEWPORT ST	OCEANO RD	373	36	13428	Residential	Asphalt	41	11/6/2023
COACH::MALVASIA::1	MALVASIA WAY	PRIMITIVO DR	RODREJO WAY	193	32	6176	Residential	Asphalt	31	11/6/2023
COACH::MALVASIA::2	MALVASIA WAY	RODREJO WAY	MERCADO CIR	129	32	4128	Residential	Asphalt	39	11/6/2023
COACH::MALVASIA::3	MALVASIA WAY	MERCADO CIR	CHARDONNAY CIR	397	32	12704	Residential	Asphalt	42	11/6/2023
COACH::MALVASIA::4	MALVASIA WAY	CHARDONNAY CIR	PROSECCO WAY	195	32	6240	Residential	Asphalt	45	11/6/2023
COACH::MANHATTAN::1	MANHATTAN AVE	VAN BUREN ST	MONARCH RD	587	36	21132	Residential	Asphalt	69	11/6/2023
COACH::MARGARITA::1	MARGARITA AVE	JAZMIN ST	HIBISCO ST	1023	37	37851	Residential	Asphalt	36	11/6/2023
COACH::MARIANAAVE::1	MARIANA AVE	SOL DE LINDA ST	CIELO VICTORIA ST	151	37	5587	Residential	Asphalt	67	11/6/2023
COACH::MARIANAAVE::2	MARIANA AVE	CIELO VICTORIA ST	LUNA DE NICOLETA ST	293	37	10841	Residential	Asphalt	63	11/6/2023
COACH::MARIANAAVE::3	MARIANA AVE	LUNA DE NICOLETA ST	ESTRELLA TOMAS ST	280	37	10360	Residential	Asphalt	72	11/6/2023
COACH::MARIPOSADR::1	MARIPOSA DR	PALMERAS CIR	PALMERAS CIR	458	36	16488	Residential	Asphalt	41	11/6/2023
COACH::MARYCT::1	MARY CT	CHRISTINA RD	CDS	193	32	6176	Residential	Asphalt	64	11/6/2023
COACH::MAZATLANDR::1	MAZATLAN DR	SALTILLO CIR	MAZATLAN DR	186	32	5952	Residential	Asphalt	64	11/6/2023
COACH::MAZATLANDR::2	MAZATLAN DR	MAZATLAN DR	SALTILLO CIR	189	32	6048	Residential	Asphalt	62	11/6/2023
COACH::MAZATLANDR::3	MAZATLAN DR	MAZATLAN DR	MAZATLAN DR PARKING LOOP	194	32	6208	Residential	Asphalt	45	11/6/2023
COACH::MAZATLANDR::4	MAZATLAN DR	MAZATLAN DR PARKING LOOP	CHIHUAHUA CT	216	32	6912	Residential	Asphalt	57	11/6/2023
COACH::MAZATLANDR::5	MAZATLAN DR	CHIHUAHUA CT	TAXCO WAY	195	32	6240	Residential	Asphalt	57	11/6/2023
COACH::MAZATLANDR::6	MAZATLAN DR	MAZATLAN DR PARKING LOOP	TAXCO WAY	311	32	9952	Residential	Asphalt	54	11/6/2023
COACH::MAZATLANDR::7	MAZATLAN DR	MAZATLAN DR PARKING LOOP	MAZATLAN DR PARKING LOOP	270	32	8640	Residential	Asphalt	60	11/6/2023
COACH::MAZATLANDR::8	MAZATLAN DR	MAZATLAN DR PARKING LOOP	MAZATLAN DR PARKING LOOP	540	32	17280	Residential	Asphalt	83	11/6/2023
COACH::MAZATLANDR::9	MAZATLAN DR	MAZATLAN DR PARKING LOOP	50TH AVE	366	32	11712	Residential	Asphalt	71	11/6/2023
COACH::MCCOYPEAK::1	MCCOY PEAK AVE	SAN GORGONIO ST	ARICA DR	260	36	9360	Residential	Asphalt	69	11/6/2023
COACH::MCCOYPEAK::2	MCCOY PEAK AVE	ARICA DR	CHAPARROSA ST	172	36	6192	Residential	Asphalt	73	11/6/2023
COACH::MCCOYPEAK::3	MCCOY PEAK AVE	CHAPARROSA ST	SAN JACINTO LN	164	36	5904	Residential	Asphalt	62	11/6/2023
COACH::MCCOYPEAK::4	MCCOY PEAK AVE	SAN JACINTO LN	PINTO LN	380	36	13680	Residential	Asphalt	63	11/6/2023
COACH::MEADOWSLN::1	MEADOWS LN	SIERRA ST	PRIMA VERA	352	37	13024	Residential	Asphalt	63	11/6/2023
COACH::MEADOWSLN::2	MEADOWS LN	PRIMA VERA	BRIANNE LN	337	37	12469	Residential	Asphalt	66	11/6/2023
COACH::MECCAHILLS::1	MECCA HILLS AVE	CHARLTON PEAK ST	CHAPARROSA ST	557	36	20052	Residential	Asphalt	65	11/6/2023
COACH::MECCAHILLS::2	MECCA HILLS AVE	CHAPARROSA ST	CDS	425	36	15300	Residential	Asphalt	60	11/6/2023
COACH::MECCALANE::1	MECCA LANE	BAGDAD AVE	670' N/O BAGDAD AVE	670	38	25460	Residential	Asphalt	23	11/6/2023
COACH::MECCALANE::2	MECCA LANE	670' N/O BAGDAD AVE	51ST AVE	707	38	26866	Residential	Asphalt	35	11/6/2023
COACH::MEDINAAVE::1	MEDINA AVE	TRIPOLI WAY	DATE AVE	660	38	25080	Residential	Surface Treatment	69	11/6/2023
COACH::MERCADOCIR::1	MERCADO CIR	MALVASIA WAY	CDS	217	32	6944	Residential	Asphalt	50	11/6/2023
COACH::MESACT::1	MESA CT	LAS LUNAS AVE	CDS	450	36	16200	Residential	Asphalt	79	11/6/2023
COACH::MICHELLEDR::1	MICHELLE DR	CALLE ALICIA	MICHELLE DR	429	36	15444	Residential	Asphalt	56	11/6/2023
COACH::MICHELLEDR::2	MICHELLE DR	MICHELLE DR	MICHELLE DR	225	36	8100	Residential	Asphalt	73	11/6/2023
COACH::MICHELLEDR::3	MICHELLE DR	AVENIDA NICOLE	MICHELLE DR	393	36	14148	Residential	Asphalt	66	11/6/2023
COACH::MICHELLEDR::4	MICHELLE DR	AVENIDA ALEENAH	AVENIDA NICOLE	165	36	5940	Residential	Asphalt	80	11/6/2023
COACH::MIRAMARCT::1	MIRAMAR CT	CDS	NEWPORT ST	289	36	10404	Residential	Asphalt	45	11/6/2023
COACH::MITCHELLDR::1	MITCHELL DR	FREDERICK ST	SH-111	667	38	25346	Collector	Asphalt	65	11/6/2023
COACH::MODENATER::1	MODENA TER	BELLISSIMA AVE	SIENO LN	256	30	7680	Residential	Asphalt	93	11/6/2023
COACH::MODENATER::2	MODENA TER	SIENO LN	CDS	517	30	15510	Residential	Asphalt	100	11/6/2023
COACH::MONARCHRD::1	MONARCH RD	CAPITOLA AVE	MANHATTAN AVE	261	36	9396	Residential	Asphalt	80	11/6/2023
COACH::MONARCHRD::2	MONARCH RD	MANHATTAN AVE	HUNTINGTON AVE	261	36	9396	Residential	Asphalt	78	11/6/2023
COACH::MONZALANE::1	MONZA LANE	TORINO PLACE	CORTINA PLACE	560	36	20160	Residential	Asphalt	100	11/6/2023
COACH::MOONLITDR::1	MOONLIT DR	CRESCENT WAY	VALLE POSADA	953	36	34308	Residential	Asphalt	47	11/6/2023
COACH::MOONLITDR::2	MOONLIT DR	VALLE POSADA	VAN BUREN ST	210	36	7560	Residential	Asphalt	49	11/6/2023
COACH::MORGANAVE::1	MORGAN AVE	VALLEY RD	52ND AVE	1307	38	49666	Residential	Surface Treatment	73	11/6/2023
COACH::NSIENNACIR::1	N SIENNA CIR	W SIENNA CIR	SLATE DR	251	36	9036	Residential	Asphalt	70	11/6/2023
COACH::NSIENNACIR::2	N SIENNA CIR	SLATE DR	SAPPHIRE LN	266	36	9576	Residential	Asphalt	67	11/6/2023
COACH::NSIENNACIR::3	N SIENNA CIR	SAPPHIRE LN	E SIENNA CIR	460	36	16560	Residential	Asphalt	67	11/6/2023
COACH::NAOMICT::1	NAOMI CT	LA PONDEROSA DR	PEREZ ST	251	40	10040	Residential	Asphalt	98	11/6/2023

Asset Id	Name	Start Location	End Location	Length	Width	Area	Functional Classification	Pavement Type	Last Inspection PCI	Last Inspection Date
COACH::NAOMICT::2	NAOMI CT	PEREZ ST	CDS	156	40	6240	Residential	Asphalt	91	11/6/2023
COACH::NAPOLILN::1	NAPOLI LN	CDS	GENOA ST	353	30	10590	Residential	Asphalt	60	11/6/2023
COACH::NARCISOLN::1	NARCISO LN	CALENDULA AVE	CDS	286	36	10296	Residential	Asphalt	43	11/6/2023
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	1308	38	49704	Residential	Surface Treatment	77	11/6/2023
COACH::NEWPORTST::1	NEWPORT ST	MIRAMAR CT	CAPITOLA AVE	259	36	9324	Residential	Asphalt	51	11/6/2023
COACH::NEWPORTST::2	NEWPORT ST	CAPITOLA AVE	MALIBU AVE	258	36	9288	Residential	Asphalt	47	11/6/2023
COACH::NEWPORTST::3	NEWPORT ST	MALIBU AVE	CATALINA AVE	258	36	9288	Residential	Asphalt	60	11/6/2023
COACH::NEWPORTST::4	NEWPORT ST	CATALINA AVE	LA JOLLA AVE	262	36	9432	Residential	Asphalt	41	11/6/2023
COACH::NICKLECREK::1	NICKLECREEK DR	COPPERIDGE ST	CINNABAR LN	989	37	36593	Residential	Asphalt	77	11/6/2023
COACH::NIETOST::1	NIETO ST	GUITRON ST	ROMERO ST	280	34	9520	Residential	Asphalt	50	11/6/2023
COACH::NILELN::1	NILE LN	CDS	GENOA ST	353	30	10590	Residential	Asphalt	65	11/6/2023
COACH::OASISPALM::1	OASIS PALM AVE	HEATHER LN	VALLEY RD	561	38	21318	Residential	Surface Treatment	63	11/6/2023
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	1311	38	49818	Residential	Surface Treatment	78	11/6/2023
COACH::OATESLN::1	OATES LN	OATES LN	PETER RABBIT LN	536	33	17688	Collector	Asphalt	40	11/6/2023
COACH::OATESLN::2	OATES LN	OATES LN	CITY LIMITS	1020	33	33660	Collector	Asphalt	17	11/6/2023
COACH::OCEANORD::1	OCEANO RD	CAPITOLA AVE	MALIBU AVE	258	36	9288	Residential	Asphalt	41	11/6/2023
COACH::OCEANORD::2	OCEANO RD	MALIBU AVE	CATALINA AVE	258	36	9288	Residential	Asphalt	47	11/6/2023
COACH::OCEANORD::3	OCEANO RD	CATALINA AVE	CDS	239	36	8604	Residential	Asphalt	47	11/6/2023
COACH::ORCHARDAVE::1	ORCHARD AVE	280' W/O SHADY LN	SHADY LN	284	60	17040	Collector	Asphalt	39	11/6/2023
COACH::ORCHARDAVE::10	ORCHARD AVE	ALLEY	2ND ST	188	60	11280	Collector	Asphalt	30	11/6/2023
COACH::ORCHARDAVE::11	ORCHARD AVE	2ND ST	ALLEY	188	60	11280	Collector	Asphalt	48	11/6/2023
COACH::ORCHARDAVE::12	ORCHARD AVE	ALLEY	1ST ST	188	60	11280	Collector	Asphalt	55	11/6/2023
COACH::ORCHARDAVE::2	ORCHARD AVE	ORCHARD AVE	9TH ST	234	60	14040	Collector	Asphalt	61	11/6/2023
COACH::ORCHARDAVE::3	ORCHARD AVE	9TH ST	8TH ST	375	60	22500	Collector	Asphalt	50	11/6/2023
COACH::ORCHARDAVE::4	ORCHARD AVE	8TH ST	7TH ST	375	60	22500	Collector	Asphalt	59	11/6/2023
COACH::ORCHARDAVE::5	ORCHARD AVE	7TH ST	6TH ST	325	60	19500	Collector	Asphalt	50	11/6/2023
COACH::ORCHARDAVE::6	ORCHARD AVE	6TH ST	5TH ST	325	60	19500	Collector	Asphalt	55	11/6/2023
COACH::ORCHARDAVE::7	ORCHARD AVE	5TH ST	4TH ST	325	60	19500	Collector	Asphalt	54	11/6/2023
COACH::ORCHARDAVE::8	ORCHARD AVE	4TH ST	3RD ST	325	60	19500	Collector	Asphalt	68	11/6/2023
COACH::ORCHARDAVE::9	ORCHARD AVE	3RD ST	ALLEY	188	60	11280	Collector	Asphalt	30	11/6/2023
COACH::ORQUIDEALN::1	ORQUIDEA LN	CALENDULA AVE	CDS	535	36	19260	Residential	Asphalt	52	11/6/2023
COACH::ORTIZST::1	ORTIZ ST	PEREZ ST	HERNANDEZ ST	442	40	17680	Residential	Asphalt	87	11/6/2023
COACH::PALERMOCT::1	PALERMO CT	CDS	CORTINA PLACE	343	36	12348	Residential	Asphalt	100	11/6/2023
COACH::PALMAVE::1	PALM AVE	7TH ST	6TH ST	325	60	19500	Collector	Asphalt	37	11/6/2023
COACH::PALMAVE::2	PALM AVE	6TH ST	5TH ST	325	60	19500	Collector	Asphalt	36	11/6/2023
COACH::PALMAVE::3	PALM AVE	5TH ST	4TH ST	325	60	19500	Collector	Asphalt	49	11/6/2023
COACH::PALMAVE::4	PALM AVE	4TH ST	3RD ST	325	60	19500	Collector	Asphalt	55	11/6/2023
COACH::PALMAVE::5	PALM AVE	3RD ST	ALLEY	188	60	11280	Collector	Asphalt	59	11/6/2023
COACH::PALMAVE::6	PALM AVE	ALLEY	2ND ST	188	60	11280	Collector	Asphalt	63	11/6/2023
COACH::PALMAVE::7	PALM AVE	2ND ST	ALLEY	188	60	11280	Collector	Asphalt	48	11/6/2023
COACH::PALMAVE::8	PALM AVE	ALLEY	1ST ST	188	60	11280	Collector	Asphalt	71	11/6/2023
COACH::PALMERASCR::1	PALMERAS CIR	PALOMA DR	CARDINAL DR	460	36	16560	Residential	Asphalt	22	11/6/2023
COACH::PALMERASCR::10	PALMERAS CIR	PALOMA DR	MARIPOSA DR	200	36	7200	Residential	Asphalt	18	11/6/2023
COACH::PALMERASCR::11	PALMERAS CIR	PALMERAS CIR	PALOMA DR	271	36	9756	Residential	Asphalt	35	11/6/2023
COACH::PALMERASCR::12	PALMERAS CIR	CARDINAL DR	PALMERAS CIR	166	36	5976	Residential	Asphalt	18	11/6/2023
COACH::PALMERASCR::2	PALMERAS CIR	PALOMA DR	MARIPOSA DR	200	36	7200	Residential	Asphalt	73	11/6/2023
COACH::PALMERASCR::3	PALMERAS CIR	MARIPOSA DR	CHUPAROSA DR	200	36	7200	Residential	Asphalt	53	11/6/2023
COACH::PALMERASCR::4	PALMERAS CIR	CHUPAROSA DR	CARDELINA DR	200	36	7200	Residential	Asphalt	16	11/6/2023
COACH::PALMERASCR::5	PALMERAS CIR	CARDELINA DR	PALMERAS CIR	200	36	7200	Residential	Asphalt	48	11/6/2023
COACH::PALMERASCR::6	PALMERAS CIR	PALMERAS CIR	PALMERAS CIR	458	36	16488	Residential	Asphalt	59	11/6/2023
COACH::PALMERASCR::7	PALMERAS CIR	CARDELINA DR	PALMERAS CIR	200	36	7200	Residential	Asphalt	54	11/6/2023
COACH::PALMERASCR::8	PALMERAS CIR	CHUPAROSA DR	CARDELINA DR	200	36	7200	Residential	Asphalt	36	11/6/2023
COACH::PALMERASCR::9	PALMERAS CIR	MARIPOSA DR	CHUPAROSA DR	200	36	7200	Residential	Asphalt	34	11/6/2023
COACH::PALOMADR::1	PALOMA DR	PALMERAS CIR	PALMERAS CIR	458	36	16488	Residential	Asphalt	46	11/6/2023
COACH::PALOMARCT::1	PALOMAR CT	SAN JACINTO LN	CDS	277	36	9972	Residential	Asphalt	69	11/6/2023
COACH::PARKLN::1	PARK LN	CITY LIMITS	SH-86	601	30	18030	Collector	Asphalt	55	11/6/2023
COACH::PARKLN::2	PARK LN	SH-86	130' W/O SH-111	100	30	3000	Arterial	Asphalt	58	11/6/2023
COACH::PARKLN::3	PARK LN	130' W/O SH-111	SH-111	127	30	3810	Arterial	Asphalt	68	11/6/2023
COACH::PARKINGLOT::1	PARKING LOT	200' S/O BAGDAD AVE	BAGDAD AVE	199	32	6368	Residential	Asphalt	29	11/6/2023
COACH::PASEOBARCE::1	PASEO BARCELONA	CALLE SEVILLE	VIA MERIDA	506	36	18216	Residential	Surface Treatment	96	11/6/2023
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	296	36	10656	Residential	Surface Treatment	89	11/6/2023
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	802	36	28872	Residential	Surface Treatment	93	11/6/2023
COACH::PASEOCORDO::1	PASEO CORDOVA	VIA VALENCIA	CALLE GRANADA	500	33	16500	Residential	Surface Treatment	96	11/6/2023
COACH::PASEOLARED::1	PASEO LAREDO	FREDERICK ST	CALLE DE VEGA	159	40	6360	Residential	Asphalt	98	11/6/2023
COACH::PASEOLARED::2	PASEO LAREDO	CALLE DE VEGA	AVENIDA CORTEZ	382	40	15280	Residential	Asphalt	89	11/6/2023
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	500	33	16500	Residential	Surface Treatment	86	11/6/2023
COACH::PAVONPALMA::1	PAVON PALMA	50TH AVE	VERA CRUZ	180	40	7200	Residential	Asphalt	70	11/6/2023
COACH::PEDRODR::1	PEDRO DR	TOMAS LN	AVENIDA DEL PARQUE	356	36	12816	Residential	Asphalt	81	11/6/2023
COACH::PEDRODR::2	PEDRO DR	AVENIDA DEL PARQUE	AVENIDA ADOBE	411	36	14796	Residential	Asphalt	74	11/6/2023
COACH::PENDLETON::1	PENDLETON WAY	7TH ST	9TH ST	752	40	30080	Collector	Asphalt	67	11/6/2023
COACH::PEREZST::1	PEREZ ST	NAOMI CT	ROMUALDA CT	280	40	11200	Residential	Asphalt	97	11/6/2023
COACH::PEREZST::2	PEREZ ST	ROMUALDA CT	ORTIZ ST	263	40	10520	Residential	Asphalt	100	11/6/2023
COACH::PEREZST::3	PEREZ ST	ORTIZ ST	HERNANDEZ ST	431	40	17240	Residential	Asphalt	83	11/6/2023
COACH::PETERRABBT::1	PETER RABBIT LN	CDS	50TH AVE	1356	36	48816	Collector	Asphalt	48	11/6/2023
COACH::PHOENIXAVE::1	PHOENIX AVE	WASHINGTONIA AVE	LIVISTONA CT	947	36	34092	Residential	Asphalt	51	11/6/2023
COACH::PHOENIXAVE::2	PHOENIX AVE	LIVISTONA CT	KENTIA CT	270	36	9720	Residential	Asphalt	43	11/6/2023
COACH::PHOENIXAVE::3	PHOENIX AVE	KENTIA CT	SABAL CT	270	36	9720	Residential	Asphalt	44	11/6/2023
COACH::PHOENIXAVE::4	PHOENIX AVE	SABAL CT	HIBISCO ST	12	36	432	Residential	Asphalt	100	11/6/2023
COACH::PHOENIXAVE::5	PHOENIX AVE	HIBISCO ST	FREDERICK ST	192	36	6912	Residential	Asphalt	49	11/6/2023
COACH::PHOENIXCT::1	PHOENIX CT	CDS	WASHINGTONIA AVE	406	36	14616	Residential	Asphalt	63	11/6/2023
COACH::PIERCEST::1	PIERCE ST	55TH AVE	CITY LIMITS	1329	24	31896	Rural	Asphalt	91	11/6/2023
COACH::PINTOLN::1	PINTO LN	EAGLE AVE	120' S/O MCCOY PEAK AVE	144	36	5184	Residential	Asphalt	58	11/6/2023
COACH::PINTOLN::2	PINTO LN	120' S/O MCCOY PEAK AVE	MCCOY PEAK AVE	126	36	4536	Residential	Asphalt	72	11/6/2023
COACH::PINTOLN::3	PINTO LN	MCCOY PEAK AVE	RIMROCK LN	310	36	11160	Residential	Asphalt	65	11/6/2023
COACH::PISMOCT::1	PISMO CT	CDS	VENENTA BLVD	320	36	11520	Residential	Asphalt	52	11/6/2023
COACH::PLAYADELAM::1	PLAYA DEL AMOR ST	CAMINO BAHIA AVE	PUERTECITOS AVE	290	36	10440	Residential	Asphalt	76	11/6/2023
COACH::PLAYADELAM::3	PLAYA DEL AMOR ST	PUERTECITOS AVE	LOS MOCHIS AVE	810	36	29160	Residential	Asphalt	74	11/6/2023
COACH::PLAYADELAM::4	PLAYA DEL AMOR ST	LOS MOCHIS AVE	PUEBLO BONITO AVE	188	36	6768	Residential	Asphalt	76	11/6/2023
COACH::PLAYADELAM::5	PLAYA DEL AMOR ST	PUEBLO BONITO AVE	EL GRECO AVE	280	36	10080	Residential	Asphalt	87	11/6/2023
COACH::PLAZADEORO::1	PLAZA DE ORO AVE	SOL DE LINDA ST	LUNA DE NICOLETA ST	444	36	15984	Residential	Asphalt	75	11/6/2023
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	179	36	6444	Residential	Surface Treatment	81	11/6/2023
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	180	36	6480	Residential	Surface Treatment	87	11/6/2023
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	291	36	10476	Residential	Surface Treatment	83	11/6/2023
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	260	36	9360	Residential	Surface Treatment	84	11/6/2023
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	291	36	10476	Residential	Surface Treatment	85	11/6/2023
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	181	36	6516	Residential	Surface Treatment	88	11/6/2023
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	178	36	6408	Residential	Surface Treatment	94	11/6/2023
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	291	36	10476	Residential	Surface Treatment	80	11/6/2023
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	260	36	9360	Residential	Surface Treatment	93	11/6/2023
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	291	36	10476	Residential	Surface Treatment	87	11/6/2023
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	469	36	16884	Residential	Surface Treatment	87	11/6/2023
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	255	36	9180	Residential	Surface Treatment	79	11/6/2023
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	469	36	16884	Residential	Surface Treatment	94	11/6/2023
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	216	36	7776	Residential	Surface Treatment	91	11/6/2023
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	216	36	7776	Residential	Surface Treatment	85	11/6/2023
COACH::POLKST::1	POLK ST	54TH AVE	1330' S/O INDUSTRIAL WAY	2739	46	125994	Collector	Asphalt	68	11/6/2023
COACH::POLKST::2	POLK ST	1330' S/O INDUSTRIAL WAY	610' S/O INDUSTRIAL WAY	721	46	33166	Collector	Asphalt	73	11/6/2023
COACH::POLKST::3	POLK ST	610' S/O INDUSTRIAL WAY	INDUSTRIAL WAY	615	46	28290	Collector	Asphalt	67	11/6/2023
COACH::POLKST::4	POLK ST	52ND AVE	2160' N/O 52ND AVE	2168	30	65040	Rural	Asphalt	15	11/6/2023
COACH::POLKST::5	POLK ST	2160' N/O 52ND AVE	50TH AVE	1932	30	57960	Rural	Asphalt	30	11/6/2023
COACH::PRIMAVERA::1	PRIMA VERA	MEADOWS LN	49TH AVE	188	36	6768	Residential	Asphalt	48	11/6/2023
COACH::PRIMITIVO::1	PRIMITIVO DR	PRIMITIVO DR	MALVASIA WAY	267	32	8544	Residential	Asphalt	31	11/6/2023
COACH::PRIMITIVO::2	PRIMITIVO DR	PRIMITIVO DR	PRIMITIVO DR	97	32	3104	Residential	Asphalt	38	11/6/2023
COACH::PRIMITIVO::3	PRIMITIVO DR	PRIMITIVO DR	VERMOUTH DR	758	32	24256	Residential	Asphalt	29	11/6/2023
COACH::PRIMITIVO::4	PRIMITIVO DR	VERMOUTH DR	52ND AVE	363	32	11616	Residential	Asphalt	30	11/6/2023
COACH::PROSECCO::1	PROSECCO WAY	RODREJO WAY	ALLENDE DR	185	32	5920	Residential	Asphalt	51	11/6/2023
COACH::PROSECCO::2	PROSECCO WAY	RODREJO WAY	PROSECCO WAY	127	32	4064	Residential	Asphalt	62	11/6/2023
COACH::PROSECCO::3	PROSECCO WAY	SOLARCE ST	SOLARCE ST	200	32	6400	Residential	Asphalt	55	11/6/2023
COACH::PROSECCO::4	PROSECCO WAY	SOLARCE ST	MALVASIA WAY	152	32	4864	Residential	Asphalt	63	11/6/2023
COACH::PUEBLOBONI::1	PUEBLO BONITO AVE	PLAYA DEL AMOR ST	EL ACRO ST	280	36	10080	Residential	Asphalt	81	11/6/2023
COACH::PUEBLOBONI::2	PUEBLO BONITO AVE	EL ACRO ST	EL CASTILLO RD	280	36	10080	Residential	Asphalt	72	11/6/2023
COACH::PUEBLOBONI::3	PUEBLO BONITO AVE	EL CASTILLO RD	TAXCO AVE	306	36	11016	Residential	Asphalt	83	11/6/2023
COACH::PUERTECITO::1	PUERTECITOS AVE	JACKSON ST	PLAYA DEL AMOR ST	199	44	8756	Residential	Asphalt	82	11/6/2023
COACH::PUERTOESCO::1	PUERTO ESCONDIDO AVE	CAMINO CORTEZ	CHICHEN ITZA RD	1095	36	39420	Residential	Asphalt	50	11/6/2023
COACH::QUAILMOUNT::1	QUAIL MOUNTAIN TER	SAN GORGONIO ST	ARICA DR	320	36	11520	Residential	Asphalt	65	11/6/2023
COACH::QUEENCT::1	QUEEN CT	CDS	WASHINGTONIA AVE	317	34	10778	Residential	Asphalt	76	11/6/2023
COACH::REDMOUNT::1	RED MOUNTAIN PL	GRANITE PASS TRL	COXCOMB DR	260	36	9360	Residential	Asphalt	67	11/6/2023
COACH::REDONDOEST::1	REDONDO ESTE	REDONDO SUR	AVENIDA VESTAGO	338	36	12168	Residential	Asphalt	68	11/6/2023
COACH::REDONDOEST::2	REDONDO ESTE	AVENIDA VESTAGO	REDONDO NORTE	331	36	11916	Residential	Asphalt	64	11/6/2023
COACH::REDONDONOR::1	REDONDO NORTE	REDONDO PONIENTE	CORTE MOLINO	265	36	9540	Residential	Asphalt	68	11/6/2023
COACH::REDONDONOR::2	REDONDO NORTE	CORTE MOLINO	CALLE QUINTERRA	290	36	10440	Residential	Asphalt	62	11/6/2023
COACH::REDONDONOR::3	REDONDO NORTE	CALLE QUINTERRA	REDONDO ESTE	430	36	15480	Residential	Asphalt	38	11/6/2023
COACH::REDONDOPON::1	REDONDO PONIENTE	REDONDO SUR	REDONDO NORTE	670	40	26800	Residential	Asphalt	70	11/6/2023
COACH::REDONDOSUR::1	REDONDO SUR	REDONDO PONIENTE	CALLE QUINTERRA	430	37	15910	Residential	Asphalt	63	11/6/2023

Asset Id	Name	Start Location	End Location	Length	Width	Area	Functional Classification	Pavement Type	Last Inspection PCI	Last Inspection Date
COACH::REDONDOSUR::2	REDONDO SUR	CALLE QUINTERRA	CORTE PERCEBE	288	37	10656	Residential	Asphalt	58	11/6/2023
COACH::REDONDOSUR::3	REDONDO SUR	CORTE PERCEBE	REDONDO ESTE	271	37	10027	Residential	Asphalt	64	11/6/2023
COACH::REYESST::1	REYES ST	GUITRON ST	ROMERO ST	280	34	9520	Residential	Asphalt	59	11/6/2023
COACH::RHAPISCT::1	RHAPIS CT	CDS	WASHINGTONIA AVE	407	34	13838	Residential	Asphalt	68	11/6/2023
COACH::RIGOCT::1	RIGO CT	CHRISTINA RD	CDS	186	32	5952	Residential	Asphalt	74	11/6/2023
COACH::RIMROCKLN::1	RIMROCK LN	SAN JACINTO LN	PINTO LN	370	36	13320	Residential	Asphalt	68	11/6/2023
COACH::RIORANCHO::1	RIO RANCHO CT	LAS LUNAS AVE	CDS	450	36	16200	Residential	Asphalt	78	11/6/2023
COACH::RODREJOWAY::1	RODREJO WAY	MALVASIA WAY	PROSECCO WAY	560	34	19040	Residential	Asphalt	54	11/6/2023
COACH::ROMEROST::1	ROMERO ST	REYES ST	NIETO ST	997	34	33898	Residential	Asphalt	49	11/6/2023
COACH::ROMUALDACT::1	ROMUALDA CT	PEREZ ST	CDS	153	40	6120	Residential	Asphalt	93	11/6/2023
COACH::ROSALAVE::1	ROSAL AVE	TULIPAN ST	HIBISCO ST	768	37	28416	Residential	Asphalt	30	11/6/2023
COACH::ROYALCT::1	ROYAL CT	CDS	WASHINGTONIA AVE	310	34	10540	Residential	Asphalt	77	11/6/2023
COACH::SBALBOAST::1	S BALBOA ST	WESTERFIELD WAY	CDS	573	36	20628	Residential	Asphalt	72	11/6/2023
COACH::SCORONADO::1	S CORONADO ST	WESTERFIELD WAY	CDS	574	36	20664	Residential	Asphalt	67	11/6/2023
COACH::SKENMOREST::1	S KENMORE ST	WESTERFIELD WAY	CDS	574	36	20664	Residential	Asphalt	67	11/6/2023
COACH::SABALCT::1	SABAL CT	CDS	PHOENIX AVE	208	30	6240	Residential	Asphalt	59	11/6/2023
COACH::SAGRADODR::1	SAGRADO DR	SAN SOLANO RD	CALHOUN ST	168	40	6720	Residential	Brick	N/A	
COACH::SALTILLOCR::1	SALTILLO CIR	CHIAPAS DR	JALISCO AVE	192	26	4992	Residential	Asphalt	67	11/6/2023
COACH::SALTILLOCR::2	SALTILLO CIR	JALISCO AVE	JALISCO AVE	165	26	4290	Residential	Asphalt	72	11/6/2023
COACH::SALTILLOCR::3	SALTILLO CIR	MAZATLAN DR	JALISCO AVE	158	26	4108	Residential	Asphalt	61	11/6/2023
COACH::SALTILLOCR::4	SALTILLO CIR	MAZATLAN DR	MAZATLAN DR	181	26	4706	Residential	Asphalt	59	11/6/2023
COACH::SALTILLOCR::5	SALTILLO CIR	CHIAPAS DR	MAZATLAN DR	279	26	7254	Residential	Asphalt	69	11/6/2023
COACH::SANASISDR::1	SAN ASIS DR	CDS	SOLEDAD PL	270	40	10800	Residential	Asphalt	78	11/6/2023
COACH::SANASISDR::2	SAN ASIS DR	SOLEDAD PL	CALLE TOLOSA	265	40	10600	Residential	Asphalt	70	11/6/2023
COACH::SANASISDR::3	SAN ASIS DR	CALLE TOLOSA	SAN CAPISTRANO DR	260	40	10400	Residential	Asphalt	76	11/6/2023
COACH::SANASISDR::4	SAN ASIS DR	SAN CAPISTRANO DR	SAN SOLANO RD	260	40	10400	Residential	Asphalt	67	11/6/2023
COACH::SANCAPISTR::1	SAN CAPISTRANO DR	SAN ASIS DR	SAN REY DR	1000	40	40000	Residential	Asphalt	52	11/6/2023
COACH::SANGORGONI::1	SAN GORGONIO ST	EAGLE AVE	MCCOY PEAK AVE	270	36	9720	Residential	Asphalt	68	11/6/2023
COACH::SANGORGONI::2	SAN GORGONIO ST	MCCOY PEAK AVE	QUAIL MOUNTAIN TER	610	36	21960	Residential	Asphalt	61	11/6/2023
COACH::SANIGNACIO::1	SAN IGNACIO AVE	CHICHEN ITZA RD	CALHOUN ST	194	44	8536	Residential	Asphalt	87	11/6/2023
COACH::SANJACINTO::1	SAN JACINTO LN	MCCOY PEAK AVE	RIMROCK LN	311	36	11196	Residential	Asphalt	62	11/6/2023
COACH::SANJACINTO::2	SAN JACINTO LN	RIMROCK LN	PALOMAR CT	316	36	11376	Residential	Asphalt	68	11/6/2023
COACH::SANMATEOAV::1	SAN MATEO AVE	CHARLTON PEAK ST	GARNET RIDGE ST	269	36	9684	Residential	Asphalt	57	11/6/2023
COACH::SANMATEOAV::2	SAN MATEO AVE	GARNET RIDGE ST	CHAPARROSA ST	287	36	10332	Residential	Asphalt	68	11/6/2023
COACH::SANMATEOAV::3	SAN MATEO AVE	CHAPARROSA ST	CDS	425	36	15300	Residential	Asphalt	59	11/6/2023
COACH::SANREYDR::1	SAN REY DR	CALLE TOLOSA	COLONIA DR	160	40	6400	Residential	Asphalt	61	11/6/2023
COACH::SANREYDR::2	SAN REY DR	COLONIA DR	SAN CAPISTRANO DR	100	40	4000	Residential	Asphalt	60	11/6/2023
COACH::SANREYDR::3	SAN REY DR	SAN CAPISTRANO DR	SAN SOLANO RD	260	40	10400	Residential	Asphalt	50	11/6/2023
COACH::SANSOLANO::1	SAN SOLANO RD	SAN ASIS DR	SAGRADO DR	410	40	16400	Residential	Asphalt	73	11/6/2023
COACH::SANSOLANO::2	SAN SOLANO RD	SAGRADO DR	SAN REY DR	591	40	23640	Residential	Asphalt	69	11/6/2023
COACH::SANTOLN::1	SANTO LN	SOLEDAD PL	CALLE TOLOSA	265	40	10600	Residential	Asphalt	69	11/6/2023
COACH::SAPPHIRELN::1	SAPPHIRE LN	SCARLET WAY	N SIENNA CIR	652	36	23472	Residential	Asphalt	70	11/6/2023
COACH::SCARLETWAY::1	SCARLET WAY	SLATE DR	SAPPHIRE LN	273	36	9828	Residential	Asphalt	72	11/6/2023
COACH::SCARLETWAY::2	SCARLET WAY	SAPPHIRE LN	E SIENNA CIR	421	36	15156	Residential	Asphalt	73	11/6/2023
COACH::SCARLETWAY::3	SCARLET WAY	E SIENNA CIR	FREDERICK ST	184	36	6624	Residential	Asphalt	78	11/6/2023
COACH::SEDONACT::1	SEDONA CT	LAS LUNAS AVE	CDS	450	36	16200	Residential	Asphalt	76	11/6/2023
COACH::SERPENTINE::1	SERPENTINE WAY	CDS	CINNABAR LN	352	37	13024	Residential	Asphalt	50	11/6/2023
COACH::SH-111::1	SH-111	54TH AVE	TYLER ST	5278	50	263900	Arterial	Asphalt	81	11/6/2023
COACH::SH-111::14	SH-111	50TH AVE	PARK LN	1025	50	51250	Arterial	Asphalt	86	11/6/2023
COACH::SH-111::15	SH-111	PARK LN	SH-86	699	50	34950	Arterial	Asphalt	57	11/6/2023
COACH::SH-111::2	SH-111	TYLER ST	52ND AVE	1301	50	65050	Arterial	Asphalt	83	11/6/2023
COACH::SH-111::3	SH-111	52ND AVE	HILL DR	1230	50	61500	Arterial	Asphalt	69	11/6/2023
COACH::SH-111::4	SH-111	HILL DR	9TH ST	1724	50	86200	Arterial	Asphalt	71	11/6/2023
COACH::SH-111N::10	SH-111	4TH ST	3RD ST	325	50	16250	Arterial	Asphalt	100	11/6/2023
COACH::SH-111N::11	SH-111	3RD ST	2ND ST	375	50	18750	Arterial	Asphalt	100	11/6/2023
COACH::SH-111N::12	SH-111	2ND ST	1ST ST	375	50	18750	Arterial	Asphalt	100	11/6/2023
COACH::SH-111N::13	SH-111	1ST ST	50TH AVE	819	50	40950	Arterial	Asphalt	100	11/6/2023
COACH::SH-111N::16	SH-111	SH-86	SH-86	1435	50	71750	Arterial	Asphalt	61	11/6/2023
COACH::SH-111N::17	SH-111	49TH AVE	MITCHELL DR	1569	50	78450	Arterial	Asphalt	57	11/6/2023
COACH::SH-111N::18	SH-111	MITCHELL DR	48TH AVE	1807	50	90350	Arterial	Asphalt	63	11/6/2023
COACH::SH-111N::5	SH-111	9TH ST	8TH ST	378	50	18900	Arterial	Asphalt	100	11/6/2023
COACH::SH-111N::6	SH-111	8TH ST	7TH ST	375	50	18750	Arterial	Asphalt	100	11/6/2023
COACH::SH-111N::7	SH-111	7TH ST	6TH ST	325	50	16250	Arterial	Asphalt	100	11/6/2023
COACH::SH-111N::8	SH-111	6TH ST	5TH ST	325	50	16250	Arterial	Asphalt	100	11/6/2023
COACH::SH-111N::9	SH-111	5TH ST	4TH ST	325	50	16250	Arterial	Asphalt	100	11/6/2023
COACH::SH-111S::1	SH-111	48TH AVE	MITCHELL DR	1771	50	88550	Arterial	Asphalt	37	11/6/2023
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	325	50	16250	Arterial	Surface Treatment	75	11/6/2023
COACH::SH-111S::11	SH-111	7TH ST	8TH ST	375	50	18750	Arterial	Surface Treatment	97	11/6/2023
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	378	50	18900	Arterial	Surface Treatment	94	11/6/2023
COACH::SH-111S::2	SH-111	49TH AVE	MITCHELL DR	1578	50	78900	Arterial	Asphalt	58	11/6/2023
COACH::SH-111S::3	SH-111	49TH AVE	SH-86	1462	50	73100	Arterial	Asphalt	64	11/6/2023
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	726	50	36300	Arterial	Surface Treatment	87	11/6/2023
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	375	50	18750	Arterial	Surface Treatment	90	11/6/2023
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	375	50	18750	Arterial	Surface Treatment	92	11/6/2023
COACH::SH-111S::7	SH-111	3RD ST	4TH ST	325	50	16250	Arterial	Surface Treatment	96	11/6/2023
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	325	50	16250	Arterial	Surface Treatment	87	11/6/2023
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	325	50	16250	Arterial	Surface Treatment	86	11/6/2023
COACH::SH-86N::1	SH-86	54TH AVE	53RD AVE	2650	80	212000	Arterial	Asphalt	77	11/6/2023
COACH::SH-86N::10	SH-86	DAMASCUS AVE	BAGDAD AVE	334	80	26720	Arterial	Asphalt	83	11/6/2023
COACH::SH-86N::11	SH-86	BAGDAD AVE	BAGDAD AVE	64	80	5120	Arterial	Asphalt	84	11/6/2023
COACH::SH-86N::12	SH-86	BAGDAD AVE	6TH ST	347	80	27760	Arterial	Asphalt	86	11/6/2023
COACH::SH-86N::13	SH-86	6TH ST	4TH ST	924	80	73920	Arterial	Asphalt	74	11/6/2023
COACH::SH-86N::14	SH-86	4TH ST	ALLEY	986	80	78880	Arterial	Asphalt	73	11/6/2023
COACH::SH-86N::15	SH-86	ALLEY	WESTERFIELD WAY	336	80	26880	Arterial	Asphalt	88	11/6/2023
COACH::SH-86N::16	SH-86	WESTERFIELD WAY	50TH AVE	1322	80	105760	Arterial	Asphalt	64	11/6/2023
COACH::SH-86N::17	SH-86	50TH AVE	PARK LN	1034	80	82720	Arterial	Asphalt	65	11/6/2023
COACH::SH-86N::18	SH-86	PARK LN	SH-111	558	80	44640	Arterial	Asphalt	44	11/6/2023
COACH::SH-86N::2	SH-86	53RD AVE	CALLE ZAMORA	661	80	52880	Arterial	Asphalt	81	11/6/2023
COACH::SH-86N::3	SH-86	CALLE ZAMORA	CALLE VERDE	659	80	52720	Arterial	Asphalt	83	11/6/2023
COACH::SH-86N::4	SH-86	CALLE VERDE	CALLE ROJO	648	80	51840	Arterial	Asphalt	86	11/6/2023
COACH::SH-86N::5	SH-86	CALLE ROJO	52ND AVE	596	80	47680	Arterial	Asphalt	69	11/6/2023
COACH::SH-86N::6	SH-86	52ND AVE	ALLEY	560	80	44800	Arterial	Asphalt	62	11/6/2023
COACH::SH-86N::7	SH-86	ALLEY	CAIRO AVE	107	80	8560	Arterial	Asphalt	81	11/6/2023
COACH::SH-86N::8	SH-86	CAIRO AVE	CAIRO AVE	32	80	2560	Arterial	Asphalt	70	11/6/2023
COACH::SH-86N::9	SH-86	CAIRO AVE	DAMASCUS AVE	302	80	24160	Arterial	Asphalt	73	11/6/2023
COACH::SH-86S::1	SH-86	SH-111	PARK LN	545	80	43600	Arterial	Asphalt	34	11/6/2023
COACH::SH-86S::10	SH-86	DAMASCUS AVE	CAIRO AVE	302	80	24160	Arterial	Asphalt	87	11/6/2023
COACH::SH-86S::11	SH-86	CAIRO AVE	CAIRO AVE	32	80	2560	Arterial	Asphalt	86	11/6/2023
COACH::SH-86S::12	SH-86	CAIRO AVE	ALLEY	107	80	8560	Arterial	Asphalt	70	11/6/2023
COACH::SH-86S::13	SH-86	ALLEY	52ND AVE	560	80	44800	Arterial	Asphalt	56	11/6/2023
COACH::SH-86S::14	SH-86	52ND AVE	CALLE ROJO	596	80	47680	Arterial	Asphalt	73	11/6/2023
COACH::SH-86S::15	SH-86	CALLE ROJO	CALLE VERDE	648	80	51840	Arterial	Asphalt	80	11/6/2023
COACH::SH-86S::16	SH-86	CALLE VERDE	CALLE ZAMORA	659	80	52720	Arterial	Asphalt	83	11/6/2023
COACH::SH-86S::17	SH-86	CALLE ZAMORA	53RD AVE	661	80	52880	Arterial	Asphalt	81	11/6/2023
COACH::SH-86S::18	SH-86	53RD AVE	54TH AVE	2650	80	212000	Arterial	Asphalt	71	11/6/2023
COACH::SH-86S::2	SH-86	PARK LN	50TH AVE	1024	80	81920	Arterial	Asphalt	79	11/6/2023
COACH::SH-86S::3	SH-86	50TH AVE	WESTERFIELD WAY	1322	80	105760	Arterial	Asphalt	77	11/6/2023
COACH::SH-86S::4	SH-86	WESTERFIELD WAY	ALLEY	336	80	26880	Arterial	Asphalt	71	11/6/2023
COACH::SH-86S::5	SH-86	ALLEY	4TH ST	986	80	78880	Arterial	Asphalt	69	11/6/2023
COACH::SH-86S::6	SH-86	4TH ST	6TH ST	924	80	73920	Arterial	Asphalt	78	11/6/2023
COACH::SH-86S::7	SH-86	6TH ST	BAGDAD AVE	347	80	27760	Arterial	Asphalt	86	11/6/2023
COACH::SH-86S::8	SH-86	BAGDAD AVE	BAGDAD AVE	64	80	5120	Arterial	Asphalt	66	11/6/2023
COACH::SH-86S::9	SH-86	BAGDAD AVE	DAMASCUS AVE	334	80	26720	Arterial	Asphalt	84	11/6/2023
COACH::SHADOWROCK::1	SHADOWROCK DR	CALHOUN ST	COPPERIDGE ST	191	37	7067	Residential	Asphalt	40	11/6/2023
COACH::SHADOWROCK::2	SHADOWROCK DR	COPPERIDGE ST	CINNABAR LN	989	37	36593	Residential	Asphalt	42	11/6/2023
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	357	56	19992	Residential	Surface Treatment	94	11/6/2023
COACH::SHADYLN::10	SHADY LN	53RD AVE	STACIE LN	193	56	10808	Residential	Surface Treatment	32	11/6/2023
COACH::SHADYLN::11	SHADY LN	STACIE LN	BRENDA LN	265	56	14840	Residential	Surface Treatment	68	11/6/2023
COACH::SHADYLN::12	SHADY LN	BRENDA LN	HEATHER LN	270	56	15120	Residential	Surface Treatment	57	11/6/2023
COACH::SHADYLN::13	SHADY LN	HEATHER LN	VALENCIA LN	284	56	15904	Residential	Surface Treatment	50	11/6/2023
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	1314	38	49932	Residential	Surface Treatment	79	11/6/2023
COACH::SHADYLN::15	SHADY LN	52ND AVE	ARABY AVE	336	56	18816	Collector	Asphalt	35	11/6/2023
COACH::SHADYLN::16	SHADY LN	ARABY AVE	CAIRO AVE	324	56	18144	Collector	Asphalt	30	11/6/2023
COACH::SHADYLN::17	SHADY LN	BAGDAD AVE	ORCHARD AVE	422	56	23632	Collector	Asphalt	30	11/6/2023
COACH::SHADYLN::18	SHADY LN	CAIRO AVE	BAGDAD AVE	660	56	36960	Collector	Asphalt	47	11/6/2023
COACH::SHADYLN::19	SHADY LN	ORCHARD AVE	9TH ST	460	56	25760	Collector	Asphalt	39	11/6/2023
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	240	56	13440	Residential	Surface Treatment	85	11/6/2023
COACH::SHADYLN::3	SHADY LN	AVENIDA TACUBA	AVENIDA REFORMA	358	56	20048	Residential	Surface Treatment	99	11/6/2023
COACH::SHADYLN::4	SHADY LN	AVENIDA REFORMA	AVENIDA DEL PRADO	240	56	13440	Residential	Surface Treatment	69	11/6/2023
COACH::SHADYLN::5	SHADY LN	D/E	VIA MISIONERO	129	56	7224	Residential	Asphalt	79	11/6/2023
COACH::SHADYLN::6	SHADY LN	VIA MISIONERO	DIEGO CT	276	56	15456	Residential	Asphalt	86	11/6/2023
COACH::SHADYLN::7	SHADY LN	DIEGO CT	GUADALUPANA CT	285	56	15960	Residential	Asphalt	77	11/6/2023
COACH::SHADYLN::8	SHADY LN	GUADALUPANA CT	VIA TEPEYAC	276	56	15456	Residential	Asphalt	82	11/6/2023
COACH::SHADYLN::9	SHADY LN	VIA TEPEYAC	53RD AVE	348	56	19488	Residential	Asphalt	79	11/6/2023

Asset Id	Name	Start Location	End Location	Length	Width	Area	Functional Classification	Pavement Type	Last Inspection PCI	Last Inspection Date
COACH::SIENOLN::1	SIENA LN	MODENA TER	TORINO PLACE	261	36	9396	Residential	Asphalt	100	11/6/2023
COACH::SIENOLN::2	SIENA LN	TORINO PLACE	CORTINA PLACE	613	36	22068	Residential	Asphalt	99	11/6/2023
COACH::SIERRAST::1	SIERRA ST	FIESTA RD	TERA VISTA	256	37	9472	Residential	Asphalt	66	11/6/2023
COACH::SIERRAST::2	SIERRA ST	TERA VISTA	MEADOWS LN	254	37	9398	Residential	Asphalt	68	11/6/2023
COACH::SLATEDR::1	SLATE DR	54TH AVE	W SIENNA CIR	202	36	7272	Residential	Asphalt	84	11/6/2023
COACH::SLATEDR::2	SLATE DR	W SIENNA CIR	SCARLET WAY	257	36	9252	Residential	Asphalt	73	11/6/2023
COACH::SLATEDR::3	SLATE DR	SCARLET WAY	N SIENNA CIR	762	36	27432	Residential	Asphalt	77	11/6/2023
COACH::SLATEDR::4	SLATE DR	N SIENNA CIR	D/E	142	36	5112	Residential	Asphalt	76	11/6/2023
COACH::SOLDELINDA::1	SOL DE LINDA ST	PLAZA DE ORO AVE	MARIANA AVE	350	40	14000	Residential	Asphalt	74	11/6/2023
COACH::SOLARCEST::1	SOLARCE ST	PROSECCO WAY	SOLARCE ST	194	34	6596	Residential	Asphalt	53	11/6/2023
COACH::SOLARCEST::2	SOLARCE ST	PROSECCO WAY	SOLARCE ST	159	34	5406	Residential	Asphalt	51	11/6/2023
COACH::SOLARCEST::3	SOLARCE ST	SOLARCE ST	ALLENDE DR	131	34	4454	Residential	Asphalt	47	11/6/2023
COACH::SOLARCEST::4	SOLARCE ST	ALLENDE DR	FREDERICK ST	238	34	8092	Residential	Asphalt	47	11/6/2023
COACH::SOLEDADPL::1	SOLEDAD PL	SAN ASIS DR	SANTO LN	385	40	15400	Residential	Asphalt	75	11/6/2023
COACH::STACIELN::1	STACIE LN	CDS	SHADY LN	634	40	25360	Residential	Surface Treatment	62	11/6/2023
COACH::SUEZRD::1	SUEZ RD	CAIRO AVE	DAMASCUS AVE	334	20	6680	Residential	Asphalt	63	11/6/2023
COACH::SUEZRD::2	SUEZ RD	DAMASCUS AVE	BAGDAD AVE	334	20	6680	Residential	Asphalt	55	11/6/2023
COACH::SUMMERST::1	SUMMER ST	CALENDULA AVE	MAGNOLIA ST	262	37	9694	Residential	Asphalt	65	11/6/2023
COACH::SUMMERST::2	SUMMER ST	FIESTA RD	CDS	478	37	17686	Residential	Asphalt	71	11/6/2023
COACH::SUMMERST::3	SUMMER ST	MAGNOLIA ST	FIESTA RD	255	37	9435	Residential	Asphalt	69	11/6/2023
COACH::SUNBURSTST::1	SUNBURST ST	SUNSHINE AVE	SUNRISE AVE	846	40	33840	Residential	Asphalt	67	11/6/2023
COACH::SUNCRESTST::1	SUNCREST ST	51ST AVE	SUNSHINE AVE	188	40	7520	Residential	Asphalt	71	11/6/2023
COACH::SUNCRESTST::2	SUNCREST ST	SUNSHINE AVE	SUNDANCE LN	302	40	12080	Residential	Asphalt	70	11/6/2023
COACH::SUNCRESTST::3	SUNCREST ST	SUNDANCE LN	SUNDOWN LN	286	40	11440	Residential	Asphalt	78	11/6/2023
COACH::SUNCRESTST::4	SUNCREST ST	SUNDOWN LN	SUNRISE AVE	270	40	10800	Residential	Asphalt	57	11/6/2023
COACH::SUNCRESTST::5	SUNCREST ST	SUNRISE AVE	WESTERFIELD WAY	288	40	11520	Residential	Asphalt	56	11/6/2023
COACH::SUNDANCELN::1	SUNDANCE LN	CDS	SUNCREST ST	498	40	19920	Residential	Asphalt	63	11/6/2023
COACH::SUNDOWNLN::1	SUNDOWN LN	CDS	SUNCREST ST	450	40	18000	Residential	Asphalt	56	11/6/2023
COACH::SUNRISEAVE::1	SUNRISE AVE	SUNBURST ST	SUNCREST ST	686	40	27440	Residential	Asphalt	60	11/6/2023
COACH::SUNSETDR::1	SUNSET DR	52ND AVE	SH-111	1072	88	94336	Arterial	Asphalt	76	11/6/2023
COACH::SUNSETDR::2	SUNSET DR	52ND AVE	HILL DR	934	38	35492	Residential	Asphalt	58	11/6/2023
COACH::SUNSHINEAV::1	SUNSHINE AVE	SUNBURST ST	SUNCREST ST	823	40	32920	Residential	Asphalt	60	11/6/2023
COACH::SYLMARLN::1	SYLMAR LN	CDS	GENOA ST	353	30	10590	Residential	Asphalt	66	11/6/2023
COACH::TABASCOCT::1	TABASCO CT	CHIAPAS DR	CDS	153	28	4284	Residential	Asphalt	48	11/6/2023
COACH::TAXCOAVE::1	TAXCO AVE	PUEBLO BONITO AVE	EL GRECO AVE	280	40	11200	Residential	Asphalt	87	11/6/2023
COACH::TAXCOWAY::1	TAXCO WAY	MAZATLAN DR	JALISCO AVE	369	28	10332	Residential	Asphalt	57	11/6/2023
COACH::TEPEYACCT::1	TEPEYAC CT	VIA TEPEYAC	CDS	146	36	5256	Residential	Asphalt	75	11/6/2023
COACH::TERAVISTA::1	TERA VISTA	SIERRA ST	BRIANNE LN	691	37	25567	Residential	Asphalt	70	11/6/2023
COACH::TIJSSELING::1	TIJSSELING CT	52ND AVE	CDS	322	36	11592	Residential	Asphalt	70	11/6/2023
COACH::TODOSSANTO::1	TODOS SANTOS AVE	EL ARCO ST	EL CASTILLO RD	280	36	10080	Residential	Asphalt	69	11/6/2023
COACH::TODOSSANTO::2	TODOS SANTOS AVE	EL CASTILLO RD	420' W/O CAMINO CORTEZ	202	36	7272	Residential	Asphalt	70	11/6/2023
COACH::TODOSSANTO::3	TODOS SANTOS AVE	420' W/O CAMINO CORTEZ	CAMINO CORTEZ	418	36	15048	Residential	Asphalt	75	11/6/2023
COACH::TODOSSANTO::4	TODOS SANTOS AVE	CAMINO CORTEZ	COZUMEL ST	815	36	29340	Residential	Asphalt	68	11/6/2023
COACH::TOMASLN::2	TOMAS LN	CHRISTINA RD	PEDRO DR	453	36	16308	Residential	Asphalt	81	11/6/2023
COACH::TOPAZCT::1	TOPAZ CT	CDS	W SIENNA CIR	110	37	4070	Residential	Asphalt	71	11/6/2023
COACH::TORINOPL::1	TORINO PLACE	SIENO LN	MONZA LANE	508	36	18288	Residential	Asphalt	100	11/6/2023
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	1305	36	46980	Residential	Surface Treatment	75	11/6/2023
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	199	36	7164	Residential	Surface Treatment	81	11/6/2023
COACH::TRIPOLIWAY::11	TRIPOLI WAY	BAGDAD AVE	7TH ST	351	36	12636	Collector	Asphalt	63	11/6/2023
COACH::TRIPOLIWAY::12	TRIPOLI WAY	7TH ST	6TH ST	325	36	11700	Collector	Asphalt	60	11/6/2023
COACH::TRIPOLIWAY::2	TRIPOLI WAY	52ND AVE	ARABY AVE	300	36	10800	Residential	Asphalt	66	11/6/2023
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	240	36	8640	Residential	Surface Treatment	64	11/6/2023
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	30	36	1080	Residential	Surface Treatment	76	11/6/2023
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	120	36	4320	Residential	Surface Treatment	82	11/6/2023
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	150	36	5400	Residential	Surface Treatment	75	11/6/2023
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	142	36	5112	Residential	Surface Treatment	80	11/6/2023
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	128	36	4608	Residential	Surface Treatment	60	11/6/2023
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	71	36	2556	Residential	Surface Treatment	72	11/6/2023
COACH::TULIPANST::1	TULIPAN ST	CALENDULA AVE	ROSAL AVE	774	36	27864	Residential	Asphalt	38	11/6/2023
COACH::TYLERLN::1	TYLER LN	TYLER ST	CDS	947	36	34092	Collector	Asphalt	72	11/6/2023
COACH::TYLERST::1	TYLER ST	CITY LIMITS	54TH AVE	1334	50	66700	Collector	Asphalt	97	11/6/2023
COACH::TYLERST::11	TYLER ST	LAS FLORES AVE	CALLE PIZANO	274	40	10960	Collector	Asphalt	31	11/6/2023
COACH::TYLERST::13	TYLER ST	CALLE PIZANO	CALLE MENDOZA	686	40	27440	Collector	Asphalt	36	11/6/2023
COACH::TYLERST::15	TYLER ST	CALLE MENDOZA	50TH AVE	1883	40	75320	Collector	Asphalt	22	11/6/2023
COACH::TYLERST::16	TYLER ST	50TH AVE	50TH AVE	786	30	23580	Rural	Asphalt	52	11/6/2023
COACH::TYLERST::17	TYLER ST	50TH AVE	4540' N/O 50TH AVE	4535	30	136050	Rural	Asphalt	33	11/6/2023
COACH::TYLERST::18	TYLER ST	4785' S/O VISTA DEL SUR	3485' S/O VISTA DEL SUR	1299	30	38970	Rural	Asphalt	100	11/6/2023
COACH::TYLERST::19	TYLER ST	3485' S/O VISTA DEL SUR	2125' S/O VISTA DEL SUR	1358	30	40740	Rural	Asphalt	95	11/6/2023
COACH::TYLERST::2	TYLER ST	54TH AVE	TYLER LN	1021	50	51050	Collector	Asphalt	66	11/6/2023
COACH::TYLERST::20	TYLER ST	2125' S/O VISTA DEL SUR	VISTA DEL SUR	2126	30	63780	Rural	Asphalt	96	11/6/2023
COACH::TYLERST::3	TYLER ST	TYLER LN	1640' N/O TYLER LN	1637	50	81850	Collector	Asphalt	64	11/6/2023
COACH::TYLERST::4	TYLER ST	1615' S/O SH-111	SH-111	1614	50	80700	Collector	Asphalt	60	11/6/2023
COACH::TYLERST::5	TYLER ST	52ND AVE	410' S/O CARDINAL DR	1316	40	52640	Collector	Asphalt	44	11/6/2023
COACH::TYLERST::6	TYLER ST	410' S/O CARDINAL DR	CARDINAL DR	410	40	16400	Collector	Asphalt	32	11/6/2023
COACH::TYLERST::7	TYLER ST	CARDINAL DR	CALLE BOUGANVILIA	921	40	36840	Collector	Asphalt	38	11/6/2023
COACH::TYLERST::9	TYLER ST	CALLE BOUGANVILA	LAS FLORES AVE	270	40	10800	Collector	Asphalt	19	11/6/2023
COACH::VALENCIALN::1	VALENCIA LN	CDS	CYPRESS ST	245	36	8820	Residential	Surface Treatment	57	11/6/2023
COACH::VALENCIALN::2	VALENCIA LN	CYPRESS ST	SHADY LN	265	36	9540	Residential	Surface Treatment	48	11/6/2023
COACH::VALLEPOSAD::1	VALLE POSADA	MOONLIT DR	FIESTA RD	403	36	14508	Residential	Asphalt	51	11/6/2023
COACH::VALLEYRD::1	VALLEY RD	SH-86	JENNIFER WAY	396	40	15840	Collector	Surface Treatment	61	11/6/2023
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	160	40	6400	Collector	Surface Treatment	67	11/6/2023
COACH::VALLEYRD::2	VALLEY RD	JENNIFER WAY	TRIPOLI WAY	260	40	10400	Collector	Surface Treatment	58	11/6/2023
COACH::VALLEYRD::3	VALLEY RD	TRIPOLI WAY	MORGAN AVE	268	40	10720	Collector	Surface Treatment	53	11/6/2023
COACH::VALLEYRD::4	VALLEY RD	MORGAN AVE	NELSON ST	276	40	11040	Collector	Surface Treatment	72	11/6/2023
COACH::VALLEYRD::5	VALLEY RD	NELSON ST	LAS PALMAS ST	268	40	10720	Collector	Surface Treatment	67	11/6/2023
COACH::VALLEYRD::6	VALLEY RD	LAS PALMAS ST	OASIS PALM AVE	260	40	10400	Collector	Asphalt	80	11/6/2023
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	260	40	10400	Collector	Surface Treatment	70	11/6/2023
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	260	40	10400	Collector	Surface Treatment	77	11/6/2023
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	260	40	10400	Collector	Surface Treatment	70	11/6/2023
COACH::VANBURENST::1	VAN BUREN ST	AIRPORT BLVD	55TH AVE	2644	20	52880	Collector	Asphalt	76	11/6/2023
COACH::VANBURENST::10	VAN BUREN ST	VIA VALENCIA	50TH AVE	695	48	33360	Collector	Asphalt	38	11/6/2023
COACH::VANBURENST::11	VAN BUREN ST	50TH AVE	MOONLIT DR	1580	76	120080	Collector	Asphalt	38	11/6/2023
COACH::VANBURENST::12	VAN BUREN ST	MOONLIT DR	FIESTA RD	448	76	34048	Collector	Asphalt	54	11/6/2023
COACH::VANBURENST::13	VAN BUREN ST	FIESTA RD	49TH AVE	698	76	53048	Collector	Asphalt	16	11/6/2023
COACH::VANBURENST::14	VAN BUREN ST	49TH AVE	ED MITCHELL DR	1298	35	45430	Collector	Asphalt	32	11/6/2023
COACH::VANBURENST::15	VAN BUREN ST	ED MITCHELL DR	48TH AVE	1399	35	48965	Collector	Asphalt	33	11/6/2023
COACH::VANBURENST::2	VAN BUREN ST	54TH AVE	2630' N/O 54TH AVE	2630	35	92050	Collector	Asphalt	99	11/6/2023
COACH::VANBURENST::4	VAN BUREN ST	2630' N/O 54TH AVE	3290' N/O 54TH AVE	649	35	22715	Collector	Asphalt	100	11/6/2023
COACH::VANBURENST::5	VAN BUREN ST	3290' N/O 54TH AVE	52ND AVE	1940	35	67900	Collector	Asphalt	99	11/6/2023
COACH::VANBURENST::6	VAN BUREN ST	52ND AVE	MANHATTAN AVE	1979	72	142488	Collector	Asphalt	72	11/6/2023
COACH::VANBURENST::7	VAN BUREN ST	MANHATTAN AVE	51ST AVE	694	72	49968	Collector	Asphalt	32	11/6/2023
COACH::VANBURENST::8	VAN BUREN ST	51ST AVE	VIA MERIDA	1307	48	62736	Collector	Asphalt	40	11/6/2023
COACH::VANBURENST::9	VAN BUREN ST	VIA MERIDA	VIA VALENCIA	634	48	30432	Collector	Asphalt	28	11/6/2023
COACH::VENENTABLD::1	VENENTA BLVD	CAPITOLA AVE	PISMO CT	261	36	9396	Residential	Asphalt	55	11/6/2023
COACH::VENENTABLD::2	VENENTA BLVD	PISMO CT	HUNTINGTON AVE	261	36	9396	Residential	Asphalt	59	11/6/2023
COACH::VENICELN::1	VENICE LN	HUNTINGTON AVE	CDS	232	36	8352	Residential	Asphalt	79	11/6/2023
COACH::VERACRUZ::1	VERA CRUZ	CDS	PAVON PALMA	208	40	8320	Residential	Asphalt	87	11/6/2023
COACH::VERACRUZ::2	VERA CRUZ	PAVON PALMA	AVENIDA CORTEZ	166	40	6640	Residential	Asphalt	100	11/6/2023
COACH::VERMOUTHDR::1	VERMOUTH DR	D/E	PRIMITIVO DR	190	32	6080	Residential	Asphalt	51	11/6/2023
COACH::VERMOUTHDR::2	VERMOUTH DR	PRIMITIVO DR	ALLENDE DR	866	32	27712	Residential	Asphalt	36	11/6/2023
COACH::VIACONCHIL::1	VIA CONCHILLA	AVENIDA DE PLATA	AVENIDA DE PLATINA	265	40	10600	Residential	Asphalt	51	11/6/2023
COACH::VIADURANGO::1	VIA DURANGO	CDS	AVENIDA CORTEZ	375	40	15000	Residential	Asphalt	100	11/6/2023
COACH::VIAESTANCN::1	VIA ESTANCIA	AVENIDA CAMPANAS	50TH AVE	180	18	3240	Residential	Asphalt	99	11/6/2023
COACH::VIAESTANCS::1	VIA ESTANCIA	AVENIDA CAMPANAS	50TH AVE	180	18	3240	Residential	Asphalt	100	11/6/2023
COACH::VIAHERMOSA::1	VIA HERMOSA	CDS	AVENIDA CORTEZ	376	40	15040	Residential	Asphalt	100	11/6/2023
COACH::VIAMERIDA::1	VIA MERIDA	VAN BUREN ST	PASEO BARCELONA	202	36	7272	Residential	Surface Treatment	55	11/6/2023
COACH::VIAMISIONE::1	VIA MISIONERO	CALLE SOLEDAD	SHADY LN	659	36	23724	Residential	Asphalt	72	11/6/2023
COACH::VIAPICON::1	VIA PICON	CALHOUN ST	CALLE FRONTERA	199	20	3990	Residential	Asphalt	97	11/6/2023
COACH::VIAPICON::2	VIA PICON	CALHOUN ST	CALLE FRONTERA	201	20	4023	Residential	Asphalt	97	11/6/2023
COACH::VIASANTIAG::1	VIA SANTIAGO	CDS	CALLE DIEGO	71	36	2556	Residential	Asphalt	68	11/6/2023
COACH::VIATEPEYAC::1	VIA TEPEYAC	CALLE SOLEDAD	TEPEYAC CT	426	36	15336	Residential	Asphalt	68	11/6/2023
COACH::VIATEPEYAC::2	VIA TEPEYAC	TEPEYAC CT	SHADY LN	288	36	10368	Residential	Asphalt	74	11/6/2023
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	202	33	6666	Residential	Surface Treatment	62	11/6/2023
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	153	33	5049	Residential	Surface Treatment	85	11/6/2023
COACH::VIAVALENCI::3	VIA VALENCIA	CALLE MARBELLA	PASEO CORDOVA	147	33	4851	Residential	Surface Treatment	97	11/6/2023
COACH::VIAZAHIDI::1	VIA ZAHIDI	AVENIDA RAZON	AVENIDA ADOBE	1026	40	41040	Residential	Asphalt	65	11/6/2023
COACH::VINEAVE::1	VINE AVE	9TH ST	8TH ST	375	52	19500	Collector	Asphalt	28	11/6/2023
COACH::VINEAVE::10	VINE AVE	ALLEY	1ST ST	188	52	9776	Collector	Asphalt	58	11/6/2023
COACH::VINEAVE::2	VINE AVE	8TH ST	7TH ST	375	52	19500	Collector	Asphalt	42	11/6/2023
COACH::VINEAVE::3	VINE AVE	7TH ST	6TH ST	325	52	16900	Collector	Asphalt	27	11/6/2023
COACH::VINEAVE::4	VINE AVE	6TH ST	5TH ST	325	52	16900	Collector	Asphalt	39	11/6/2023
COACH::VINEAVE::5	VINE AVE	5TH ST	4TH ST	325	52	16900	Collector	Asphalt	32	11/6/2023
COACH::VINEAVE::6	VINE AVE	4TH ST	3RD ST	325	52	16900	Collector	Asphalt	48	11/6/2023
COACH::VINEAVE::7	VINE AVE	3RD ST	ALLEY	188	52	9776	Collector	Asphalt	44	11/6/2023

Asset Id	Name	Start Location	End Location	Length	Width	Area	Functional Classification	Pavement Type	Last Inspection PCI	Last Inspection Date
COACH::VINEAVE::8	VINE AVE	ALLEY	2ND ST	188	52	9776	Collector	Asphalt	50	11/6/2023
COACH::VINEAVE::9	VINE AVE	2ND ST	ALLEY	188	52	9776	Collector	Asphalt	28	11/6/2023
COACH::VINETALN::1	VINETA LN	CDS	GENOA ST	353	30	10590	Residential	Asphalt	65	11/6/2023
COACH::VISTADELNO::1	VISTA DEL NORTE	HARRISON ST	CITY LIMITS	2650	30	79500	Collector	Asphalt	97	11/6/2023
COACH::VISTADELNO::2	VISTA DEL NORTE	760' W/O DILLON RD	DILLON RD	756	60	45360	Collector	Asphalt	41	11/6/2023
COACH::VISTADELNO::3	VISTA DEL NORTE	DILLON RD	1630' E/O DILLON RD	1624	40	64960	Collector	Asphalt	33	11/6/2023
COACH::VISTADELNO::4	VISTA DEL NORTE	1630' E/O DILLON RD	TYLER ST	615	40	24600	Collector	Asphalt	45	11/6/2023
COACH::VISTADELNO::5	VISTA DEL NORTE	TYLER ST	980' E/O TYLER AVE	977	40	39080	Collector	Asphalt	35	11/6/2023
COACH::VISTADELNO::6	VISTA DEL NORTE	980' E/O TYLER AVE	1580' E/O TYLER AVE	592	40	23680	Collector	Asphalt	46	11/6/2023
COACH::VISTADELNO::7	VISTA DEL NORTE	1580' E/O TYLER AVE	CITY LIMITS	1156	40	46240	Collector	Asphalt	48	11/6/2023
COACH::VISTADELSU::1	VISTA DEL SUR	DILLON RD	CAMP CT	1084	40	43360	Collector	Asphalt	47	11/6/2023
COACH::VISTADELSU::2	VISTA DEL SUR	CAMP CT	TYLER ST	2043	40	81720	Collector	Asphalt	36	11/6/2023
COACH::VISTADELSU::3	VISTA DEL SUR	TYLER ST	CITY LIMITS	2805	40	112200	Collector	Asphalt	29	11/6/2023
COACH::WSIENNACIR::1	W SIENNA CIR	TOPAZ CT	N SIENNA CIR	910	36	32760	Residential	Asphalt	63	11/6/2023
COACH::WSIENNACIR::2	W SIENNA CIR	TOPAZ CT	100' W/O SLATE DR	189	36	6804	Residential	Asphalt	73	11/6/2023
COACH::WSIENNACIR::3	W SIENNA CIR	100' W/O SLATE DR	SLATE DR	100	36	3600	Residential	Asphalt	75	11/6/2023
COACH::WASHINGTON::1	WASHINGTONIA AVE	50TH AVE	ROYAL CT	225	36	8100	Residential	Asphalt	55	11/6/2023
COACH::WASHINGTON::2	WASHINGTONIA AVE	ROYAL CT	KING CT	254	36	9144	Residential	Asphalt	51	11/6/2023
COACH::WASHINGTON::3	WASHINGTONIA AVE	KING CT	QUEEN CT	254	36	9144	Residential	Asphalt	49	11/6/2023
COACH::WASHINGTON::4	WASHINGTONIA AVE	QUEEN CT	RHAPIS CT	254	36	9144	Residential	Asphalt	46	11/6/2023
COACH::WASHINGTON::5	WASHINGTONIA AVE	RHAPIS CT	PHOENIX AVE	254	36	9144	Residential	Asphalt	62	11/6/2023
COACH::WESTERFILD::1	WESTERFIELD WAY	AVENIDA ADOBE	140' W/O S BALBOA ST	130	40	5200	Residential	Asphalt	35	11/6/2023
COACH::WESTERFILD::2	WESTERFIELD WAY	140' W/O S BALBOA ST	S BALBOA ST	137	40	5480	Residential	Asphalt	44	11/6/2023
COACH::WESTERFILD::3	WESTERFIELD WAY	S BALBOA ST	140' E/O S CORONADO ST	137	40	5480	Residential	Asphalt	41	11/6/2023
COACH::WESTERFILD::4	WESTERFIELD WAY	140' E/O S CORONADO ST	S CORONADO ST	137	40	5480	Residential	Asphalt	61	11/6/2023
COACH::WESTERFILD::5	WESTERFIELD WAY	S CORONADO ST	140' E/O S CORONADO ST	137	40	5480	Residential	Asphalt	47	11/6/2023
COACH::WESTERFILD::6	WESTERFIELD WAY	140' E/O S CORONADO ST	S KENMORE ST	137	40	5480	Residential	Asphalt	53	11/6/2023
COACH::WESTERFILD::7	WESTERFIELD WAY	S KENMORE ST	SUNCREST ST	135	40	5400	Residential	Asphalt	51	11/6/2023
COACH::WESTERFILD::8	WESTERFIELD WAY	SUNCREST ST	SH-86	510	40	20400	Residential	Asphalt	39	11/6/2023
COACH::ZUMADR::1	ZUMA DR	LA JOLLA AVE	51ST AVE	178	36	6408	Residential	Asphalt	64	11/6/2023

APPENDIX B:
WORK PLAN FOR SCENARIO 1: UNLIMITED BUDGET

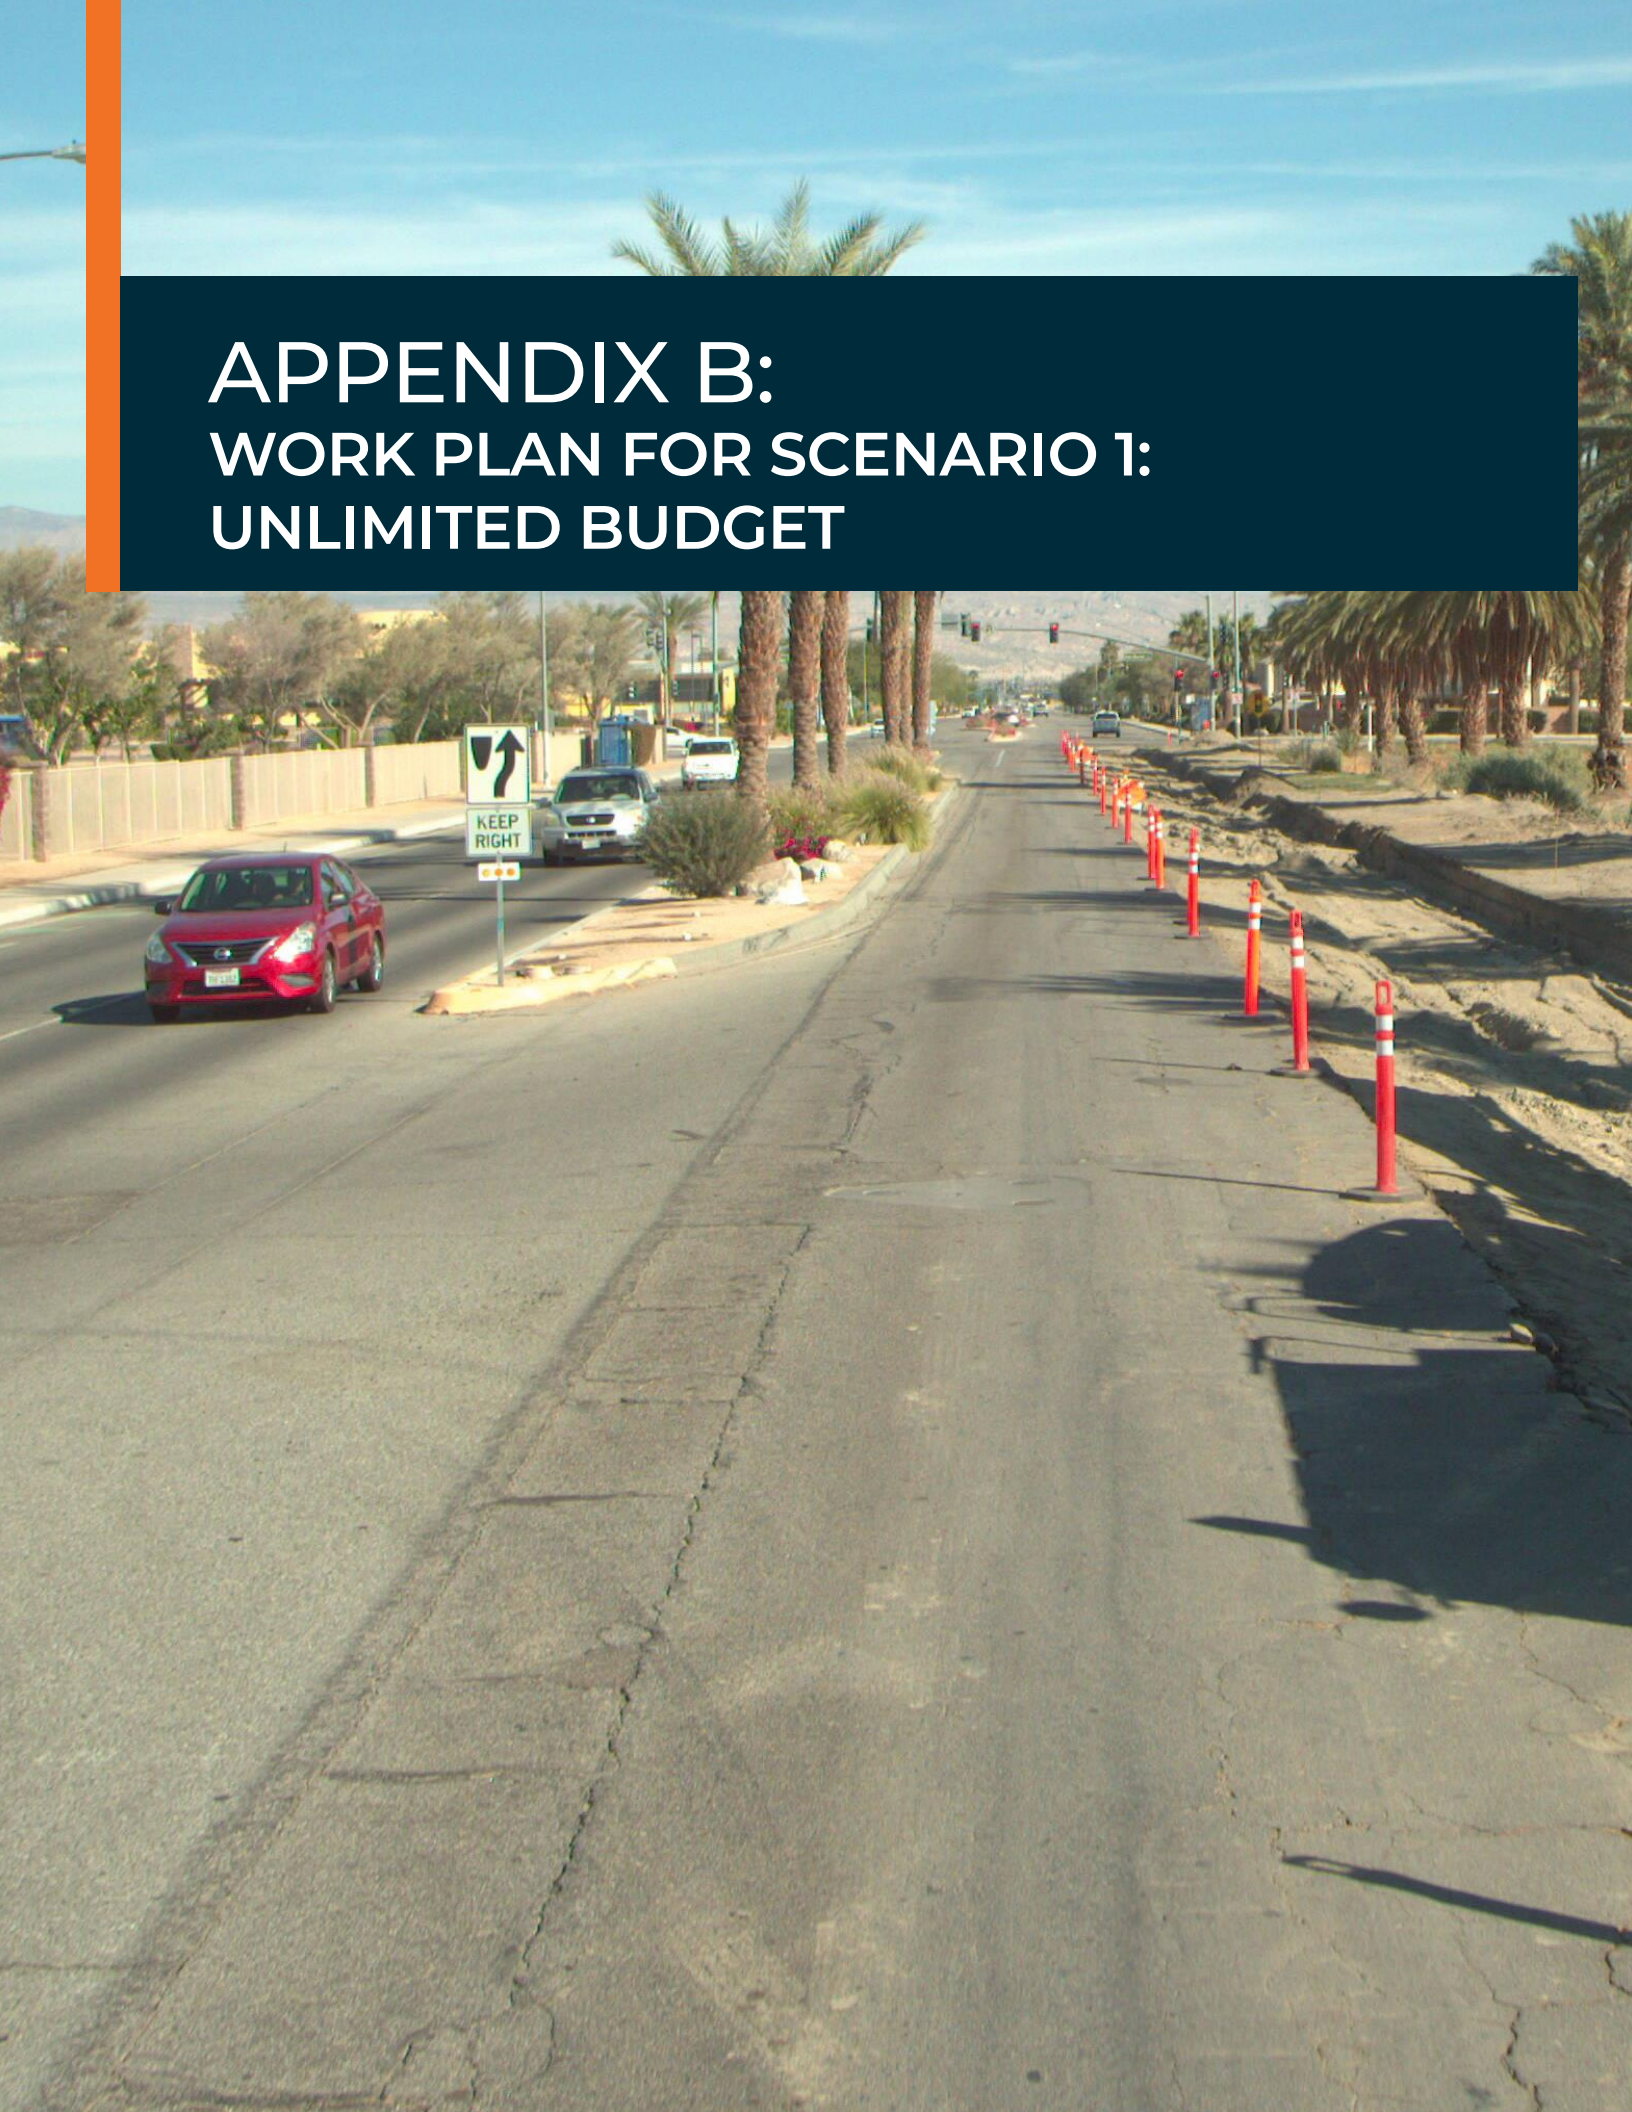

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::FILLMOREST::3	FILLMORE ST	1750' S/O 54TH AVE	54TH AVE	Rural	41,736.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	1.5	100	$ 834,720.0
COACH::DILLONRD::13	DILLON RD	VISTA DEL NORTE	DILLON RD	Arterial	280,416.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	3	100	$ 5,608,320.0
COACH::52NDAVEE::36	52ND AVE	ENTERPRISE WAY	HERNANDEZ ST	Arterial	28,530.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	4.5	100	$ 570,600.0
COACH::50THAVE::4	50TH AVE	TYLER ST	660' W/O TYLER ST	Arterial	26,320.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	6	100	$ 526,400.0
COACH::FILLMOREST::5	FILLMORE ST	52ND AVE	2650' N/O 52ND AVE	Rural	63,576.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	7.5	100	$ 1,271,520.0
COACH::ENTERPRISE::3	ENTERPRISE WAY	INDUSTRIAL WAY	52ND AVE	Collector	58,995.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	10.5	100	$ 1,179,900.0
COACH::50THAVE::5	50TH AVE	940' E/O TYLER ST	TYLER ST	Rural	28,020.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	10.5	100	$ 560,400.0
COACH::52NDAVEE::35	52ND AVE	LA PONDEROSA DR	ENTERPRISE WAY	Arterial	18,810.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	10.5	100	$ 376,200.0
COACH::AADOBE::1	AVENIDA ADOBE	51ST AVE	CALLE CATHRON	Residential	6,960.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	10.5	100	$ 139,200.0
COACH::CESARCHAVE::3	CESAR CHAVEZ ST	CALLE ROJO	52ND AVE	Collector	22,459.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	12	100	$ 449,180.0
COACH::POLKST::4	POLK ST	52ND AVE	2160' N/O 52ND AVE	Rural	65,040.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	13.5	100	$ 1,300,800.0
COACH::52NDAVEW::2	52ND AVE	ENTERPRISE WAY	LA PONDEROSA DR	Arterial	18,810.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	13.5	100	$ 376,200.0
COACH::ALLENDEDR::4	ALLENDE DR	ALLENDE DR	VERMOUTH DR	Residential	3,168.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	13.5	100	$ 63,360.0
COACH::VANBURENST::13	VAN BUREN ST	FIESTA RD	49TH AVE	Collector	53,048.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	15	100	$ 1,060,960.0
COACH::54THAVE::11	54TH AVE	FILLMORE ST	2645' E/O FILLMORE ST	Rural	52,920.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	15	100	$ 1,058,400.0
COACH::CALENDULA::3	CALENDULA AVE	JAZMIN ST	TULIPAN ST	Residential	9,583.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	15	100	$ 191,660.0
COACH::PALMERASCR::4	PALMERAS CIR	CHUPAROSA DR	CARDELINA DR	Residential	7,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	15	100	$ 144,000.0
COACH::50THAVE::8	50TH AVE	POLK ST	FILLMORE ST	Rural	138,060.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	16.5	100	$ 2,761,200.0
COACH::FILLMOREST::6	FILLMORE ST	2650' S/O 50TH AVE	50TH AVE	Rural	63,120.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	16.5	100	$ 1,262,400.0
COACH::50THAVEE::1	50TH AVE	CITY LIMITS	COLONIA DR	Arterial	33,690.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	16.5	100	$ 673,800.0
COACH::OATESLN::2	OATES LN	OATES LN	CITY LIMITS	Collector	33,660.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	16.5	100	$ 673,200.0
COACH::50THAVEE::10	50TH AVE	FREDERICK ST	PAVON PALMA	Arterial	12,375.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	16.5	100	$ 247,500.0
COACH::PALMERASCR::10	PALMERAS CIR	PALOMA DR	MARIPOSA DR	Residential	7,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	16.5	100	$ 144,000.0
COACH::PALMERASCR::12	PALMERAS CIR	CARDINAL DR	PALMERAS CIR	Residential	5,976.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	16.5	100	$ 119,520.0
COACH::52NDAVE::42	52ND AVE	FILLMORE ST	5300' E/O FILLMORE ST	Rural	79,530.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	18	100	$ 1,590,600.0
COACH::TYLERST::9	TYLER ST	CALLE BOUGANVILA	LAS FLORES AVE	Collector	10,800.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	18	100	$ 216,000.0
COACH::HILLDR::3	HILL DR	SUNSET DR	240' W/O SH-111	Residential	5,640.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	18	100	$ 112,800.0
COACH::50THAVE::3	50TH AVE	660' W/O TYLER ST	1660' W/O TYLER ST	Arterial	40,000.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	19.5	100	$ 800,000.0
COACH::51STAVE::3	51ST AVE	ZUMA DR	CHAPAS DR	Collector	33,558.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	19.5	100	$ 671,160.0
COACH::52NDAVEW::1	52ND AVE	HERNANDEZ ST	ENTERPRISE WAY	Arterial	28,395.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	19.5	100	$ 567,900.0
COACH::54THAVE::12	54TH AVE	2645' E/O FILLMORE ST	CITY LIMITS	Rural	26,820.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	19.5	100	$ 536,400.0
COACH::TYLERST::15	TYLER ST	CALLE MENDOZA	50TH AVE	Collector	75,320.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	21	100	$ 1,506,400.0
COACH::50THAVEW::14	50TH AVE	WASHINGTONIA AVE	VAN BUREN ST	Arterial	49,323.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	21	100	$ 986,460.0
COACH::52NDAVEW::21	52ND AVE	FREDERICK ST	PRIMITIVO DR	Arterial	38,580.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	21	100	$ 771,600.0
COACH::49THAVE::5	49TH AVE	LAS CRUCES ST	SH-111	Collector	26,796.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	21	100	$ 535,920.0
COACH::PALMERASCR::1	PALMERAS CIR	PALOMA DR	CARDINAL DR	Residential	16,560.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	21	100	$ 331,200.0
COACH::DILLONRDS::1	DILLON RD	44TH AVE	DILLON RD	Arterial	49,830.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	22.5	100	$ 996,600.0
COACH::FREDERICK::16	FREDERICK ST	PASEO LAREDO	PHOENIX AVE	Collector	30,822.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	22.5	100	$ 616,440.0
COACH::MECCALANE::1	MECCA LANE	BAGDAD AVE	670' N/O BAGDAD AVE	Residential	25,460.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	22.5	100	$ 509,200.0
COACH::50THAVEE::2	50TH AVE	COLONIA DR	CALHOUN ST	Arterial	15,630.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	22.5	100	$ 312,600.0
COACH::HIBISCOST::3	HIBISCO ST	IRIS AVE	AMAPOLA LN	Residential	9,842.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	22.5	100	$ 196,840.0
COACH::HIBISCOST::5	HIBISCO ST	ROSAL AVE	MARGARITA AVE	Residential	9,398.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	22.5	100	$ 187,960.0
COACH::GENOAST::3	GENOA ST	AVENIDA ALEENAH	150' N/O AVENIDA ALEENAH	Residential	5,291.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	22.5	100	$ 105,820.0
COACH::53RDAVE::11	53RD AVE	SH-86	CALLE BONITA	Collector	38,580.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	24	100	$ 771,600.0
COACH::BAGDADAVE::4	BAGDAD AVE	CALLE AVILA	CALLE CAMACHO	Residential	12,520.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	24	100	$ 250,400.0
COACH::HIBISCOST::2	HIBISCO ST	CALENDULA AVE	IRIS AVE	Residential	9,472.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	24	100	$ 189,440.0
COACH::JAZMINST::2	JAZMIN ST	MARGARITA AVE	49TH AVE	Residential	6,549.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	24	100	$ 130,980.0
COACH::ARAYLYNN::3	AVENIDA RAYLYNN	CALLE FLORENA	150' E/O CALLE FLORENA	Residential	5,184.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	24	100	$ 103,680.0
COACH::FREDERICK::14	FREDERICK ST	50TH AVE	AVENIDA VESTAGO	Collector	35,442.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	25.5	100	$ 708,840.0
COACH::4THST::3	4TH ST	ORCHARD AVE	VINE AVE	Collector	23,800.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	25.5	100	$ 476,000.0
COACH::FREDERICK::15	FREDERICK ST	AVENIDA VESTAGO	PASEO LAREDO	Collector	22,902.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	25.5	100	$ 458,040.0
COACH::VINEAVE::3	VINE AVE	7TH ST	6TH ST	Collector	16,900.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	25.5	100	$ 338,000.0
COACH::SHADYLN::10	SHADY LN	53RD AVE	STACIE LN	Residential	10,808.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	26	100	$ 216,160.0
COACH::49THAVE::4	49TH AVE	FREDERICK ST	LAS CRUCES ST	Collector	76,428.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	27	100	$ 1,528,560.0
COACH::VANBURENST::9	VAN BUREN ST	VIA MERIDA	VIA VALENCIA	Collector	30,432.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	27	100	$ 608,640.0
COACH::VIMEAVE::1	VINE AVE	9TH ST	8TH ST	Collector	19,500.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	27	100	$ 390,000.0
COACH::VINEAVE::9	VINE AVE	2ND ST	ALLEY	Collector	9,776.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	27	100	$ 195,520.0
COACH::CALENDULA::5	CALENDULA AVE	ORQUIDEA LN	NARCISO LN	Residential	9,435.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	27	100	$ 188,700.0
COACH::DOUMACT::2	DOUMA CT	DOUMA CT	CALLE TORRES ORDUNO	Residential	6,660.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	27	100	$ 133,200.0
COACH::VISTADELSU::3	VISTA DEL SUR	TYLER ST	CITY LIMITS	Collector	112,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 2,244,000.0
COACH::POLKST::5	POLK ST	2160' N/O 52ND AVE	50TH AVE	Rural	57,960.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 1,159,200.0
COACH::48THAVEW::2	48TH AVE	SH-111	VAN BUREN ST	Arterial	44,180.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 883,600.0
COACH::52NDAVEE::3	52ND AVE	PRIMITIVO DR	FREDERICK ST	Arterial	38,640.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 772,800.0
COACH::50THAVEE::7	50TH AVE	WASHINGTONIA AVE	CALLE QUINTERRA	Arterial	28,905.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 578,100.0
COACH::ROSALAVE::1	ROSAL AVE	TULIPAN ST	HIBISCO ST	Residential	28,416.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 568,320.0
COACH::PRIMITIVO::3	PRIMITIVO DR	PRIMITIVO DR	VERMOUTH DR	Residential	24,256.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 485,120.0
COACH::SHADYLN::17	SHADY LN	BAGDAD AVE	ORCHARD AVE	Collector	23,632.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 472,640.0
COACH::SHADYLN::16	SHADY LN	ARABY AVE	CAIRO AVE	Collector	18,144.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 362,880.0
COACH::CAPITOLAAV::3	CAPITOLA AVE	LAGUNA LN	VENENTA BLVD	Residential	11,880.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 237,600.0
COACH::PRIMITIVO::4	PRIMITIVO DR	VERMOUTH DR	52ND AVE	Residential	11,616.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 232,320.0
COACH::ORCHARDAVE::10	ORCHARD AVE	ALLEY	2ND ST	Collector	11,280.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 225,600.0
COACH::ORCHARDAVE::9	ORCHARD AVE	3RD ST	ALLEY	Collector	11,280.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 225,600.0
COACH::ALLENDEDR::5	ALLENDE DR	ALLENDE DR	VERMOUTH DR	Residential	11,104.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 222,080.0
COACH::PARKINGLOT::1	PARKING LOT	200' S/O BAGDAD AVE	BAGDAD AVE	Residential	6,368.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 127,360.0
COACH::GENOAST::5	GENOA ST	AVENIDA VERONICA	150' N/O AVENIDA VERONICA	Residential	5,476.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 109,520.0
COACH::48THAVEE::5	48TH AVE	VAN BUREN ST	SH-111	Arterial	44,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	30	100	$ 884,000.0
COACH::54THAVEE::10	54TH AVE	POLK ST	CITY LIMITS	Arterial	22,140.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	30	100	$ 442,800.0
COACH::TYLERST::11	TYLER ST	LAS FLORES AVE	CALLE PIZANO	Collector	10,960.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	30	100	$ 219,200.0
COACH::COPPERIDGE::3	COPPERIDGE ST	SHADOWROCK DR	LAPIS DR	Residential	10,360.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	30	100	$ 207,200.0
COACH::PRIMITIVO::1	PRIMITIVO DR	PRIMITIVO DR	MALVASIA WAY	Residential	8,544.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	30	100	$ 170,880.0
COACH::MALVASIA::1	MALVASIA WAY	PRIMITIVO DR	RODREJO WAY	Residential	6,176.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	30	100	$ 123,520.0
COACH::53RDAVE::6	53RD AVE	130' W/O CALLE CAMACHO	CALLE CAMACHO	Collector	4,995.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	30	100	$ 99,900.0
COACH::SH-111S::1	SH-111	48TH AVE	MITCHELL DR	Arterial	88,550.0	3" Mill & Overlay	11/6/2024	36	100	$ 796,950.0
COACH::DILLONRDN::14	DILLON RD	DILLON RD	44TH AVE	Arterial	50,358.0	3" Mill & Overlay	11/6/2024	36	100	$ 453,222.0
COACH::CAVILA::7	CALLE AVILA	52ND AVE	CAIRO AVE	Residential	27,120.0	3" Mill & Overlay	11/6/2024	36	100	$ 244,080.0
COACH::4THST::4	4TH ST	VINE AVE	SH-111	Collector	25,312.0	3" Mill & Overlay	11/6/2024	36	100	$ 227,808.0
COACH::PALMAVE::1	PALM AVE	7TH ST	6TH ST	Collector	19,500.0	3" Mill & Overlay	11/6/2024	36	100	$ 175,500.0
COACH::CEMELIA::2	CALLE EMELIA	AVENIDA RAYLYNN	AVENIDA GRACE	Residential	9,288.0	3" Mill & Overlay	11/6/2024	36	100	$ 83,592.0
COACH::HIBISCOST::4	HIBISCO ST	AMAPOLA LN	ROSAL AVE	Residential	9,287.0	3" Mill & Overlay	11/6/2024	36	100	$ 83,583.0
COACH::IRISAVE::1	IRIS AVE	HIBISCO ST	FREDERICK ST	Residential	6,956.0	3" Mill & Overlay	11/6/2024	36	100	$ 62,604.0
COACH::50THAVEW::3	50TH AVE	AVENIDA DE PLATINA	CORONADO ST	Arterial	4,389.0	3" Mill & Overlay	11/6/2024	36	100	$ 39,501.0
COACH::VANBURENST::11	VAN BUREN ST	50TH AVE	MOONLIT DR	Collector	120,080.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 1,080,720.0
COACH::INDUSTRIAL::2	INDUSTRIAL WAY	ENTERPRISE WAY	POLK ST	Collector	75,780.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 682,020.0
COACH::50THAVEE::6	50TH AVE	VAN BUREN ST	WASHINGTONIA AVE	Arterial	49,323.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 443,907.0
COACH::TYLERST::7	TYLER ST	CARDINAL DR	CALLE BOUGANVILIA	Collector	36,840.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 331,560.0
COACH::VANBURENST::10	VAN BUREN ST	VIA VALENCIA	50TH AVE	Collector	33,360.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 300,240.0
COACH::54THAVEW::10	54TH AVE	SLATE DR	VAN BUREN ST	Arterial	27,960.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 251,640.0
COACH::TULIPANST::1	TULIPAN ST	CALENDULA AVE	ROSAL AVE	Residential	27,864.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 250,776.0
COACH::CROJO::1	CALLE ROJO	260' W/O CALLE EMPALME	D/E	Residential	26,400.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 237,600.0
COACH::SHADYLN::19	SHADY LN	ORCHARD AVE	9TH ST	Collector	25,760.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 231,840.0
COACH::3RDST::2	3RD ST	PALM AVE	ORCHARD AVE	Collector	23,800.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 214,200.0
COACH::WESTERFIELD::8	WESTERFIELD WAY	SUNCREST ST	SH-86	Residential	20,400.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 183,600.0
COACH::ORCHARDAVE::1	ORCHARD AVE	280' W/O SHADY LN	SHADY LN	Collector	17,040.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 153,360.0
COACH::VINEAVE::4	VINE AVE	6TH ST	5TH ST	Collector	16,900.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 152,100.0
COACH::REDONDONOR::3	REDONDO NORTE	CALLE QUINTERRA	REDONDO ESTE	Residential	15,480.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 139,320.0
COACH::50THAVEW::8	50TH AVE	AVENIDA DEL PARQUE	PAVON PALMA	Arterial	13,728.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 123,552.0
COACH::JALISCOAVE::6	JALISCO AVE	TAXCO WAY	FREDERICK ST	Residential	7,056.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 63,504.0
COACH::53RDAVE::7	53RD AVE	CALLE CAMACHO	130' E/O CALLE CAMACHO	Collector	4,995.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 44,955.0
COACH::JALISCOAVE::2	JALISCO AVE	SALTILLO CIR	JALISCO AVE	Residential	4,592.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 41,328.0
COACH::MALVASIA::2	MALVASIA WAY	RODREJO WAY	MERCADO CIR	Residential	4,128.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 37,152.0
COACH::CROJO::3	CALLE ROJO	85' W/O CALLE EMPALME	170' W/O CALLE EMPALME	Residential	3,520.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 31,680.0
COACH::PRIMITIVO::2	PRIMITIVO DR	PRIMITIVO DR	PRIMAVO DR	Residential	3,104.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 27,936.0
COACH::CAIROAVE::5	CAIRO AVE	SH-86	ALLEY	Residential	9,416.0	3" Mill & Overlay	11/6/2024	38	100	$ 84,744.0
COACH::VANBURENST::8	VAN BUREN ST	51ST AVE	VIA MERIDA	Collector	62,736.0	3" Mill & Overlay	11/6/2024	39	100	$ 564,624.0
COACH::FREDERICK::8	FREDERICK ST	1350' S/O 51ST AVE	51ST AVE	Collector	58,050.0	3" Mill & Overlay	11/6/2024	39	100	$ 522,450.0
COACH::FREDERICK::7	FREDERICK ST	52ND AVE	1330' N/O 52ND AVE	Collector	57,018.0	3" Mill & Overlay	11/6/2024	39	100	$ 513,162.0
COACH::JAZMINST::1	JAZMIN ST	CALENDULA AVE	MARGARITA AVE	Residential	37,044.0	3" Mill & Overlay	11/6/2024	39	100	$ 333,396.0
COACH::AGRACE::3	AVENIDA GRACE	150' E/O CALLE FLORENA	CALLE EMELIA	Residential	36,792.0	3" Mill & Overlay	11/6/2024	39	100	$ 331,128.0
COACH::ADEPLATINA::1	AVENIDA DE PLATINA	50TH AVE	VIA CONCHILLA	Residential	22,160.0	3" Mill & Overlay	11/6/2024	39	100	$ 199,440.0
COACH::OATESLN::1	OATES LN	OATES LN	PETER RABBIT LN	Collector	17,688.0	3" Mill & Overlay	11/6/2024	39	100	$ 159,192.0
COACH::CHUPAROSA::1	CHUPAROSA DR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.0	3" Mill & Overlay	11/6/2024	39	100	$ 148,392.0
COACH::FIESTARD::3	FIESTA RD	VAN BUREN ST	SUMMER ST	Residential	7,380.0	3" Mill & Overlay	11/6/2024	39	100	$ 66,420.0
COACH::SHADOWROCK::1	SHADOWROCK DR	CALHOUN ST	COPPERIDGE ST	Residential	7,067.0	3" Mill & Overlay	11/6/2024	39	100	$ 63,603.0
COACH::VISTADELNO::2	VISTA DEL NORTE	760' W/O DILLON RD	DILLON RD	Collector	45,360.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 408,240.0
COACH::SHADOWROCK::2	SHADOWROCK DR	COPPERIDGE ST	CINNABAR LN	Residential	36,593.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 329,337.0
COACH::DOUMACT::1	DOUMA CT	52ND AVE	DOUMA CT	Residential	24,948.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 224,532.0
COACH::VINEAVE::2	VINE AVE	8TH ST	7TH ST	Collector	19,500.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 175,500.0
COACH::MARIPOSADR::1	MARIPOSA DR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 148,392.0
COACH::AFLORABUND::2	AVENIDA FLORABUNDA	CALLE ABELIA	CALLE TECOMARIA	Residential	15,732.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 141,588.0
COACH::ALLENDEDR::3	ALLENDE DR	SOLARCE ST	ALLENDE DR	Residential	15,008.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 135,072.0
COACH::MALIBUAVE::1	MALIBU AVE	NEWPORT ST	OCEANO RD	Residential	13,428.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 120,852.0
COACH::MALVASIA::3	MALVASIA WAY	MERCADO CIR	CHARDONNAY CIR	Residential	12,704.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 114,336.0
COACH::ASHLERCT::1	ASHLER CT	COPPERIDGE ST	CDS	Residential	12,469.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 112,221.0
COACH::CTECOMARIA::2	CALLE TECOMARIA	AVENIDA EUROPA	AVENIDA CEDRUS	Residential	10,296.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 92,664.0
COACH::NEWPORTST::4	NEWPORT ST	CATALINA AVE	LA JOLLA AVE	Residential	9,432.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 84,888.0
COACH::OCEANORD::1	OCEANO RD	CAPITOLA AVE	MALIBU AVE	Residential	9,288.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 83,592.0
COACH::ALLENDEDR::1	ALLENDE DR	D/E	PROSECCO WAY	Residential	8,032.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 72,288.0
COACH::WESTERFILD::3	WESTERFIELD WAY	S BALBOA ST	140' E/O S CORONADO ST	Residential	5,480.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 49,320.0
COACH::CROJO::4	CALLE ROJO	85' W/O CALLE EMPALME	CALLE EMPALME	Residential	3,400.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 30,600.0
COACH::50THAVE::2	50TH AVE	PETER RABBIT LN	1660' W/O TYLER ST	Arterial	42,480.0	3" Mill & Overlay	11/6/2024	42	100	$ 382,320.0
COACH::GUITRONST::2	GUITRON ST	REYES ST	NIETO ST	Residential	33,898.0	3" Mill & Overlay	11/6/2024	42	100	$ 305,082.0
COACH::FREDERICK::4	FREDERICK ST	53RD AVE	CALLE GREGORIO	Collector	25,890.0	3" Mill & Overlay	11/6/2024	42	100	$ 233,010.0
COACH::5THST::3	5TH ST	VINE AVE	SH-111	Collector	25,368.0	3" Mill & Overlay	11/6/2024	42	100	$ 228,312.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::6THST::1	6TH ST	SH-86	TRIPOLI WAY	Collector	28,048.0	3" Mill & Overlay	11/6/2024	42	100	$ 180,432.0
COACH::JADEROCKRD::1	JADEROCK RD	COPPERIDGE ST	HORNBLEND ST	Residential	18,833.0	3" Mill & Overlay	11/6/2024	42	100	$ 169,497.0
COACH::CAIROAVE::2	CAIRO AVE	CALLE TECHA	CALLE AVILA	Residential	10,440.0	3" Mill & Overlay	11/6/2024	42	100	$ 93,960.0
COACH::NARCISOLN::1	NARCISO LN	CALENDULA AVE	CDS	Residential	10,296.0	3" Mill & Overlay	11/6/2024	42	100	$ 92,664.0
COACH::PHOENIXAVE::2	PHOENIX AVE	LIVISTONA CT	KENTIA CT	Residential	9,720.0	3" Mill & Overlay	11/6/2024	42	100	$ 87,480.0
COACH::49THAVE::3	49TH AVE	JAZMIN ST	FREDERICK ST	Collector	79,134.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 712,206.0
COACH::TYLERST::5	TYLER ST	52ND AVE	410' S/O CARDINAL DR	Collector	52,640.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 473,760.0
COACH::SH-86N::18	SH-86	PARK LN	SH-111	Arterial	44,640.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 401,760.0
COACH::VISTADELNO::4	VISTA DEL NORTE	1630' E/O DILLON RD	TYLER ST	Collector	24,600.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 221,400.0
COACH::2NDST::3	2ND ST	ORCHARD AVE	VINE AVE	Collector	23,800.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 214,200.0
COACH::GENOAST::2	GENOA ST	AVENIDA RAYLYNN	AVENIDA ALEENAH	Residential	20,720.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 186,480.0
COACH::CAPITOLAAV::5	CAPITOLA AVE	NEWPORT ST	OCEANO RD	Residential	13,428.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 120,852.0
COACH::55THAVE::1	55TH AVE	CITY LIMITS	VAN BUREN ST	Collector	13,210.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 118,890.0
COACH::CAIROAVE::3	CAIRO AVE	CALLE AVILA	CALLE CAMACHO	Residential	12,520.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 112,680.0
COACH::MIRAMARCT::1	MIRAMAR CT	CDS	NEWPORT ST	Residential	10,404.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 93,636.0
COACH::CINNABARLN::1	CINNABAR LN	JADEROCK RD	NICKLECREEK DR	Residential	10,360.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 93,240.0
COACH::CCARMELLO::3	CALLE CARMELLO	AVENIDA CEDRUS	AVENIDA NERIUM	Residential	10,296.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 92,664.0
COACH::VINEAVE::7	VINE AVE	3RD ST	ALLEY	Collector	9,776.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 87,984.0
COACH::PHOENIXAVE::3	PHOENIX AVE	KENTIA CT	SABAL CT	Residential	9,720.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 87,480.0
COACH::CALENDULA::4	CALENDULA AVE	TULIPAN ST	ORQUIDEA LN	Residential	9,361.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 84,249.0
COACH::DATEAVE::8	DATE AVE	BAGDAD AVE	8TH ST	Collector	7,020.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 63,180.0
COACH::MALVASIA::4	MALVASIA WAY	CHARDONNAY CIR	PROSECCO WAY	Residential	6,240.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 56,160.0
COACH::MAZATLANDR::3	MAZATLAN DR	MAZATLAN DR	MAZATLAN DR PARKING LOOP	Residential	6,208.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 55,872.0
COACH::WESTERFILD::2	WESTERFIELD WAY	140' W/O S BALBOA ST	S BALBOA ST	Residential	5,480.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 49,320.0
COACH::AADOBE::11	AVENIDA ADOBE	CHRISTINA RD	45' N/O CHRISTINA RD	Residential	1,620.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 14,580.0
COACH::SHADYLN::13	SHADY LN	HEATHER LN	VALENCIA LN	Residential	15,904.0	3" Mill & Overlay	11/6/2024	44	100	$ 143,136.0
COACH::VALENCIALN::2	VALENCIA LN	CYPRESS ST	SHADY LN	Residential	9,540.0	3" Mill & Overlay	11/6/2024	44	100	$ 85,860.0
COACH::52NDAVE::37	52ND AVE	HERNANDEZ ST	POLK ST	Arterial	59,970.0	3" Mill & Overlay	11/6/2024	45	100	$ 539,730.0
COACH::55THAVE::4	55TH AVE	2675' W/O PEIRCE ST	PIERCE ST	Rural	53,440.0	3" Mill & Overlay	11/6/2024	45	100	$ 480,960.0
COACH::PETERRABBT::1	PETER RABBIT LN	D/E	50TH AVE	Collector	48,816.0	3" Mill & Overlay	11/6/2024	45	100	$ 439,344.0
COACH::VISTADELNO::7	VISTA DEL NORTE	1580' E/O TYLER AVE	CITY LIMITS	Collector	46,240.0	3" Mill & Overlay	11/6/2024	45	100	$ 416,160.0
COACH::VISTADELSU::1	VISTA DEL SUR	DILLON RD	CAMP CT	Collector	43,360.0	3" Mill & Overlay	11/6/2024	45	100	$ 390,240.0
COACH::SHADYLN::18	SHADY LN	CAIRO AVE	BAGDAD AVE	Collector	36,960.0	3" Mill & Overlay	11/6/2024	45	100	$ 332,640.0
COACH::ARAYLYNN::4	AVENIDA RAYLYNN	150' E/O CALLE FLORENA	CALLE EMELIA	Residential	36,792.0	3" Mill & Overlay	11/6/2024	45	100	$ 331,128.0
COACH::LAPISDR::1	LAPIS DR	COPPERIDGE ST	CINNABAR LN	Residential	36,593.0	3" Mill & Overlay	11/6/2024	45	100	$ 329,337.0
COACH::MOONLITDR::1	MOONLIT DR	CRESCENT WAY	VALLE POSADA	Residential	34,308.0	3" Mill & Overlay	11/6/2024	45	100	$ 308,772.0
COACH::FREDERICK::5	FREDERICK ST	CALLE GREGORIO	SOLARCE ST	Collector	27,780.0	3" Mill & Overlay	11/6/2024	45	100	$ 250,020.0
COACH::55THAVE::3	55TH AVE	1330' E/O FILLMORE ST	2660' E/O FILLMORE ST	Rural	26,580.0	3" Mill & Overlay	11/6/2024	45	100	$ 239,220.0
COACH::CAVILA::6	CALLE AVILA	CALLE ROJO	52ND AVE	Residential	24,280.0	3" Mill & Overlay	11/6/2024	45	100	$ 218,520.0
COACH::VISTADELNO::6	VISTA DEL NORTE	980' E/O TYLER AVE	1580' E/O TYLER AVE	Collector	23,680.0	3" Mill & Overlay	11/6/2024	45	100	$ 213,120.0
COACH::49THAVE::2	49TH AVE	PRIMA VERA	JAZMIN ST	Collector	23,218.0	3" Mill & Overlay	11/6/2024	45	100	$ 208,962.0
COACH::50THAVE::5	50TH AVE	CALLE PUERTA DEL SOL	VAN BUREN ST	Arterial	21,728.0	3" Mill & Overlay	11/6/2024	45	100	$ 195,552.0
COACH::VINEAVE::6	VINE AVE	4TH ST	3RD ST	Collector	16,900.0	3" Mill & Overlay	11/6/2024	45	100	$ 152,100.0
COACH::PALOMADR::1	PALOMA DR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.0	3" Mill & Overlay	11/6/2024	45	100	$ 148,392.0
COACH::CARDELINAD::1	CARDELINA DR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.0	3" Mill & Overlay	11/6/2024	45	100	$ 148,392.0
COACH::CFLORENA::4	CALLE FLORENA	110' N/O AVENIDA ALEENAH	AVENIDA VERONICA	Residential	14,184.0	3" Mill & Overlay	11/6/2024	45	100	$ 127,656.0
COACH::CATALINAAV::1	CATALINA AVE	NEWPORT ST	OCEANO RD	Residential	13,428.0	3" Mill & Overlay	11/6/2024	45	100	$ 120,852.0
COACH::50THAVEW::9	50TH AVE	PAVON PALMA	FREDERICK ST	Arterial	12,375.0	3" Mill & Overlay	11/6/2024	45	100	$ 111,375.0
COACH::ANERIUM::1	AVENIDA NERIUM	CALLE CARMELLO	CALLE GLORIOSA	Residential	11,880.0	3" Mill & Overlay	11/6/2024	45	100	$ 106,920.0
COACH::PALMAVE::7	PALM AVE	2ND ST	ALLEY	Collector	11,280.0	3" Mill & Overlay	11/6/2024	45	100	$ 101,520.0
COACH::ORCHARDAVE::11	ORCHARD AVE	2ND ST	ALLEY	Collector	11,280.0	3" Mill & Overlay	11/6/2024	45	100	$ 101,520.0
COACH::CBONITA::1	CALLE BONITA	CALLE NINOS	CALLE FELIZ	Residential	11,232.0	3" Mill & Overlay	11/6/2024	45	100	$ 101,088.0
COACH::CAIROAVE::1	CAIRO AVE	CALLE EMPALME	CALLE TECHA	Residential	10,560.0	3" Mill & Overlay	11/6/2024	45	100	$ 95,040.0
COACH::CEMELIA::3	CALLE EMELIA	AVENIDA GRACE	AVENIDA ALEENAH	Residential	10,476.0	3" Mill & Overlay	11/6/2024	45	100	$ 94,284.0
COACH::COZUMELST::1	COZUMEL ST	IXTAPA AVE	TODOS SANTOS AVE	Residential	10,080.0	3" Mill & Overlay	11/6/2024	45	100	$ 90,720.0
COACH::IXTAPAAVE::2	IXTAPA AVE	COZUMEL ST	CHICHEN ITZA RD	Residential	10,080.0	3" Mill & Overlay	11/6/2024	45	100	$ 90,720.0
COACH::OCEANORD::2	OCEANO RD	MALIBU AVE	CATALINA AVE	Residential	9,288.0	3" Mill & Overlay	11/6/2024	45	100	$ 83,592.0
COACH::NEWPORTST::2	NEWPORT ST	CAPITOLA AVE	MALIBU AVE	Residential	9,288.0	3" Mill & Overlay	11/6/2024	45	100	$ 83,592.0
COACH::GENOAST::12	GENOA ST	SYLMAR LN	NAPOLI LN	Residential	9,250.0	3" Mill & Overlay	11/6/2024	45	100	$ 83,250.0
COACH::WASHINGTON::4	WASHINGTONIA AVE	QUEEN CT	RHAPIS CT	Residential	9,144.0	3" Mill & Overlay	11/6/2024	45	100	$ 82,296.0
COACH::OCEANORD::3	OCEANO RD	CATALINA AVE	CDS	Residential	8,604.0	3" Mill & Overlay	11/6/2024	45	100	$ 77,436.0
COACH::SOLARCEST::4	SOLARCE ST	ALLENDE DR	FREDERICK ST	Residential	8,092.0	3" Mill & Overlay	11/6/2024	45	100	$ 72,828.0
COACH::CQUINTERRA::1	CALLE QUINTERRA	50TH AVE	REDONDO SUR	Residential	7,844.0	3" Mill & Overlay	11/6/2024	45	100	$ 70,596.0
COACH::PALMERASCR::5	PALMERAS CIR	CARDELINA DR	PALMERAS CIR	Residential	7,200.0	3" Mill & Overlay	11/6/2024	45	100	$ 64,800.0
COACH::PRIMAVERA::1	PRIMA VERA	MEADOWS LN	49TH AVE	Residential	6,768.0	3" Mill & Overlay	11/6/2024	45	100	$ 60,912.0
COACH::CQUINTERRA::4	CALLE QUINTERRA	CORTE LORETO	REDONDO NORTE	Residential	5,846.0	3" Mill & Overlay	11/6/2024	45	100	$ 52,614.0
COACH::WESTERFILD::5	WESTERFIELD WAY	S CORONADO ST	140' E/O S CORONADO ST	Residential	5,480.0	3" Mill & Overlay	11/6/2024	45	100	$ 49,320.0
COACH::AFLORABUND::1	AVENIDA FLORABUNDA	CALLE CARMELLO	CALLE ABELIA	Residential	4,464.0	3" Mill & Overlay	11/6/2024	45	100	$ 40,176.0
COACH::SOLARCEST::3	SOLARCE ST	SOLARCE ST	ALLENDE DR	Residential	4,454.0	3" Mill & Overlay	11/6/2024	45	100	$ 40,086.0
COACH::50THAVEE::13	50TH AVE	AVENIDA DE ORO	BALBOA ST	Arterial	4,356.0	3" Mill & Overlay	11/6/2024	45	100	$ 39,204.0
COACH::TABASCOCT::1	TABASCO CT	CHIAPAS DR	CDS	Residential	4,284.0	3" Mill & Overlay	11/6/2024	45	100	$ 38,556.0
COACH::52NDAVEW::9	52ND AVE	SH-86	CESAR CHAVEZ ST	Arterial	2,236.0	3" Mill & Overlay	11/6/2024	45	100	$ 20,124.0
COACH::AADOBE::9	AVENIDA ADOBE	LINDA AVE	215' S/O CHRISTINA RD	Residential	1,620.0	3" Mill & Overlay	11/6/2024	45	100	$ 14,580.0
COACH::HEATHERLN::1	HEATHER LN	OASIS PALM AVE	SHADY LN	Residential	29,830.0	1.5" Thin Overlay	11/6/2024	56	100	$ 149,150.0
COACH::STACELN::1	STACIE LN	CDS	SHADY LN	Residential	25,360.0	1.5" Thin Overlay	11/6/2024	56	100	$ 126,800.0
COACH::VALLEYRD::1	VALLEY RD	SH-86	JENNIFER WAY	Collector	15,840.0	1.5" Thin Overlay	11/6/2024	56	100	$ 79,200.0
COACH::SHADYLN::12	SHADY LN	BRENDA LN	HEATHER LN	Residential	15,120.0	1.5" Thin Overlay	11/6/2024	56	100	$ 75,600.0
COACH::CYPRESSST::1	CYPRESS ST	VALENCIA LN	VALLEY RD	Residential	11,172.0	1.5" Thin Overlay	11/6/2024	56	100	$ 55,860.0
COACH::VALLEYRD::2	VALLEY RD	JENNIFER WAY	TRIPOLI WAY	Collector	10,400.0	1.5" Thin Overlay	11/6/2024	56	100	$ 52,000.0
COACH::VALENCIALN::1	VALENCIA LN	CDS	CYPRESS ST	Residential	8,820.0	1.5" Thin Overlay	11/6/2024	56	100	$ 44,100.0
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	Residential	6,666.0	1.5" Thin Overlay	11/6/2024	56	100	$ 33,330.0
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	Residential	4,608.0	1.5" Thin Overlay	11/6/2024	56	100	$ 23,040.0
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.0	1.5" Thin Overlay	11/6/2024	56	100	$ 10,080.0
COACH::JACKSONST::3	JACKSON ST	LOS MOCHIS AVE	48TH AVE	Arterial	85,668.0	1.5" Thin Overlay	11/6/2024	57	100	$ 428,340.0
COACH::TYLERST::4	TYLER ST	1615' S/O SH-111	SH-111	Collector	80,700.0	1.5" Thin Overlay	11/6/2024	57	100	$ 403,500.0
COACH::52NDAVE::2	52ND AVE	VAN BUREN ST	PRIMITIVO DR	Arterial	79,500.0	1.5" Thin Overlay	11/6/2024	57	100	$ 397,500.0
COACH::SH-111S::2	SH-111	49TH AVE	MITCHELL DR	Arterial	78,900.0	1.5" Thin Overlay	11/6/2024	57	100	$ 394,500.0
COACH::7THST::2	7TH ST	DATE AVE	PALM AVE	Collector	44,128.0	1.5" Thin Overlay	11/6/2024	57	100	$ 220,640.0
COACH::50THAVEE::4	50TH AVE	HORNBLEND ST	CALLE PUERTA DEL SOL	Arterial	39,680.0	1.5" Thin Overlay	11/6/2024	57	100	$ 198,400.0
COACH::54THAVEW::3	54TH AVE	SH-111	ENTERPRISE WAY	Arterial	39,348.0	1.5" Thin Overlay	11/6/2024	57	100	$ 196,740.0
COACH::CAMPCT::1	CAMP CT	CDS	VISTA DEL SUR	Collector	39,248.0	1.5" Thin Overlay	11/6/2024	57	100	$ 196,240.0
COACH::54THAVEE::8	54TH AVE	SH-111	ENTERPRISE WAY	Arterial	38,952.0	1.5" Thin Overlay	11/6/2024	57	100	$ 194,760.0
COACH::53RDAVE::19	53RD AVE	FREDERICK ST	CALLE LEANDRO	Collector	38,668.1	1.5" Thin Overlay	11/6/2024	57	100	$ 193,340.7
COACH::54THAVEW::2	54TH AVE	ENTERPRISE WAY	POLK ST	Arterial	36,504.0	1.5" Thin Overlay	11/6/2024	57	100	$ 182,520.0
COACH::SUNSETDR::2	SUNSET DR	52ND AVE	HILL DR	Residential	35,492.0	1.5" Thin Overlay	11/6/2024	57	100	$ 177,460.0
COACH::50THAVEW::18	50TH AVE	COLONIA DR	CITY LIMITS	Arterial	33,690.0	1.5" Thin Overlay	11/6/2024	57	100	$ 168,450.0
COACH::SUNSHINEAV::1	SUNSHINE AVE	SUNBURST ST	SUNCREST ST	Residential	32,920.0	1.5" Thin Overlay	11/6/2024	57	100	$ 164,600.0
COACH::49THAVE::1	49TH AVE	VAN BUREN ST	PRIMA VERA	Collector	32,262.0	1.5" Thin Overlay	11/6/2024	57	100	$ 161,310.0
COACH::SUNRISEAVE::1	SUNRISE AVE	SUNBURST ST	SUNCREST ST	Residential	27,440.0	1.5" Thin Overlay	11/6/2024	57	100	$ 137,200.0
COACH::CALTURIAN::1	CORTE ALTURIAN	CDS	AVENIDA ADOBE	Residential	26,160.0	1.5" Thin Overlay	11/6/2024	57	100	$ 130,800.0
COACH::BELLAROMA::1	BELLA ROMA LN	D/E	BELLISSIMA AVE	Residential	25,888.0	1.5" Thin Overlay	11/6/2024	57	100	$ 129,440.0
COACH::CEMPALME::4	CALLE EMPALME	CALLE ROJO	52ND AVE	Residential	24,280.0	1.5" Thin Overlay	11/6/2024	57	100	$ 121,400.0
COACH::ORCHARDAVE::4	ORCHARD AVE	8TH ST	7TH ST	Collector	22,500.0	1.5" Thin Overlay	11/6/2024	57	100	$ 112,500.0
COACH::BAGDADAVE::3	BAGDAD AVE	MECCA LANE	CALLE AVILA	Residential	21,480.0	1.5" Thin Overlay	11/6/2024	57	100	$ 107,400.0
COACH::DAMASCUSAV::1	DAMASCUS AVE	DOUMA ST	CALLE TORRES ORDUNO	Residential	19,532.0	1.5" Thin Overlay	11/6/2024	57	100	$ 97,660.0
COACH::50THAVEE::12	50TH AVE	AVENIDA DEL PARQUE	AVENIDA DE ORO	Arterial	17,853.0	1.5" Thin Overlay	11/6/2024	57	100	$ 89,265.0
COACH::CLIMON::2	CALLE LIMON	52ND AVE	CAMINO CORTO	Residential	17,430.0	1.5" Thin Overlay	11/6/2024	57	100	$ 87,150.0
COACH::AMARIA::1	AVENIDA MARIA	GENOA ST	CALLE DANIELLE	Residential	16,797.0	1.5" Thin Overlay	11/6/2024	57	100	$ 83,985.0
COACH::PALMERASCR::6	PALMERAS CIR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.0	1.5" Thin Overlay	11/6/2024	57	100	$ 82,440.0
COACH::50THAVEW::17	50TH AVE	CALHOUN ST	COLONIA DR	Arterial	15,630.0	1.5" Thin Overlay	11/6/2024	57	100	$ 78,150.0
COACH::COXCOMBDR::1	COXCOMB DR	CHAPARROSA ST	RED MOUNTAIN PL	Residential	15,624.0	1.5" Thin Overlay	11/6/2024	57	100	$ 78,120.0
COACH::CLAMORADA::1	CORTE LA MORADA	CDS	CALLE EL SOL	Residential	15,392.0	1.5" Thin Overlay	11/6/2024	57	100	$ 76,960.0
COACH::CSOLEADO::1	CORTE SOLEADO	CDS	CALLE EL SOL	Residential	15,355.0	1.5" Thin Overlay	11/6/2024	57	100	$ 76,775.0
COACH::SANMATEOAV::3	SAN MATEO AVE	CHAPARROSA ST	CDS	Residential	15,300.0	1.5" Thin Overlay	11/6/2024	57	100	$ 76,500.0
COACH::MECCAHILLS::2	MECCA HILLS AVE	CHAPARROSA ST	CDS	Residential	15,300.0	1.5" Thin Overlay	11/6/2024	57	100	$ 76,500.0
COACH::CSOLIS::1	CORTE SOLIS	CALLE OCASO	CDS	Residential	14,134.0	1.5" Thin Overlay	11/6/2024	57	100	$ 70,670.0
COACH::AALEENAH::3	AVENIDA ALEENAH	ADRIANA CT	JULIA CT	Residential	14,112.0	1.5" Thin Overlay	11/6/2024	57	100	$ 70,560.0
COACH::CABELIA::1	CALLE ABELIA	49TH AVE	AVENIDA FLORABUNDA	Residential	13,920.0	1.5" Thin Overlay	11/6/2024	57	100	$ 69,600.0
COACH::CRESCENTW::1	CRESCENT WAY	MOONLIT DR	FIESTA RD	Residential	13,104.0	1.5" Thin Overlay	11/6/2024	57	100	$ 65,520.0
COACH::BAGDADAVE::10	BAGDAD AVE	TRIPOLI WAY	DATE AVE	Collector	12,440.0	1.5" Thin Overlay	11/6/2024	57	100	$ 62,200.0
COACH::TRIPOLIWAY::12	TRIPOLI WAY	7TH ST	6TH ST	Collector	11,700.0	1.5" Thin Overlay	11/6/2024	57	100	$ 58,500.0
COACH::DATEAVE::10	DATE AVE	7TH ST	6TH ST	Collector	11,700.0	1.5" Thin Overlay	11/6/2024	57	100	$ 58,500.0
COACH::2NDST::5	2ND ST	ALLEY	SH-111	Collector	11,536.0	1.5" Thin Overlay	11/6/2024	57	100	$ 57,680.0
COACH::PALMAVE::5	PALM AVE	3RD ST	ALLEY	Collector	11,280.0	1.5" Thin Overlay	11/6/2024	57	100	$ 56,400.0
COACH::REDONDOSUR::2	REDONDO SUR	CALLE QUINTERRA	CORTE PERCEBE	Residential	10,656.0	1.5" Thin Overlay	11/6/2024	57	100	$ 53,280.0
COACH::NAPOLILN::1	NAPOLI LN	CDS	GENOA ST	Residential	10,590.0	1.5" Thin Overlay	11/6/2024	57	100	$ 52,950.0
COACH::1STST::1	1ST ST	SH-86	PALM AVE	Collector	10,431.0	1.5" Thin Overlay	11/6/2024	57	100	$ 52,155.0
COACH::COPPERIDGE::1	COPPERIDGE ST	JADEROCK RD	NICKLECREEK DR	Residential	10,360.0	1.5" Thin Overlay	11/6/2024	57	100	$ 51,800.0
COACH::CELSOL::3	CALLE EL SOL	CORTE LA MORADA	CORTE SOLEADO	Residential	10,360.0	1.5" Thin Overlay	11/6/2024	57	100	$ 51,800.0
COACH::AADOBE::5	AVENIDA ADOBE	VIA ZAHIDI	CORTE ALTURIAN	Residential	10,320.0	1.5" Thin Overlay	11/6/2024	57	100	$ 51,600.0
COACH::ARAYLYNN::1	AVENIDA RAYLYNN	GENOA ST	CALLE JOYCE	Residential	10,080.0	1.5" Thin Overlay	11/6/2024	57	100	$ 50,400.0
COACH::AFLORABUND::4	AVENIDA FLORABUNDA	CALLE ELDARICA	CALLE CANTARA	Residential	10,080.0	1.5" Thin Overlay	11/6/2024	57	100	$ 50,400.0
COACH::FREDERICK::19	FREDERICK ST	IRIS AVE	150' N/O IRIS AVE	Collector	9,900.0	1.5" Thin Overlay	11/6/2024	57	100	$ 49,500.0
COACH::VINEAVE::10	VINE AVE	ALLEY	1ST ST	Collector	9,776.0	1.5" Thin Overlay	11/6/2024	57	100	$ 48,880.0
COACH::CHAPARROSA::2	CHAPARROSA ST	MECCA HILLS AVE	GLENDORA RIDGE AVE	Residential	9,648.0	1.5" Thin Overlay	11/6/2024	57	100	$ 48,240.0
COACH::REYESST::1	REYES ST	GUITRON ST	ROMERO ST	Residential	9,520.0	1.5" Thin Overlay	11/6/2024	57	100	$ 47,600.0
COACH::HILLDR::4	HILL DR	240' W/O SH-111	SH-111	Residential	9,440.0	1.5" Thin Overlay	11/6/2024	57	100	$ 47,200.0
COACH::VENENTABLD::2	VENENTA BLVD	PISMO CT	HUNTINGTON AVE	Residential	9,396.0	1.5" Thin Overlay	11/6/2024	57	100	$ 46,980.0
COACH::LAGUNALN::2	LAGUNA LN	LAGUNA LN	CAPITOLA AVE	Residential	9,324.0	1.5" Thin Overlay	11/6/2024	57	100	$ 46,620.0
COACH::AADOBE::8	AVENIDA ADOBE	JULIA DR	LINDA AVE	Residential	9,324.0	1.5" Thin Overlay	11/6/2024	57	100	$ 46,620.0
COACH::NEWPORTST::3	NEWPORT ST	MALIBU AVE	CATALINA AVE	Residential	9,288.0	1.5" Thin Overlay	11/6/2024	57	100	$ 46,440.0
COACH::GENOAST::11	GENOA ST	VINETA LN	SYLMAR LN	Residential	9,250.0	1.5" Thin Overlay	11/6/2024	57	100	$ 46,250.0
COACH::ARAZON::2	AVENIDA RAZON	CORTE YAGER	CORTE GILLAN	Residential	9,250.0	1.5" Thin Overlay	11/6/2024	57	100	$ 46,250.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::CHIAPASDR::5	CHIAPAS DR	315' E/O BAJA WAY	BAJA WAY	Residential	8,848.0	1.5" Thin Overlay	11/6/2024	57	100	$ 44,240.0
COACH::MAZATLANDR::7	MAZATLAN DR	MAZATLAN DR PARKING LOOP	MAZATLAN DR PARKING LOOP	Residential	8,640.0	1.5" Thin Overlay	11/6/2024	57	100	$ 43,200.0
COACH::BAGDADAVE::6	BAGDAD AVE	SUEZ RD	SH-86	Residential	8,560.0	1.5" Thin Overlay	11/6/2024	57	100	$ 42,800.0
COACH::HILLDR::2	HILL DR	CALLE PERA	SUNSET DR	Residential	8,160.0	1.5" Thin Overlay	11/6/2024	57	100	$ 40,800.0
COACH::BAJAWAY::1	BAJA WAY	CHIAPAS DR	FREDERICK ST	Residential	7,500.0	1.5" Thin Overlay	11/6/2024	57	100	$ 37,500.0
COACH::CGREGORIO::1	CALLE GREGORIO	FREDERICK ST	CALLE DIEGO	Residential	6,916.0	1.5" Thin Overlay	11/6/2024	57	100	$ 34,580.0
COACH::SABALCT::1	SABAL CT	CDS	PHOENIX AVE	Residential	6,240.0	1.5" Thin Overlay	11/6/2024	57	100	$ 31,200.0
COACH::CTECHA::2	CALLE TECHA	CALLE ZAMORA	CALLE LYA	Residential	6,200.0	1.5" Thin Overlay	11/6/2024	57	100	$ 31,000.0
COACH::CQUINTERRA::2	CALLE QUINTERRA	REDONDO SUR	CORTE SANTOS	Residential	5,883.0	1.5" Thin Overlay	11/6/2024	57	100	$ 29,415.0
COACH::AALEENAH::2	AVENIDA ALEENAH	'150 E/O GENOA ST	ADRIANA CT	Residential	5,328.0	1.5" Thin Overlay	11/6/2024	57	100	$ 26,640.0
COACH::CCORTO::1	CAMINO CORTO	CALLE LIMON	CDS	Residential	5,250.0	1.5" Thin Overlay	11/6/2024	57	100	$ 26,250.0
COACH::PINTOLN::1	PINTO LN	EAGLE AVE	120' S/O MCCOY PEAK AVE	Residential	5,184.0	1.5" Thin Overlay	11/6/2024	57	100	$ 25,920.0
COACH::CNINOS::4	CALLE NINOS	140' W/O CALLE BELLA	CALLE AMIGOS	Residential	5,148.0	1.5" Thin Overlay	11/6/2024	57	100	$ 25,740.0
COACH::GUITRONST::3	GUITRON ST	NIETO ST	AVENIDA DE ORO	Residential	4,930.0	1.5" Thin Overlay	11/6/2024	57	100	$ 24,650.0
COACH::SALTILLOCR::4	SALTILLO CIR	MAZATLAN DR	MAZATLAN DR	Residential	4,706.0	1.5" Thin Overlay	11/6/2024	57	100	$ 23,530.0
COACH::50THAVEE::16	50TH AVE	CORONADO ST	AVENIDA DE PLATINA	Arterial	4,389.0	1.5" Thin Overlay	11/6/2024	57	100	$ 21,945.0
COACH::SANREYDR::2	SAN REY DR	COLONIA DR	SAN CAPISTRANO DR	Residential	4,000.0	1.5" Thin Overlay	11/6/2024	57	100	$ 20,000.0
COACH::52NDAVEW::15	52ND AVE	CALLE TECHA	CALLE EMPALME	Arterial	3,640.0	1.5" Thin Overlay	11/6/2024	57	100	$ 18,200.0
COACH::AALEENAH::4	AVENIDA ALEENAH	JULIA CT	'160 W/O CALLE FLORENA	Residential	3,564.0	1.5" Thin Overlay	11/6/2024	57	100	$ 17,820.0
COACH::52NDAVEE::10	52ND AVE	CALLE TECHA	CALLE TECHA	Arterial	3,146.0	1.5" Thin Overlay	11/6/2024	57	100	$ 15,730.0
COACH::PARKLN::2	PARK LN	SH-86	130' W/O SH-111	Arterial	3,000.0	1.5" Thin Overlay	11/6/2024	57	100	$ 15,000.0
COACH::52NDAVEE::7	52ND AVE	CALLE TORRES ORDUNO	CALLE EMPALME	Arterial	1,456.0	1.5" Thin Overlay	11/6/2024	57	100	$ 7,280.0
COACH::SH-111N::18	SH-111	MITCHELL DR	48TH AVE	Arterial	90,350.0	1.5" Thin Overlay	11/6/2024	60	100	$ 451,750.0
COACH::SH-111N::16	SH-111	SH-86	SH-86	Arterial	71,750.0	1.5" Thin Overlay	11/6/2024	60	100	$ 358,750.0
COACH::52NDAVE::39	52ND AVE	1030' E/O POLK ST	2700' W/O FILLMORE ST	Rural	63,270.0	1.5" Thin Overlay	11/6/2024	60	100	$ 316,350.0
COACH::9THST::1	9TH ST	BAGDAD AVE	ORCHARD AVE	Collector	57,624.0	1.5" Thin Overlay	11/6/2024	60	100	$ 288,120.0
COACH::AVENUES3::2	AVENUE 53	1000' E/O CALLE EMELIA	CALLE EMELIA	Collector	56,715.0	1.5" Thin Overlay	11/6/2024	60	100	$ 283,575.0
COACH::48THAVEE::1	48TH AVE	JACKSON ST	CIELO VICTORIA ST	Arterial	53,400.0	1.5" Thin Overlay	11/6/2024	60	100	$ 267,000.0
COACH::FREDERICK::6	FREDERICK ST	SOLARCE ST	52ND AVE	Collector	51,348.0	1.5" Thin Overlay	11/6/2024	60	100	$ 256,740.0
COACH::SH-86N::6	SH-86	52ND AVE	ALLEY	Arterial	44,800.0	1.5" Thin Overlay	11/6/2024	60	100	$ 224,000.0
COACH::CLAPAZ::1	CALLE LA PAZ	CALLE NINOS	CALLE ROSA	Residential	34,056.0	1.5" Thin Overlay	11/6/2024	60	100	$ 170,280.0
COACH::WSIENNACIR::1	W SIENNA CIR	TOPAZ CT	N SIENNA CIR	Residential	32,760.0	1.5" Thin Overlay	11/6/2024	60	100	$ 163,800.0
COACH::CCANTARA::1	CALLE CANTARA	AVENIDA FLORABUNDA	AVENIDA NERIUM	Residential	30,924.0	1.5" Thin Overlay	11/6/2024	60	100	$ 154,620.0
COACH::BAGDADAVE::1	BAGDAD AVE	DOUMA ST	LIBNAN ST	Residential	26,560.0	1.5" Thin Overlay	11/6/2024	60	100	$ 132,800.0
COACH::55THAVE::2	55TH AVE	FILLMORE ST	1330' E/O FILLMORE ST	Rural	26,540.0	1.5" Thin Overlay	11/6/2024	60	100	$ 132,700.0
COACH::CALHOUNST::10	CALHOUN ST	EAGLE AVE	EL MAR AVE	Collector	26,350.0	1.5" Thin Overlay	11/6/2024	60	100	$ 131,750.0
COACH::CCAMACHO::5	CALLE CAMACHO	CALLE ROJO	52ND AVE	Residential	24,280.0	1.5" Thin Overlay	11/6/2024	60	100	$ 121,400.0
COACH::CTOLOSA::2	CALLE TOLOSA	SANTO LN	SAN REY DR	Residential	22,792.0	1.5" Thin Overlay	11/6/2024	60	100	$ 113,960.0
COACH::CBONITA::2	CALLE BONITA	CALLE FELIZ	CALLE ROSA	Residential	22,752.0	1.5" Thin Overlay	11/6/2024	60	100	$ 113,760.0
COACH::SANGORGONI::2	SAN GORGONIO ST	MCCOY PEAK AVE	QUAIL MOUNTAIN TER	Residential	21,960.0	1.5" Thin Overlay	11/6/2024	60	100	$ 109,800.0
COACH::EAGLEAVE::3	EAGLE AVE	CHAPARROSA ST	PINTO LN	Residential	20,558.0	1.5" Thin Overlay	11/6/2024	60	100	$ 102,790.0
COACH::SUNDANCELN::1	SUNDANCE LN	CDS	SUNCREST ST	Residential	19,920.0	1.5" Thin Overlay	11/6/2024	60	100	$ 99,600.0
COACH::CBOUGANVILL::1	CALLE BOUGANVILLA	TYLER ST	CALLE CLAVEL	Residential	19,476.0	1.5" Thin Overlay	11/6/2024	60	100	$ 97,380.0
COACH::JALISCOAVE::4	JALISCO AVE	JALISCO ACE PARKING LOOP	100' S/O TAXCO WAY	Residential	19,404.0	1.5" Thin Overlay	11/6/2024	60	100	$ 97,020.0
COACH::CALICIA::1	CALLE ALICIA	AVENIDA NICOLE	MICHELLE DR	Residential	16,050.0	1.5" Thin Overlay	11/6/2024	60	100	$ 80,250.0
COACH::REDONDOSUR::1	REDONDO SUR	REDONDO PONIENTE	CALLE QUINTERRA	Residential	15,910.0	1.5" Thin Overlay	11/6/2024	60	100	$ 79,550.0
COACH::GRANITEPAS::1	GRANITE PASS TRL	CHAPARROSA ST	RED MOUNTAIN PL	Residential	15,444.0	1.5" Thin Overlay	11/6/2024	60	100	$ 77,220.0
COACH::52NDAVE::16	52ND AVE	SH-86	TIJSSELING CT	Arterial	15,312.0	1.5" Thin Overlay	11/6/2024	60	100	$ 76,560.0
COACH::PHOENIXCT::1	PHOENIX CT	CDS	WASHINGTONIA AVE	Residential	14,616.0	1.5" Thin Overlay	11/6/2024	60	100	$ 73,080.0
COACH::ORCHARDAVE::2	ORCHARD AVE	ORCHARD AVE	9TH ST	Collector	14,040.0	1.5" Thin Overlay	11/6/2024	60	100	$ 70,200.0
COACH::MCCOYPEAK::4	MCCOY PEAK AVE	SAN JACINTO LN	PINTO LN	Residential	13,680.0	1.5" Thin Overlay	11/6/2024	60	100	$ 68,400.0
COACH::CLEANDRO::4	CALLE LEANDRO	CALLE GREGORIO	CDS	Residential	13,560.0	1.5" Thin Overlay	11/6/2024	60	100	$ 67,800.0
COACH::CCAMACHO::6	CALLE CAMACHO	52ND AVE	CAIRO AVE	Residential	13,480.0	1.5" Thin Overlay	11/6/2024	60	100	$ 67,400.0
COACH::MEADOWSLN::1	MEADOWS LN	SIERRA ST	PRIMA VERA	Residential	13,024.0	1.5" Thin Overlay	11/6/2024	60	100	$ 65,120.0
COACH::TRIPOLIWAY::11	TRIPOLI WAY	BAGDAD AVE	7TH ST	Collector	12,636.0	1.5" Thin Overlay	11/6/2024	60	100	$ 63,180.0
COACH::ESTRELLAPE::1	ESTRELLA PEDRO ST	CAMINO BONITO AVE	LA COSTA AVE	Residential	12,600.0	1.5" Thin Overlay	11/6/2024	60	100	$ 63,000.0
COACH::CVERDE::4	CALLE VERDE	CALLE CAMACHO	CESAR CHAVEZ ST	Collector	12,080.0	1.5" Thin Overlay	11/6/2024	60	100	$ 60,400.0
COACH::PALMAVE::6	PALM AVE	ALLEY	2ND ST	Collector	11,280.0	1.5" Thin Overlay	11/6/2024	60	100	$ 56,400.0
COACH::SANJACINTO::1	SAN JACINTO LN	MCCOY PEAK AVE	RIMROCK LN	Residential	11,196.0	1.5" Thin Overlay	11/6/2024	60	100	$ 55,980.0
COACH::MARIANAAVE::2	MARIANA AVE	CIELO VICTORIA ST	LUNA DE NICOLETA ST	Residential	10,841.0	1.5" Thin Overlay	11/6/2024	60	100	$ 54,205.0
COACH::REDONDONOR::2	REDONDO NORTE	CORTE MOLINO	CALLE QUINTERRA	Residential	10,440.0	1.5" Thin Overlay	11/6/2024	60	100	$ 52,200.0
COACH::CELSOL::4	CALLE EL SOL	CORTE SOLEADO	AVENIDA LA LUNA	Residential	10,360.0	1.5" Thin Overlay	11/6/2024	60	100	$ 51,800.0
COACH::COCASO::3	CALLE OCASO	CORTE ESTIVO	CORTE SOLIS	Residential	10,360.0	1.5" Thin Overlay	11/6/2024	60	100	$ 51,800.0
COACH::CFLORENA::1	CALLE FLORENA	AVENIDA RAYLYNN	AVENIDA GRACE	Residential	10,152.0	1.5" Thin Overlay	11/6/2024	60	100	$ 50,760.0
COACH::AFLORABUND::3	AVENIDA FLORABUNDA	CALLE TECOMARIA	CALLE ELDARICA	Residential	10,080.0	1.5" Thin Overlay	11/6/2024	60	100	$ 50,400.0
COACH::CNINOS::5	CALLE NINOS	CALLE AMIGOS	CALLE LA PAZ	Residential	9,972.0	1.5" Thin Overlay	11/6/2024	60	100	$ 49,860.0
COACH::ESIENNACIR::2	E SIENNA CIR	INDIGO CT	N SIENNA CIR	Residential	9,504.0	1.5" Thin Overlay	11/6/2024	60	100	$ 47,520.0
COACH::BRIANNELN::2	BRIANNE LN	CALENDULA AVE	MAGNOLIA ST	Residential	9,361.0	1.5" Thin Overlay	11/6/2024	60	100	$ 46,805.0
COACH::CATARINACT::1	CATARINA CT	AVENIDA NICOLE	CDS	Residential	9,360.0	1.5" Thin Overlay	11/6/2024	60	100	$ 46,800.0
COACH::CHRISTINA::6	CHRISTINA RD	MARY CT	AVENIDA ADOBE	Residential	9,288.0	1.5" Thin Overlay	11/6/2024	60	100	$ 46,440.0
COACH::WASHINGTON::5	WASHINGTONIA AVE	RHAPIS CT	PHOENIX AVE	Residential	9,144.0	1.5" Thin Overlay	11/6/2024	60	100	$ 45,720.0
COACH::53RDAVE::17	53RD AVE	SHADY LN	SHADY LN	Collector	8,835.0	1.5" Thin Overlay	11/6/2024	60	100	$ 44,175.0
COACH::ELMARAVE::1	EL MAR AVE	LA PLAYA ST	CALHOUN ST	Residential	8,536.0	1.5" Thin Overlay	11/6/2024	60	100	$ 42,680.0
COACH::ARAZON::5	AVENIDA RAZON	VIA ZAHIDI	CDS	Residential	8,140.0	1.5" Thin Overlay	11/6/2024	60	100	$ 40,700.0
COACH::ADELPARQUE::1	AVENIDA DEL PARQUE	PEDRO DR	50TH AVE	Residential	8,000.0	1.5" Thin Overlay	11/6/2024	60	100	$ 40,000.0
COACH::SUEZRD::1	SUEZ RD	CAIRO AVE	DAMASCUS AVE	Residential	6,680.0	1.5" Thin Overlay	11/6/2024	60	100	$ 33,400.0
COACH::AGUACALIEN::1	AGUA CALIENTE ST	AGUA BLANCA AVE	CAMINO LAS BRISAS	Residential	6,660.0	1.5" Thin Overlay	11/6/2024	60	100	$ 33,300.0
COACH::CHIHUAHUA::1	CHIHUAHUA CT	CDS	MAZATLAN DR	Residential	6,608.0	1.5" Thin Overlay	11/6/2024	60	100	$ 33,040.0
COACH::SANREYDR::1	SAN REY DR	CALLE TOLOSA	COLONIA DR	Residential	6,400.0	1.5" Thin Overlay	11/6/2024	60	100	$ 32,000.0
COACH::AHALAWAY::1	AVENIDA HALAWAY	FREDERICK ST	AVENIDA RAZON	Residential	6,264.0	1.5" Thin Overlay	11/6/2024	60	100	$ 31,320.0
COACH::MAZATLANDR::2	MAZATLAN DR	MAZATLAN DR	SALTILLO CIR	Residential	6,048.0	1.5" Thin Overlay	11/6/2024	60	100	$ 30,240.0
COACH::MCCOYPEAK::3	MCCOY PEAK AVE	CHAPARROSA ST	SAN JACINTO LN	Residential	5,904.0	1.5" Thin Overlay	11/6/2024	60	100	$ 29,520.0
COACH::CPERCEBE::1	CORTE PERCEBE	REDONDO SUR	CDS	Residential	5,904.0	1.5" Thin Overlay	11/6/2024	60	100	$ 29,520.0
COACH::JALISCOAVE::3	JALISCO AVE	JALISCO AVE	JALISCO ACE PARKING LOOP	Residential	5,768.0	1.5" Thin Overlay	11/6/2024	60	100	$ 28,840.0
COACH::AALEENAH::5	AVENIDA ALEENAH	'160 W/O CALLE FLORENA	CALLE FLORENA	Residential	5,760.0	1.5" Thin Overlay	11/6/2024	60	100	$ 28,800.0
COACH::WESTERFILD::4	WESTERFIELD WAY	140' E/O S CORONADO ST	S CORONADO ST	Residential	5,480.0	1.5" Thin Overlay	11/6/2024	60	100	$ 27,400.0
COACH::52NDAVEW::13	52ND AVE	CALLE AVILA	CALLE TECHA	Arterial	5,278.0	1.5" Thin Overlay	11/6/2024	60	100	$ 26,390.0
COACH::52NDAVEE::11	52ND AVE	CALLE TECHA	CALLE AVILA	Arterial	5,278.0	1.5" Thin Overlay	11/6/2024	60	100	$ 26,390.0
COACH::LAPLAYAST::2	LA PLAYA ST	CALLE COLIMA	140' N/O CALLE COLIMA	Residential	5,040.0	1.5" Thin Overlay	11/6/2024	60	100	$ 25,200.0
COACH::PROSECCO::4	PROSECCO WAY	SOLARCE ST	MALVASIA WAY	Residential	4,864.0	1.5" Thin Overlay	11/6/2024	60	100	$ 24,320.0
COACH::SALTILLOCR::3	SALTILLO CIR	MAZATLAN DR	JALISCO AVE	Residential	4,108.0	1.5" Thin Overlay	11/6/2024	60	100	$ 20,540.0
COACH::PROSECCO::2	PROSECCO WAY	RODREJO WAY	PROSECCO WAY	Residential	4,064.0	1.5" Thin Overlay	11/6/2024	60	100	$ 20,320.0
COACH::52NDAVEW::17	52ND AVE	CALLE EMPALME	CALLE TORRES ORDUNO	Arterial	1,482.0	1.5" Thin Overlay	11/6/2024	60	100	$ 7,410.0
COACH::OASISPALM::1	OASIS PALM AVE	HEATHER LN	VALLEY RD	Residential	21,318.0	1.5" Thin Overlay	11/6/2024	62	100	$ 106,590.0
COACH::CAIROAVE::7	CAIRO AVE	ALLEY	TRIPOLI WAY	Residential	16,539.0	1.5" Thin Overlay	11/6/2024	62	100	$ 82,695.0
COACH::ALLEY::2	ALLEY	52ND AVE	ALLEY	Alley	16,350.0	1.5" Thin Overlay	11/6/2024	62	100	$ 81,750.0
COACH::SHADYLN::11	SHADY LN	STACIE LN	BRENDA LN	Residential	14,840.0	1.5" Thin Overlay	11/6/2024	62	100	$ 74,200.0
COACH::VALLEYRD::5	VALLEY RD	NELSON ST	LAS PALMAS ST	Collector	10,720.0	1.5" Thin Overlay	11/6/2024	62	100	$ 53,600.0
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	Residential	10,080.0	1.5" Thin Overlay	11/6/2024	62	100	$ 50,400.0
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	Residential	9,720.0	1.5" Thin Overlay	11/6/2024	62	100	$ 48,600.0
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	Residential	8,640.0	1.5" Thin Overlay	11/6/2024	62	100	$ 43,200.0
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	Residential	7,704.0	1.5" Thin Overlay	11/6/2024	62	100	$ 38,520.0
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	Collector	6,400.0	1.5" Thin Overlay	11/6/2024	62	100	$ 32,000.0
COACH::SH-86N::16	SH-86	WESTERFIELD WAY	50TH AVE	Arterial	105,760.0	1.5" Thin Overlay	11/6/2024	63	100	$ 528,800.0
COACH::SH-86N::17	SH-86	50TH AVE	PARK LN	Arterial	82,720.0	1.5" Thin Overlay	11/6/2024	63	100	$ 413,600.0
COACH::TYLERST::3	TYLER ST	TYLER LN	1640' N/O TYLER LN	Collector	81,850.0	1.5" Thin Overlay	11/6/2024	63	100	$ 409,250.0
COACH::SH-111S::3	SH-111	49TH AVE	SH-86	Arterial	73,100.0	1.5" Thin Overlay	11/6/2024	63	100	$ 365,500.0
COACH::TYLERST::2	TYLER ST	54TH AVE	TYLER LN	Collector	51,050.0	1.5" Thin Overlay	11/6/2024	63	100	$ 255,250.0
COACH::VIAZAHIDI::1	VIA ZAHIDI	AVENIDA RAZON	AVENIDA ADOBE	Residential	41,040.0	1.5" Thin Overlay	11/6/2024	63	100	$ 205,200.0
COACH::54THAVE::3	54TH AVE	FREDERICK ST	SH-86	Arterial	39,585.0	1.5" Thin Overlay	11/6/2024	63	100	$ 197,925.0
COACH::DOUMAST::1	DOUMA ST	52ND AVE	DAMASCUS AVE	Residential	38,950.0	1.5" Thin Overlay	11/6/2024	63	100	$ 194,750.0
COACH::MAGNOLIAST::1	MAGNOLIA ST	SUMMER ST	BRIANNE LN	Residential	36,149.0	1.5" Thin Overlay	11/6/2024	63	100	$ 180,745.0
COACH::CHARLTONPK::2	CHARLTON PEAK ST	MECCA HILLS AVE	BIG BEAR PL	Residential	32,220.0	1.5" Thin Overlay	11/6/2024	63	100	$ 161,100.0
COACH::CHAPARROSA::7	CHAPARROSA ST	MCCOY PEAK AVE	48TH AVE	Residential	29,700.0	1.5" Thin Overlay	11/6/2024	63	100	$ 148,500.0
COACH::MITCHELLDR::1	MITCHELL DR	FREDERICK ST	SH-111	Collector	25,346.0	1.5" Thin Overlay	11/6/2024	63	100	$ 126,730.0
COACH::1STST::2	1ST ST	PALM AVE	ORCHARD AVE	Collector	24,282.0	1.5" Thin Overlay	11/6/2024	63	100	$ 121,410.0
COACH::AGRACE::1	AVENIDA GRACE	CALLE JOYCE	CALLE FLORENA	Residential	23,976.0	1.5" Thin Overlay	11/6/2024	63	100	$ 119,880.0
COACH::ENTERPRISE::1	ENTERPRISE WAY	D/E	54TH AVE	Collector	22,905.0	1.5" Thin Overlay	11/6/2024	63	100	$ 114,525.0
COACH::8THST::1	8TH ST	DATE AVE	PENDLETON WAY	Collector	22,400.0	1.5" Thin Overlay	11/6/2024	63	100	$ 112,000.0
COACH::50THAVEW::1	50TH AVE	SH-86	KENMORE ST	Arterial	22,209.0	1.5" Thin Overlay	11/6/2024	63	100	$ 111,045.0
COACH::50THAVEW::13	50TH AVE	VAN BUREN ST	CALLE PUERTA DEL SOL	Arterial	21,728.0	1.5" Thin Overlay	11/6/2024	63	100	$ 108,640.0
COACH::GENOAST::7	GENOA ST	AVENIDA MARIA	52ND AVE	Residential	21,312.0	1.5" Thin Overlay	11/6/2024	63	100	$ 106,560.0
COACH::MECCAHILLS::1	MECCA HILLS AVE	CHARLTON PEAK ST	CHAPARROSA ST	Residential	20,052.0	1.5" Thin Overlay	11/6/2024	63	100	$ 100,260.0
COACH::CBERNARDO::1	CALLE BERNARDO	CDS	CALLE LEANDRO	Residential	19,006.0	1.5" Thin Overlay	11/6/2024	63	100	$ 95,030.0
COACH::BAGDADAVE::8	BAGDAD AVE	PARKING LOT ENTRANCE	TRIPOLI WAY	Collector	17,760.0	1.5" Thin Overlay	11/6/2024	63	100	$ 88,800.0
COACH::53RDAVE::12	53RD AVE	CALLE BONITA	ADAM LN	Collector	16,920.0	1.5" Thin Overlay	11/6/2024	63	100	$ 84,600.0
COACH::CMENDOZA::3	CALLE MENDOZA	LAS FLORES AVE	CALLE PIZANO	Residential	15,279.0	1.5" Thin Overlay	11/6/2024	63	100	$ 76,395.0
COACH::AADOBE::12	AVENIDA ADOBE	45' N/O CHRISTINA RD	PEDRO DR	Residential	14,688.0	1.5" Thin Overlay	11/6/2024	63	100	$ 73,440.0
COACH::CBERNO::1	CORTE BERNARDO	CDS	AVENIDA ADOBE	Residential	14,400.0	1.5" Thin Overlay	11/6/2024	63	100	$ 72,000.0
COACH::CTOLOSA::1	CALLE TOLOSA	SAN ASIS DR	SANTO LN	Residential	14,245.0	1.5" Thin Overlay	11/6/2024	63	100	$ 71,225.0
COACH::ACRYSTAL::1	AVENIDA CRYSTAL	CALLE DANIELLE	CALLE ANABELLA	Residential	14,160.0	1.5" Thin Overlay	11/6/2024	63	100	$ 70,800.0
COACH::MICHELLEDR::3	MICHELLE DR	AVENIDA NICOLE	MICHELLE DR	Residential	14,148.0	1.5" Thin Overlay	11/6/2024	63	100	$ 70,740.0
COACH::CHIAPASDR::3	CHIAPAS DR	TABASCO CT	500' E/O TABASCO CT	Residential	13,972.0	1.5" Thin Overlay	11/6/2024	63	100	$ 69,860.0
COACH::MEADOWSLN::2	MEADOWS LN	PRIMA VERA	BRIANNE LN	Residential	12,469.0	1.5" Thin Overlay	11/6/2024	63	100	$ 62,345.0
COACH::REDONDOEST::2	REDONDO ESTE	AVENIDA VESTAGO	REDONDO NORTE	Residential	11,916.0	1.5" Thin Overlay	11/6/2024	63	100	$ 59,580.0
COACH::QUAILMOUNT::1	QUAIL MOUNTAIN TER	SAN GORGONIO ST	ARICA DR	Residential	11,520.0	1.5" Thin Overlay	11/6/2024	63	100	$ 57,600.0
COACH::CROBERTO::1	CALLE ROBERTO	CALLE TECHA	CDS	Residential	11,232.0	1.5" Thin Overlay	11/6/2024	63	100	$ 56,160.0
COACH::CHAPARROSA::5	CHAPARROSA ST	COXCOMB DR	EAGLE AVE	Residential	11,196.0	1.5" Thin Overlay	11/6/2024	63	100	$ 55,980.0
COACH::PINTOLN::3	PINTO LN	MCCOY PEAK AVE	RIMROCK LN	Residential	11,160.0	1.5" Thin Overlay	11/6/2024	63	100	$ 55,800.0
COACH::TRIPOLIWAY::2	TRIPOLI WAY	52ND AVE	ARABY AVE	Residential	10,800.0	1.5" Thin Overlay	11/6/2024	63	100	$ 54,000.0
COACH::ASANDOMING::3	AVENIDA SAN DOMINGO	CAMINO EL FARO	CAMINO LORETO	Residential	10,693.0	1.5" Thin Overlay	11/6/2024	63	100	$ 53,465.0
COACH::VINETALN::1	VINETA LN	CDS	GENOA ST	Residential	10,590.0	1.5" Thin Overlay	11/6/2024	63	100	$ 52,950.0
COACH::NILELN::1	NILE LN	CDS	GENOA ST	Residential	10,590.0	1.5" Thin Overlay	11/6/2024	63	100	$ 52,950.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::SYLMARLN::1	SYLMAR LN	CDS	GENOA ST	Residential	10,590.0	1.5" Thin Overlay	11/6/2024	63	100	$ 52,950.0
COACH::50THAVEW::10	50TH AVE	FREDERICK ST	MAZATLAN DR	Arterial	10,373.0	1.5" Thin Overlay	11/6/2024	63	100	$ 51,865.0
COACH::GLENDORARG::1	GLENDORA RIDGE AVE	CHIRIACO SUMMIT ST	CHAPARROSA ST	Residential	10,296.0	1.5" Thin Overlay	11/6/2024	63	100	$ 51,480.0
COACH::CBERNARDO::3	CALLE BERNARDO	CALLE LEANDRO	CDS	Residential	10,234.0	1.5" Thin Overlay	11/6/2024	63	100	$ 51,170.0
COACH::CAPITOLAAV::2	CAPITOLA AVE	MONARCH RD	LAGUNA LN	Residential	10,116.0	1.5" Thin Overlay	11/6/2024	63	100	$ 50,580.0
COACH::ANERIUM::3	AVENIDA NERIUM	CALLE TECOMARIA	CALLE ELDARICA	Residential	10,080.0	1.5" Thin Overlay	11/6/2024	63	100	$ 50,400.0
COACH::ANERIUM::4	AVENIDA NERIUM	CALLE ELDARICA	CALLE CANTARA	Residential	10,080.0	1.5" Thin Overlay	11/6/2024	63	100	$ 50,400.0
COACH::REDONDOSUR::3	REDONDO SUR	CORTE PERCEBE	REDONDO ESTE	Residential	10,027.0	1.5" Thin Overlay	11/6/2024	63	100	$ 50,135.0
COACH::SUMMERST::1	SUMMER ST	CALENDULA AVE	MAGNOLIA ST	Residential	9,694.0	1.5" Thin Overlay	11/6/2024	63	100	$ 48,470.0
COACH::BRIANNELN::5	BRIANNE LN	TERA VISTA	MEADOWS LN	Residential	9,546.0	1.5" Thin Overlay	11/6/2024	63	100	$ 47,730.0
COACH::SIERRAST::1	SIERRA ST	FIESTA RD	TERA VISTA	Residential	9,472.0	1.5" Thin Overlay	11/6/2024	63	100	$ 47,360.0
COACH::BRIANNELN::3	BRIANNE LN	MAGNOLIA ST	FIESTA RD	Residential	9,435.0	1.5" Thin Overlay	11/6/2024	63	100	$ 47,175.0
COACH::CHARLTONPK::1	CHARLTON PEAK ST	SAN MATEO AVE	MECCA HILLS AVE	Residential	9,360.0	1.5" Thin Overlay	11/6/2024	63	100	$ 46,800.0
COACH::CNINOS::2	CALLE NINOS	50' W/O CALLE BONITA	CALLE BELLA	Residential	8,460.0	1.5" Thin Overlay	11/6/2024	63	100	$ 42,300.0
COACH::ADRIANACT::1	ADRIANA CT	AVENIDA ALEENAH	CDS	Residential	8,424.0	1.5" Thin Overlay	11/6/2024	63	100	$ 42,120.0
COACH::ANERIUM::2	AVENIDA NERIUM	CALLE GLORIOSA	CALLE TECOMARIA	Residential	8,280.0	1.5" Thin Overlay	11/6/2024	63	100	$ 41,400.0
COACH::CPERA::1	CALLE PERA	HILL DR	CDS	Residential	6,688.0	1.5" Thin Overlay	11/6/2024	63	100	$ 33,440.0
COACH::ZUMADR::1	ZUMA DR	LA JOLLA AVE	51ST AVE	Residential	6,408.0	1.5" Thin Overlay	11/6/2024	63	100	$ 32,040.0
COACH::MARYCT::1	MARY CT	CHRISTINA RD	CDS	Residential	6,176.0	1.5" Thin Overlay	11/6/2024	63	100	$ 30,880.0
COACH::MAZATLANDR::1	MAZATLAN DR	SALTILLO CIR	MAZATLAN DR	Residential	5,952.0	1.5" Thin Overlay	11/6/2024	63	100	$ 29,760.0
COACH::CNINOS::3	CALLE NINOS	CALLE BELLA	140' W/O CALLE BELLA	Residential	5,148.0	1.5" Thin Overlay	11/6/2024	63	100	$ 25,740.0
COACH::SH-86S::8	SH-86	BAGDAD AVE	BAGDAD AVE	Arterial	5,120.0	1.5" Thin Overlay	11/6/2024	63	100	$ 25,600.0
COACH::JALISCOAVE::1	JALISCO AVE	SALTILLO CIR	JALISCO AVE	Residential	4,676.0	1.5" Thin Overlay	11/6/2024	63	100	$ 23,380.0
COACH::GENOAST::10	GENOA ST	CALLE LIMON	VINETA LN	Residential	4,662.0	1.5" Thin Overlay	11/6/2024	63	100	$ 23,310.0
COACH::53RDAVE::8	53RD AVE	115' W/O CESAR CHAVEZ ST	CESAR CHAVEZ ST	Collector	4,255.0	1.5" Thin Overlay	11/6/2024	63	100	$ 21,275.0
COACH::CSTELLA::1	CORTE STELLA	CALLE PIZANO	CDS	Residential	3,993.0	1.5" Thin Overlay	11/6/2024	63	100	$ 19,965.0
COACH::CFLORENA::2	CALLE FLORENA	AVENIDA ALEENAH	110' N/O AVENIDA ALEENAH	Residential	3,924.0	1.5" Thin Overlay	11/6/2024	63	100	$ 19,620.0
COACH::52NDAVEW::14	52ND AVE	CALLE TECHA	CALLE TECHA	Arterial	3,146.0	1.5" Thin Overlay	11/6/2024	63	100	$ 15,730.0
COACH::DILLONRD::5	DILLON RD	3135' S/O VISTA DEL SUR	VISTA DEL SUR	Arterial	301,056.0	Microsurfacing	11/6/2024	72	100	$ 301,056.0
COACH::HARRISONST::1	HARRISON ST	D/E	48TH AVE	Collector	113,670.0	Microsurfacing	11/6/2024	72	100	$ 113,670.0
COACH::SH-86N::14	SH-86	4TH ST	ALLEY	Arterial	78,880.0	Microsurfacing	11/6/2024	72	100	$ 78,880.0
COACH::48THAVEW::3	48TH AVE	VAN BUREN ST	CHAPARROSA ST	Arterial	77,600.0	Microsurfacing	11/6/2024	72	100	$ 77,600.0
COACH::SH-86N::13	SH-86	6TH ST	4TH ST	Arterial	73,920.0	Microsurfacing	11/6/2024	72	100	$ 73,920.0
COACH::JACKSONST::2	JACKSON ST	PUERTECITOS AVE	LOS MOCHIS AVE	Arterial	53,460.0	Microsurfacing	11/6/2024	72	100	$ 53,460.0
COACH::SH-86S::14	SH-86	52ND AVE	CALLE ROJO	Arterial	47,680.0	Microsurfacing	11/6/2024	72	100	$ 47,680.0
COACH::CALHOUNST::8	CALHOUN ST	AVENUE 49	SAN IGNACIO AVE	Collector	47,306.0	Microsurfacing	11/6/2024	72	100	$ 47,306.0
COACH::51STAVE::5	51ST AVE	FREDERICK ST	690' E/O FREDRICK ST	Collector	42,718.0	Microsurfacing	11/6/2024	72	100	$ 42,718.0
COACH::POLKST::2	POLK ST	1330' S/O INDUSTRIAL WAY	610' S/O INDUSTRIAL WAY	Collector	33,166.0	Microsurfacing	11/6/2024	72	100	$ 33,166.0
COACH::51STAVE::6	51ST AVE	400' W/O AVENIDA ADOBE	AVENIDA ADOBE	Collector	24,924.0	Microsurfacing	11/6/2024	72	100	$ 24,924.0
COACH::SH-86N::9	SH-86	CAIRO AVE	DAMASCUS AVE	Arterial	24,160.0	Microsurfacing	11/6/2024	72	100	$ 24,160.0
COACH::CESARCHAVE::2	CESAR CHAVEZ ST	CALLE VERDE	CALLE ROJO	Collector	23,976.0	Microsurfacing	11/6/2024	72	100	$ 23,976.0
COACH::FREDERICK::1	FREDERICK ST	54TH AVE	SCARLET WAY	Collector	22,752.0	Microsurfacing	11/6/2024	72	100	$ 22,752.0
COACH::51STAVE::9	51ST AVE	SUNCREST ST	SH-86	Collector	21,600.0	Microsurfacing	11/6/2024	72	100	$ 21,600.0
COACH::53RDAVE::4	53RD AVE	CALLE TECHA	CALLE AVILA	Collector	21,090.0	Microsurfacing	11/6/2024	72	100	$ 21,090.0
COACH::52NDAVEE::4	52ND AVE	FREDERICK ST	DOUMA ST	Arterial	18,278.0	Microsurfacing	11/6/2024	72	100	$ 18,278.0
COACH::AVENUES3::3	AVENUE 53	CALLE EMELIA	TYLER ST	Collector	18,012.0	Microsurfacing	11/6/2024	72	100	$ 18,012.0
COACH::53RDAVE::13	53RD AVE	ADAM LN	LEE LN	Collector	16,320.0	Microsurfacing	11/6/2024	72	100	$ 16,320.0
COACH::52NDAVEW::6	52ND AVE	SUNSET DR	CALLE LIMON	Arterial	15,075.0	Microsurfacing	11/6/2024	72	100	$ 15,075.0
COACH::51STAVE::7	51ST AVE	AVENIDA ADOBE	MECCA LANE	Collector	14,756.0	Microsurfacing	11/6/2024	72	100	$ 14,756.0
COACH::PLAYADELAM::3	PLAYA DEL AMOR ST	PUERTECITOS AVE	LOS MOCHIS AVE	Residential	29,160.0	Slurry Seal	11/6/2024	72	100	$ 14,580.0
COACH::CAVILA::4	CALLE AVILA	53RD AVE	CALLE ZAMORA	Residential	26,440.0	Slurry Seal	11/6/2024	72	100	$ 13,220.0
COACH::CMAYA::1	CAMINO MAYA	AGUA BLANCA AVE	CALLE COLIMA	Residential	26,136.0	Slurry Seal	11/6/2024	72	100	$ 13,068.0
COACH::CTECHA::6	CALLE TECHA	CALLE VERDE	CALLE ROJO	Residential	25,920.0	Slurry Seal	11/6/2024	72	100	$ 12,960.0
COACH::FIESTARD::5	FIESTA RD	SIERRA ST	BRIANNE LN	Residential	24,876.0	Slurry Seal	11/6/2024	72	100	$ 12,438.0
COACH::CBAHIAAVE::1	CAMINO BAHIA AVE	PLAYA DEL AMOR ST	CAMINO ROSARITO	Residential	24,480.0	Slurry Seal	11/6/2024	72	100	$ 12,240.0
COACH::CESARCHAVE::1	CESAR CHAVEZ ST	53RD AVE	CALLE ZAMORA	Residential	24,457.0	Slurry Seal	11/6/2024	72	100	$ 12,228.5
COACH::LAGUNALN::1	LAGUNA LN	CDS	LAGUNA LN	Residential	23,148.0	Slurry Seal	11/6/2024	72	100	$ 11,574.0
COACH::52NDAVE::25	52ND AVE	OASIS PALM AVE	DOS PALMAS AVE	Arterial	11,440.0	Microsurfacing	11/6/2024	72	100	$ 11,440.0
COACH::52NDAVE::24	52ND AVE	LAS PALMAS ST	OASIS PALM AVE	Arterial	11,396.0	Microsurfacing	11/6/2024	72	100	$ 11,396.0
COACH::CGERANIO::1	CALLE GERANIO	CALLE CLAVEL	CALLE GARDENIA	Residential	20,889.0	Slurry Seal	11/6/2024	72	100	$ 10,444.5
COACH::AGUACALIEN::2	AGUA CALIENTE ST	CAMINO LAS BRISAS	CALLE COLIMA	Residential	20,202.0	Slurry Seal	11/6/2024	72	100	$ 10,101.0
COACH::52NDAVEE::5	52ND AVE	DOUMA ST	DOUMA CT	Arterial	9,412.0	Microsurfacing	11/6/2024	72	100	$ 9,412.0
COACH::AMARIA::2	AVENIDA MARIA	CALLE DANIELLE	CALLE ANABELLA	Residential	16,401.0	Slurry Seal	11/6/2024	72	100	$ 8,200.5
COACH::SANSOLANO::1	SAN SOLANO RD	SAN ASIS DR	SAGRADO DR	Residential	16,400.0	Slurry Seal	11/6/2024	72	100	$ 8,200.0
COACH::CBOUGANVIL::3	CALLE BOUGANVILIA	EL SOL ST	CALLE GARDENIA	Residential	16,272.0	Slurry Seal	11/6/2024	72	100	$ 8,136.0
COACH::PLAZADEORO::1	PLAZA DE ORO AVE	SOL DE LINDA ST	LUNA DE NICOLETA ST	Residential	15,984.0	Slurry Seal	11/6/2024	72	100	$ 7,992.0
COACH::GUADALUPAN::1	GUADALUPANA CT	CDS	SHADY LN	Residential	15,624.0	Slurry Seal	11/6/2024	72	100	$ 7,812.0
COACH::CPIZANO::2	CALLE PIZANO	COURTE STELLA	CALLE MENDOZA	Residential	15,444.0	Slurry Seal	11/6/2024	72	100	$ 7,722.0
COACH::SOLEDADPL::1	SOLEDAD PL	SAN ASIS DR	SANTO LN	Residential	15,400.0	Slurry Seal	11/6/2024	72	100	$ 7,700.0
COACH::SCARLETWAY::2	SCARLET WAY	SAPPHIRE LN	E SIENNA CIR	Residential	15,156.0	Slurry Seal	11/6/2024	72	100	$ 7,578.0
COACH::TODOSSANTO::3	TODOS SANTOS AVE	420' W/O CAMINO CORTEZ	CAMINO CORTEZ	Residential	15,048.0	Slurry Seal	11/6/2024	72	100	$ 7,524.0
COACH::PEDRODR::2	PEDRO DR	AVENIDA DEL PARQUE	AVENIDA ADOBE	Residential	14,796.0	Slurry Seal	11/6/2024	72	100	$ 7,398.0
COACH::CECLIPSE::1	CORTE ECLIPSE	CALLE OCASO	CDS	Residential	14,134.0	Slurry Seal	11/6/2024	72	100	$ 7,067.0
COACH::SOLDELINDA::1	SOL DE LINDA ST	PLAZA DE ORO AVE	MARIANA AVE	Residential	14,000.0	Slurry Seal	11/6/2024	72	100	$ 7,000.0
COACH::CZAMORA::1	CALLE ZAMORA	CALLE EMPALME	CALLE TECHA	Residential	13,356.0	Slurry Seal	11/6/2024	72	100	$ 6,678.0
COACH::LAJOLLAAVE::2	LA JOLLA AVE	HERMOSA BLVD	ZUMA DR	Residential	11,736.0	Slurry Seal	11/6/2024	72	100	$ 5,868.0
COACH::52NDAVEW::18	52ND AVE	CALLE TORRES ORDUNO	DOUMA CT	Arterial	5,278.0	Microsurfacing	11/6/2024	72	100	$ 5,278.0
COACH::AGUABLANCA::1	AGUA BLANCA AVE	AGUA CALIENTE ST	LUNA DE NICOLETA ST	Residential	10,440.0	Slurry Seal	11/6/2024	72	100	$ 5,220.0
COACH::CCOLIMA::1	CALLE COLIMA	AGUA CALIENTE ST	LUNA DE NICOLETA ST	Residential	10,440.0	Slurry Seal	11/6/2024	72	100	$ 5,220.0
COACH::VIATEPEYAC::2	VIA TEPEYAC	TEPEYAC CT	SHADY LN	Residential	10,368.0	Slurry Seal	11/6/2024	72	100	$ 5,184.0
COACH::COCASO::2	CALLE OCASO	CORTE ECLIPSE	CORTE ESTIVO	Residential	10,360.0	Slurry Seal	11/6/2024	72	100	$ 5,180.0
COACH::CROSA::2	CALLE ROSA	CALLE BONITA	CALLE LINDA	Residential	10,332.0	Slurry Seal	11/6/2024	72	100	$ 5,166.0
COACH::CTECHA::4	CALLE TECHA	CALLE ROBERTO	CALLE VERDE	Residential	10,240.0	Slurry Seal	11/6/2024	72	100	$ 5,120.0
COACH::CHICHENITZ::1	CHICHEN ITZA RD	PUERTO ESCONDIDO AVE	IXTAPA AVE	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::AGUABLANCA::2	AGUA BLANCA AVE	LUNA DE NICOLETA ST	CAMINO MAYA	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CFLORENA::3	CALLE FLORENA	AVENIDA GRACE	AVENIDA ALEENAH	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CCOLIMA::4	CALLE COLIMA	CAMINO REAL	LA PLAYA ST	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CCOLIMA::2	CALLE COLIMA	LUNA DE NICOLETA ST	CAMINO MAYA	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CANABELLA::1	CALLE ANABELLA	AVENIDA MARIA	AVENIDA CRYSTAL	Residential	9,900.0	Slurry Seal	11/6/2024	72	100	$ 4,950.0
COACH::CCERVANTES::2	CALLE CERVANTES	CALLE LARRIVA	CALLE CHAVEZ	Residential	9,792.0	Slurry Seal	11/6/2024	72	100	$ 4,896.0
COACH::CHANNINGCT::1	CHANNING CT	AVENIDA MARIA	CDS	Residential	9,720.0	Slurry Seal	11/6/2024	72	100	$ 4,860.0
COACH::CFELIZ::1	CALLE FELIZ	CALLE LOS HERMANOS	CALLE BONITA	Residential	9,396.0	Slurry Seal	11/6/2024	72	100	$ 4,698.0
COACH::CROSA::1	CALLE ROSA	CALLE LOS HERMANOS	CALLE BONITA	Residential	9,360.0	Slurry Seal	11/6/2024	72	100	$ 4,680.0
COACH::SLATEDR::2	SLATE DR	W SIENNA CIR	SCARLET WAY	Residential	9,252.0	Slurry Seal	11/6/2024	72	100	$ 4,626.0
COACH::CIELOVICTR::1	CIELO VICTORIA ST	MARIANA AVE	48TH AVE	Residential	9,200.0	Slurry Seal	11/6/2024	72	100	$ 4,600.0
COACH::HUNTINGTON::2	HUNTINGTON AVE	MONARCH RD	HERMOSA BLVD	Residential	9,000.0	Slurry Seal	11/6/2024	72	100	$ 4,500.0
COACH::50THAVEW::6	50TH AVE	BALBOA ST	AVENIDA DE ORO	Arterial	4,356.0	Microsurfacing	11/6/2024	72	100	$ 4,356.0
COACH::CGARDENIA::2	CALLE GARDENIA	CALLE VIOLETA	CALLE BOUGANVILIA	Residential	8,448.0	Slurry Seal	11/6/2024	72	100	$ 4,224.0
COACH::CCLAVEL::1	CALLE CLAVEL	CALLE GERANIO	CALLE VIOLETA	Residential	8,448.0	Slurry Seal	11/6/2024	72	100	$ 4,224.0
COACH::JULIACT::1	JULIA CT	AVENIDA ALEENAH	CDS	Residential	8,280.0	Slurry Seal	11/6/2024	72	100	$ 4,140.0
COACH::MICHELLEDR::2	MICHELLE DR	MICHELLE DR	MICHELLE DR	Residential	8,100.0	Slurry Seal	11/6/2024	72	100	$ 4,050.0
COACH::CLINDA::1	CALLE LINDA	CDS	CALLE ROSA	Residential	7,260.0	Slurry Seal	11/6/2024	72	100	$ 3,630.0
COACH::PALMERASCR::2	PALMERAS CIR	PALOMA DR	MARIPOSA DR	Residential	7,200.0	Slurry Seal	11/6/2024	72	100	$ 3,600.0
COACH::LASLUNASAV::1	LAS LUNAS AVE	FREDERICK ST	SEDONA CT	Residential	7,164.0	Slurry Seal	11/6/2024	72	100	$ 3,582.0
COACH::WSIENNACIR::2	W SIENNA CIR	TOPAZ CT	100' W/O SLATE DR	Residential	6,804.0	Slurry Seal	11/6/2024	72	100	$ 3,402.0
COACH::MCCOYPEAK::2	MCCOY PEAK AVE	ARICA DR	CHAPARROSA ST	Residential	6,192.0	Slurry Seal	11/6/2024	72	100	$ 3,096.0
COACH::RIGOCT::1	RIGO CT	CHRISTINA RD	CDS	Residential	5,952.0	Slurry Seal	11/6/2024	72	100	$ 2,976.0
COACH::DAMASCUSAV::2	DAMASCUS AVE	CALLE TORRES ORDUNO	LIBNAN ST	Residential	5,700.0	Slurry Seal	11/6/2024	72	100	$ 2,850.0
COACH::ALEENAH::6	AVENIDA ALEENAH	CALLE FLORENA	'150 E/O CALLE FLORENA	Residential	5,328.0	Slurry Seal	11/6/2024	72	100	$ 2,664.0
COACH::TEPEYACT::1	TEPEYAC CT	VIA TEPEYAC	CDS	Residential	5,256.0	Slurry Seal	11/6/2024	72	100	$ 2,628.0
COACH::WSIENNACIR::3	W SIENNA CIR	100' W/O SLATE DR	SLATE DR	Residential	3,600.0	Slurry Seal	11/6/2024	72	100	$ 1,800.0
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	Residential	49,932.0	Slurry Seal	11/6/2024	74	100	$ 24,966.0
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	Residential	49,818.0	Slurry Seal	11/6/2024	74	100	$ 24,909.0
COACH::LASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	Residential	49,742.0	Slurry Seal	11/6/2024	74	100	$ 24,871.0
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	Residential	49,704.0	Slurry Seal	11/6/2024	74	100	$ 24,852.0
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	Residential	49,552.0	Slurry Seal	11/6/2024	74	100	$ 24,776.0
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	Residential	46,980.0	Slurry Seal	11/6/2024	74	100	$ 23,490.0
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	Arterial	16,250.0	Microsurfacing	11/6/2024	74	100	$ 16,250.0
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2024	74	100	$ 12,540.0
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.0	Microsurfacing	11/6/2024	74	100	$ 10,400.0
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.0	Slurry Seal	11/6/2024	74	100	$ 8,455.0
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.0	Slurry Seal	11/6/2024	74	100	$ 5,400.0
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2024	74	100	$ 5,238.0
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.0	Slurry Seal	11/6/2024	74	100	$ 4,860.0
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.0	Slurry Seal	11/6/2024	74	100	$ 4,590.0
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.0	Slurry Seal	11/6/2024	74	100	$ 2,700.0
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.0	Slurry Seal	11/6/2024	74	100	$ 2,556.0
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.0	Slurry Seal	11/6/2024	74	100	$ 2,520.0
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.0	Slurry Seal	11/6/2024	74	100	$ 2,340.0
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2024	74	100	$ 2,068.3
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2024	74	100	$ 2,068.3
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.0	Slurry Seal	11/6/2024	74	100	$ 540.0
COACH::SH-86N::1	SH-86	54TH AVE	53RD AVE	Arterial	212,000.0	Microsurfacing	11/6/2024	75	100	$ 212,000.0
COACH::SH-86S::3	SH-86	50TH AVE	WESTERFIELD WAY	Arterial	105,760.0	Microsurfacing	11/6/2024	75	100	$ 105,760.0
COACH::SUNSETDR::1	SUNSET DR	52ND AVE	SH-111	Arterial	94,336.0	Microsurfacing	11/6/2024	75	100	$ 94,336.0
COACH::SH-86S::6	SH-86	4TH ST	6TH ST	Arterial	73,920.0	Microsurfacing	11/6/2024	75	100	$ 73,920.0
COACH::VANBURENST::1	VAN BUREN ST	AIRPORT BLVD	55TH AVE	Collector	52,880.0	Microsurfacing	11/6/2024	75	100	$ 52,880.0
COACH::52NDAVEW::4	52ND AVE	TYLER ST	SH-111	Arterial	50,670.0	Microsurfacing	11/6/2024	75	100	$ 50,670.0
COACH::FREDERICK::13	FREDERICK ST	JALISCO AVE	50TH AVE	Collector	42,966.0	Microsurfacing	11/6/2024	75	100	$ 42,966.0
COACH::CALHOUNST::11	CALHOUN ST	EL MAR AVE	48TH AVE	Collector	40,610.0	Microsurfacing	11/6/2024	75	100	$ 40,610.0
COACH::54THAVEE::6	54TH AVE	SHADY LN	TYLER ST	Arterial	33,972.0	Microsurfacing	11/6/2024	75	100	$ 33,972.0
COACH::48THAVEE::3	48TH AVE	CALHOUN ST	CHAPARROSA ST	Arterial	28,400.0	Microsurfacing	11/6/2024	75	100	$ 28,400.0
COACH::48THAVEW::4	48TH AVE	CHAPARROSA ST	CALHOUN ST	Arterial	28,400.0	Microsurfacing	11/6/2024	75	100	$ 28,400.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::52NDAVEE::32	52ND AVE	SUNSET DR	SH-111	Arterial	27,270.0	Microsurfacing	11/6/2024	75	100	$ 27,270.0
COACH::52NDAVEW::5	52ND AVE	SH-111	SUNSET DR	Arterial	26,415.0	Microsurfacing	11/6/2024	75	100	$ 26,415.0
COACH::JULIADR::1	JULIA DR	ANDREA LN	AVENIDA ADOBE	Residential	36,756.0	Slurry Seal	11/6/2024	75	100	$ 18,378.0
COACH::NICKLECREK::1	NICKLECREEK DR	COPPERIDGE ST	CINNABAR LN	Residential	36,593.0	Slurry Seal	11/6/2024	75	100	$ 18,296.5
COACH::ELGRECOAVE::1	EL GRECO AVE	PLAYA DEL AMOR ST	TAXCO AVE	Residential	32,908.0	Slurry Seal	11/6/2024	75	100	$ 16,454.0
COACH::CSOLEDAD::1	CALLE SOLEDAD	VIA MISIONERO	VIA TEPEYAC	Residential	31,248.0	Slurry Seal	11/6/2024	75	100	$ 15,624.0
COACH::52NDAVE::21	52ND AVE	MORGAN AVE	NELSON ST	Arterial	13,800.0	Microsurfacing	11/6/2024	75	100	$ 13,800.0
COACH::CLASBRISAS::1	CAMINO LAS BRISAS	EL CASTILLO RD	AGLIA CALIENTE ST	Residential	27,576.0	Slurry Seal	11/6/2024	75	100	$ 13,788.0
COACH::SLATEDR::3	SLATE DR	SCARLET WAY	N SIENNA CIR	Residential	27,432.0	Slurry Seal	11/6/2024	75	100	$ 13,716.0
COACH::XENMOREST::1	KENMORE ST	D/E	50TH AVE	Residential	26,880.0	Slurry Seal	11/6/2024	75	100	$ 13,440.0
COACH::CORONADOST::1	CORONADO ST	D/E	50TH AVE	Residential	26,840.0	Slurry Seal	11/6/2024	75	100	$ 13,420.0
COACH::LUNADENICO::1	LUNA DE NICOLETA ST	AGUA BLANCA AVE	CALLE COLIMA	Residential	26,136.0	Slurry Seal	11/6/2024	75	100	$ 13,068.0
COACH::CCAMACHO::4	CALLE CAMACHO	CALLE VERDE	CALLE ROJO	Residential	25,920.0	Slurry Seal	11/6/2024	75	100	$ 12,960.0
COACH::CVERDE::2	CALLE VERDE	CALLE TECHA	CALLE AVILA	Collector	12,960.0	Microsurfacing	11/6/2024	75	100	$ 12,960.0
COACH::CEMPALME::3	CALLE EMPALME	CALLE VERDE	CALLE ROJO	Residential	25,920.0	Slurry Seal	11/6/2024	75	100	$ 12,960.0
COACH::52NDAVE::43	52ND AVE	5300' E/O FILLMORE ST	CITY LIMITS	Rural	13,515.0	Chip Seal	11/6/2024	75	100	$ 10,812.0
COACH::CVIOLETA::1	CALLE VIOLETA	CALLE CLAVEL	CALLE GARDENIA	Residential	20,856.0	Slurry Seal	11/6/2024	75	100	$ 10,428.0
COACH::SEDONACT::1	SEDONA CT	LAS LUNAS AVE	CDS	Residential	16,200.0	Slurry Seal	11/6/2024	75	100	$ 8,100.0
COACH::RIORANCHO::1	RIO RANCHO CT	LAS LUNAS AVE	CDS	Residential	16,200.0	Slurry Seal	11/6/2024	75	100	$ 8,100.0
COACH::SHADYLN::7	SHADY LN	DIEGO CT	GUADALUPANA CT	Residential	15,960.0	Slurry Seal	11/6/2024	75	100	$ 7,980.0
COACH::CROJO::7	CALLE ROJO	CALLE AVILA	CALLE CAMACHO	Residential	12,960.0	Slurry Seal	11/6/2024	75	100	$ 6,480.0
COACH::LAJOLLAAVE::1	LA JOLLA AVE	CDS	HERMOSA BLVD	Residential	12,780.0	Slurry Seal	11/6/2024	75	100	$ 6,390.0
COACH::ACORTEZ::4	AVENIDA CORTEZ	PASEO LAREDO	CALLE LEON	Residential	11,952.0	Slurry Seal	11/6/2024	75	100	$ 5,976.0
COACH::LASLUNASAV::4	LAS LUNAS AVE	RIO RANCHO CT	LAS CRUCES ST	Residential	11,556.0	Slurry Seal	11/6/2024	75	100	$ 5,778.0
COACH::SUNCRESTST::3	SUNCREST ST	SUNDANCE LN	SUNDOWN LN	Residential	11,440.0	Slurry Seal	11/6/2024	75	100	$ 5,720.0
COACH::LASLUNASAV::2	LAS LUNAS AVE	SEDONA CT	MESA CT	Residential	11,376.0	Slurry Seal	11/6/2024	75	100	$ 5,688.0
COACH::CROSARITO::2	CAMINO ROSARITO	CAMINO BAHIA AVE	LOS CABOS AVE	Residential	11,200.0	Slurry Seal	11/6/2024	75	100	$ 5,600.0
COACH::52NDAVE::22	52ND AVE	NELSON ST	DATE AVE	Arterial	5,500.0	Microsurfacing	11/6/2024	75	100	$ 5,500.0
COACH::SANASISDR::1	SAN ASIS DR	CDS	COLEDAD PL	Residential	10,800.0	Slurry Seal	11/6/2024	75	100	$ 5,400.0
COACH::QUEENCT::1	QUEEN CT	CDS	WASHINGTONIA AVE	Residential	10,778.0	Slurry Seal	11/6/2024	75	100	$ 5,389.0
COACH::ROYALCT::1	ROYAL CT	CDS	WASHINGTONIA AVE	Residential	10,540.0	Slurry Seal	11/6/2024	75	100	$ 5,270.0
COACH::PLAYADELAM::1	PLAYA DEL AMOR ST	CAMINO BAHIA AVE	PUERTECITOS AVE	Residential	10,440.0	Slurry Seal	11/6/2024	75	100	$ 5,220.0
COACH::SANASISDR::3	SAN ASIS DR	CALLE TOLOSA	SAN CAPISTRANO DR	Residential	10,400.0	Slurry Seal	11/6/2024	75	100	$ 5,200.0
COACH::AGUABLANCA::4	AGUA BLANCA AVE	CAMINO REAL	CHICHEN ITZA RD	Residential	10,080.0	Slurry Seal	11/6/2024	75	100	$ 5,040.0
COACH::CCOLIMA::3	CALLE COLIMA	CAMINO MAYA	CAMINO REAL	Residential	10,080.0	Slurry Seal	11/6/2024	75	100	$ 5,040.0
COACH::LACOSTAAVE::1	LA COSTA AVE	ESTRELLA PEDRO ST	LA PLAYA ST	Residential	9,520.0	Slurry Seal	11/6/2024	75	100	$ 4,760.0
COACH::MONARCHRD::2	MONARCH RD	MANHATTAN AVE	HUNTINGTON AVE	Residential	9,396.0	Slurry Seal	11/6/2024	75	100	$ 4,698.0
COACH::CHRISTINA::4	CHRISTINA RD	TOMAS LN	RIGO CT	Residential	9,108.0	Slurry Seal	11/6/2024	75	100	$ 4,554.0
COACH::ACORTEZ::3	AVENIDA CORTEZ	VIA DURANGO	PASEO LAREDO	Residential	8,604.0	Slurry Seal	11/6/2024	75	100	$ 4,302.0
COACH::CGARDENIA::1	CALLE GARDENIA	CALLE GERANIO	CALLE VIOLETA	Residential	8,481.0	Slurry Seal	11/6/2024	75	100	$ 4,240.5
COACH::HUXLEYCT::1	HUXLEY CT	MICHELLE DR	CDS	Residential	8,064.0	Slurry Seal	11/6/2024	75	100	$ 4,032.0
COACH::PLAYADELAM::4	PLAYA DEL AMOR ST	LOS MOCHIS AVE	PUEBLO BONITO AVE	Residential	6,768.0	Slurry Seal	11/6/2024	75	100	$ 3,384.0
COACH::SCARLETWAY::3	SCARLET WAY	E SIENNA CIR	FREDERICK ST	Residential	6,624.0	Slurry Seal	11/6/2024	75	100	$ 3,312.0
COACH::CROSARITO::1	CAMINO ROSARITO	D/E	CAMINO BAHIA AVE	Residential	6,440.0	Slurry Seal	11/6/2024	75	100	$ 3,220.0
COACH::CGLORIOSA::1	CALLE GLORIOSA	AVENIDA NERIUM	D/E	Residential	5,508.0	Slurry Seal	11/6/2024	75	100	$ 2,754.0
COACH::CROSA::3	CALLE ROSA	CALLE LINDA	140' W/O CALLE ESTRELLA	Residential	5,148.0	Slurry Seal	11/6/2024	75	100	$ 2,574.0
COACH::SLATEDR::4	SLATE DR	N SIENNA CIR	D/E	Residential	5,112.0	Slurry Seal	11/6/2024	75	100	$ 2,556.0
COACH::CDIEGO::4	CALLE DIEGO	150' E/O CALLE LEANDRO	CDS	Residential	3,128.0	Slurry Seal	11/6/2024	75	100	$ 1,564.0
COACH::SH-111::1	SH-111	54TH AVE	TYLER ST	Arterial	263,900.0	Microsurfacing	11/6/2024	78	100	$ 263,900.0
COACH::SH-86S::2	SH-86	PARK LN	50TH AVE	Arterial	81,920.0	Microsurfacing	11/6/2024	78	100	$ 81,920.0
COACH::48THAVEE::4	48TH AVE	CHAPARROSA ST	VAN BUREN ST	Arterial	77,600.0	Microsurfacing	11/6/2024	78	100	$ 77,600.0
COACH::50THAVE::1	50TH AVE	SH-86	PETER RABBIT LN	Arterial	67,160.0	Microsurfacing	11/6/2024	78	100	$ 67,160.0
COACH::51STAVE::8	51ST AVE	MECCA LANE	SUNCREST ST	Collector	58,140.0	Microsurfacing	11/6/2024	78	100	$ 58,140.0
COACH::48THAVEW::6	48TH AVE	CIELO VICTORIA ST	JACKSON ST	Arterial	53,400.0	Microsurfacing	11/6/2024	78	100	$ 53,400.0
COACH::SH-86N::2	SH-86	53RD AVE	CALLE ZAMORA	Arterial	52,880.0	Microsurfacing	11/6/2024	78	100	$ 52,880.0
COACH::SH-86S::17	SH-86	CALLE ZAMORA	53RD AVE	Arterial	52,880.0	Microsurfacing	11/6/2024	78	100	$ 52,880.0
COACH::SH-86S::15	SH-86	CALLE ROJO	CALLE VERDE	Arterial	51,840.0	Microsurfacing	11/6/2024	78	100	$ 51,840.0
COACH::FREDERICK::12	FREDERICK ST	660' S/O CHRISTINA RD	JALISCO AVE	Collector	44,154.0	Microsurfacing	11/6/2024	78	100	$ 44,154.0
COACH::DILLONRD::12	DILLON RD	450' S/O VISTA DEL NORTE	VISTA DEL NORTE	Arterial	43,488.0	Microsurfacing	11/6/2024	78	100	$ 43,488.0
COACH::1STST::4	1ST ST	VINE AVE	SH-111	Collector	25,878.0	Microsurfacing	11/6/2024	78	100	$ 25,878.0
COACH::50THAVE::6	50TH AVE	TYLER ST	50TH AVE	Rural	31,890.0	Chip Seal	11/6/2024	78	100	$ 25,512.0
COACH::FILLMOREST::4	FILLMORE ST	54TH AVE	CITY LIMIT	Rural	31,680.0	Chip Seal	11/6/2024	78	100	$ 25,344.0
COACH::LINDAAVE::1	LINDA AVE	ANDREA LN	AVENIDA ADOBE	Residential	36,756.0	Slurry Seal	11/6/2024	78	100	$ 18,378.0
COACH::AVENUE49::1	AVENUE 49	CALHOUN ST	GARNET RIDGE ST	Collector	17,784.0	Microsurfacing	11/6/2024	78	100	$ 17,784.0
COACH::GRAPEFRUIT::1	GRAPEFRUIT BLVD	CITY LIMITS	3310' S/O 54TH AVE	Arterial	14,905.0	Microsurfacing	11/6/2024	78	100	$ 14,905.0
COACH::CCAMACHO::3	CALLE CAMACHO	CALLE ZAMORA	CALLE VERDE	Residential	26,440.0	Slurry Seal	11/6/2024	78	100	$ 13,220.0
COACH::CTECHA::1	CALLE TECHA	53RD AVE	CALLE ZAMORA	Residential	26,440.0	Slurry Seal	11/6/2024	78	100	$ 13,220.0
COACH::CVERDE::1	CALLE VERDE	CALLE EMPALME	CALLE TECHA	Collector	12,960.0	Microsurfacing	11/6/2024	78	100	$ 12,960.0
COACH::CEMPALME::2	CALLE EMPALME	53RD AVE	CALLE ZAMORA	Residential	23,796.0	Slurry Seal	11/6/2024	78	100	$ 11,898.0
COACH::LASCRUCES::2	LAS CRUCES ST	LA LUNAS AVE	49TH AVE	Residential	23,292.0	Slurry Seal	11/6/2024	78	100	$ 11,646.0
COACH::52NDAVE::26	52ND AVE	DOS PALMAS AVE	CYPRESS ST	Arterial	11,440.0	Microsurfacing	11/6/2024	78	100	$ 11,440.0
COACH::52NDAVE::27	52ND AVE	CYPRESS ST	SHADY LN	Arterial	11,440.0	Microsurfacing	11/6/2024	78	100	$ 11,440.0
COACH::VALLEYRD::6	VALLEY RD	LAS PALMAS ST	OASIS PALM AVE	Collector	10,400.0	Microsurfacing	11/6/2024	78	100	$ 10,400.0
COACH::SHADYLN::9	SHADY LN	VIA TEPEYAC	53RD AVE	Residential	19,488.0	Slurry Seal	11/6/2024	78	100	$ 9,744.0
COACH::SH-86N::7	SH-86	ALLEY	CAIRO AVE	Arterial	8,560.0	Microsurfacing	11/6/2024	78	100	$ 8,560.0
COACH::ELCASTILLO::2	EL CASTILLO RD	CAMINO LAS BRISAS	PUEBLO BONITO AVE	Residential	17,024.0	Slurry Seal	11/6/2024	78	100	$ 8,512.0
COACH::LAPLAYAST::4	LA PLAYA ST	EL MAR AVE	LA COSTA AVE	Residential	16,380.0	Slurry Seal	11/6/2024	78	100	$ 8,190.0
COACH::TOMASLN::2	TOMAS LN	CHRISTINA RD	PEDRO DR	Residential	16,308.0	Slurry Seal	11/6/2024	78	100	$ 8,154.0
COACH::MESACT::1	MESA CT	LAS LUNAS AVE	CDS	Residential	16,200.0	Slurry Seal	11/6/2024	78	100	$ 8,100.0
COACH::CREAL::2	CAMINO REAL	CAMINO PELICANO	CALLE COLIMA	Residential	16,056.0	Slurry Seal	11/6/2024	78	100	$ 8,028.0
COACH::CELALBA::1	CORTE EL ALBA	CDS	CALLE EL SOL	Residential	15,392.0	Slurry Seal	11/6/2024	78	100	$ 7,696.0
COACH::PEDRODR::1	PEDRO DR	TOMAS LN	AVENIDA DEL PARQUE	Residential	12,816.0	Slurry Seal	11/6/2024	78	100	$ 6,408.0
COACH::INDIGOCT::1	INDIGO CT	CDS	E SIENNA CIR	Residential	10,944.0	Slurry Seal	11/6/2024	78	100	$ 5,472.0
COACH::ELCASTILLO::1	EL CASTILLO RD	TODOS SANTOS AVE	CAMINO LAS BRISAS	Residential	10,640.0	Slurry Seal	11/6/2024	78	100	$ 5,320.0
COACH::ELARCOST::1	EL ARCO ST	LOS CABOS AVE	TODOS SANTOS AVE	Residential	10,640.0	Slurry Seal	11/6/2024	78	100	$ 5,320.0
COACH::COCASO::1	CALLE OCASO	AVENIDA VERANO	CORTE ECLIPSE	Residential	10,360.0	Slurry Seal	11/6/2024	78	100	$ 5,180.0
COACH::CPUERTADEL::1	CALLE PUERTA DEL SOL	50TH AVE	AVENIDA VERANO	Residential	10,272.0	Slurry Seal	11/6/2024	78	100	$ 5,136.0
COACH::PUEBLOBONI::1	PUEBLO BONITO AVE	PLAYA DEL AMOR ST	EL ACRO ST	Residential	10,080.0	Slurry Seal	11/6/2024	78	100	$ 5,040.0
COACH::KINGCT::1	KING CT	CDS	WASHINGTONIA AVE	Residential	10,016.0	Slurry Seal	11/6/2024	78	100	$ 5,008.0
COACH::MONARCHRD::1	MONARCH RD	CAPITOLA AVE	MANHATTAN AVE	Residential	9,396.0	Slurry Seal	11/6/2024	78	100	$ 4,698.0
COACH::HERMOSABL::1	HERMOSA BLVD	HUNTINGTON AVE	LA JOLLA AVE	Residential	9,216.0	Slurry Seal	11/6/2024	78	100	$ 4,608.0
COACH::LOSMOCHIS::1	LOS MOCHIS AVE	JACKSON ST	PLAYA DEL AMOR ST	Residential	8,624.0	Slurry Seal	11/6/2024	78	100	$ 4,312.0
COACH::CCLAVEL::2	CALLE CLAVEL	CALLE VIOLETA	CALLE BOUGANVILIA	Residential	8,415.0	Slurry Seal	11/6/2024	78	100	$ 4,207.5
COACH::VENICELN::1	VENICE LN	HUNTINGTON AVE	CDS	Residential	8,352.0	Slurry Seal	11/6/2024	78	100	$ 4,176.0
COACH::SHADYLN::5	SHADY LN	D/E	VIA MISIONERO	Residential	7,224.0	Slurry Seal	11/6/2024	78	100	$ 3,612.0
COACH::MICHELLEDR::4	MICHELLE DR	AVENIDA ALEENAH	AVENIDA NICOLE	Residential	5,940.0	Slurry Seal	11/6/2024	78	100	$ 2,970.0
COACH::LUNADENICO::2	LUNA DE NICOLETA ST	CALLE COLIMA	140' N/O CALLE COLIMA	Residential	5,076.0	Slurry Seal	11/6/2024	78	100	$ 2,538.0
COACH::52NDAVE::17	52ND AVE	TIJSSELING CT	JENNIFER WAY	Arterial	1,716.0	Microsurfacing	11/6/2024	78	100	$ 1,716.0
COACH::LAPLAYAST::3	LA PLAYA ST	50' S/O EL MAR AVE	EL MAR AVE	Residential	1,260.0	Slurry Seal	11/6/2024	78	100	$ 630.0
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	Residential	49,856.0	Slurry Seal	11/6/2024	80	100	$ 24,928.0
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.0	Slurry Seal	11/6/2024	80	100	$ 11,898.0
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.0	Slurry Seal	11/6/2024	80	100	$ 9,036.0
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.0	Slurry Seal	11/6/2024	80	100	$ 6,720.0
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2024	80	100	$ 5,238.0
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2024	80	100	$ 5,238.0
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2024	80	100	$ 4,680.0
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.0	Slurry Seal	11/6/2024	80	100	$ 3,888.0
COACH::TRIPOLWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.0	Slurry Seal	11/6/2024	80	100	$ 3,582.0
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.0	Slurry Seal	11/6/2024	80	100	$ 3,222.0
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.0	Slurry Seal	11/6/2024	80	100	$ 2,524.5
COACH::TRIPOLWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.0	Slurry Seal	11/6/2024	80	100	$ 2,160.0
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.0	Slurry Seal	11/6/2024	80	100	$ 1,440.0
COACH::GRAPEFRUIT::3	GRAPEFRUIT BLVD	1660' S/O 54TH AVE	54TH AVE	Arterial	91,135.0	Microsurfacing	11/6/2024	81	100	$ 91,135.0
COACH::SH-111::2	SH-111	TYLER ST	52ND AVE	Arterial	65,050.0	Microsurfacing	11/6/2024	81	100	$ 65,050.0
COACH::FREDERICK::9	FREDERICK ST	51ST AVE	AVENIDA HALAWAY	Collector	53,064.0	Microsurfacing	11/6/2024	81	100	$ 53,064.0
COACH::SH-86S::16	SH-86	CALLE VERDE	CALLE ZAMORA	Arterial	52,720.0	Microsurfacing	11/6/2024	81	100	$ 52,720.0
COACH::SH-86N::3	SH-86	CALLE ZAMORA	CALLE VERDE	Arterial	52,720.0	Microsurfacing	11/6/2024	81	100	$ 52,720.0
COACH::52NDAVEE::33	52ND AVE	SH-111	TYLER ST	Arterial	49,770.0	Microsurfacing	11/6/2024	81	100	$ 49,770.0
COACH::CALHOUNST::9	CALHOUN ST	SAN IGNACIO AVE	EAGLE AVE	Collector	48,794.0	Microsurfacing	11/6/2024	81	100	$ 48,794.0
COACH::AIRPORTBL::3	AIRPORT BLVD	2640' W/O FILLMORE ST	1830' W/O FILLMORE ST	Collector	40,450.0	Microsurfacing	11/6/2024	81	100	$ 40,450.0
COACH::FREDERICK::11	FREDERICK ST	BAJA WAY	520' N/O BAJA WAY	Collector	34,056.0	Microsurfacing	11/6/2024	81	100	$ 34,056.0
COACH::SH-86N::10	SH-86	DAMASCUS AVE	BAGDAD AVE	Arterial	26,720.0	Microsurfacing	11/6/2024	81	100	$ 26,720.0
COACH::SH-86S::9	SH-86	BAGDAD AVE	DAMASCUS AVE	Arterial	26,720.0	Microsurfacing	11/6/2024	81	100	$ 26,720.0
COACH::1STST::3	1ST ST	ORCHARD AVE	VINE AVE	Collector	24,225.0	Microsurfacing	11/6/2024	81	100	$ 24,225.0
COACH::52NDAVEW::8	52ND AVE	GENOA ST	SHADY LN	Arterial	23,625.0	Microsurfacing	11/6/2024	81	100	$ 23,625.0
COACH::AIRPORTBL::9	AIRPORT BLVD	FILLMORE ST	CITY LIMITS	Collector	18,760.0	Microsurfacing	11/6/2024	81	100	$ 18,760.0
COACH::DILLONRD::10	DILLON RD	800' S/O VISTA DEL NORTE	650' S/O VISTA DEL NORTE	Arterial	14,208.0	Microsurfacing	11/6/2024	81	100	$ 14,208.0
COACH::CCAMACHO::2	CALLE CAMACHO	53RD AVE	CALLE ZAMORA	Residential	26,440.0	Slurry Seal	11/6/2024	81	100	$ 13,220.0
COACH::CCAMACHO::1	CALLE CAMACHO	D/E	53RD AVE	Residential	26,400.0	Slurry Seal	11/6/2024	81	100	$ 13,200.0
COACH::CDIEGO::2	CALLE DIEGO	VIA SANTIAGO	CALLE LEANDRO	Residential	23,664.0	Slurry Seal	11/6/2024	81	100	$ 11,832.0
COACH::AIRPORTBL::5	AIRPORT BLVD	1395' W/O FILLMORE ST	1215' W/O FILLMORE ST	Collector	8,900.0	Microsurfacing	11/6/2024	81	100	$ 8,900.0
COACH::MAZATLANDR::8	MAZATLAN DR	MAZATLAN DR PARKING LOOP	MAZATLAN DR PARKING LOOP	Residential	17,280.0	Slurry Seal	11/6/2024	81	100	$ 8,640.0
COACH::PEREZST::3	PEREZ ST	ORTIZ ST	HERNANDEZ ST	Residential	17,240.0	Slurry Seal	11/6/2024	81	100	$ 8,620.0
COACH::DIEGOCT::1	DIEGO CT	CDS	SHADY LN	Residential	15,624.0	Slurry Seal	11/6/2024	81	100	$ 7,812.0
COACH::SHADYLN::8	SHADY LN	GUADALUPANA CT	VIA TEPEYAC	Residential	15,456.0	Slurry Seal	11/6/2024	81	100	$ 7,728.0
COACH::AMETHYSTCT::1	AMETHYST CT	CDS	SCARLET WAY	Residential	14,760.0	Slurry Seal	11/6/2024	81	100	$ 7,380.0
COACH::HUNTINGTON::1	HUNTINGTON AVE	VENICE LN	MONARCH RD	Residential	14,400.0	Slurry Seal	11/6/2024	81	100	$ 7,200.0
COACH::CAVILA::2	CALLE AVILA	CALLE NOGAL	CALLE PINO	Residential	13,960.0	Slurry Seal	11/6/2024	81	100	$ 6,980.0
COACH::52NDAVE::23	52ND AVE	DATE AVE	LAS PALMAS ST	Arterial	6,952.0	Microsurfacing	11/6/2024	81	100	$ 6,952.0
COACH::CROJO::8	CALLE ROJO	CALLE CAMACHO	CESAR CHAVEZ ST	Residential	12,320.0	Slurry Seal	11/6/2024	81	100	$ 6,160.0
COACH::LAPONDEROS::1	LA PONDEROSA DR	52ND AVE	NAOMI CT	Residential	12,204.0	Slurry Seal	11/6/2024	81	100	$ 6,102.0
COACH::PUEBLOBONI::3	PUEBLO BONITO AVE	EL CASTILLO RD	TAXCO AVE	Residential	11,016.0	Slurry Seal	11/6/2024	81	100	$ 5,508.0
COACH::ESIENNACIR::1	E SIENNA CIR	SCARLET WAY	INDIGO CT	Residential	10,476.0	Slurry Seal	11/6/2024	81	100	$ 5,238.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::SH-86N::11	SH-86	BAGDAD AVE	BAGDAD AVE	Arterial	5,120.0	Microsurfacing	11/6/2024	81	100	$ 5,120.0
COACH::CHRISTINA::3	CHRISTINA RD	ANDREA LN	TOMAS LN	Residential	9,144.0	Slurry Seal	11/6/2024	81	100	$ 4,572.0
COACH::PUERTECITO::1	PUERTECITOS AVE	JACKSON ST	PLAYA DEL AMOR ST	Residential	8,756.0	Slurry Seal	11/6/2024	81	100	$ 4,378.0
COACH::CAVILA::3	CALLE AVILA	CALLE PINO	53RD AVE	Residential	7,400.0	Slurry Seal	11/6/2024	81	100	$ 3,700.0
COACH::SLATEDR::1	SLATE DR	54TH AVE	W SIENNA CIR	Residential	7,272.0	Slurry Seal	11/6/2024	81	100	$ 3,636.0
COACH::GRAPEFRUIT::2	GRAPEFRUIT BLVD	3310' S/O 54TH AVE	1660' S/O 54TH AVE	Arterial	90,530.0	Microsurfacing	11/6/2024	84	100	$ 90,530.0
COACH::SH-86N::4	SH-86	CALLE VERDE	CALLE ROJO	Arterial	51,840.0	Microsurfacing	11/6/2024	84	100	$ 51,840.0
COACH::SH-111::14	SH-111	50TH AVE	PARK LN	Arterial	51,250.0	Microsurfacing	11/6/2024	84	100	$ 51,250.0
COACH::51STAVE::4	51ST AVE	CHIAPAS DR	FREDERICK ST	Collector	49,968.0	Microsurfacing	11/6/2024	84	100	$ 49,968.0
COACH::ADEORO::2	AVENIDA DEL ORO	AVENIDA DEL PARQUE	GUITRON ST	Collector	29,970.0	Microsurfacing	11/6/2024	84	100	$ 29,970.0
COACH::SH-86N::12	SH-86	BAGDAD AVE	6TH ST	Arterial	27,760.0	Microsurfacing	11/6/2024	84	100	$ 27,760.0
COACH::SH-86S::7	SH-86	6TH ST	BAGDAD AVE	Arterial	27,760.0	Microsurfacing	11/6/2024	84	100	$ 27,760.0
COACH::ADEORO::1	AVENIDA DE ORO	50TH AVE	AVENIDA DEL PARQUE	Collector	25,715.0	Microsurfacing	11/6/2024	84	100	$ 25,715.0
COACH::SH-86S::10	SH-86	DAMASCUS AVE	CAIRO AVE	Arterial	24,160.0	Microsurfacing	11/6/2024	84	100	$ 24,160.0
COACH::9THST::2	9TH ST	ORCHARD AVE	VINE AVE	Collector	23,744.0	Microsurfacing	11/6/2024	84	100	$ 23,744.0
COACH::50THAVEW::16	50TH AVE	HORNBLEND ST	CALHOUN ST	Arterial	23,392.0	Microsurfacing	11/6/2024	84	100	$ 23,392.0
COACH::DILLONRD::7	DILLON RD	VISTA DEL SUR	1070' S/O VISTA DEL NORTE	Arterial	22,272.0	Microsurfacing	11/6/2024	84	100	$ 22,272.0
COACH::50THAVEE::18	50TH AVE	KENMORE ST	SH-86	Arterial	22,209.0	Microsurfacing	11/6/2024	84	100	$ 22,209.0
COACH::53RDAVE::3	53RD AVE	CALLE EMPALME	CALLE TECHA	Collector	21,147.0	Microsurfacing	11/6/2024	84	100	$ 21,147.0
COACH::ADELPARQUE::3	AVENIDA DEL PARQUE	COURTE DEL PARQUE	AVENIDA DE ORO	Residential	18,880.0	Slurry Seal	11/6/2024	84	100	$ 9,440.0
COACH::ORTIZST::1	ORTIZ ST	PEREZ ST	HERNANDEZ ST	Residential	17,680.0	Slurry Seal	11/6/2024	84	100	$ 8,840.0
COACH::CNOGAL::1	CALLE NOGAL	CALLE OLIVO	CALLE AVILA	Residential	16,740.0	Slurry Seal	11/6/2024	84	100	$ 8,370.0
COACH::CPINO::1	CALLE PINO	CALLE OLIVO	CALLE AVILA	Residential	16,740.0	Slurry Seal	11/6/2024	84	100	$ 8,370.0
COACH::SHADYLN::6	SHADY LN	VIA MISIONERO	DIEGO CT	Residential	15,456.0	Slurry Seal	11/6/2024	84	100	$ 7,728.0
COACH::CLEON::1	CALLE LEON	CALLE DE VEGA	AVENIDA CORTEZ	Residential	15,280.0	Slurry Seal	11/6/2024	84	100	$ 7,640.0
COACH::ANDREALN::4	ANDREA LN	'45' N/O CHRISTINA RD	CDS	Residential	13,949.0	Slurry Seal	11/6/2024	84	100	$ 6,974.5
COACH::CCINDARELA::1	CORTE CINDARELLA	CDS	AVENIDA ADOBE	Residential	13,360.0	Slurry Seal	11/6/2024	84	100	$ 6,680.0
COACH::9THST::3	9TH ST	VINE AVE	SHADY LN	Collector	5,880.0	Microsurfacing	11/6/2024	84	100	$ 5,880.0
COACH::TAXCOAVE::1	TAXCO AVE	PUEBLO BONITO AVE	EL GRECO AVE	Residential	11,200.0	Slurry Seal	11/6/2024	84	100	$ 5,600.0
COACH::CHICHENITZ::4	CHICHEN ITZA RD	SAN IGNACIO AVE	AGUA BLANCA AVE	Residential	11,196.0	Slurry Seal	11/6/2024	84	100	$ 5,598.0
COACH::PLAYADELAM::5	PLAYA DEL AMOR ST	PUEBLO BONITO AVE	EL GRECO AVE	Residential	10,080.0	Slurry Seal	11/6/2024	84	100	$ 5,040.0
COACH::ANDREALN::1	ANDREA LN	JULIA DR	LINDA AVE	Residential	9,620.0	Slurry Seal	11/6/2024	84	100	$ 4,810.0
COACH::FREDERICK::20	FREDERICK ST	140' S/O LAS LUNAS AVE	LAS LUNAS AVE	Residential	9,372.0	Slurry Seal	11/6/2024	84	100	$ 4,686.0
COACH::SANIGNACIO::1	SAN IGNACIO AVE	CHICHEN ITZA RD	CALHOUN ST	Residential	8,536.0	Slurry Seal	11/6/2024	84	100	$ 4,268.0
COACH::VERACRUZ::1	VERA CRUZ	CDS	PAVON PALMA	Residential	8,320.0	Slurry Seal	11/6/2024	84	100	$ 4,160.0
COACH::SH-86S::11	SH-86	CAIRO AVE	CAIRO AVE	Arterial	2,560.0	Microsurfacing	11/6/2024	84	100	$ 2,560.0
COACH::CAVILA::1	CALLE AVILA	D/E	CALLE NOGAL	Residential	5,040.0	Slurry Seal	11/6/2024	84	100	$ 2,520.0
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	Arterial	36,300.0	Microsurfacing	11/6/2024	85	100	$ 36,300.0
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.0	Slurry Seal	11/6/2024	85	100	$ 24,947.0
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.0	Microsurfacing	11/6/2024	85	100	$ 18,750.0
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.0	Slurry Seal	11/6/2024	85	100	$ 16,650.0
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.0	Microsurfacing	11/6/2024	85	100	$ 16,250.0
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.0	Microsurfacing	11/6/2024	85	100	$ 16,250.0
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.0	Slurry Seal	11/6/2024	85	100	$ 14,094.0
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.0	Slurry Seal	11/6/2024	85	100	$ 12,580.0
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.0	Slurry Seal	11/6/2024	85	100	$ 9,000.0
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2024	85	100	$ 8,442.0
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2024	85	100	$ 8,250.0
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.0	Slurry Seal	11/6/2024	85	100	$ 5,328.0
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2024	85	100	$ 5,238.0
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.0	Slurry Seal	11/6/2024	85	100	$ 4,560.0
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2024	85	100	$ 4,320.0
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2024	85	100	$ 4,320.0
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.0	Slurry Seal	11/6/2024	85	100	$ 3,648.0
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.0	Slurry Seal	11/6/2024	85	100	$ 3,344.0
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.0	Slurry Seal	11/6/2024	85	100	$ 3,258.0
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.0	Slurry Seal	11/6/2024	85	100	$ 3,256.0
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.0	Slurry Seal	11/6/2024	85	100	$ 3,240.0
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.0	Slurry Seal	11/6/2024	85	100	$ 3,222.0
COACH::TYLERST::17	TYLER ST	50TH AVE	4540' N/O 50TH AVE	Rural	136,050.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 2,721,000.0
COACH::VISTADELNO::3	VISTA DEL NORTE	DILLON RD	1630' E/O DILLON RD	Collector	64,960.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 1,299,200.0
COACH::VANBURENST::7	VAN BUREN ST	MANHATTAN AVE	51ST AVE	Collector	49,968.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 999,360.0
COACH::VANBURENST::15	VAN BUREN ST	ED MITCHELL DR	48TH AVE	Collector	48,965.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 979,300.0
COACH::VANBURENST::14	VAN BUREN ST	49TH AVE	ED MITCHELL DR	Collector	45,430.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 908,600.0
COACH::ADEPLATA::1	AVENIDA DE PLATA	50TH AVE	VIA CONCHILLA	Residential	22,120.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 442,400.0
COACH::FILLMOREST::2	FILLMORE ST	55TH AVE	900' N/O 55TH AVE	Rural	21,600.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 432,000.0
COACH::VINEAVE::5	VINE AVE	5TH ST	4TH ST	Collector	16,900.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 338,000.0
COACH::TYLERST::6	TYLER ST	410' S/O CARDINAL DR	CARDINAL DR	Collector	16,400.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 328,000.0
COACH::GENOAST::4	GENOA ST	380' S/O AVENIDA VERONICA	AVENIDA VERONICA	Residential	14,134.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 282,680.0
COACH::CQUINTERRA::3	CALLE QUINTERRA	CORTE SANTOS	CORTE LORETO	Residential	13,690.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 273,800.0
COACH::COPPERIDGE::2	COPPERIDGE ST	NICKLECREEK DR	SHADOWROCK DR	Residential	10,360.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 207,200.0
COACH::CALENDULA::6	CALENDULA AVE	NARCISO LN	HIBISCO ST	Residential	9,768.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 195,360.0
COACH::CAPITOLAAV::4	CAPITOLA AVE	VENENTA BLVD	NEWPORT ST	Residential	9,072.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 181,440.0
COACH::AADOBE::10	AVENIDA ADOBE	215' S/O CHRISTINA RD	CHRISTINA RD	Residential	7,704.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 154,080.0
COACH::GUITRONST::1	GUITRON ST	FREDERICK ST	REYES ST	Residential	6,154.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 123,080.0
COACH::53RDAVE::5	53RD AVE	CALLE AVILA	130' E/O CALLE AVILA	Collector	4,995.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 99,900.0
COACH::50THAVEW::5	50TH AVE	AVENIDA DE PLATA	BALBOA ST	Arterial	4,356.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 87,120.0
COACH::CROJO::9	CALLE ROJO	CESAR CHAVEZ ST	SH-86	Residential	4,280.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 85,600.0
COACH::CROJO::2	CALLE ROJO	170 W/O CALLE EMPALME	260' W/O CALLE EMPALME	Residential	3,520.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	$ 70,400.0
COACH::BRENDALN::1	BRENDA LN	CDS	SHADY LN	Residential	24,092.0	3" Mill & Overlay	11/6/2025	44	100	$ 216,828.0
COACH::VALLEYRD::3	VALLEY RD	TRIPOLI WAY	MORGAN AVE	Collector	10,720.0	3" Mill & Overlay	11/6/2025	44	100	$ 96,480.0
COACH::VIAMERIDA::1	VIA MERIDA	VAN BUREN ST	PASEO BARCELONA	Residential	7,272.0	3" Mill & Overlay	11/6/2025	44	100	$ 65,448.0
COACH::INDUSTRIAL::1	INDUSTRIAL WAY	TYLER ST	ENTERPRISE WAY	Collector	161,145.0	3" Mill & Overlay	11/6/2025	45	100	$ 1,450,305.0
COACH::50THAVE::7	50TH AVE	50TH AVE	POLK ST	Rural	132,780.0	3" Mill & Overlay	11/6/2025	45	100	$ 1,195,020.0
COACH::PUERTOESCO::1	PUERTO ESCONDIDO AVE	CAMINO CORTEZ	CHICHEN ITZA RD	Residential	39,420.0	3" Mill & Overlay	11/6/2025	45	100	$ 354,780.0
COACH::FREDERICK::2	FREDERICK ST	SCARLET WAY	BELLISSIMA AVE	Collector	38,844.0	3" Mill & Overlay	11/6/2025	45	100	$ 349,596.0
COACH::PHOENIXAVE::1	PHOENIX AVE	WASHINGTONIA AVE	LIVISTONA CT	Residential	34,092.0	3" Mill & Overlay	11/6/2025	45	100	$ 306,828.0
COACH::ROMEROST::1	ROMERO ST	REYES ST	NIETO ST	Residential	33,898.0	3" Mill & Overlay	11/6/2025	45	100	$ 305,082.0
COACH::CTECHA::8	CALLE TECHA	52ND AVE	CAIRO AVE	Residential	27,120.0	3" Mill & Overlay	11/6/2025	45	100	$ 244,080.0
COACH::8THST::3	8TH ST	VINE AVE	SH-111	Collector	25,424.0	3" Mill & Overlay	11/6/2025	45	100	$ 228,816.0
COACH::2NDST::2	2ND ST	PALM AVE	ORCHARD AVE	Collector	23,856.0	3" Mill & Overlay	11/6/2025	45	100	$ 214,704.0
COACH::4THST::2	4TH ST	PALM AVE	ORCHARD AVE	Collector	23,800.0	3" Mill & Overlay	11/6/2025	45	100	$ 214,200.0
COACH::8THST::2	8TH ST	ORCHARD AVE	VINE AVE	Collector	23,744.0	3" Mill & Overlay	11/6/2025	45	100	$ 213,696.0
COACH::ORCHARDAVE::3	ORCHARD AVE	9TH ST	8TH ST	Collector	22,500.0	3" Mill & Overlay	11/6/2025	45	100	$ 202,500.0
COACH::54THAVEW::1	54TH AVE	POLK ST	CITY LIMITS	Arterial	22,140.0	3" Mill & Overlay	11/6/2025	45	100	$ 199,260.0
COACH::3RDST::1	3RD ST	D/E	PALM AVE	Collector	21,672.0	3" Mill & Overlay	11/6/2025	45	100	$ 195,048.0
COACH::54THAVEW::6	54TH AVE	SHADY LN	CALLE BALDERAS	Arterial	20,985.0	3" Mill & Overlay	11/6/2025	45	100	$ 188,865.0
COACH::PALMAVE::3	PALM AVE	5TH ST	4TH ST	Collector	19,500.0	3" Mill & Overlay	11/6/2025	45	100	$ 175,500.0
COACH::ORCHARDAVE::5	ORCHARD AVE	7TH ST	6TH ST	Collector	19,500.0	3" Mill & Overlay	11/6/2025	45	100	$ 175,500.0
COACH::DILLONRD::11	DILLON RD	650' S/O VISTA DEL NORTE	450' S/O VISTA DEL NORTE	Arterial	18,624.0	3" Mill & Overlay	11/6/2025	45	100	$ 167,616.0
COACH::CBELLA::1	CALLE BELLA	CALLE NINOS	CDS	Residential	15,444.0	3" Mill & Overlay	11/6/2025	45	100	$ 138,996.0
COACH::VALLEPOSAD::1	VALLE POSADA	MOONLIT DR	FIESTA RD	Residential	14,508.0	3" Mill & Overlay	11/6/2025	45	100	$ 130,572.0
COACH::2NDST::4	2ND ST	VINE AVE	ALLEY	Collector	13,720.0	3" Mill & Overlay	11/6/2025	45	100	$ 123,480.0
COACH::SERPENTINE::1	SERPENTINE WAY	CDS	CINNABAR LN	Residential	13,024.0	3" Mill & Overlay	11/6/2025	45	100	$ 117,216.0
COACH::HUNTINGTON::3	HUNTINGTON AVE	HERMOSA BLVD	VENENTA BLVD	Residential	12,996.0	3" Mill & Overlay	11/6/2025	45	100	$ 116,964.0
COACH::AMAPOLALN::1	AMAPOLA LN	CDS	HIBISCO ST	Residential	12,728.0	3" Mill & Overlay	11/6/2025	45	100	$ 114,552.0
COACH::GENOAST::1	GENOA ST	AVENUE 53	AVENIDA RAYLYNN	Residential	12,358.0	3" Mill & Overlay	11/6/2025	45	100	$ 111,222.0
COACH::3RDST::5	3RD ST	ALLEY	SH-111	Collector	11,592.0	3" Mill & Overlay	11/6/2025	45	100	$ 104,328.0
COACH::AADOBE::3	AVENIDA ADOBE	CORTE CINDARELLA	CORTE BERNARDO	Residential	11,560.0	3" Mill & Overlay	11/6/2025	45	100	$ 104,040.0
COACH::CTORRESORD::2	CALLE TORRES ORDUNO	DOUMA CT	DAMASCUS AVE	Residential	11,424.0	3" Mill & Overlay	11/6/2025	45	100	$ 102,816.0
COACH::VIACONCHIL::1	VIA CONCHILLA	AVENIDA DE PLATA	AVENIDA DE PLATINA	Residential	10,600.0	3" Mill & Overlay	11/6/2025	45	100	$ 95,400.0
COACH::SANREYDR::3	SAN REY DR	SAN CAPISTRANO DR	SAN SOLANO RD	Residential	10,400.0	3" Mill & Overlay	11/6/2025	45	100	$ 93,600.0
COACH::CELSOL::1	CALLE EL SOL	AVENIDA VERANO	CORTE EL ALBA	Residential	10,360.0	3" Mill & Overlay	11/6/2025	45	100	$ 93,240.0
COACH::CINNABARLN::2	CINNABAR LN	NICKLECREEK DR	SHADOWROCK DR	Residential	10,360.0	3" Mill & Overlay	11/6/2025	45	100	$ 93,240.0
COACH::LAJOLLAAVE::3	LA JOLLA AVE	ZUMA DR	NEWPORT ST	Residential	10,332.0	3" Mill & Overlay	11/6/2025	45	100	$ 92,988.0
COACH::GENOAST::8	GENOA ST	52ND AVE	NILE LN	Residential	10,323.0	3" Mill & Overlay	11/6/2025	45	100	$ 92,907.0
COACH::CINNABARLN::4	CINNABAR LN	LAPIS DR	SERPENTINE WAY	Residential	10,175.0	3" Mill & Overlay	11/6/2025	45	100	$ 91,575.0
COACH::CCORTEZ::2	CAMINO CORTEZ	LOS CABOS AVE	TODOS SANTOS AVE	Residential	10,080.0	3" Mill & Overlay	11/6/2025	45	100	$ 90,720.0
COACH::VINEAVE::8	VINE AVE	ALLEY	2ND ST	Collector	9,776.0	3" Mill & Overlay	11/6/2025	45	100	$ 87,984.0
COACH::NIETOST::1	NIETO ST	GUITRON ST	ROMERO ST	Residential	9,520.0	3" Mill & Overlay	11/6/2025	45	100	$ 85,680.0
COACH::NEWPORTST::1	NEWPORT ST	MIRAMAR CT	CAPITOLA AVE	Residential	9,324.0	3" Mill & Overlay	11/6/2025	45	100	$ 83,916.0
COACH::WASHINGTON::2	WASHINGTONIA AVE	ROYAL CT	KING CT	Residential	9,144.0	3" Mill & Overlay	11/6/2025	45	100	$ 82,296.0
COACH::WASHINGTON::3	WASHINGTONIA AVE	KING CT	QUEEN CT	Residential	9,144.0	3" Mill & Overlay	11/6/2025	45	100	$ 82,296.0
COACH::52NDAVEW::10	52ND AVE	CESAR CHAVEZ ST	CALLE CAMACHO	Arterial	8,138.0	3" Mill & Overlay	11/6/2025	45	100	$ 73,242.0
COACH::CHIAPASDR::6	CHIAPAS DR	220' S/O SALTILLO CT	315' E/O BAJA WAY	Residential	8,064.0	3" Mill & Overlay	11/6/2025	45	100	$ 72,576.0
COACH::FIESTARD::2	FIESTA RD	VALLE POSADA	VAN BUREN ST	Residential	7,704.0	3" Mill & Overlay	11/6/2025	45	100	$ 69,336.0
COACH::MOONLITDR::2	MOONLIT DR	VALLE POSADA	VAN BUREN ST	Residential	7,560.0	3" Mill & Overlay	11/6/2025	45	100	$ 68,040.0
COACH::MERCADOCIR::1	MERCADO CIR	MALVASIA WAY	CDS	Residential	6,944.0	3" Mill & Overlay	11/6/2025	45	100	$ 62,496.0
COACH::PHOENIXAVE::5	PHOENIX AVE	HIBISCO ST	FREDERICK ST	Residential	6,912.0	3" Mill & Overlay	11/6/2025	45	100	$ 62,208.0
COACH::LIVISTONA::1	LIVISTONA CT	CDS	PHOENIX AVE	Residential	6,656.0	3" Mill & Overlay	11/6/2025	45	100	$ 59,904.0
COACH::CLAPAZ::2	CALLE LA PAZ	CALLE ROSA	53RD AVE	Residential	6,444.0	3" Mill & Overlay	11/6/2025	45	100	$ 57,996.0
COACH::CAIROAVE::4	CAIRO AVE	CALLE CAMACHO	SUEZ RD	Residential	6,240.0	3" Mill & Overlay	11/6/2025	45	100	$ 56,160.0
COACH::VERMOUTHDR::1	VERMOUTH DR	D/E	PRIMITIVO DR	Residential	6,080.0	3" Mill & Overlay	11/6/2025	45	100	$ 54,720.0
COACH::HIBISCOST::1	HIBISCO ST	PHOENIX AVE	CALENDULA AVE	Residential	5,994.0	3" Mill & Overlay	11/6/2025	45	100	$ 53,946.0
COACH::PROSECCO::1	PROSECCO WAY	RODREJO WAY	ALLENDE DR	Residential	5,920.0	3" Mill & Overlay	11/6/2025	45	100	$ 53,280.0
COACH::SOLARCEST::2	SOLARCE ST	PROSECCO WAY	SOLARCE ST	Residential	5,406.0	3" Mill & Overlay	11/6/2025	45	100	$ 48,654.0
COACH::WESTERFILD::7	WESTERFIELD WAY	S KENMORE ST	SUNCREST ST	Residential	5,400.0	3" Mill & Overlay	11/6/2025	45	100	$ 48,600.0
COACH::AEUROPA::1	AVENIDA EUROPA	D/E	CALLE CARMELLO	Residential	4,932.0	3" Mill & Overlay	11/6/2025	45	100	$ 44,388.0
COACH::50THAVEE::14	50TH AVE	BALBOA ST	AVENIDA DE PLATA	Arterial	4,356.0	3" Mill & Overlay	11/6/2025	45	100	$ 39,204.0
COACH::50THAVEW::2	50TH AVE	KENMORE ST	AVENIDA DE PLATINA	Arterial	4,323.0	3" Mill & Overlay	11/6/2025	45	100	$ 38,907.0
COACH::LAJOLLAAVE::4	LA JOLLA AVE	NEWPORT ST	CDS	Residential	3,564.0	3" Mill & Overlay	11/6/2025	45	100	$ 32,076.0
COACH::CAIROAVE::9	CAIRO AVE	DATE AVE	SHADY LN	Residential	53,520.0	1.5" Thin Overlay	11/6/2025	62	100	$ 267,600.0
COACH::ARABYAVE::2	ARABY AVE	DATE AVE	SHADY LN	Residential	52,182.0	1.5" Thin Overlay	11/6/2025	62	100	$ 260,910.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::MORGANAVE::1	MORGAN AVE	VALLEY RD	52ND AVE	Residential	49,666.0	1.5" Thin Overlay	11/6/2025	62	100	$ 248,330.0
COACH::DAMASCUSAV::5	DAMASCUS AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	1.5" Thin Overlay	11/6/2025	62	100	$ 125,400.0
COACH::CAIROAVE::8	CAIRO AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	1.5" Thin Overlay	11/6/2025	62	100	$ 125,400.0
COACH::MEDINAAVE::1	MEDINA AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	1.5" Thin Overlay	11/6/2025	62	100	$ 125,400.0
COACH::SHADYLN::4	SHADY LN	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	13,440.0	1.5" Thin Overlay	11/6/2025	62	100	$ 67,200.0
COACH::VALLEYRD::4	VALLEY RD	MORGAN AVE	NELSON ST	Collector	11,040.0	1.5" Thin Overlay	11/6/2025	62	100	$ 55,200.0
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	Collector	10,400.0	1.5" Thin Overlay	11/6/2025	62	100	$ 52,000.0
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	Collector	10,400.0	1.5" Thin Overlay	11/6/2025	62	100	$ 52,000.0
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.0	1.5" Thin Overlay	11/6/2025	62	100	$ 12,780.0
COACH::POLKST::1	POLK ST	54TH AVE	1330' S/O INDUSTRIAL WAY	Collector	125,994.0	1.5" Thin Overlay	11/6/2025	63	100	$ 629,970.0
COACH::AVENUE53::1	AVENUE 53	SHADY LN	1000' E/O CALLE EMELIA	Collector	94,791.0	1.5" Thin Overlay	11/6/2025	63	100	$ 473,955.0
COACH::SH-86S::5	SH-86	ALLEY	4TH ST	Arterial	78,880.0	1.5" Thin Overlay	11/6/2025	63	100	$ 394,400.0
COACH::SH-111::3	SH-111	52ND AVE	HILL DR	Arterial	61,500.0	1.5" Thin Overlay	11/6/2025	63	100	$ 307,500.0
COACH::48THAVEE::2	48TH AVE	CIELO VICTORIA ST	CALHOUN ST	Arterial	53,080.0	1.5" Thin Overlay	11/6/2025	63	100	$ 265,400.0
COACH::CALHOUNST::5	CALHOUN ST	50TH AVE	SHADOWROCK DR	Collector	48,174.0	1.5" Thin Overlay	11/6/2025	63	100	$ 240,870.0
COACH::SH-86N::5	SH-86	CALLE ROJO	52ND AVE	Arterial	47,680.0	1.5" Thin Overlay	11/6/2025	63	100	$ 238,400.0
COACH::53RDAVE::16	53RD AVE	CALLE SOLEDAD	SHADY LN	Collector	42,840.0	1.5" Thin Overlay	11/6/2025	63	100	$ 214,200.0
COACH::CALENDULA::1	CALENDULA AVE	SUMMER ST	BRIANNE LN	Residential	36,149.0	1.5" Thin Overlay	11/6/2025	63	100	$ 180,745.0
COACH::SUNBURSTST::1	SUNBURST ST	SUNSHINE AVE	SUNRISE AVE	Residential	33,840.0	1.5" Thin Overlay	11/6/2025	63	100	$ 169,200.0
COACH::CELDARICA::1	CALLE ELDARICA	AVENIDA FLORABUNDA	AVENIDA NERIUM	Residential	30,924.0	1.5" Thin Overlay	11/6/2025	63	100	$ 154,620.0
COACH::PENDLETON::1	PENDLETON WAY	7TH ST	9TH ST	Collector	30,080.0	1.5" Thin Overlay	11/6/2025	63	100	$ 150,400.0
COACH::TODOSSANTO::4	TODOS SANTOS AVE	CAMINO CORTEZ	COZUMEL ST	Residential	29,340.0	1.5" Thin Overlay	11/6/2025	63	100	$ 146,700.0
COACH::POLKST::3	POLK ST	610' S/O INDUSTRIAL WAY	INDUSTRIAL WAY	Collector	28,290.0	1.5" Thin Overlay	11/6/2025	63	100	$ 141,450.0
COACH::6THST::6	6TH ST	VINE AVE	SH-111	Collector	25,368.0	1.5" Thin Overlay	11/6/2025	63	100	$ 126,840.0
COACH::52NDAVEE::30	52ND AVE	GENOA ST	CALLE LIMON	Arterial	24,615.0	1.5" Thin Overlay	11/6/2025	63	100	$ 123,075.0
COACH::AIRPORTBL::8	AIRPORT BLVD	860' W/O FILLMORE ST	FILLMORE ST	Collector	24,024.0	1.5" Thin Overlay	11/6/2025	63	100	$ 120,120.0
COACH::LASFLORES::1	LAS FLORES AVE	TYLER ST	EL SOL ST	Residential	23,727.0	1.5" Thin Overlay	11/6/2025	63	100	$ 118,635.0
COACH::SANSOLANO::2	SAN SOLANO RD	SAGRADO DR	SAN REY DR	Residential	23,640.0	1.5" Thin Overlay	11/6/2025	63	100	$ 118,200.0
COACH::CLOSHERMAN::1	CALLE LOS HERMANOS	CALLE FELIZ	CALLE ROSA	Residential	22,536.0	1.5" Thin Overlay	11/6/2025	63	100	$ 112,680.0
COACH::CHIRIACOSU::1	CHIRIACO SUMMIT ST	GLENDORA RIDGE AVE	BIG BEAR PL	Residential	22,248.0	1.5" Thin Overlay	11/6/2025	63	100	$ 111,240.0
COACH::ARICADR::1	ARICA DR	MCCOY PEAK AVE	QUAIL MOUNTAIN TER	Residential	22,176.0	1.5" Thin Overlay	11/6/2025	63	100	$ 110,880.0
COACH::MANHATTAN::1	MANHATTAN AVE	VAN BUREN ST	MONARCH RD	Residential	21,132.0	1.5" Thin Overlay	11/6/2025	63	100	$ 105,660.0
COACH::CMENDOZA::1	CALLE MENDOZA	TYLER ST	CORTE OLIVIA	Residential	20,955.0	1.5" Thin Overlay	11/6/2025	63	100	$ 104,775.0
COACH::BAGDADAVE::15	BAGDAD AVE	SHADY LN	GENOA ST	Collector	20,920.0	1.5" Thin Overlay	11/6/2025	63	100	$ 104,600.0
COACH::SKENMOREST::1	S KENMORE ST	WESTERFIELD WAY	CDS	Residential	20,664.0	1.5" Thin Overlay	11/6/2025	63	100	$ 103,320.0
COACH::SCORONADO::1	S CORONADO ST	WESTERFIELD WAY	CDS	Residential	20,664.0	1.5" Thin Overlay	11/6/2025	63	100	$ 103,320.0
COACH::53RDAVE::14	53RD AVE	LEE LN	CALLE LA PAZ	Collector	19,620.0	1.5" Thin Overlay	11/6/2025	63	100	$ 98,100.0
COACH::ORCHARDAVE::8	ORCHARD AVE	4TH ST	3RD ST	Collector	19,500.0	1.5" Thin Overlay	11/6/2025	63	100	$ 97,500.0
COACH::NSIENNACIR::3	N SIENNA CIR	SAPPHIRE LN	E SIENNA CIR	Residential	16,560.0	1.5" Thin Overlay	11/6/2025	63	100	$ 82,800.0
COACH::EAGLEAVE::2	EAGLE AVE	SAN GORGONIO ST	CHAPARROSA ST	Residential	16,530.0	1.5" Thin Overlay	11/6/2025	63	100	$ 82,650.0
COACH::53RDAVE::15	53RD AVE	CALLE LA PAZ	CALLE SOLEDAD	Collector	16,320.0	1.5" Thin Overlay	11/6/2025	63	100	$ 81,600.0
COACH::LAPLAYAST::1	LA PLAYA ST	CAMINO PELICANO	CALLE COLIMA	Residential	16,056.0	1.5" Thin Overlay	11/6/2025	63	100	$ 80,280.0
COACH::VIATEPEYAC::1	VIA TEPEYAC	CALLE SOLEDAD	TEPEYAC CT	Residential	15,336.0	1.5" Thin Overlay	11/6/2025	63	100	$ 76,680.0
COACH::GLENDORARG::2	GLENDORA RIDGE AVE	CHAPARROSA ST	CDS	Residential	15,300.0	1.5" Thin Overlay	11/6/2025	63	100	$ 76,500.0
COACH::RHAPIST::1	RHAPIS CT	CDS	WASHINGTONIA AVE	Residential	13,838.0	1.5" Thin Overlay	11/6/2025	63	100	$ 69,190.0
COACH::LASFLORES::2	LAS FLORES AVE	EL SOL ST	CALLE MENDOZA	Residential	13,497.0	1.5" Thin Overlay	11/6/2025	63	100	$ 67,485.0
COACH::RIMROCKLN::1	RIMROCK LN	SAN JACINTO LN	PINTO LN	Residential	13,320.0	1.5" Thin Overlay	11/6/2025	63	100	$ 66,600.0
COACH::CVERDE::3	CALLE VERDE	CALLE AVILA	CALLE CAMACHO	Collector	12,960.0	1.5" Thin Overlay	11/6/2025	63	100	$ 64,800.0
COACH::DOUMAST::2	DOUMA ST	DAMASCUS AVE	BAGDAD AVE	Residential	12,654.0	1.5" Thin Overlay	11/6/2025	63	100	$ 63,270.0
COACH::BAGDADAVE::11	BAGDAD AVE	DATE AVE	DATE AVE	Collector	12,480.0	1.5" Thin Overlay	11/6/2025	63	100	$ 62,400.0
COACH::REDONDOEST::1	REDONDO ESTE	REDONDO SUR	AVENIDA VESTAGO	Residential	12,168.0	1.5" Thin Overlay	11/6/2025	63	100	$ 60,840.0
COACH::SANJACINTO::2	SAN JACINTO LN	RIMROCK LN	PALOMAR CT	Residential	11,376.0	1.5" Thin Overlay	11/6/2025	63	100	$ 56,880.0
COACH::LASLUNASAV::3	LAS LUNAS AVE	MESA CT	RIO RANCHO CT	Residential	11,376.0	1.5" Thin Overlay	11/6/2025	63	100	$ 56,880.0
COACH::CJOYCE::1	CALLE JOYCE	AVENIDA RAYLYNN	AVENIDA GRACE	Residential	10,620.0	1.5" Thin Overlay	11/6/2025	63	100	$ 53,100.0
COACH::SANTOLN::1	SANTO LN	SOLEDAD PL	CALLE TOLOSA	Residential	10,600.0	1.5" Thin Overlay	11/6/2025	63	100	$ 53,000.0
COACH::SANASISDR::4	SAN ASIS DR	SAN CAPISTRANO DR	SAN SOLANO RD	Residential	10,400.0	1.5" Thin Overlay	11/6/2025	63	100	$ 52,000.0
COACH::CELSOL::2	CALLE EL SOL	CORTE EL ALBA	CORTE LA MORADA	Residential	10,360.0	1.5" Thin Overlay	11/6/2025	63	100	$ 51,800.0
COACH::ANICOLE::1	AVENIDA NICOLE	CALLE ALICIA	CATARINA CT	Residential	10,332.0	1.5" Thin Overlay	11/6/2025	63	100	$ 51,660.0
COACH::SANMATEOAV::2	SAN MATEO AVE	GARNET RIDGE ST	CHAPARROSA ST	Residential	10,332.0	1.5" Thin Overlay	11/6/2025	63	100	$ 51,660.0
COACH::CHIAPASDR::4	CHIAPAS DR	500' E/O TABASCO CT	BAJA WAY	Residential	10,332.0	1.5" Thin Overlay	11/6/2025	63	100	$ 51,660.0
COACH::CCARMELLO::1	CALLE CARMELLO	AVENIDA FLORABUNDA	AVENIDA EUROPA	Residential	10,296.0	1.5" Thin Overlay	11/6/2025	63	100	$ 51,480.0
COACH::GENOAST::13	GENOA ST	NAPOLI LN	BAGDAD ST	Residential	10,175.0	1.5" Thin Overlay	11/6/2025	63	100	$ 50,875.0
COACH::TODOSSANTO::1	TODOS SANTOS AVE	EL ARCO ST	EL CASTILLO RD	Residential	10,080.0	1.5" Thin Overlay	11/6/2025	63	100	$ 50,400.0
COACH::CALENDULA::2	CALENDULA AVE	BRIANNE LN	JAZMIN ST	Residential	10,027.0	1.5" Thin Overlay	11/6/2025	63	100	$ 50,135.0
COACH::PALOMARCT::1	PALOMAR CT	SAN JACINTO LN	CDS	Residential	9,972.0	1.5" Thin Overlay	11/6/2025	63	100	$ 49,860.0
COACH::CHAPARROSA::6	CHAPARROSA ST	EAGLE AVE	MCCOY PEAK AVE	Residential	9,720.0	1.5" Thin Overlay	11/6/2025	63	100	$ 48,600.0
COACH::SANGORGONI::1	SAN GORGONIO ST	EAGLE AVE	MCCOY PEAK AVE	Residential	9,720.0	1.5" Thin Overlay	11/6/2025	63	100	$ 48,600.0
COACH::CZAMORA::3	CALLE ZAMORA	CALLE AVILA	CALLE CAMACHO	Residential	9,720.0	1.5" Thin Overlay	11/6/2025	63	100	$ 48,600.0
COACH::ANDREALN::2	ANDREA LN	LINDA AVE	CHRISTINA RD	Residential	9,583.0	1.5" Thin Overlay	11/6/2025	63	100	$ 47,915.0
COACH::NSIENNACIR::2	N SIENNA CIR	SLATE DR	SAPPHIRE LN	Residential	9,576.0	1.5" Thin Overlay	11/6/2025	63	100	$ 47,880.0
COACH::REDONDONOR::1	REDONDO NORTE	REDONDO PONIENTE	CORTE MOLINO	Residential	9,540.0	1.5" Thin Overlay	11/6/2025	63	100	$ 47,700.0
COACH::BRIANNELN::4	BRIANNE LN	FIESTA RD	TERA VISTA	Residential	9,472.0	1.5" Thin Overlay	11/6/2025	63	100	$ 47,360.0
COACH::SUMMERST::3	SUMMER ST	MAGNOLIA ST	FIESTA RD	Residential	9,435.0	1.5" Thin Overlay	11/6/2025	63	100	$ 47,175.0
COACH::52NDAVEW::19	52ND AVE	DOUMA CT	DOUMA ST	Arterial	9,412.0	1.5" Thin Overlay	11/6/2025	63	100	$ 47,060.0
COACH::SIERRAST::2	SIERRA ST	TERA VISTA	MEADOWS LN	Residential	9,398.0	1.5" Thin Overlay	11/6/2025	63	100	$ 46,990.0
COACH::BIGBEARPL::1	BIG BEAR PL	CHARLTON PEAK ST	CHIRIACO SUMMIT ST	Residential	9,360.0	1.5" Thin Overlay	11/6/2025	63	100	$ 46,800.0
COACH::REDMOUNT::1	RED MOUNTAIN PL	GRANITE PASS TRL	COXCOMB DR	Residential	9,360.0	1.5" Thin Overlay	11/6/2025	63	100	$ 46,800.0
COACH::MCCOYPEAK::1	MCCOY PEAK AVE	SAN GORGONIO ST	ARICA DR	Residential	9,360.0	1.5" Thin Overlay	11/6/2025	63	100	$ 46,800.0
COACH::ACORTEZ::2	AVENIDA CORTEZ	VIA HERMOSA	VIA DURANGO	Residential	8,748.0	1.5" Thin Overlay	11/6/2025	63	100	$ 43,740.0
COACH::CSANTOS::1	CORTE SANTOS	CDS	CALLE QUINTERRA	Residential	8,748.0	1.5" Thin Overlay	11/6/2025	63	100	$ 43,740.0
COACH::CLAMIRADAW::1	CORTE LA MIRADA	VAN BUREN ST	CALLE EL SOL	Residential	8,029.0	1.5" Thin Overlay	11/6/2025	63	100	$ 40,145.0
COACH::GARNETRIDG::1	GARNET RIDGE ST	AVENUE 49	SAN MATEO AVE	Residential	7,560.0	1.5" Thin Overlay	11/6/2025	63	100	$ 37,800.0
COACH::CHIAPASDR::2	CHIAPAS DR	500' N/O 51ST AVE	TABASCO CT	Residential	7,392.0	1.5" Thin Overlay	11/6/2025	63	100	$ 36,960.0
COACH::SALTILLOCR::5	SALTILLO CIR	CHIAPAS DR	MAZATLAN DR	Residential	7,254.0	1.5" Thin Overlay	11/6/2025	63	100	$ 36,270.0
COACH::52NDAVEW::11	52ND AVE	CALLE CAMACHO	CALLE AVILA	Arterial	6,916.0	1.5" Thin Overlay	11/6/2025	63	100	$ 34,580.0
COACH::KENTIACT::1	KENTIA CT	CDS	PHOENIX AVE	Residential	6,656.0	1.5" Thin Overlay	11/6/2025	63	100	$ 33,280.0
COACH::CMOLINO::1	CORTE MOLINO	CDS	REDONDO NORTE	Residential	6,600.0	1.5" Thin Overlay	11/6/2025	63	100	$ 33,000.0
COACH::CLIMON::1	CALLE LIMON	GENOA ST	CAMINO CORTO	Residential	6,570.0	1.5" Thin Overlay	11/6/2025	63	100	$ 32,850.0
COACH::LASFLORES::3	LAS FLORES AVE	CALLE MENDOZA	CDS	Residential	6,468.0	1.5" Thin Overlay	11/6/2025	63	100	$ 32,340.0
COACH::AMARIA::3	AVENIDA MARIA	CALLE ANABELLA	CALLE ALICIA	Residential	6,270.0	1.5" Thin Overlay	11/6/2025	63	100	$ 31,350.0
COACH::CHIAPASDR::7	CHIAPAS DR	220' S/O SALTILLO CT	SALTILLO CIR	Residential	6,188.0	1.5" Thin Overlay	11/6/2025	63	100	$ 30,940.0
COACH::BELUSSIMA::1	BELUSSIMA AVE	FREDERICK ST	MODENA TER	Residential	6,160.0	1.5" Thin Overlay	11/6/2025	63	100	$ 30,800.0
COACH::MARIANAAVE::1	MARIANA AVE	SOL DE LINDA ST	CIELO VICTORIA ST	Residential	5,587.0	1.5" Thin Overlay	11/6/2025	63	100	$ 27,935.0
COACH::52NDAVEE::6	52ND AVE	DOUMA CT	CALLE TORRES ORDUNO	Arterial	5,304.0	1.5" Thin Overlay	11/6/2025	63	100	$ 26,520.0
COACH::BAGDADAVE::2	BAGDAD AVE	LIBNAN ST	MECCA LANE	Residential	5,200.0	1.5" Thin Overlay	11/6/2025	63	100	$ 26,000.0
COACH::LUNADENICO::3	LUNA DE NICOLETA ST	140' S/O PLAZA DE ORO AVE	PLAZA DE ORO AVE	Residential	5,040.0	1.5" Thin Overlay	11/6/2025	63	100	$ 25,200.0
COACH::SALTILLOCR::1	SALTILLO CIR	CHIAPAS DR	JALISCO AVE	Residential	4,992.0	1.5" Thin Overlay	11/6/2025	63	100	$ 24,960.0
COACH::ARAZON::4	AVENIDA RAZON	AVENIDA HALAWAY	VIA ZAHIDI	Residential	4,810.0	1.5" Thin Overlay	11/6/2025	63	100	$ 24,050.0
COACH::CZAMORA::5	CALLE ZAMORA	CESAR CHAVEZ ST	SH-86	Residential	3,852.0	1.5" Thin Overlay	11/6/2025	63	100	$ 19,260.0
COACH::PARKLN::3	PARK LN	130' W/O SH-111	SH-111	Arterial	3,810.0	1.5" Thin Overlay	11/6/2025	63	100	$ 19,050.0
COACH::CVERDE::5	CALLE VERDE	CESAR CHAVEZ ST	SH-86	Collector	3,400.0	1.5" Thin Overlay	11/6/2025	63	100	$ 17,000.0
COACH::VIASANTIAGO::1	VIA SANTIAGO	CDS	CALLE DIEGO	Residential	2,556.0	1.5" Thin Overlay	11/6/2025	63	100	$ 12,780.0
COACH::52NDAVEE::12	52ND AVE	CALLE AVILA	CALLE AVILA	Arterial	1,508.0	1.5" Thin Overlay	11/6/2025	63	100	$ 7,540.0
COACH::CALHOUNST::7	CALHOUN ST	LAS PLUMAS CT	AVENUE 49	Collector	104,470.0	Microsurfacing	11/6/2025	84	100	$ 104,470.0
COACH::52NDAVE::41	52ND AVE	2200' W/O FILLMORE ST	FILLMORE ST	Rural	65,400.0	Chip Seal	11/6/2025	84	100	$ 52,320.0
COACH::SH-86N::15	SH-86	ALLEY	WESTERFIELD WAY	Arterial	26,880.0	Microsurfacing	11/6/2025	84	100	$ 26,880.0
COACH::52NDAVEE::29	52ND AVE	SHADY LN	GENOA ST	Arterial	23,625.0	Microsurfacing	11/6/2025	84	100	$ 23,625.0
COACH::AIRPORTBL::4	AIRPORT BLVD	1830' W/O FILLMORE ST	1395' W/O FILLMORE ST	Collector	21,750.0	Microsurfacing	11/6/2025	84	100	$ 21,750.0
COACH::54THAVEE::5	54TH AVE	CALLE BALDERAS	SHADY LN	Arterial	20,985.0	Microsurfacing	11/6/2025	84	100	$ 20,985.0
COACH::54THAVEE::4	54TH AVE	SH-86	CALLE BALDERAS	Arterial	16,605.0	Microsurfacing	11/6/2025	84	100	$ 16,605.0
COACH::AIRPORTBL::7	AIRPORT BLVD	1085' W/O FILLMORE ST	860' W/O FILLMORE ST	Collector	11,300.0	Microsurfacing	11/6/2025	84	100	$ 11,300.0
COACH::CEMPALME::1	CALLE EMPALME	BELUSSIMA AVE	53RD AVE	Residential	18,720.0	Slurry Seal	11/6/2025	84	100	$ 9,360.0
COACH::PASEOLAREDO::2	PASEO LAREDO	CALLE DE VEGA	AVENIDA CORTEZ	Residential	15,280.0	Slurry Seal	11/6/2025	84	100	$ 7,640.0
COACH::CCARRASCO::2	CALLE CARRASCO	CALLE CHAVEZ	CALLE YSIANO	Residential	9,576.0	Slurry Seal	11/6/2025	84	100	$ 4,788.0
COACH::HORNBLEND::1	HORNBLEND ST	50TH AVE	JADEROCK RD	Residential	8,436.0	Slurry Seal	11/6/2025	84	100	$ 4,218.0
COACH::CHRISTINA::1	CHRISTINA RD	FREDERICK ST	ANDREA LN	Residential	6,480.0	Slurry Seal	11/6/2025	84	100	$ 3,240.0
COACH::LAPONDEROS::3	LA PONDEROSA DR	HERNANDEZ ST	CDS	Residential	4,140.0	Slurry Seal	11/6/2025	84	100	$ 2,070.0
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.0	Microsurfacing	11/6/2025	85	100	$ 18,900.0
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.0	Microsurfacing	11/6/2025	85	100	$ 18,750.0
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.0	Slurry Seal	11/6/2025	85	100	$ 17,613.0
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.0	Slurry Seal	11/6/2025	85	100	$ 17,537.0
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.0	Slurry Seal	11/6/2025	85	100	$ 17,075.5
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.0	Slurry Seal	11/6/2025	85	100	$ 14,436.0
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.0	Slurry Seal	11/6/2025	85	100	$ 9,996.0
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2025	85	100	$ 8,442.0
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.0	Slurry Seal	11/6/2025	85	100	$ 5,577.0
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2025	85	100	$ 4,680.0
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.0	Slurry Seal	11/6/2025	85	100	$ 4,458.5
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2025	85	100	$ 4,320.0
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.0	Slurry Seal	11/6/2025	85	100	$ 4,320.0
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2025	85	100	$ 4,320.0
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.0	Slurry Seal	11/6/2025	85	100	$ 3,888.0
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.0	Slurry Seal	11/6/2025	85	100	$ 3,204.0
COACH::4THST::1	4TH ST	SH-86	PALM AVE	Collector	54,432.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	30	100	$ 1,088,640.0
COACH::SH-86S::1	SH-86	SH-111	PARK LN	Arterial	43,600.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	30	100	$ 872,000.0
COACH::PALMERASCR::9	PALMERAS CIR	MARIPOSA DR	CHUPAROSA DR	Residential	7,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	30	100	$ 144,000.0
COACH::FILLMOREST::1	FILLMORE ST	AIRPORT BLVD	5STH AVE	Rural	63,840.0	3" Mill & Overlay	11/6/2026	45	100	$ 574,560.0
COACH::51STAVE::2	51ST AVE	VAN BUREN ST	ZUMA DR	Collector	48,972.0	3" Mill & Overlay	11/6/2026	45	100	$ 440,748.0
COACH::SANCAPISTR::1	SAN CAPISTRANO DR	SAN ASIS DR	SAN REY DR	Residential	40,000.0	3" Mill & Overlay	11/6/2026	45	100	$ 360,000.0
COACH::54THAVEW::8	54TH AVE	SH-86	FREDERICK ST	Arterial	39,585.0	3" Mill & Overlay	11/6/2026	45	100	$ 356,265.0
COACH::53RDAVE::18	53RD AVE	SHADY LN	CDS	Collector	35,872.0	3" Mill & Overlay	11/6/2026	45	100	$ 322,848.0
COACH::ALALUNA::1	AVENIDA LA LUNA	CALLE OCASO	CALLE EL SOL	Residential	35,409.0	3" Mill & Overlay	11/6/2026	45	100	$ 318,681.0
COACH::AVERONICA::1	AVENIDA VERONICA	GENOA ST	CALLE FLORENA	Residential	35,039.0	3" Mill & Overlay	11/6/2026	45	100	$ 315,351.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::VANBURENST::12	VAN BUREN ST	MOONLIT DR	FIESTA RD	Collector	34,048.0	3" Mill & Overlay	11/6/2026	45	100	$ 306,432.0
COACH::CEMPALME::5	CALLE EMPALME	52ND AVE	CAIRO AVE	Residential	29,788.0	3" Mill & Overlay	11/6/2026	45	100	$ 268,092.0
COACH::50THAVEW::12	50TH AVE	CALLE QUINTERRA	WASHINGTONIA AVE	Arterial	28,905.0	3" Mill & Overlay	11/6/2026	45	100	$ 260,145.0
COACH::54THAVEE::1	54TH AVE	VAN BUREN ST	SLATE DR	Arterial	27,960.0	3" Mill & Overlay	11/6/2026	45	100	$ 251,640.0
COACH::7THST::5	7TH ST	VINE AVE	SH-111	Collector	25,424.0	3" Mill & Overlay	11/6/2026	45	100	$ 228,816.0
COACH::CTECHA::7	CALLE TECHA	CALLE ROJO	52ND AVE	Residential	24,280.0	3" Mill & Overlay	11/6/2026	45	100	$ 218,520.0
COACH::ARAYLYNN::2	AVENIDA RAYLYNN	CALLE JOYCE	CALLE FLORENA	Residential	24,228.0	3" Mill & Overlay	11/6/2026	45	100	$ 218,052.0
COACH::ADAMLN::1	ADAM LN	53RD AVE	CDS	Residential	24,120.0	3" Mill & Overlay	11/6/2026	45	100	$ 217,080.0
COACH::7THST::3	7TH ST	PALM AVE	ORCHARD AVE	Collector	23,744.0	3" Mill & Overlay	11/6/2026	45	100	$ 213,696.0
COACH::TYLERST::16	TYLER ST	50TH AVE	50TH AVE	Rural	23,580.0	3" Mill & Overlay	11/6/2026	45	100	$ 212,220.0
COACH::CTORRESORD::1	CALLE TORRES ORDUNO	52ND AVE	DOUMA CT	Residential	23,290.0	3" Mill & Overlay	11/6/2026	45	100	$ 209,610.0
COACH::2NDST::1	2ND ST	D/E	PALM AVE	Collector	21,672.0	3" Mill & Overlay	11/6/2026	45	100	$ 195,048.0
COACH::ACEDRUS::1	AVENIDA CEDRUS	CALLE CARMELLO	CALLE TECOMARIA	Residential	20,160.0	3" Mill & Overlay	11/6/2026	45	100	$ 181,440.0
COACH::AEUROPA::2	AVENIDA EUROPA	CALLE CARMELLO	CALLE TECOMARIA	Residential	20,160.0	3" Mill & Overlay	11/6/2026	45	100	$ 181,440.0
COACH::CALHOUNST::6	CALHOUN ST	SHADOWROCK DR	LAS PLUMAS CT	Collector	19,654.0	3" Mill & Overlay	11/6/2026	45	100	$ 176,886.0
COACH::ORCHARDAVE::7	ORCHARD AVE	5TH ST	4TH ST	Collector	19,500.0	3" Mill & Overlay	11/6/2026	45	100	$ 175,500.0
COACH::IXTAPAAVE::1	IXTAPA AVE	CDS	COZUMEL ST	Residential	19,260.0	3" Mill & Overlay	11/6/2026	45	100	$ 173,340.0
COACH::ORQUIDEAUN::1	ORQUIDEA LN	CALENDULA AVE	CDS	Residential	19,260.0	3" Mill & Overlay	11/6/2026	45	100	$ 173,340.0
COACH::RODREJOWAY::1	RODREJO WAY	MALVASIA WAY	PROSECCO WAY	Residential	19,040.0	3" Mill & Overlay	11/6/2026	45	100	$ 171,360.0
COACH::FREDERICK::18	FREDERICK ST	GUITRON ST	IRIS AVE	Collector	18,216.0	3" Mill & Overlay	11/6/2026	45	100	$ 163,944.0
COACH::50THAVEW::7	50TH AVE	AVENIDA DE ORO	AVENIDA DEL PARQUE	Arterial	17,853.0	3" Mill & Overlay	11/6/2026	45	100	$ 160,677.0
COACH::AVERANO::2	AVENIDA VERANO	CALLE PUERTA DEL SOL	CALLE EL SOL	Residential	17,575.0	3" Mill & Overlay	11/6/2026	45	100	$ 158,175.0
COACH::BELLISSIMA::3	BELLISSIMA AVE	BELLA ROMA LN	CALLE EMPALME	Residential	15,890.0	3" Mill & Overlay	11/6/2026	45	100	$ 143,010.0
COACH::3RDST::4	3RD ST	VINE AVE	ALLEY	Collector	13,720.0	3" Mill & Overlay	11/6/2026	45	100	$ 123,480.0
COACH::54THAVEE::2	54TH AVE	SLATE DR	FREDERICK ST	Arterial	12,420.0	3" Mill & Overlay	11/6/2026	45	100	$ 111,780.0
COACH::PISMOCT::1	PISMO CT	CDS	VENENTA BLVD	Residential	11,520.0	3" Mill & Overlay	11/6/2026	45	100	$ 103,680.0
COACH::50THAVEE::9	50TH AVE	MAZATLAN DR	FREDERICK ST	Arterial	10,373.0	3" Mill & Overlay	11/6/2026	45	100	$ 93,357.0
COACH::CINNABARLN::3	CINNABAR LN	SHADOWROCK DR	LAPIS DR	Residential	10,360.0	3" Mill & Overlay	11/6/2026	45	100	$ 93,240.0
COACH::COCASO::4	CALLE OCASO	CORTE SOLIS	AVENIDA LA LUNA	Residential	10,360.0	3" Mill & Overlay	11/6/2026	45	100	$ 93,240.0
COACH::AADOBE::4	AVENIDA ADOBE	CORTE BERNARDO	VIA ZAHIDI	Residential	10,240.0	3" Mill & Overlay	11/6/2026	45	100	$ 92,160.0
COACH::COPPERIDGE::4	COPPERIDGE ST	LAPIS DR	ASHLER CT	Residential	10,175.0	3" Mill & Overlay	11/6/2026	45	100	$ 91,575.0
COACH::CCORTEZ::1	CAMINO CORTEZ	PUERTO ESCONDIDO AVE	LOS CABOS AVE	Residential	10,080.0	3" Mill & Overlay	11/6/2026	45	100	$ 90,720.0
COACH::MAZATLANDR::6	MAZATLAN DR	MAZATLAN DR PARKING LOOP	TAXCO WAY	Residential	9,952.0	3" Mill & Overlay	11/6/2026	45	100	$ 89,568.0
COACH::CHRISTINA::5	CHRISTINA RD	RIGO CT	MARY CT	Residential	9,216.0	3" Mill & Overlay	11/6/2026	45	100	$ 82,944.0
COACH::CHICHENITZ::2	CHICHEN ITZA RD	IXTAPA AVE	SAN IGNACIO AVE	Residential	8,964.0	3" Mill & Overlay	11/6/2026	45	100	$ 80,676.0
COACH::52NDAVE::14	52ND AVE	CALLE CAMACHO	CESAR CHAVEZ ST	Arterial	8,138.0	3" Mill & Overlay	11/6/2026	45	100	$ 73,242.0
COACH::PALMERASCR::3	PALMERAS CIR	MARIPOSA DR	CHUPAROSA DR	Residential	7,200.0	3" Mill & Overlay	11/6/2026	45	100	$ 64,800.0
COACH::PALMERASCR::7	PALMERAS CIR	CARDELINA DR	PALMERAS CIR	Residential	7,200.0	3" Mill & Overlay	11/6/2026	45	100	$ 64,800.0
COACH::EAGLEAVE::1	EAGLE AVE	CALHOUN ST	SAN GORGONIO ST	Residential	7,144.0	3" Mill & Overlay	11/6/2026	45	100	$ 64,296.0
COACH::SOLARCEST::1	SOLARCE ST	PROSECCO WAY	SOLARCE ST	Residential	6,596.0	3" Mill & Overlay	11/6/2026	45	100	$ 59,364.0
COACH::BAGDADAVE::5	BAGDAD AVE	CALLE CAMACHO	SUEZ RD	Residential	6,240.0	3" Mill & Overlay	11/6/2026	45	100	$ 56,160.0
COACH::52NDAVE::19	52ND AVE	ALLEY	TRIPOLI WAY	Arterial	6,160.0	3" Mill & Overlay	11/6/2026	45	100	$ 55,440.0
COACH::CHARDONNAY::1	CHARDONNAY CIR	MALVASIA WAY	CDS	Residential	5,760.0	3" Mill & Overlay	11/6/2026	45	100	$ 51,840.0
COACH::WESTERFILD::6	WESTERFIELD WAY	140' E/O S CORONADO ST	S KENMORE ST	Residential	5,480.0	3" Mill & Overlay	11/6/2026	45	100	$ 49,320.0
COACH::ALEENAH::1	AVENIDA ALEENAH	GENOA ST	'150 E/O GENOA ST	Residential	5,364.0	3" Mill & Overlay	11/6/2026	45	100	$ 48,276.0
COACH::CDIEGO::3	CALLE DIEGO	CALLE LEANDRO	150' E/O CALLE LEANDRO	Residential	5,202.0	3" Mill & Overlay	11/6/2026	45	100	$ 46,818.0
COACH::52NDAVE::18	52ND AVE	JENNIFER WAY	ALLEY	Arterial	5,060.0	3" Mill & Overlay	11/6/2026	45	100	$ 45,540.0
COACH::52NDAVEE::9	52ND AVE	CALLE EMPALME	CALLE TECHA	Arterial	3,640.0	3" Mill & Overlay	11/6/2026	45	100	$ 32,760.0
COACH::JALISCOAVE::5	JALISCO AVE	100' S/O TAXCO WAY	TAXCO WAY	Residential	3,024.0	3" Mill & Overlay	11/6/2026	45	100	$ 27,216.0
COACH::SH-86S::18	SH-86	53RD AVE	54TH AVE	Arterial	212,000.0	1.5" Thin Overlay	11/6/2026	63	100	$ 1,060,000.0
COACH::ENTERPRISE::2	ENTERPRISE WAY	54TH AVE	INDUSTRIAL WAY	Collector	195,030.0	1.5" Thin Overlay	11/6/2026	63	100	$ 975,150.0
COACH::VANBURENST::6	VAN BUREN ST	52ND AVE	MANHATTAN AVE	Collector	142,488.0	1.5" Thin Overlay	11/6/2026	63	100	$ 712,440.0
COACH::HARRISONST::2	HARRISON ST	CITY LIMITS	CITY LIMITS	Residential	126,912.0	1.5" Thin Overlay	11/6/2026	63	100	$ 634,560.0
COACH::SH-111::4	SH-111	HILL DR	9TH ST	Arterial	86,200.0	1.5" Thin Overlay	11/6/2026	63	100	$ 431,000.0
COACH::48THAVEW::5	48TH AVE	CALHOUN ST	CIELO VICTORIA ST	Arterial	53,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 265,400.0
COACH::FREDERICK::21	FREDERICK ST	LAS LUNAS AVE	49TH AVE	Collector	42,702.0	1.5" Thin Overlay	11/6/2026	63	100	$ 213,510.0
COACH::50THAVEW::15	50TH AVE	CALLE PUERTA DEL SOL	HORNBLEND ST	Arterial	39,680.0	1.5" Thin Overlay	11/6/2026	63	100	$ 198,400.0
COACH::54THAVEE::9	54TH AVE	ENTERPRISE WAY	POLK ST	Arterial	36,504.0	1.5" Thin Overlay	11/6/2026	63	100	$ 182,520.0
COACH::JACKSONST::1	JACKSON ST	CITY LIMITS	PUERTECITOS AVE	Arterial	34,584.0	1.5" Thin Overlay	11/6/2026	63	100	$ 172,920.0
COACH::TYLERLN::1	TYLER LN	TYLER ST	CDS	Collector	34,092.0	1.5" Thin Overlay	11/6/2026	63	100	$ 170,460.0
COACH::ELARCOST::2	EL ARCO ST	TODOS SANTOS AVE	PUEBLO BONITO AVE	Residential	27,664.0	1.5" Thin Overlay	11/6/2026	63	100	$ 138,320.0
COACH::SH-86S::4	SH-86	WESTERFIELD WAY	ALLEY	Arterial	26,880.0	1.5" Thin Overlay	11/6/2026	63	100	$ 134,400.0
COACH::BALBOAST::1	BALBOA ST	D/E	50TH AVE	Residential	26,840.0	1.5" Thin Overlay	11/6/2026	63	100	$ 134,200.0
COACH::REDONDOPON::1	REDONDO PONIENTE	REDONDO SUR	REDONDO NORTE	Residential	26,800.0	1.5" Thin Overlay	11/6/2026	63	100	$ 134,000.0
COACH::CCAMACHO::7	CALLE CAMACHO	CAIRO AVE	BAGDAD AVE	Residential	26,680.0	1.5" Thin Overlay	11/6/2026	63	100	$ 133,400.0
COACH::CAVILA::8	CALLE AVILA	CAIRO AVE	BAGDAD AVE	Residential	26,640.0	1.5" Thin Overlay	11/6/2026	63	100	$ 133,200.0
COACH::CAVILA::5	CALLE AVILA	CALLE VERDE	CALLE ROJO	Residential	25,920.0	1.5" Thin Overlay	11/6/2026	63	100	$ 129,600.0
COACH::TERAVISTA::1	TERA VISTA	SIERRA ST	BRIANNE LN	Residential	25,567.0	1.5" Thin Overlay	11/6/2026	63	100	$ 127,835.0
COACH::52NDAVEW::7	52ND AVE	CALLE LIMON	GENOA ST	Arterial	24,615.0	1.5" Thin Overlay	11/6/2026	63	100	$ 123,075.0
COACH::6THST::5	6TH ST	ORCHARD AVE	VINE AVE	Collector	23,800.0	1.5" Thin Overlay	11/6/2026	63	100	$ 119,000.0
COACH::VIAMISIONE::1	VIA MISIONERO	CALLE SOLEDAD	SHADY LN	Residential	23,724.0	1.5" Thin Overlay	11/6/2026	63	100	$ 118,620.0
COACH::SAPPHIRELN::1	SAPPHIRE LN	SCARLET WAY	N SIENNA CIR	Residential	23,472.0	1.5" Thin Overlay	11/6/2026	63	100	$ 117,360.0
COACH::50THAVEW::11	50TH AVE	MAZATLAN DR	CALLE QUINTERRA	Arterial	20,746.0	1.5" Thin Overlay	11/6/2026	63	100	$ 103,730.0
COACH::SBALBOAST::1	S BALBOA ST	WESTERFIELD WAY	CDS	Residential	20,628.0	1.5" Thin Overlay	11/6/2026	63	100	$ 103,140.0
COACH::CDIEGO::1	CALLE DIEGO	VIA SANTIAGO	CALLE GREGORIO	Residential	19,788.0	1.5" Thin Overlay	11/6/2026	63	100	$ 98,940.0
COACH::CPIZANO::1	CALLE PIZANO	TYLER ST	COURTE STELLA	Residential	18,480.0	1.5" Thin Overlay	11/6/2026	63	100	$ 92,400.0
COACH::CMENDOZA::2	CALLE MENDOZA	CORTE OLIVIA	CALLE PIZANO	Residential	18,480.0	1.5" Thin Overlay	11/6/2026	63	100	$ 92,400.0
COACH::52NDAVEW::20	52ND AVE	DOUMA ST	FREDERICK ST	Arterial	18,278.0	1.5" Thin Overlay	11/6/2026	63	100	$ 91,390.0
COACH::LOSCABOSAV::2	LOS CABOS AVE	CAMINO ROSARITO	CAMINO CORTEZ	Residential	18,036.0	1.5" Thin Overlay	11/6/2026	63	100	$ 90,180.0
COACH::AVERANO::1	AVENIDA VERANO	CALLE OCASO	CALLE PUERTA DEL SOL	Residential	17,908.0	1.5" Thin Overlay	11/6/2026	63	100	$ 89,540.0
COACH::SUMMERST::2	SUMMER ST	FIESTA RD	CDS	Residential	17,686.0	1.5" Thin Overlay	11/6/2026	63	100	$ 88,430.0
COACH::54THAVEW::7	54TH AVE	CALLE BALDERAS	SH-86	Arterial	16,605.0	1.5" Thin Overlay	11/6/2026	63	100	$ 83,025.0
COACH::CLEANDRO::3	CALLE LEANDRO	CALLE BERNARDO	CALLE GREGORIO	Residential	15,560.0	1.5" Thin Overlay	11/6/2026	63	100	$ 77,800.0
COACH::CAMIGOS::1	CALLE AMIGOS	CALLE LA PAZ	CDS	Residential	15,444.0	1.5" Thin Overlay	11/6/2026	63	100	$ 77,220.0
COACH::52NDAVEE::31	52ND AVE	CALLE LIMON	SUNSET DR	Arterial	15,075.0	1.5" Thin Overlay	11/6/2026	63	100	$ 75,375.0
COACH::LOSCABOSAV::1	LOS CABOS AVE	EL ARCO ST	CAMINO ROSARITO	Residential	14,400.0	1.5" Thin Overlay	11/6/2026	63	100	$ 72,000.0
COACH::CGILLAN::1	CORTE GILLAN	AVENIDA RAZON	CDS	Residential	14,400.0	1.5" Thin Overlay	11/6/2026	63	100	$ 72,000.0
COACH::CYAGER::1	CORTE YAGER	AVENIDA RAZON	CDS	Residential	14,400.0	1.5" Thin Overlay	11/6/2026	63	100	$ 72,000.0
COACH::CESTIVO::1	CORTE ESTIVO	CALLE OCASO	CDS	Residential	14,134.0	1.5" Thin Overlay	11/6/2026	63	100	$ 70,670.0
COACH::52NDAVE::20	52ND AVE	TRIPOLI WAY	MORGAN AVE	Arterial	13,700.0	1.5" Thin Overlay	11/6/2026	63	100	$ 68,500.0
COACH::CZAMORA::2	CALLE ZAMORA	CALLE TECHA	CALLE AVILA	Residential	13,320.0	1.5" Thin Overlay	11/6/2026	63	100	$ 66,600.0
COACH::CAPITOLAAV::1	CAPITOLA AVE	CDS	MONARCH RD	Residential	12,996.0	1.5" Thin Overlay	11/6/2026	63	100	$ 64,980.0
COACH::CROJO::5	CALLE ROJO	CALLE EMPALME	CALLE TECHA	Residential	12,960.0	1.5" Thin Overlay	11/6/2026	63	100	$ 64,800.0
COACH::CROJO::6	CALLE ROJO	CALLE TECHA	CALLE AVILA	Residential	12,960.0	1.5" Thin Overlay	11/6/2026	63	100	$ 64,800.0
COACH::ESTRELLATO::1	ESTRELLA TOMAS ST	CAMINO BONITO AVE	MARIANA AVE	Residential	12,600.0	1.5" Thin Overlay	11/6/2026	63	100	$ 63,000.0
COACH::LUNADENICO::4	LUNA DE NICOLETA ST	PLAZA DE ORO AVE	MARIANA AVE	Residential	12,600.0	1.5" Thin Overlay	11/6/2026	63	100	$ 63,000.0
COACH::MAHOGANYCT::1	MAHOGANY CT	CDS	SCARLET WAY	Residential	12,348.0	1.5" Thin Overlay	11/6/2026	63	100	$ 61,740.0
COACH::SUNCRESTST::2	SUNCREST ST	SUNSHINE AVE	SUNDANCE LN	Residential	12,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 60,400.0
COACH::CSOLEDAD::2	CALLE SOLEDAD	VIA TEPEYAC	53RD AVE	Residential	11,844.0	1.5" Thin Overlay	11/6/2026	63	100	$ 59,220.0
COACH::MAZATLANDR::9	MAZATLAN DR	MAZATLAN DR PARKING LOOP	50TH AVE	Residential	11,712.0	1.5" Thin Overlay	11/6/2026	63	100	$ 58,560.0
COACH::TUSSELING::1	TUSSELING CT	52ND AVE	CDS	Residential	11,592.0	1.5" Thin Overlay	11/6/2026	63	100	$ 57,960.0
COACH::PALMAALY::8	PALM ALLEY	ALLEY	1ST ST	Collector	11,280.0	1.5" Thin Overlay	11/6/2026	63	100	$ 56,400.0
COACH::COLIVIA::1	CORTE OLIVIA	CDS	CALLE MENDOZA	Residential	11,187.0	1.5" Thin Overlay	11/6/2026	63	100	$ 55,935.0
COACH::CROSA::5	CALLE ROSA	CALLE ESTRELLA	CALLE LA PAZ	Residential	10,908.0	1.5" Thin Overlay	11/6/2026	63	100	$ 54,540.0
COACH::CLYA::1	CALLE LYA	CALLE TECHA	CDS	Residential	10,860.0	1.5" Thin Overlay	11/6/2026	63	100	$ 54,300.0
COACH::SANASISDR::2	SAN ASIS DR	SOLEDAD PL	CALLE TOLOSA	Residential	10,600.0	1.5" Thin Overlay	11/6/2026	63	100	$ 53,000.0
COACH::MARIANAAVE::3	MARIANA AVE	LUNA DE NICOLETA ST	ESTRELLA TOMAS ST	Residential	10,360.0	1.5" Thin Overlay	11/6/2026	63	100	$ 51,800.0
COACH::FIESTARD::4	FIESTA RD	SUMMER ST	SIERRA ST	Residential	10,332.0	1.5" Thin Overlay	11/6/2026	63	100	$ 51,660.0
COACH::ANICOLE::2	AVENIDA NICOLE	CATARINA CT	MICHELLE DR	Residential	10,332.0	1.5" Thin Overlay	11/6/2026	63	100	$ 51,660.0
COACH::CBONITOAVE::1	CAMINO BONITO AVE	ESTRELLA TOMAS ST	ESTRELLA PEDRO ST	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 50,400.0
COACH::AGUABLANCA::3	AGUA BLANCA AVE	CAMINO MAYA	CAMINO REAL	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 50,400.0
COACH::PUEBLOBONI::2	PUEBLO BONITO AVE	EL ARCO ST	EL CASTILLO RD	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 50,400.0
COACH::CPELICANO::1	CAMINO PELICANO	CAMINO REAL	LA PLAYA ST	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 50,400.0
COACH::CREAL::1	CAMINO REAL	AGUA BLANCA AVE	CAMINO PELICANO	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 50,400.0
COACH::CTECHA::3	CALLE TECHA	CALLE LYA	CALLE ROBERTO	Residential	10,040.0	1.5" Thin Overlay	11/6/2026	63	100	$ 50,200.0
COACH::SCARLETWAY::1	SCARLET WAY	SLATE DR	SAPPHIRE LN	Residential	9,828.0	1.5" Thin Overlay	11/6/2026	63	100	$ 49,140.0
COACH::CDANIELLE::1	CALLE DANIELLE	AVENIDA MARIA	AVENIDA CRYSTAL	Residential	9,720.0	1.5" Thin Overlay	11/6/2026	63	100	$ 48,600.0
COACH::ARAZON::1	AVENIDA RAZON	CALLE CATHRON	CORTE YAGER	Residential	9,435.0	1.5" Thin Overlay	11/6/2026	63	100	$ 47,175.0
COACH::NSIENNACIR::1	N SIENNA CIR	W SIENNA CIR	SLATE DR	Residential	9,036.0	1.5" Thin Overlay	11/6/2026	63	100	$ 45,180.0
COACH::ELSOLST::1	EL SOL ST	CALLE BOUGANVILIA	LAS FLORES AVE	Residential	8,778.0	1.5" Thin Overlay	11/6/2026	63	100	$ 43,890.0
COACH::CESTRELLA::1	CALLE ESTRELLA	CDS	CALLE ROSA	Residential	8,712.0	1.5" Thin Overlay	11/6/2026	63	100	$ 43,560.0
COACH::SH-86S::12	SH-86	CAIRO AVE	ALLEY	Arterial	8,560.0	1.5" Thin Overlay	11/6/2026	63	100	$ 42,800.0
COACH::CLORETO::1	CORTE LORETO	CALLE QUINTERRA	CDS	Residential	8,172.0	1.5" Thin Overlay	11/6/2026	63	100	$ 40,860.0
COACH::CLAMIRADAE::1	CORTE LA MIRADA	CALLE EL SOL	VAN BUREN ST	Residential	8,066.0	1.5" Thin Overlay	11/6/2026	63	100	$ 40,330.0
COACH::GENOAST::6	GENOA ST	200' S/O AVENIDA MARIA	AVENIDA MARIA	Residential	7,548.0	1.5" Thin Overlay	11/6/2026	63	100	$ 37,740.0
COACH::SUNCRESTST::1	SUNCREST ST	51ST AVE	SUNSHINE AVE	Residential	7,520.0	1.5" Thin Overlay	11/6/2026	63	100	$ 37,600.0
COACH::TODOSSANTO::2	TODOS SANTOS AVE	EL CASTILLO RD	420' W/O CAMINO CORTEZ	Residential	7,272.0	1.5" Thin Overlay	11/6/2026	63	100	$ 36,360.0
COACH::PAVONPALMA::1	PAVON PALMA	50TH AVE	VERA CRUZ	Residential	7,200.0	1.5" Thin Overlay	11/6/2026	63	100	$ 36,000.0
COACH::52NDAVEE::13	52ND AVE	CALLE AVILA	CALLE CAMACHO	Arterial	6,916.0	1.5" Thin Overlay	11/6/2026	63	100	$ 34,580.0
COACH::CBOUGANVIL::2	CALLE BOUGANVILIA	CALLE CLAVEL	EL SOL ST	Residential	6,444.0	1.5" Thin Overlay	11/6/2026	63	100	$ 32,220.0
COACH::CROSA::4	CALLE ROSA	140' W/O CALLE ESTRELLA	CALLE ESTRELLA	Residential	5,148.0	1.5" Thin Overlay	11/6/2026	63	100	$ 25,740.0
COACH::PINTOLN::2	PINTO LN	120' S/O MCCOY PEAK AVE	MCCOY PEAK AVE	Residential	4,536.0	1.5" Thin Overlay	11/6/2026	63	100	$ 22,680.0
COACH::SALTILLOCR::2	SALTILLO CIR	JALISCO AVE	JALISCO AVE	Residential	4,290.0	1.5" Thin Overlay	11/6/2026	63	100	$ 21,450.0
COACH::TOPAZCT::1	TOPAZ CT	CDS	W SIENNA CIR	Residential	4,070.0	1.5" Thin Overlay	11/6/2026	63	100	$ 20,350.0
COACH::CALICIA::2	CALLE ALICIA	MICHELLE DR	AVENIDA MARIA	Residential	3,270.0	1.5" Thin Overlay	11/6/2026	63	100	$ 16,350.0
COACH::53RDAVE::9	53RD AVE	CESAR CHAVEZ ST	50' W/O CESAR CHAVEZ ST	Collector	3,145.0	1.5" Thin Overlay	11/6/2026	63	100	$ 15,725.0
COACH::SH-86N::8	SH-86	CAIRO AVE	CAIRO AVE	Arterial	2,560.0	1.5" Thin Overlay	11/6/2026	63	100	$ 12,800.0
COACH::CNINOS::1	CALLE NINOS	CALLE BONITA	50' W/O CALLE BONITA	Residential	1,548.0	1.5" Thin Overlay	11/6/2026	63	100	$ 7,740.0
COACH::48THAVEE::6	48TH AVE	CITY LIMITS	HARRISON ST	Arterial	57,480.0	Microsurfacing	11/6/2026	84	100	$ 57,480.0
COACH::51STAVE::1	51ST AVE	CITY LIMITS	VAN BUREN ST	Collector	39,360.0	Microsurfacing	11/6/2026	84	100	$ 39,360.0
COACH::54THAVEW::5	54TH AVE	TYLER ST	SHADY LN	Arterial	33,972.0	Microsurfacing	11/6/2026	84	100	$ 33,972.0
COACH::DILLONRD::8	DILLON RD	1070' S/O VISTA DEL NORTE	800' S/O VISTA DEL NORTE	Arterial	25,824.0	Microsurfacing	11/6/2026	84	100	$ 25,824.0
COACH::PIERCEST::1	PIERCE ST	55TH AVE	CITY LIMITS	Rural	31,896.0	Chip Seal	11/6/2026	84	100	$ 25,516.8

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::LAPONDEROS::2	LA PONDEROSA DR	NAOMI CT	HERNANDEZ ST	Residential	42,012.0	Slurry Seal	11/6/2026	84	100	$ 21,006.0
COACH::DILLONRD::1	DILLON RD	CITY LIMITS	HARRISON ST	Arterial	20,064.0	Microsurfacing	11/6/2026	84	100	$ 20,064.0
COACH::AIRPORTBL::2	AIRPORT BLVD	CITY LIMITS	2640' W/O FILLMORE ST	Collector	9,250.0	Microsurfacing	11/6/2026	84	100	$ 9,250.0
COACH::BAGDADAVE::7	BAGDAD AVE	SH-86	ALLEY	Collector	8,560.0	Microsurfacing	11/6/2026	84	100	$ 8,560.0
COACH::COLIVO::1	CALLE OLIVO	CALLE NOGAL	CALLE PINO	Residential	10,440.0	Slurry Seal	11/6/2026	84	100	$ 5,220.0
COACH::NAOMICT::2	NAOMI CT	PEREZ ST	CDS	Residential	6,240.0	Slurry Seal	11/6/2026	84	100	$ 3,120.0
COACH::SH-111S::11	SH-111	7TH ST	8TH ST	Arterial	18,750.0	Microsurfacing	11/6/2026	85	100	$ 18,750.0
COACH::SH-111S::7	SH-111	3RD ST	4TH ST	Arterial	16,250.0	Microsurfacing	11/6/2026	85	100	$ 16,250.0
COACH::PASEOBARCE::1	PASEO BARCELONA	CALLE SEVILLE	VIA MERIDA	Residential	18,216.0	Slurry Seal	11/6/2026	85	100	$ 9,108.0
COACH::PASEOCORDO::1	PASEO CORDOVA	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2026	85	100	$ 8,250.0
COACH::CGRANADA::1	CALLE GRANADA	PASEO MADRID	PASEO CORDOVA	Residential	10,800.0	Slurry Seal	11/6/2026	85	100	$ 5,400.0
COACH::VIAVALENCI::3	VIA VALENCIA	CALLE MARBELLA	PASEO CORDOVA	Residential	4,851.0	Slurry Seal	11/6/2026	85	100	$ 2,425.5
COACH::52NDAVEE::34	52ND AVE	TYLER ST	LA PONDEROSA DR	Arterial	104,355.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 2,087,100.0
COACH::VISTADELSU::2	VISTA DEL SUR	CAMP CT	TYLER ST	Collector	81,720.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 1,634,400.0
COACH::VISTADELNO::5	VISTA DEL NORTE	TYLER ST	980' E/O TYLER AVE	Collector	39,080.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 781,600.0
COACH::MARGARITA::1	MARGARITA AVE	JAZMIN ST	HIBISCO ST	Residential	37,851.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 757,020.0
COACH::VERMOUTHDR::2	VERMOUTH DR	PRIMITIVO DR	ALLENDE DR	Residential	27,712.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 554,240.0
COACH::TYLERST::13	TYLER ST	CALLE PIZANO	CALLE MENDOZA	Collector	27,440.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 548,800.0
COACH::MECCALANE::2	MECCA LANE	670' N/O BAGDAD AVE	51ST AVE	Residential	26,866.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 537,320.0
COACH::3RDST::3	3RD ST	ORCHARD AVE	VINE AVE	Collector	23,800.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 476,000.0
COACH::7THST::4	7TH ST	ORCHARD AVE	VINE AVE	Collector	23,744.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 474,880.0
COACH::5THST::1	5TH ST	D/E	PALM AVE	Collector	21,672.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 433,440.0
COACH::PALMAVE::2	PALM AVE	6TH ST	5TH ST	Collector	19,500.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 390,000.0
COACH::SHADYLN::15	SHADY LN	52ND AVE	ARABY AVE	Collector	18,816.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 376,320.0
COACH::PALMERASCR::11	PALMERAS CIR	PALMERAS CIR	PALOMA DR	Residential	9,756.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 195,120.0
COACH::PALMERASCR::8	PALMERAS CIR	CHUPAROSA DR	CARDELINA DR	Residential	7,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 144,000.0
COACH::AADOBE::7	AVENIDA ADOBE	WESTERFIELD WAY	JULIA DR	Residential	5,364.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 107,280.0
COACH::WESTERFILD::1	WESTERFIELD WAY	AVENIDA ADOBE	140' W/O S BALBOA ST	Residential	5,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 104,000.0
COACH::50THAVEW::4	50TH AVE	CORONADO ST	AVENIDA DE PLATA	Arterial	4,356.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	$ 87,120.0
COACH::52NDAVEW::3	52ND AVE	LA PONDEROSA DR	TYLER ST	Arterial	104,355.0	3" Mill & Overlay	11/6/2027	45	100	$ 939,195.0
COACH::SH-111N::17	SH-111	49TH AVE	MITCHELL DR	Arterial	78,450.0	3" Mill & Overlay	11/6/2027	45	100	$ 706,050.0
COACH::EDMITCHELL::1	ED MITCHELL DR	VAN BUREN ST	MITCHELL DR	Collector	74,880.0	3" Mill & Overlay	11/6/2027	45	100	$ 673,920.0
COACH::BAGDADAVE::13	BAGDAD AVE	9TH ST	SHADY LN	Collector	50,320.0	3" Mill & Overlay	11/6/2027	45	100	$ 452,880.0
COACH::SH-86S::13	SH-86	ALLEY	52ND AVE	Arterial	44,800.0	3" Mill & Overlay	11/6/2027	45	100	$ 403,200.0
COACH::AALEENAH::7	AVENIDA ALEENAH	'150 E/O CALLE FLORENA	CALLE EMELIA	Residential	36,756.0	3" Mill & Overlay	11/6/2027	45	100	$ 330,804.0
COACH::CCATHRON::1	CALLE CATHRON	AVENIDA RAZON	AVENIDA ADOBE	Residential	36,720.0	3" Mill & Overlay	11/6/2027	45	100	$ 330,480.0
COACH::SH-111::15	SH-111	PARK LN	SH-86	Arterial	34,950.0	3" Mill & Overlay	11/6/2027	45	100	$ 314,550.0
COACH::FIESTARD::1	FIESTA RD	CRESCENT WAY	VALLE POSADA	Residential	34,452.0	3" Mill & Overlay	11/6/2027	45	100	$ 310,068.0
COACH::52NDAVE::38	52ND AVE	POLK ST	1030' E/O POLK ST	Rural	30,900.0	3" Mill & Overlay	11/6/2027	45	100	$ 278,100.0
COACH::CGREGORIO::2	CALLE GREGORIO	CALLE DIEGO	CALLE LEANDRO	Residential	25,308.0	3" Mill & Overlay	11/6/2027	45	100	$ 227,772.0
COACH::LEELN::1	LEE LN	53RD AVE	CDS	Residential	24,160.0	3" Mill & Overlay	11/6/2027	45	100	$ 217,440.0
COACH::BELLISSIMA::2	BELLISSIMA AVE	MODENA TER	BELLA ROMA LN	Residential	24,080.0	3" Mill & Overlay	11/6/2027	45	100	$ 216,720.0
COACH::6THST::4	6TH ST	PALM AVE	ORCHARD AVE	Collector	23,800.0	3" Mill & Overlay	11/6/2027	45	100	$ 214,200.0
COACH::5THST::2	5TH ST	PALM AVE	ORCHARD AVE	Collector	23,800.0	3" Mill & Overlay	11/6/2027	45	100	$ 214,200.0
COACH::CALHOUNST::13	CALHOUN ST	VIA PICON	50TH AVE	Collector	23,250.3	3" Mill & Overlay	11/6/2027	45	100	$ 209,252.7
COACH::BAGDADAVE::16	BAGDAD AVE	GENOA ST	SH-111	Collector	21,120.0	3" Mill & Overlay	11/6/2027	45	100	$ 190,080.0
COACH::50THAVEE::8	50TH AVE	CALLE QUINTERRA	MAZATLAN DR	Arterial	20,746.0	3" Mill & Overlay	11/6/2027	45	100	$ 186,714.0
COACH::7THST::1	7TH ST	TRIPOLI WAY	DATE AVE	Collector	20,496.0	3" Mill & Overlay	11/6/2027	45	100	$ 184,464.0
COACH::ORCHARDAVE::6	ORCHARD AVE	6TH ST	5TH ST	Collector	19,500.0	3" Mill & Overlay	11/6/2027	45	100	$ 175,500.0
COACH::PALMAVE::4	PALM AVE	4TH ST	3RD ST	Collector	19,500.0	3" Mill & Overlay	11/6/2027	45	100	$ 175,500.0
COACH::PARKLN::1	PARK LN	CITY LIMITS	SH-86	Collector	18,030.0	3" Mill & Overlay	11/6/2027	45	100	$ 162,270.0
COACH::SUNDOWNLN::1	SUNDOWN LN	CDS	SUNCREST ST	Residential	18,000.0	3" Mill & Overlay	11/6/2027	45	100	$ 162,000.0
COACH::JADEROCKRD::2	JADEROCK RD	HORNBLEND ST	CINNABAR LN	Residential	17,760.0	3" Mill & Overlay	11/6/2027	45	100	$ 159,840.0
COACH::CALHOUNST::12	CALHOUN ST	CITY LIMITS	VIA PICON	Collector	15,816.6	3" Mill & Overlay	11/6/2027	45	100	$ 142,349.4
COACH::MICHELLEDR::1	MICHELLE DR	CALLE ALICIA	MICHELLE DR	Residential	15,444.0	3" Mill & Overlay	11/6/2027	45	100	$ 138,996.0
COACH::52NDAVE::40	52ND AVE	2700' W/O FILLMORE ST	2200' W/O FILLMORE ST	Rural	15,150.0	3" Mill & Overlay	11/6/2027	45	100	$ 136,350.0
COACH::53RDAVE::20	53RD AVE	CALLE LEANDRO	CALLE EMPALME	Collector	15,109.5	3" Mill & Overlay	11/6/2027	45	100	$ 135,985.5
COACH::CHIAPASDR::1	CHIAPAS DR	51ST AVE	500' N/O 51ST AVE	Residential	14,168.0	3" Mill & Overlay	11/6/2027	45	100	$ 127,512.0
COACH::50THAVEE::11	50TH AVE	PAVON PALMA	AVENIDA DEL PARQUE	Arterial	13,728.0	3" Mill & Overlay	11/6/2027	45	100	$ 123,552.0
COACH::DATEAVE::9	DATE AVE	8TH ST	7TH ST	Collector	13,536.0	3" Mill & Overlay	11/6/2027	45	100	$ 121,824.0
COACH::54THAVEW::9	54TH AVE	FREDERICK ST	SLATE DR	Arterial	12,420.0	3" Mill & Overlay	11/6/2027	45	100	$ 111,780.0
COACH::SUNCRESTST::5	SUNCREST ST	SUNRISE AVE	WESTERFIELD WAY	Residential	11,520.0	3" Mill & Overlay	11/6/2027	45	100	$ 103,680.0
COACH::ORCHARDAVE::12	ORCHARD AVE	ALLEY	1ST ST	Collector	11,280.0	3" Mill & Overlay	11/6/2027	45	100	$ 101,520.0
COACH::CLEANDRO::2	CALLE LEANDRO	CALLE DIEGO	CALLE BERNARDO	Residential	11,280.0	3" Mill & Overlay	11/6/2027	45	100	$ 101,520.0
COACH::SUNCRESTST::4	SUNCREST ST	SUNDOWN LN	SUNRISE AVE	Residential	10,800.0	3" Mill & Overlay	11/6/2027	45	100	$ 97,200.0
COACH::TAXCOWAY::1	TAXCO WAY	MAZATLAN DR	JALISCO AVE	Residential	10,332.0	3" Mill & Overlay	11/6/2027	45	100	$ 92,988.0
COACH::CTECOMARIA::3	CALLE TECOMARIA	AVENIDA CEDRUS	AVENIDA NERIUM	Residential	10,332.0	3" Mill & Overlay	11/6/2027	45	100	$ 92,988.0
COACH::CTECOMARIA::1	CALLE TECOMARIA	AVENIDA FLORABUNDA	AVENIDA EUROPA	Residential	10,296.0	3" Mill & Overlay	11/6/2027	45	100	$ 92,664.0
COACH::CCARMELLO::2	CALLE CARMELLO	AVENIDA EUROPA	AVENIDA CEDRUS	Residential	10,296.0	3" Mill & Overlay	11/6/2027	45	100	$ 92,664.0
COACH::HILLDR::1	HILL DR	GENOA ST	CALLE PERA	Residential	10,120.0	3" Mill & Overlay	11/6/2027	45	100	$ 91,080.0
COACH::CHAPARROSA::1	CHAPARROSA ST	SAN MATEO AVE	MECCA HILLS AVE	Residential	9,720.0	3" Mill & Overlay	11/6/2027	45	100	$ 87,480.0
COACH::SANMATEOAV::1	SAN MATEO AVE	CHARLTON PEAK ST	GARNET RIDGE ST	Residential	9,684.0	3" Mill & Overlay	11/6/2027	45	100	$ 87,156.0
COACH::FREDERICK::17	FREDERICK ST	PHOENIX AVE	GUITRON ST	Collector	9,636.0	3" Mill & Overlay	11/6/2027	45	100	$ 86,724.0
COACH::AADOBE::2	AVENIDA ADOBE	CALLE CATHRON	CORTE CINNABELLA	Residential	9,560.0	3" Mill & Overlay	11/6/2027	45	100	$ 86,040.0
COACH::CHAPARROSA::3	CHAPARROSA ST	GLENDORA RIDGE AVE	GRANITE PASS TRL	Residential	9,432.0	3" Mill & Overlay	11/6/2027	45	100	$ 84,888.0
COACH::VENENTABLD::1	VENENTA BLVD	CAPITOLA AVE	PISMO CT	Residential	9,396.0	3" Mill & Overlay	11/6/2027	45	100	$ 84,564.0
COACH::ALLENDEDR::2	ALLENDE DR	PROSECCO WAY	SOLARCE ST	Residential	9,376.0	3" Mill & Overlay	11/6/2027	45	100	$ 84,384.0
COACH::CHAPARROSA::4	CHAPARROSA ST	GRANITE PASS TRL	COXCOMB DR	Residential	9,360.0	3" Mill & Overlay	11/6/2027	45	100	$ 84,240.0
COACH::AVESTAGO::1	AVENIDA VESTAGO	REDONDO ESTE	FREDERICK ST	Residential	9,246.0	3" Mill & Overlay	11/6/2027	45	100	$ 83,214.0
COACH::CZAMORA::4	CALLE ZAMORA	CALLE CAMACHO	CESAR CHAVEZ ST	Residential	9,216.0	3" Mill & Overlay	11/6/2027	45	100	$ 82,944.0
COACH::CAIROAVE::6	CAIRO AVE	SUEZ RD	SH-86	Residential	8,560.0	3" Mill & Overlay	11/6/2027	45	100	$ 77,040.0
COACH::CLEANDRO::1	CALLE LEANDRO	53RD AVE	CALLE DIEGO	Residential	8,440.0	3" Mill & Overlay	11/6/2027	45	100	$ 75,960.0
COACH::WASHINGTON::1	WASHINGTONIA AVE	50TH AVE	ROYAL CT	Residential	8,100.0	3" Mill & Overlay	11/6/2027	45	100	$ 72,900.0
COACH::CEMELIA::1	CALLE EMELIA	AVENUE 53	AVENIDA RAYLYNN	Residential	7,092.0	3" Mill & Overlay	11/6/2027	45	100	$ 63,828.0
COACH::CARDINALDR::1	CARDINAL DR	TYLER ST	PALMERAS CIR	Residential	6,960.0	3" Mill & Overlay	11/6/2027	45	100	$ 62,640.0
COACH::MAZATLANDR::4	MAZATLAN DR	MAZATLAN DR PARKING LOOP	CHIHUAHUA CT	Residential	6,912.0	3" Mill & Overlay	11/6/2027	45	100	$ 62,208.0
COACH::SUEZRD::2	SUEZ RD	DAMASCUS AVE	BAGDAD AVE	Residential	6,680.0	3" Mill & Overlay	11/6/2027	45	100	$ 60,120.0
COACH::CBONITA::3	CALLE BONITA	CALLE ROSA	53RD AVE	Residential	6,444.0	3" Mill & Overlay	11/6/2027	45	100	$ 57,996.0
COACH::PROSECCO::3	PROSECCO WAY	SOLARCE ST	SOLARCE ST	Residential	6,400.0	3" Mill & Overlay	11/6/2027	45	100	$ 57,600.0
COACH::MAZATLANDR::5	MAZATLAN DR	CHIHUAHUA CT	TAXCO WAY	Residential	6,240.0	3" Mill & Overlay	11/6/2027	45	100	$ 56,160.0
COACH::AMARONECIR::1	AMARONE CIR	MALVASIA WAY	CDS	Residential	5,760.0	3" Mill & Overlay	11/6/2027	45	100	$ 51,840.0
COACH::AGRACE::2	AVENIDA GRACE	CALLE FLORENA	150' E/O CALLE FLORENA	Residential	5,400.0	3" Mill & Overlay	11/6/2027	45	100	$ 48,600.0
COACH::AADOBE::6	AVENIDA ADOBE	CORTE ALTURIAN	WESTERFIELD WAY	Residential	5,120.0	3" Mill & Overlay	11/6/2027	45	100	$ 46,080.0
COACH::52NDAVEW::16	52ND AVE	CALLE EMPALME	CALLE EMPALME	Arterial	4,784.0	3" Mill & Overlay	11/6/2027	45	100	$ 43,056.0
COACH::52NDAVEE::8	52ND AVE	CALLE EMPALME	CALLE EMPALME	Arterial	4,784.0	3" Mill & Overlay	11/6/2027	45	100	$ 43,056.0
COACH::ARAZON::3	AVENIDA RAZON	CORTE GILLAN	AVENIDA HALAWAY	Residential	4,625.0	3" Mill & Overlay	11/6/2027	45	100	$ 41,625.0
COACH::GENOAST::9	GENOA ST	NILE LN	CALLE LIMON	Residential	4,588.0	3" Mill & Overlay	11/6/2027	45	100	$ 41,292.0
COACH::50THAVEE::15	50TH AVE	AVENIDA DE PLATA	CORONADO ST	Arterial	4,356.0	3" Mill & Overlay	11/6/2027	45	100	$ 39,204.0
COACH::50THAVEE::17	50TH AVE	AVENIDA DE PLATINA	KENMORE ST	Arterial	4,323.0	3" Mill & Overlay	11/6/2027	45	100	$ 38,907.0
COACH::52NDAVEE::15	52ND AVE	CESAR CHAVEZ ST	SH-86	Arterial	2,236.0	3" Mill & Overlay	11/6/2027	45	100	$ 20,124.0
COACH::52NDAVEW::12	52ND AVE	CALLE AVILA	CALLE AVILA	Arterial	1,508.0	3" Mill & Overlay	11/6/2027	45	100	$ 13,572.0
COACH::54THAVEW::4	54TH AVE	SH-111	TYLER ST	Arterial	80,525.0	Microsurfacing	11/6/2027	84	100	$ 80,525.0
COACH::TYLERST::19	TYLER ST	3485' S/O VISTA DEL SUR	2125' S/O VISTA DEL SUR	Rural	40,740.0	Chip Seal	11/6/2027	84	100	$ 32,592.0
COACH::HERNANDEZ::3	HERNANDEZ ST	52ND AVE	ORTIZ ST	Residential	43,040.0	Slurry Seal	11/6/2027	84	100	$ 21,520.0
COACH::CCEBRINO::1	CALLE CEBRINO	CALLE CHAVEZ	CDS	Residential	24,696.0	Slurry Seal	11/6/2027	84	100	$ 12,348.0
COACH::ASANDOMING::1	AVENIDA SAN DOMINGO	CAMINO FRONTERA	CAMINO CORAS	Residential	9,879.0	Slurry Seal	11/6/2027	84	100	$ 4,939.5
COACH::MODENATER::1	MODENA TER	BELLISSIMA AVE	SIENO LN	Residential	7,680.0	Slurry Seal	11/6/2027	84	100	$ 3,840.0
COACH::ROMUALDACT::1	ROMUALDA CT	PEREZ ST	CDS	Residential	6,120.0	Slurry Seal	11/6/2027	84	100	$ 3,060.0
COACH::SHADYLN::3	SHADY LN	AVENIDA TACUBA	AVENIDA REFORMA	Residential	20,048.0	Slurry Seal	11/6/2027	85	100	$ 10,024.0
COACH::CRUIZ::4	CALLE RUIZ	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	8,640.0	Slurry Seal	11/6/2027	85	100	$ 4,320.0
COACH::CRUIZ::3	CALLE RUIZ	AVENIDA ZOCALO	AVENIDA REFORMA	Residential	6,444.0	Slurry Seal	11/6/2027	85	100	$ 3,222.0
COACH::52NDAVE::1	52ND AVE	CALHOUN ST	VAN BUREN ST	Arterial	158,220.0	Microsurfacing	11/6/2028	84	100	$ 158,220.0
COACH::54THAVEE::7	54TH AVE	TYLER ST	SH-111	Arterial	80,800.0	Microsurfacing	11/6/2028	84	100	$ 80,800.0
COACH::VISTADELNO::1	VISTA DEL NORTE	HARRISON ST	CITY LIMITS	Collector	79,500.0	Microsurfacing	11/6/2028	84	100	$ 79,500.0
COACH::44THAVEE::1	44TH AVE	HARRISON ST	DILLON RD	Arterial	72,150.0	Microsurfacing	11/6/2028	84	100	$ 72,150.0
COACH::TYLERST::1	TYLER ST	CITY LIMITS	54TH AVE	Collector	66,700.0	Microsurfacing	11/6/2028	84	100	$ 66,700.0
COACH::48THAVEW::1	48TH AVE	HARRISON ST	CITY LIMITS	Arterial	57,240.0	Microsurfacing	11/6/2028	84	100	$ 57,240.0
COACH::TYLERST::20	TYLER ST	2125' S/O VISTA DEL SUR	VISTA DEL SUR	Rural	63,780.0	Chip Seal	11/6/2028	84	100	$ 51,024.0
COACH::CALHOUNST::4	CALHOUN ST	VIA PICON	50TH AVE	Collector	23,820.0	Microsurfacing	11/6/2028	84	100	$ 23,820.0
COACH::CALHOUNST::3	CALHOUN ST	CITY LIMITS	VIA PICON	Collector	16,260.0	Microsurfacing	11/6/2028	84	100	$ 16,260.0
COACH::HERNANDEZ::2	HERNANDEZ ST	PEREZ ST	ORTIZ ST	Residential	19,320.0	Slurry Seal	11/6/2028	84	100	$ 9,660.0
COACH::HERNANDEZ::1	HERNANDEZ ST	LA PONDEROSA DR	PEREZ ST	Residential	15,920.0	Slurry Seal	11/6/2028	84	100	$ 7,960.0
COACH::52NDAVE::28	52ND AVE	SHADY LN	SHADY LN	Arterial	6,248.0	Microsurfacing	11/6/2028	84	100	$ 6,248.0
COACH::PEREZST::1	PEREZ ST	NAOMI CT	ROMUALDA CT	Residential	11,200.0	Slurry Seal	11/6/2028	84	100	$ 5,600.0
COACH::CCERVANTES::3	CALLE CERVANTES	CALLE CHAVEZ	CALLE YSIANO	Residential	10,224.0	Slurry Seal	11/6/2028	84	100	$ 5,112.0
COACH::VIAPICON::2	VIA PICON	CALHOUN ST	CALLE FRONTERA	Residential	4,022.8	Slurry Seal	11/6/2028	84	100	$ 2,011.4
COACH::VIAPICON::1	VIA PICON	CALHOUN ST	CALLE FRONTERA	Residential	3,989.8	Slurry Seal	11/6/2028	84	100	$ 1,994.9
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	Arterial	36,300.0	Microsurfacing	11/6/2028	85	100	$ 36,300.0
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	Residential	49,932.0	Slurry Seal	11/6/2028	85	100	$ 24,966.0
COACH::CYPRESST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.0	Slurry Seal	11/6/2028	85	100	$ 24,947.0
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	Residential	49,856.0	Slurry Seal	11/6/2028	85	100	$ 24,928.0
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	Residential	49,818.0	Slurry Seal	11/6/2028	85	100	$ 24,909.0
COACH::LASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	Residential	49,742.0	Slurry Seal	11/6/2028	85	100	$ 24,871.0
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	Residential	49,704.0	Slurry Seal	11/6/2028	85	100	$ 24,852.0
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	Residential	49,552.0	Slurry Seal	11/6/2028	85	100	$ 24,776.0
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	Residential	46,980.0	Slurry Seal	11/6/2028	85	100	$ 23,490.0
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.0	Microsurfacing	11/6/2028	85	100	$ 18,750.0
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.0	Slurry Seal	11/6/2028	85	100	$ 16,650.0
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	Arterial	16,250.0	Microsurfacing	11/6/2028	85	100	$ 16,250.0
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.0	Microsurfacing	11/6/2028	85	100	$ 16,250.0
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.0	Microsurfacing	11/6/2028	85	100	$ 16,250.0
COACH::VALLEYRD::1	VALLEY RD	SH-86	JENNIFER WAY	Collector	15,840.0	Microsurfacing	11/6/2028	85	100	$ 15,840.0
COACH::HEATHERLN::1	HEATHER LN	OASIS PALM AVE	SHADY LN	Residential	29,830.0	Slurry Seal	11/6/2028	85	100	$ 14,915.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.0	Slurry Seal	11/6/2028	85	100	$ 14,094.0
COACH::STACIELN::1	STACIE LN	CDS	SHADY LN	Residential	25,360.0	Slurry Seal	11/6/2028	85	100	$ 12,680.0
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.0	Slurry Seal	11/6/2028	85	100	$ 12,580.0
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2028	85	100	$ 12,540.0
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.0	Slurry Seal	11/6/2028	85	100	$ 11,898.0
COACH::VALLEYRD::5	VALLEY RD	NELSON ST	LAS PALMAS ST	Collector	10,720.0	Microsurfacing	11/6/2028	85	100	$ 10,720.0
COACH::OASISPALM::1	OASIS PALM AVE	HEATHER LN	VALLEY RD	Residential	21,318.0	Slurry Seal	11/6/2028	85	100	$ 10,659.0
COACH::VALLEYRD::2	VALLEY RD	JENNIFER WAY	TRIPOLI WAY	Collector	10,400.0	Microsurfacing	11/6/2028	85	100	$ 10,400.0
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.0	Microsurfacing	11/6/2028	85	100	$ 10,400.0
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.0	Slurry Seal	11/6/2028	85	100	$ 9,036.0
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.0	Slurry Seal	11/6/2028	85	100	$ 9,000.0
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.0	Slurry Seal	11/6/2028	85	100	$ 8,455.0
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2028	85	100	$ 8,442.0
COACH::CAIROAVE::7	CAIRO AVE	ALLEY	TRIPOLI WAY	Residential	16,539.0	Slurry Seal	11/6/2028	85	100	$ 8,269.5
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2028	85	100	$ 8,250.0
COACH::SHADYLN::13	SHADY LN	HEATHER LN	VALENCIA LN	Residential	15,904.0	Slurry Seal	11/6/2028	85	100	$ 7,952.0
COACH::SHADYLN::12	SHADY LN	BRENDA LN	HEATHER LN	Residential	15,120.0	Slurry Seal	11/6/2028	85	100	$ 7,560.0
COACH::SHADYLN::11	SHADY LN	STACIE LN	BRENDA LN	Residential	14,840.0	Slurry Seal	11/6/2028	85	100	$ 7,420.0
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.0	Slurry Seal	11/6/2028	85	100	$ 6,720.0
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	Collector	6,400.0	Microsurfacing	11/6/2028	85	100	$ 6,400.0
COACH::CYPRESSST::1	CYPRESS ST	VALENCIA LN	VALLEY RD	Residential	11,172.0	Slurry Seal	11/6/2028	85	100	$ 5,586.0
COACH::SHADYLN::10	SHADY LN	53RD AVE	STACIE LN	Residential	10,808.0	Slurry Seal	11/6/2028	85	100	$ 5,404.0
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.0	Slurry Seal	11/6/2028	85	100	$ 5,400.0
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.0	Slurry Seal	11/6/2028	85	100	$ 5,328.0
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	$ 5,238.0
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	$ 5,238.0
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	$ 5,238.0
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	$ 5,238.0
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	Residential	10,080.0	Slurry Seal	11/6/2028	85	100	$ 5,040.0
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.0	Slurry Seal	11/6/2028	85	100	$ 4,860.0
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	Residential	9,720.0	Slurry Seal	11/6/2028	85	100	$ 4,860.0
COACH::VALENCIALN::2	VALENCIA LN	CYPRESS ST	SHADY LN	Residential	9,540.0	Slurry Seal	11/6/2028	85	100	$ 4,770.0
COACH::CAIROAVE::5	CAIRO AVE	SH-86	ALLEY	Residential	9,416.0	Slurry Seal	11/6/2028	85	100	$ 4,708.0
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2028	85	100	$ 4,680.0
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.0	Slurry Seal	11/6/2028	85	100	$ 4,590.0
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.0	Slurry Seal	11/6/2028	85	100	$ 4,560.0
COACH::VALENCIALN::1	VALENCIA LN	CDS	CYPRESS ST	Residential	8,820.0	Slurry Seal	11/6/2028	85	100	$ 4,410.0
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2028	85	100	$ 4,320.0
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2028	85	100	$ 4,320.0
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	Residential	8,640.0	Slurry Seal	11/6/2028	85	100	$ 4,320.0
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.0	Slurry Seal	11/6/2028	85	100	$ 3,888.0
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	Residential	7,704.0	Slurry Seal	11/6/2028	85	100	$ 3,852.0
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.0	Slurry Seal	11/6/2028	85	100	$ 3,648.0
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.0	Slurry Seal	11/6/2028	85	100	$ 3,582.0
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.0	Slurry Seal	11/6/2028	85	100	$ 3,344.0
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	Residential	6,666.0	Slurry Seal	11/6/2028	85	100	$ 3,333.0
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.0	Slurry Seal	11/6/2028	85	100	$ 3,258.0
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.0	Slurry Seal	11/6/2028	85	100	$ 3,256.0
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.0	Slurry Seal	11/6/2028	85	100	$ 3,240.0
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.0	Slurry Seal	11/6/2028	85	100	$ 3,222.0
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.0	Slurry Seal	11/6/2028	85	100	$ 3,222.0
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.0	Slurry Seal	11/6/2028	85	100	$ 2,700.0
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.0	Slurry Seal	11/6/2028	85	100	$ 2,556.0
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.0	Slurry Seal	11/6/2028	85	100	$ 2,524.5
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.0	Slurry Seal	11/6/2028	85	100	$ 2,520.0
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.0	Slurry Seal	11/6/2028	85	100	$ 2,340.0
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	Residential	4,608.0	Slurry Seal	11/6/2028	85	100	$ 2,304.0
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.0	Slurry Seal	11/6/2028	85	100	$ 2,160.0
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2028	85	100	$ 2,068.3
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2028	85	100	$ 2,068.3
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.0	Slurry Seal	11/6/2028	85	100	$ 1,440.0
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.0	Slurry Seal	11/6/2028	85	100	$ 1,008.0
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.0	Slurry Seal	11/6/2028	85	100	$ 540.0
COACH::CAIROAVE::9	CAIRO AVE	DATE AVE	SHADY LN	Residential	53,520.0	Slurry Seal	11/6/2029	85	100	$ 26,760.0
COACH::ARABYAVE::2	ARABY AVE	DATE AVE	SHADY LN	Residential	52,182.0	Slurry Seal	11/6/2029	85	100	$ 26,091.0
COACH::MORGANAVE::1	MORGAN AVE	VALLEY RD	52ND AVE	Residential	49,666.0	Slurry Seal	11/6/2029	85	100	$ 24,833.0
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.0	Microsurfacing	11/6/2029	85	100	$ 18,900.0
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.0	Microsurfacing	11/6/2029	85	100	$ 18,750.0
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.0	Slurry Seal	11/6/2029	85	100	$ 17,613.0
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.0	Slurry Seal	11/6/2029	85	100	$ 17,537.0
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.0	Slurry Seal	11/6/2029	85	100	$ 17,075.5
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.0	Slurry Seal	11/6/2029	85	100	$ 14,436.0
COACH::DAMASCUSAV::5	DAMASCUS AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2029	85	100	$ 12,540.0
COACH::CAIROAVE::8	CAIRO AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2029	85	100	$ 12,540.0
COACH::MEDINAAVE::1	MEDINA AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2029	85	100	$ 12,540.0
COACH::BRENDALN::1	BRENDA LN	CDS	SHADY LN	Residential	24,092.0	Slurry Seal	11/6/2029	85	100	$ 12,046.0
COACH::VALLEYRD::4	VALLEY RD	MORGAN AVE	NELSON ST	Collector	11,040.0	Microsurfacing	11/6/2029	85	100	$ 11,040.0
COACH::VALLEYRD::3	VALLEY RD	TRIPOLI WAY	MORGAN AVE	Collector	10,720.0	Microsurfacing	11/6/2029	85	100	$ 10,720.0
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	Collector	10,400.0	Microsurfacing	11/6/2029	85	100	$ 10,400.0
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	Collector	10,400.0	Microsurfacing	11/6/2029	85	100	$ 10,400.0
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.0	Slurry Seal	11/6/2029	85	100	$ 9,996.0
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2029	85	100	$ 8,442.0
COACH::SHADYLN::4	SHADY LN	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	13,440.0	Slurry Seal	11/6/2029	85	100	$ 6,720.0
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.0	Slurry Seal	11/6/2029	85	100	$ 5,577.0
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2029	85	100	$ 4,680.0
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.0	Slurry Seal	11/6/2029	85	100	$ 4,458.5
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	$ 4,320.0
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	$ 4,320.0
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	$ 4,320.0
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.0	Slurry Seal	11/6/2029	85	100	$ 3,888.0
COACH::VIAMERIDA::1	VIA MERIDA	VAN BUREN ST	PASEO BARCELONA	Residential	7,272.0	Slurry Seal	11/6/2029	85	100	$ 3,636.0
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.0	Slurry Seal	11/6/2029	85	100	$ 3,204.0
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.0	Slurry Seal	11/6/2029	85	100	$ 1,278.0
COACH::SH-111S::11	SH-111	7TH ST	8TH ST	Arterial	18,750.0	Microsurfacing	11/6/2030	85	100	$ 18,750.0
COACH::SH-111S::7	SH-111	3RD ST	4TH ST	Arterial	16,250.0	Microsurfacing	11/6/2030	85	100	$ 16,250.0
COACH::PASEOBARCE::1	PASEO BARCELONA	CALLE SEVILLE	VIA MERIDA	Residential	18,216.0	Slurry Seal	11/6/2030	85	100	$ 9,108.0
COACH::PASEOCORDO::1	PASEO CORDOVA	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2030	85	100	$ 8,250.0
COACH::CGRANADA::1	CALLE GRANADA	PASEO MADRID	PASEO CORDOVA	Residential	10,800.0	Slurry Seal	11/6/2030	85	100	$ 5,400.0
COACH::VIAVALENCI::3	VIA VALENCIA	CALLE MARBELLA	PASEO CORDOVA	Residential	4,851.0	Slurry Seal	11/6/2030	85	100	$ 2,425.5
COACH::AIRPORTBL::6	AIRPORT BLVD	121S' W/O FILLMORE ST	108S' W/O FILLMORE ST	Collector	6,500.0	Microsurfacing	11/6/2031	84	100	$ 6,500.0
COACH::SHADYLN::3	SHADY LN	AVENIDA TACUBA	AVENIDA REFORMA	Residential	20,048.0	Slurry Seal	11/6/2031	85	100	$ 10,024.0
COACH::CRUIZ::4	CALLE RUIZ	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	8,640.0	Slurry Seal	11/6/2031	85	100	$ 4,320.0
COACH::CRUIZ::3	CALLE RUIZ	AVENIDA ZOCALO	AVENIDA REFORMA	Residential	6,444.0	Slurry Seal	11/6/2031	85	100	$ 3,222.0
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	Arterial	36,300.0	Microsurfacing	11/6/2032	85	100	$ 36,300.0
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	Residential	49,932.0	Slurry Seal	11/6/2032	85	100	$ 24,966.0
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.0	Slurry Seal	11/6/2032	85	100	$ 24,947.0
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	Residential	49,856.0	Slurry Seal	11/6/2032	85	100	$ 24,928.0
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	Residential	49,818.0	Slurry Seal	11/6/2032	85	100	$ 24,909.0
COACH::LASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	Residential	49,742.0	Slurry Seal	11/6/2032	85	100	$ 24,871.0
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	Residential	49,704.0	Slurry Seal	11/6/2032	85	100	$ 24,852.0
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	Residential	49,552.0	Slurry Seal	11/6/2032	85	100	$ 24,776.0
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	Residential	46,980.0	Slurry Seal	11/6/2032	85	100	$ 23,490.0
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.0	Microsurfacing	11/6/2032	85	100	$ 18,750.0
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.0	Slurry Seal	11/6/2032	85	100	$ 16,650.0
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.0	Microsurfacing	11/6/2032	85	100	$ 16,250.0
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	Arterial	16,250.0	Microsurfacing	11/6/2032	85	100	$ 16,250.0
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.0	Microsurfacing	11/6/2032	85	100	$ 16,250.0
COACH::VALLEYRD::1	VALLEY RD	SH-86	JENNIFER WAY	Collector	15,840.0	Microsurfacing	11/6/2032	85	100	$ 15,840.0
COACH::HEATHERLN::1	HEATHER LN	OASIS PALM AVE	SHADY LN	Residential	29,830.0	Slurry Seal	11/6/2032	85	100	$ 14,915.0
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.0	Slurry Seal	11/6/2032	85	100	$ 14,094.0
COACH::STACIELN::1	STACIE LN	CDS	SHADY LN	Residential	25,360.0	Slurry Seal	11/6/2032	85	100	$ 12,680.0
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.0	Slurry Seal	11/6/2032	85	100	$ 12,580.0
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2032	85	100	$ 12,540.0
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.0	Slurry Seal	11/6/2032	85	100	$ 11,898.0
COACH::VALLEYRD::5	VALLEY RD	NELSON ST	LAS PALMAS ST	Collector	10,720.0	Microsurfacing	11/6/2032	85	100	$ 10,720.0
COACH::OASISPALM::1	OASIS PALM AVE	HEATHER LN	VALLEY RD	Residential	21,318.0	Slurry Seal	11/6/2032	85	100	$ 10,659.0
COACH::VALLEYRD::2	VALLEY RD	JENNIFER WAY	TRIPOLI WAY	Collector	10,400.0	Microsurfacing	11/6/2032	85	100	$ 10,400.0
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.0	Microsurfacing	11/6/2032	85	100	$ 10,400.0
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.0	Slurry Seal	11/6/2032	85	100	$ 9,036.0
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.0	Slurry Seal	11/6/2032	85	100	$ 9,000.0
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.0	Slurry Seal	11/6/2032	85	100	$ 8,455.0
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2032	85	100	$ 8,442.0
COACH::CAIROAVE::7	CAIRO AVE	ALLEY	TRIPOLI WAY	Residential	16,539.0	Slurry Seal	11/6/2032	85	100	$ 8,269.5
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2032	85	100	$ 8,250.0
COACH::SHADYLN::13	SHADY LN	HEATHER LN	VALENCIA LN	Residential	15,904.0	Slurry Seal	11/6/2032	85	100	$ 7,952.0
COACH::SHADYLN::12	SHADY LN	BRENDA LN	HEATHER LN	Residential	15,120.0	Slurry Seal	11/6/2032	85	100	$ 7,560.0
COACH::SHADYLN::11	SHADY LN	STACIE LN	BRENDA LN	Residential	14,840.0	Slurry Seal	11/6/2032	85	100	$ 7,420.0
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.0	Slurry Seal	11/6/2032	85	100	$ 6,720.0
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	Collector	6,400.0	Microsurfacing	11/6/2032	85	100	$ 6,400.0
COACH::CYPRESSST::1	CYPRESS ST	VALENCIA LN	VALLEY RD	Residential	11,172.0	Slurry Seal	11/6/2032	85	100	$ 5,586.0
COACH::SHADYLN::10	SHADY LN	53RD AVE	STACIE LN	Residential	10,808.0	Slurry Seal	11/6/2032	85	100	$ 5,404.0
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.0	Slurry Seal	11/6/2032	85	100	$ 5,400.0
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.0	Slurry Seal	11/6/2032	85	100	$ 5,328.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	$ 5,238.0
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	$ 5,238.0
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	$ 5,238.0
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	$ 5,238.0
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	Residential	10,080.0	Slurry Seal	11/6/2032	85	100	$ 5,040.0
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	Residential	9,720.0	Slurry Seal	11/6/2032	85	100	$ 4,860.0
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.0	Slurry Seal	11/6/2032	85	100	$ 4,860.0
COACH::VALENCIALN::2	VALENCIA LN	CYPRESS ST	SHADY LN	Residential	9,540.0	Slurry Seal	11/6/2032	85	100	$ 4,770.0
COACH::CAIROAVE::5	CAIRO AVE	SH-86	ALLEY	Residential	9,416.0	Slurry Seal	11/6/2032	85	100	$ 4,708.0
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2032	85	100	$ 4,680.0
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.0	Slurry Seal	11/6/2032	85	100	$ 4,590.0
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.0	Slurry Seal	11/6/2032	85	100	$ 4,560.0
COACH::VALENCIALN::1	VALENCIA LN	CDS	CYPRESS ST	Residential	8,820.0	Slurry Seal	11/6/2032	85	100	$ 4,410.0
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2032	85	100	$ 4,320.0
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	Residential	8,640.0	Slurry Seal	11/6/2032	85	100	$ 4,320.0
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2032	85	100	$ 4,320.0
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.0	Slurry Seal	11/6/2032	85	100	$ 3,888.0
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	Residential	7,704.0	Slurry Seal	11/6/2032	85	100	$ 3,852.0
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.0	Slurry Seal	11/6/2032	85	100	$ 3,648.0
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.0	Slurry Seal	11/6/2032	85	100	$ 3,582.0
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.0	Slurry Seal	11/6/2032	85	100	$ 3,344.0
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	Residential	6,666.0	Slurry Seal	11/6/2032	85	100	$ 3,333.0
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.0	Slurry Seal	11/6/2032	85	100	$ 3,258.0
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.0	Slurry Seal	11/6/2032	85	100	$ 3,256.0
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.0	Slurry Seal	11/6/2032	85	100	$ 3,240.0
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.0	Slurry Seal	11/6/2032	85	100	$ 3,222.0
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.0	Slurry Seal	11/6/2032	85	100	$ 3,222.0
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.0	Slurry Seal	11/6/2032	85	100	$ 2,700.0
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.0	Slurry Seal	11/6/2032	85	100	$ 2,556.0
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.0	Slurry Seal	11/6/2032	85	100	$ 2,524.5
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.0	Slurry Seal	11/6/2032	85	100	$ 2,520.0
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.0	Slurry Seal	11/6/2032	85	100	$ 2,340.0
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	Residential	4,608.0	Slurry Seal	11/6/2032	85	100	$ 2,304.0
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.0	Slurry Seal	11/6/2032	85	100	$ 2,160.0
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2032	85	100	$ 2,068.3
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2032	85	100	$ 2,068.3
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.0	Slurry Seal	11/6/2032	85	100	$ 1,440.0
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.0	Slurry Seal	11/6/2032	85	100	$ 1,008.0
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.0	Slurry Seal	11/6/2032	85	100	$ 540.0
COACH::CAIROAVE::9	CAIRO AVE	DATE AVE	SHADY LN	Residential	53,520.0	Slurry Seal	11/6/2033	85	100	$ 26,760.0
COACH::ARABYAVE::2	ARABY AVE	DATE AVE	SHADY LN	Residential	52,182.0	Slurry Seal	11/6/2033	85	100	$ 26,091.0
COACH::MORGANAVE::1	MORGAN AVE	VALLEY RD	52ND AVE	Residential	49,666.0	Slurry Seal	11/6/2033	85	100	$ 24,833.0
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.0	Microsurfacing	11/6/2033	85	100	$ 18,900.0
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.0	Microsurfacing	11/6/2033	85	100	$ 18,750.0
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.0	Slurry Seal	11/6/2033	85	100	$ 17,613.0
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.0	Slurry Seal	11/6/2033	85	100	$ 17,537.0
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.0	Slurry Seal	11/6/2033	85	100	$ 17,075.5
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.0	Slurry Seal	11/6/2033	85	100	$ 14,436.0
COACH::DAMASCUSAV::5	DAMASCUS AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2033	85	100	$ 12,540.0
COACH::CAIROAVE::8	CAIRO AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2033	85	100	$ 12,540.0
COACH::MEDINAAVE::1	MEDINA AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2033	85	100	$ 12,540.0
COACH::BRENDALN::1	BRENDA LN	CDS	SHADY LN	Residential	24,092.0	Slurry Seal	11/6/2033	85	100	$ 12,046.0
COACH::VALLEYRD::4	VALLEY RD	MORGAN AVE	NELSON ST	Collector	11,040.0	Microsurfacing	11/6/2033	85	100	$ 11,040.0
COACH::VALLEYRD::3	VALLEY RD	TRIPOLI WAY	MORGAN AVE	Collector	10,720.0	Microsurfacing	11/6/2033	85	100	$ 10,720.0
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	Collector	10,400.0	Microsurfacing	11/6/2033	85	100	$ 10,400.0
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	Collector	10,400.0	Microsurfacing	11/6/2033	85	100	$ 10,400.0
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.0	Slurry Seal	11/6/2033	85	100	$ 9,996.0
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2033	85	100	$ 8,442.0
COACH::SHADYLN::4	SHADY LN	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	13,440.0	Slurry Seal	11/6/2033	85	100	$ 6,720.0
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.0	Slurry Seal	11/6/2033	85	100	$ 5,577.0
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2033	85	100	$ 4,680.0
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.0	Slurry Seal	11/6/2033	85	100	$ 4,458.5
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	$ 4,320.0
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	$ 4,320.0
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	$ 4,320.0
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.0	Slurry Seal	11/6/2033	85	100	$ 3,888.0
COACH::VIAMERIDA::1	VIA MERIDA	VAN BUREN ST	PASEO BARCELONA	Residential	7,272.0	Slurry Seal	11/6/2033	85	100	$ 3,636.0
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.0	Slurry Seal	11/6/2033	85	100	$ 3,204.0
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.0	Slurry Seal	11/6/2033	85	100	$ 1,278.0

APPENDIX C:
WORK PLAN FOR SCENARIO 2: BACKLOG ELIMINATION

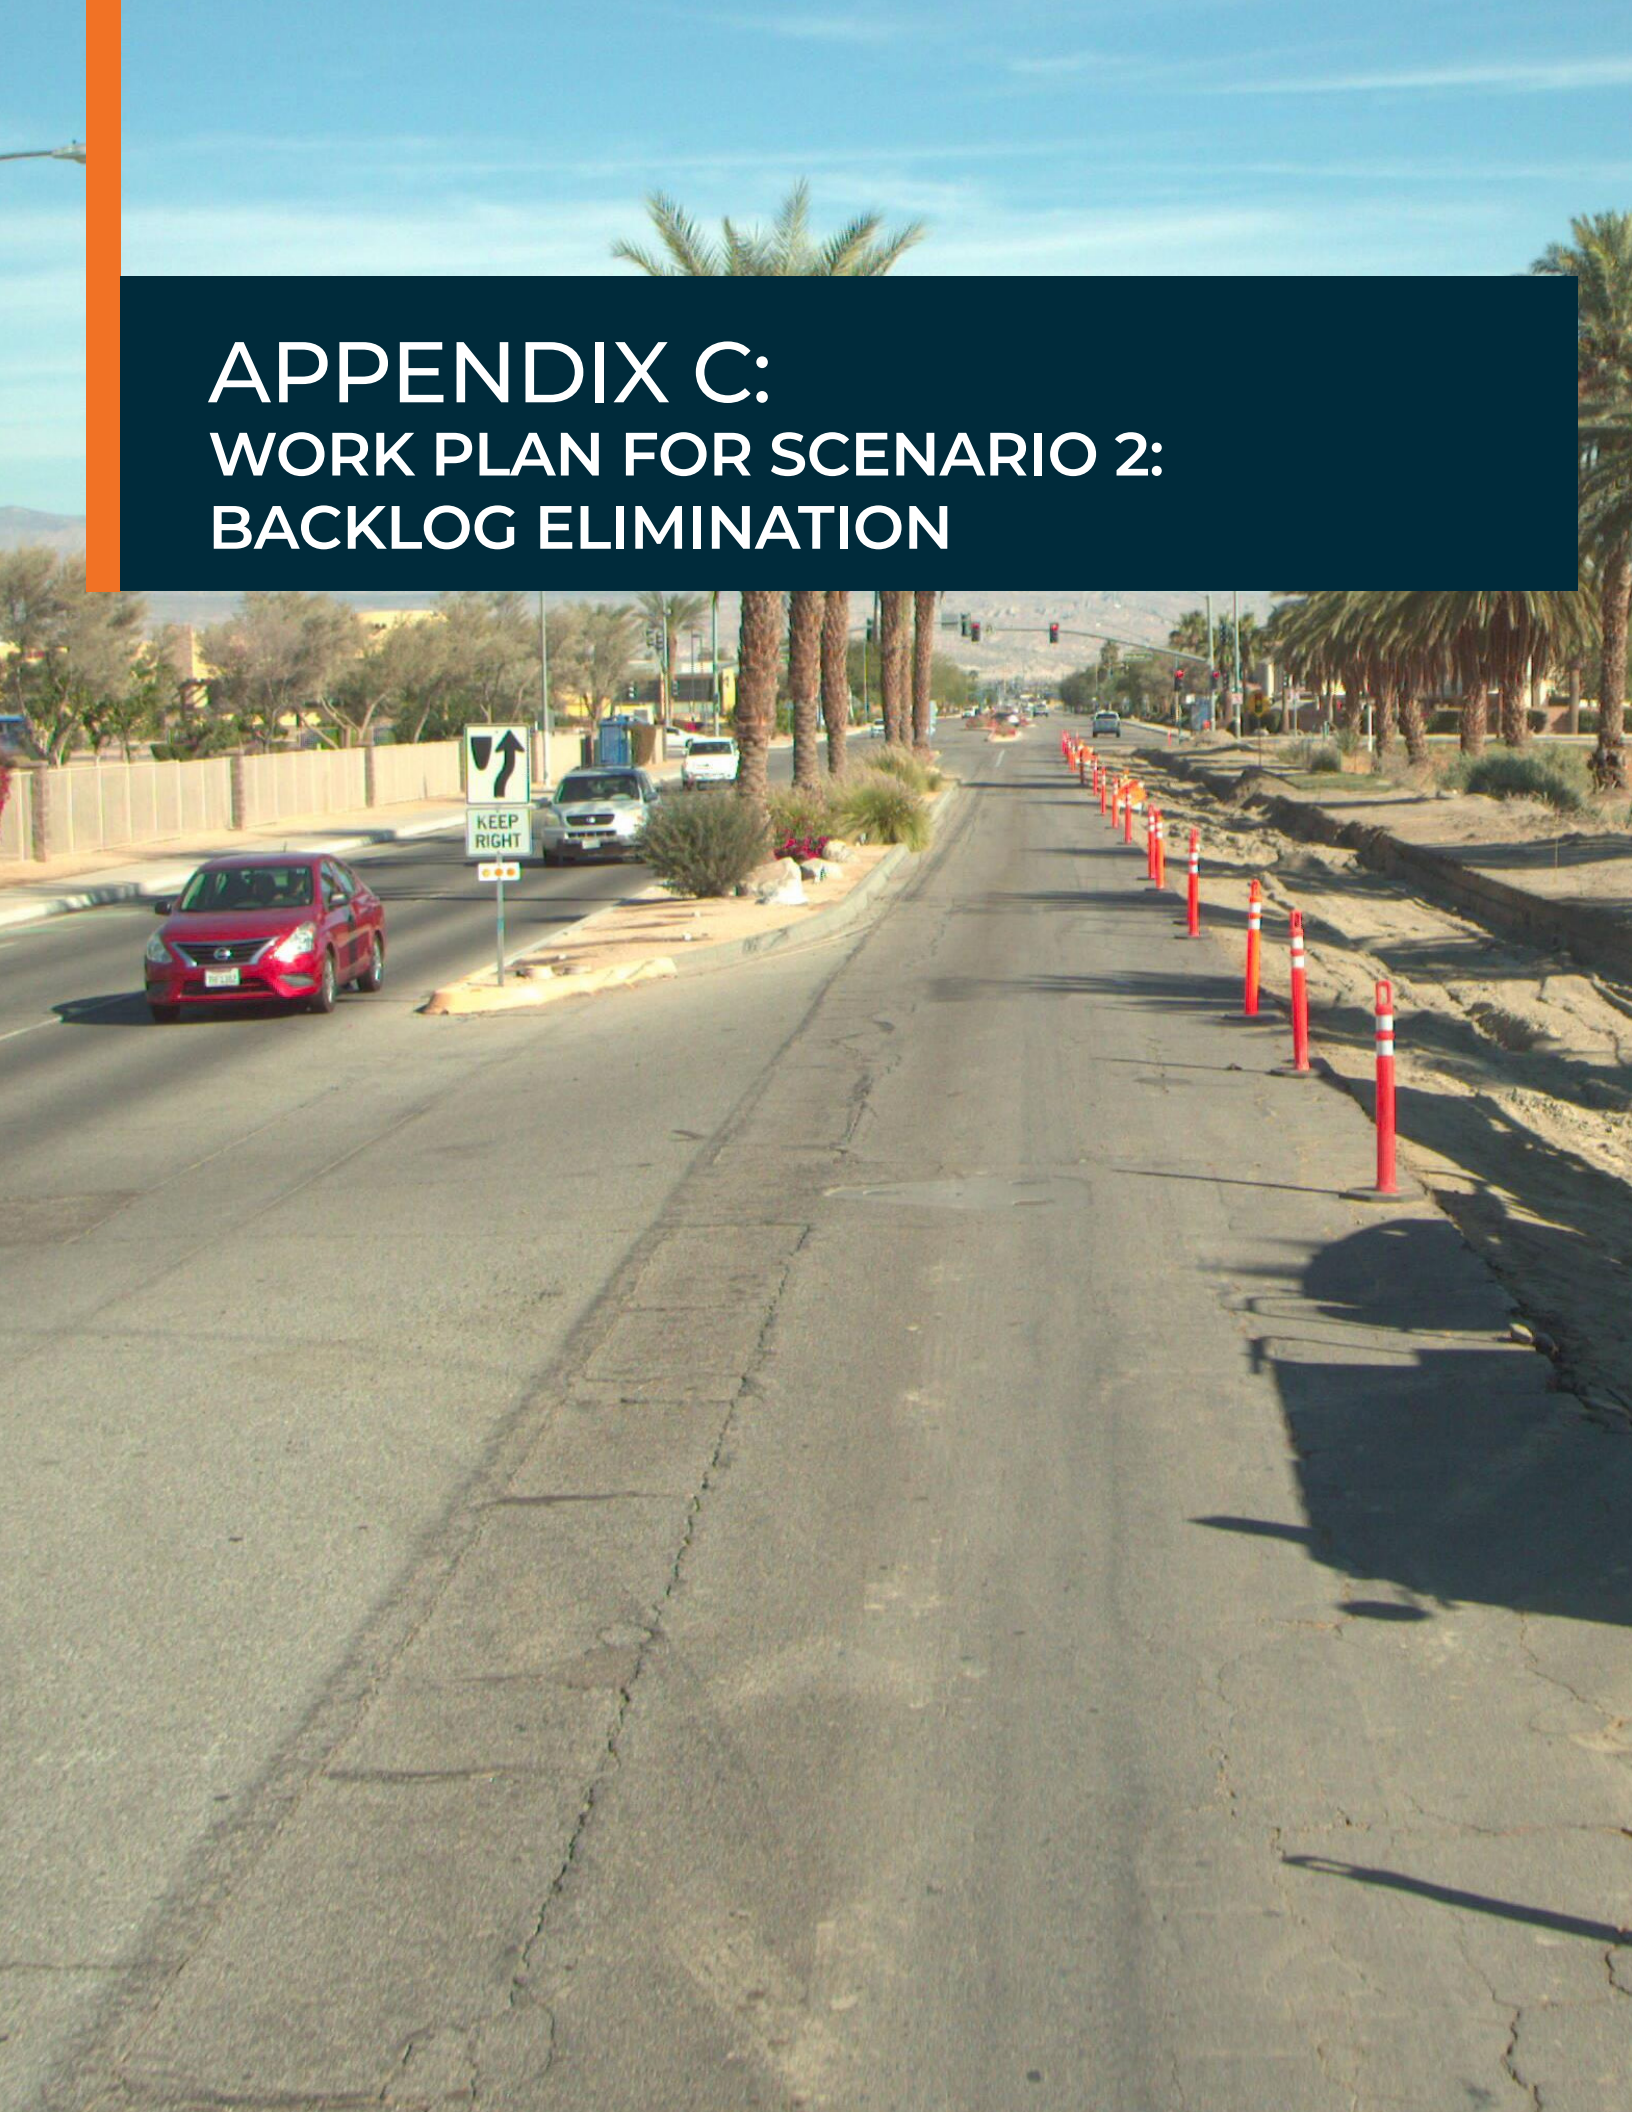

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.0	Slurry Seal	11/6/2024	74	100	$ 540.00
COACH::LAPLAYAST::3	LA PLAYA ST	50' S/O EL MAR AVE	EL MAR AVE	Residential	1,260.0	Slurry Seal	11/6/2024	78	100	$ 630.00
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.0	Slurry Seal	11/6/2024	80	100	$ 1,440.00
COACH::CDIEGO::4	CALLE DIEGO	150' E/O CALLE LEANDRO	CDS	Residential	3,128.0	Slurry Seal	11/6/2024	75	100	$ 1,564.00
COACH::52NDAVE::17	52ND AVE	TUSSELING CT	JENNIFER WAY	Arterial	1,716.0	Microsurfacing	11/6/2024	78	100	$ 1,716.00
COACH::WSIENNACIR::3	W SIENNA CIR	100' W/O SLATE DR	SLATE DR	Residential	3,600.0	Slurry Seal	11/6/2024	72	100	$ 1,800.00
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2024	74	100	$ 2,068.34
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2024	74	100	$ 2,068.34
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.0	Slurry Seal	11/6/2024	80	100	$ 2,160.00
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.0	Slurry Seal	11/6/2024	74	100	$ 2,340.00
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.0	Slurry Seal	11/6/2024	74	100	$ 2,520.00
COACH::CAVILA::1	CALLE AVILA	D/E	CALLE NOGAL	Residential	5,040.0	Slurry Seal	11/6/2024	84	100	$ 2,520.00
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.0	Slurry Seal	11/6/2024	80	100	$ 2,524.50
COACH::LUNADENICO::2	LUNA DE NICOLETA ST	CALLE COLIMA	140' N/O CALLE COLIMA	Residential	5,076.0	Slurry Seal	11/6/2024	78	100	$ 2,538.00
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.0	Slurry Seal	11/6/2024	74	100	$ 2,556.00
COACH::SLATEDR::4	SLATE DR	N SIENNA CIR	D/E	Residential	5,112.0	Slurry Seal	11/6/2024	75	100	$ 2,556.00
COACH::SH-86S::11	SH-86	CAIRO AVE	CAIRO AVE	Arterial	2,560.0	Microsurfacing	11/6/2024	84	100	$ 2,560.00
COACH::CROSA::3	CALLE ROSA	CALLE LINDA	140' W/O CALLE ESTRELLA	Residential	5,148.0	Slurry Seal	11/6/2024	75	100	$ 2,574.00
COACH::TEPEYACCT::1	TEPEYAC CT	VIA TEPEYAC	CDS	Residential	5,256.0	Slurry Seal	11/6/2024	72	100	$ 2,628.00
COACH::AALEENAH::6	AVENIDA ALEENAH	CALLE FLORENA	'150 E/O CALLE FLORENA	Residential	5,328.0	Slurry Seal	11/6/2024	72	100	$ 2,664.00
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.0	Slurry Seal	11/6/2024	74	100	$ 2,700.00
COACH::CGLORIOSA::1	CALLE GLORIOSA	AVENIDA NERIUM	D/E	Residential	5,508.0	Slurry Seal	11/6/2024	75	100	$ 2,754.00
COACH::DAMASCUSAV::2	DAMASCUS AVE	CALLE TORRES ORDUNO	LIBNAN ST	Residential	5,700.0	Slurry Seal	11/6/2024	72	100	$ 2,850.00
COACH::MICHELLEDR::4	MICHELLE DR	AVENIDA ALEENAH	AVENIDA NICOLE	Residential	5,940.0	Slurry Seal	11/6/2024	78	100	$ 2,970.00
COACH::RIGOCT::1	RIGO CT	CHRISTINA RD	CDS	Residential	5,952.0	Slurry Seal	11/6/2024	72	100	$ 2,976.00
COACH::MCCOYPEAK::2	MCCOY PEAK AVE	ARICA DR	CHAPARROSA ST	Residential	6,192.0	Slurry Seal	11/6/2024	72	100	$ 3,096.00
COACH::CROSARITO::1	CAMINO ROSARITO	D/E	CAMINO BAHIA AVE	Residential	6,440.0	Slurry Seal	11/6/2024	75	100	$ 3,220.00
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.0	Slurry Seal	11/6/2024	80	100	$ 3,222.00
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.0	Slurry Seal	11/6/2024	85	100	$ 3,222.00
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.0	Slurry Seal	11/6/2024	85	100	$ 3,240.00
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.0	Slurry Seal	11/6/2024	85	100	$ 3,256.00
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.0	Slurry Seal	11/6/2024	85	100	$ 3,258.00
COACH::SCARLETWAY::3	SCARLET WAY	E SIENNA CIR	FREDERICK ST	Residential	6,624.0	Slurry Seal	11/6/2024	75	100	$ 3,312.00
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.0	Slurry Seal	11/6/2024	85	100	$ 3,344.00
COACH::PLAYADELAM::4	PLAYA DEL AMOR ST	LOS MOCHIS AVE	PUEBLO BONITO AVE	Residential	6,768.0	Slurry Seal	11/6/2024	75	100	$ 3,384.00
COACH::WSIENNACIR::2	W SIENNA CIR	TOPAZ CT	100' W/O SLATE DR	Residential	6,804.0	Slurry Seal	11/6/2024	72	100	$ 3,402.00
COACH::LASLUNASAV::1	LAS LUNAS AVE	FREDERICK ST	SEDONA CT	Residential	7,164.0	Slurry Seal	11/6/2024	72	100	$ 3,582.00
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.0	Slurry Seal	11/6/2024	80	100	$ 3,582.00
COACH::PALMERASCR::2	PALMERAS CIR	PALOMA DR	MARIPOSA DR	Residential	7,200.0	Slurry Seal	11/6/2024	72	100	$ 3,600.00
COACH::SHADYLN::5	SHADY LN	D/E	VIA MISIONERO	Residential	7,224.0	Slurry Seal	11/6/2024	78	100	$ 3,612.00
COACH::CLINDA::1	CALLE LINDA	CDS	CALLE ROSA	Residential	7,260.0	Slurry Seal	11/6/2024	72	100	$ 3,630.00
COACH::SLATEDR::1	SLATE DR	54TH AVE	W SIENNA CIR	Residential	7,272.0	Slurry Seal	11/6/2024	81	100	$ 3,636.00
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.0	Slurry Seal	11/6/2024	85	100	$ 3,648.00
COACH::CAVILA::3	CALLE AVILA	CALLE PINO	53RD AVE	Residential	7,400.0	Slurry Seal	11/6/2024	81	100	$ 3,700.00
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.0	Slurry Seal	11/6/2024	80	100	$ 3,888.00
COACH::HUXLEYCT::1	HUXLEY CT	MICHELLE DR	CDS	Residential	8,064.0	Slurry Seal	11/6/2024	75	100	$ 4,032.00
COACH::MICHELLEDR::2	MICHELLE DR	MICHELLE DR	MICHELLE DR	Residential	8,100.0	Slurry Seal	11/6/2024	72	100	$ 4,050.00
COACH::JULIACT::1	JULIA CT	AVENIDA ALEENAH	CDS	Residential	8,280.0	Slurry Seal	11/6/2024	72	100	$ 4,140.00
COACH::VERACRUZ::1	VERA CRUZ	CDS	PAVON PALMA	Residential	8,320.0	Slurry Seal	11/6/2024	84	100	$ 4,160.00
COACH::VENICELN::1	VENICE LN	HUNTINGTON AVE	CDS	Residential	8,352.0	Slurry Seal	11/6/2024	78	100	$ 4,176.00
COACH::CCLAVEL::2	CALLE CLAVEL	CALLE VIOLETA	CALLE BOUGANVILIA	Residential	8,415.0	Slurry Seal	11/6/2024	78	100	$ 4,207.50
COACH::CCLAVEL::1	CALLE CLAVEL	CALLE GERANIO	CALLE VIOLETA	Residential	8,448.0	Slurry Seal	11/6/2024	72	100	$ 4,224.00
COACH::CGARDENIA::2	CALLE GARDENIA	CALLE VIOLETA	CALLE BOUGANVILIA	Residential	8,448.0	Slurry Seal	11/6/2024	72	100	$ 4,224.00
COACH::CGARDENIA::1	CALLE GARDENIA	CALLE GERANIO	CALLE VIOLETA	Residential	8,481.0	Slurry Seal	11/6/2024	75	100	$ 4,240.50
COACH::SANIGNACIO::1	SAN IGNACIO AVE	CHICHEN ITZA RD	CALHOUN ST	Residential	8,536.0	Slurry Seal	11/6/2024	84	100	$ 4,268.00
COACH::ACORTEZ::3	AVENIDA CORTEZ	VIA DURANGO	PASEO LAREDO	Residential	8,604.0	Slurry Seal	11/6/2024	75	100	$ 4,302.00
COACH::LOSMOCHIS::1	LOS MOCHIS AVE	JACKSON ST	PLAYA DEL AMOR ST	Residential	8,624.0	Slurry Seal	11/6/2024	78	100	$ 4,312.00
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2024	85	100	$ 4,320.00
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2024	85	100	$ 4,320.00
COACH::50THAVEW::6	50TH AVE	BALBOA ST	AVENIDA DE ORO	Arterial	4,356.0	Microsurfacing	11/6/2024	72	100	$ 4,356.00
COACH::PUERTECITO::1	PUERTECITOS AVE	JACKSON ST	PLAYA DEL AMOR ST	Residential	8,756.0	Slurry Seal	11/6/2024	81	100	$ 4,378.00
COACH::HUNTINGTON::2	HUNTINGTON AVE	MONARCH RD	HERMOSA BLVD	Residential	9,000.0	Slurry Seal	11/6/2024	72	100	$ 4,500.00
COACH::CHRISTINA::4	CHRISTINA RD	TOMAS LN	RIGO CT	Residential	9,108.0	Slurry Seal	11/6/2024	75	100	$ 4,554.00
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.0	Slurry Seal	11/6/2024	85	100	$ 4,560.00
COACH::CHRISTINA::3	CHRISTINA RD	ANDREA LN	TOMAS LN	Residential	9,144.0	Slurry Seal	11/6/2024	81	100	$ 4,572.00
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.0	Slurry Seal	11/6/2024	74	100	$ 4,590.00
COACH::CIELOVICTR::1	CIELO VICTORIA ST	MARIANA AVE	48TH AVE	Residential	9,200.0	Slurry Seal	11/6/2024	72	100	$ 4,600.00
COACH::HERMOSABL::1	HERMOSA BLVD	HUNTINGTON AVE	LA JOLLA AVE	Residential	9,216.0	Slurry Seal	11/6/2024	78	100	$ 4,608.00
COACH::SLATEDR::2	SLATE DR	W SIENNA CIR	SCARLET WAY	Residential	9,252.0	Slurry Seal	11/6/2024	72	100	$ 4,626.00
COACH::CROSA::1	CALLE ROSA	CALLE LOS HERMANOS	CALLE BONITA	Residential	9,360.0	Slurry Seal	11/6/2024	72	100	$ 4,680.00
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2024	80	100	$ 4,680.00
COACH::FREDERICK::20	FREDERICK ST	140' S/O LAS LUNAS AVE	LAS LUNAS AVE	Residential	9,372.0	Slurry Seal	11/6/2024	84	100	$ 4,686.00
COACH::CFELIZ::1	CALLE FELIZ	CALLE LOS HERMANOS	CALLE BONITA	Residential	9,396.0	Slurry Seal	11/6/2024	72	100	$ 4,698.00
COACH::MONARCHRD::2	MONARCH RD	MANHATTAN AVE	HUNTINGTON AVE	Residential	9,396.0	Slurry Seal	11/6/2024	75	100	$ 4,698.00
COACH::MONARCHRD::1	MONARCH RD	CAPITOLA AVE	MANHATTAN AVE	Residential	9,396.0	Slurry Seal	11/6/2024	78	100	$ 4,698.00
COACH::LACOSTAAVE::1	LA COSTA AVE	ESTRELLA PEDRO ST	LA PLAYA ST	Residential	9,520.0	Slurry Seal	11/6/2024	75	100	$ 4,760.00
COACH::ANDREALN::1	ANDREA LN	JULIA DR	LINDA AVE	Residential	9,620.0	Slurry Seal	11/6/2024	84	100	$ 4,810.00
COACH::CHANNINGCT::1	CHANNING CT	AVENIDA MARIA	CDS	Residential	9,720.0	Slurry Seal	11/6/2024	72	100	$ 4,860.00
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.0	Slurry Seal	11/6/2024	74	100	$ 4,860.00
COACH::CCERVANTES::2	CALLE CERVANTES	CALLE LARRIVA	CALLE CHAVEZ	Residential	9,792.0	Slurry Seal	11/6/2024	72	100	$ 4,896.00
COACH::CANABELLA::1	CALLE ANABELLA	AVENIDA MARIA	AVENIDA CRYSTAL	Residential	9,900.0	Slurry Seal	11/6/2024	72	100	$ 4,950.00
COACH::KINGCT::1	KING CT	CDS	WASHINGTONIA AVE	Residential	10,016.0	Slurry Seal	11/6/2024	78	100	$ 5,008.00
COACH::CHICHENITZ::1	CHICHEN ITZA RD	PUERTO ESCONDIDO AVE	IXTAPA AVE	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.00
COACH::CFLORENA::3	CALLE FLORENA	AVENIDA GRACE	AVENIDA ALEENAH	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.00
COACH::AGUABLANCA::2	AGUA BLANCA AVE	LUNA DE NICOLETA ST	CAMINO MAYA	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.00
COACH::CCOLIMA::2	CALLE COLIMA	LUNA DE NICOLETA ST	CAMINO MAYA	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.00
COACH::CCOLIMA::4	CALLE COLIMA	CAMINO REAL	LA PLAYA ST	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.00
COACH::CCOLIMA::3	CALLE COLIMA	CAMINO MAYA	CAMINO REAL	Residential	10,080.0	Slurry Seal	11/6/2024	75	100	$ 5,040.00
COACH::AGUABLANCA::4	AGUA BLANCA AVE	CAMINO REAL	CHICHEN ITZA RD	Residential	10,080.0	Slurry Seal	11/6/2024	75	100	$ 5,040.00
COACH::PUEBLOBONI::1	PUEBLO BONITO AVE	PLAYA DEL AMOR ST	EL ACRO ST	Residential	10,080.0	Slurry Seal	11/6/2024	78	100	$ 5,040.00
COACH::PLAYADELAM::5	PLAYA DEL AMOR ST	PUEBLO BONITO AVE	EL GRECO AVE	Residential	10,080.0	Slurry Seal	11/6/2024	84	100	$ 5,040.00
COACH::CTECHA::4	CALLE TECHA	CALLE ROBERTO	CALLE VERDE	Residential	10,240.0	Slurry Seal	11/6/2024	72	100	$ 5,120.00
COACH::SH-86N::11	SH-86	BAGDAD AVE	BAGDAD AVE	Arterial	5,120.0	Microsurfacing	11/6/2024	81	100	$ 5,120.00
COACH::CPUERTADEL::1	CALLE PUERTA DEL SOL	50TH AVE	AVENIDA VERANO	Residential	10,272.0	Slurry Seal	11/6/2024	78	100	$ 5,136.00
COACH::CROSA::2	CALLE ROSA	CALLE BONITA	CALLE LINDA	Residential	10,332.0	Slurry Seal	11/6/2024	72	100	$ 5,166.00
COACH::COCASO::2	CALLE OCASO	CORTE ECLIPSE	CORTE ESTIVO	Residential	10,360.0	Slurry Seal	11/6/2024	72	100	$ 5,180.00
COACH::COCASO::1	CALLE OCASO	AVENIDA VERANO	CORTE ECLIPSE	Residential	10,360.0	Slurry Seal	11/6/2024	78	100	$ 5,180.00
COACH::VIATEPEYAC::2	VIA TEPEYAC	TEPEYAC CT	SHADY LN	Residential	10,368.0	Slurry Seal	11/6/2024	72	100	$ 5,184.00
COACH::SANASISDR::3	SAN ASIS DR	CALLE TOLOSA	SAN CAPISTRANO DR	Residential	10,400.0	Slurry Seal	11/6/2024	75	100	$ 5,200.00
COACH::CCOLIMA::1	CALLE COLIMA	AGUA CALIENTE ST	LUNA DE NICOLETA ST	Residential	10,440.0	Slurry Seal	11/6/2024	72	100	$ 5,220.00
COACH::AGUABLANCA::1	AGUA BLANCA AVE	AGUA CALIENTE ST	LUNA DE NICOLETA ST	Residential	10,440.0	Slurry Seal	11/6/2024	72	100	$ 5,220.00
COACH::PLAYADELAM::1	PLAYA DEL AMOR ST	CAMINO BAHIA AVE	PUERTECITOS AVE	Residential	10,440.0	Slurry Seal	11/6/2024	75	100	$ 5,220.00
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2024	74	100	$ 5,238.00
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2024	80	100	$ 5,238.00
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2024	80	100	$ 5,238.00
COACH::ESIENNACIR::1	E SIENNA CIR	SCARLET WAY	INDIGO CT	Residential	10,476.0	Slurry Seal	11/6/2024	81	100	$ 5,238.00
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2024	85	100	$ 5,238.00
COACH::ROYALCT::1	ROYAL CT	CDS	WASHINGTONIA AVE	Residential	10,540.0	Slurry Seal	11/6/2024	75	100	$ 5,270.00
COACH::52NDAVEW::18	52ND AVE	CALLE TORRES ORDUNO	DOUMA CT	Arterial	5,278.0	Microsurfacing	11/6/2024	72	100	$ 5,278.00
COACH::ELCASTILLO::1	EL CASTILLO RD	TODOS SANTOS AVE	CAMINO LAS BRISAS	Residential	10,640.0	Slurry Seal	11/6/2024	78	100	$ 5,320.00
COACH::ELARCOST::1	EL ARCO ST	LOS CABOS AVE	TODOS SANTOS AVE	Residential	10,640.0	Slurry Seal	11/6/2024	78	100	$ 5,320.00
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.0	Slurry Seal	11/6/2024	85	100	$ 5,328.00
COACH::QUEENCT::1	QUEEN CT	CDS	WASHINGTONIA AVE	Residential	10,778.0	Slurry Seal	11/6/2024	75	100	$ 5,389.00
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.0	Slurry Seal	11/6/2024	74	100	$ 5,400.00
COACH::SANASISDR::1	SAN ASIS DR	CDS	SOLEDAD PL	Residential	10,800.0	Slurry Seal	11/6/2024	75	100	$ 5,400.00
COACH::INDIGOCT::1	INDIGO CT	CDS	E SIENNA CIR	Residential	10,944.0	Slurry Seal	11/6/2024	78	100	$ 5,472.00
COACH::52NDAVE::22	52ND AVE	NELSON ST	DATE AVE	Arterial	5,500.0	Microsurfacing	11/6/2024	75	100	$ 5,500.00
COACH::PUEBLOBONI::3	PUEBLO BONITO AVE	EL CASTILLO RD	TAXCO AVE	Residential	11,016.0	Slurry Seal	11/6/2024	81	100	$ 5,508.00
COACH::CHICHENITZ::4	CHICHEN ITZA RD	SAN IGNACIO AVE	AGUA BLANCA AVE	Residential	11,196.0	Slurry Seal	11/6/2024	84	100	$ 5,598.00
COACH::CROSARITO::2	CAMINO ROSARITO	CAMINO BAHIA AVE	LOS CABOS AVE	Residential	11,200.0	Slurry Seal	11/6/2024	75	100	$ 5,600.00
COACH::TAXCOAVE::1	TAXCO AVE	PUEBLO BONITO AVE	EL GRECO AVE	Residential	11,200.0	Slurry Seal	11/6/2024	84	100	$ 5,600.00
COACH::LASLUNASAV::2	LAS LUNAS AVE	SEDONA CT	MESA CT	Residential	11,376.0	Slurry Seal	11/6/2024	75	100	$ 5,688.00
COACH::SUNCRESTST::3	SUNCREST ST	SUNDANCE LN	SUNDOWN LN	Residential	11,440.0	Slurry Seal	11/6/2024	75	100	$ 5,720.00
COACH::LASLUNASAV::4	LAS LUNAS AVE	RIO RANCHO CT	LAS CRUCES ST	Residential	11,556.0	Slurry Seal	11/6/2024	75	100	$ 5,778.00
COACH::LAJOLLAAVE::2	LA JOLLA AVE	HERMOSA BLVD	ZUMA DR	Residential	11,736.0	Slurry Seal	11/6/2024	72	100	$ 5,868.00
COACH::9THST::3	9TH ST	VINE AVE	SHADY LN	Collector	5,880.0	Microsurfacing	11/6/2024	84	100	$ 5,880.00
COACH::ACORTEZ::4	AVENIDA CORTEZ	PASEO LAREDO	CALLE LEON	Residential	11,952.0	Slurry Seal	11/6/2024	75	100	$ 5,976.00
COACH::LAPONDEROSA::1	LA PONDEROSA DR	52ND AVE	NAOMI CT	Residential	12,204.0	Slurry Seal	11/6/2024	81	100	$ 6,102.00
COACH::CROJO::8	CALLE ROJO	CALLE CAMACHO	CESAR CHAVEZ ST	Residential	12,320.0	Slurry Seal	11/6/2024	81	100	$ 6,160.00
COACH::LAJOLLAAVE::1	LA JOLLA AVE	CDS	HERMOSA BLVD	Residential	12,780.0	Slurry Seal	11/6/2024	75	100	$ 6,390.00
COACH::PEDRODR::1	PEDRO DR	TOMAS LN	AVENIDA DEL PARQUE	Residential	12,816.0	Slurry Seal	11/6/2024	78	100	$ 6,408.00
COACH::CROJO::7	CALLE ROJO	CALLE AVILA	CALLE CAMACHO	Residential	12,960.0	Slurry Seal	11/6/2024	75	100	$ 6,480.00
COACH::CZAMORA::1	CALLE ZAMORA	CALLE EMPALME	CALLE TECHA	Residential	13,356.0	Slurry Seal	11/6/2024	72	100	$ 6,678.00
COACH::CCINDARELA::1	CORTE CINDARELLA	CDS	AVENIDA ADOBE	Residential	13,360.0	Slurry Seal	11/6/2024	84	100	$ 6,680.00
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.0	Slurry Seal	11/6/2024	80	100	$ 6,720.00
COACH::52NDAVE::23	52ND AVE	DATE AVE	LAS PALMAS ST	Arterial	6,952.0	Microsurfacing	11/6/2024	81	100	$ 6,952.00
COACH::ANDREALN::4	ANDREA LN	'45' N/O CHRISTINA RD	CDS	Residential	13,949.0	Slurry Seal	11/6/2024	84	100	$ 6,974.50
COACH::CAVILA::2	CALLE AVILA	CALLE NOGAL	CALLE PINO	Residential	13,960.0	Slurry Seal	11/6/2024	81	100	$ 6,980.00
COACH::SOLDELINDA::1	SOL DE LINDA ST	PLAZA DE ORO AVE	MARIANA AVE	Residential	14,000.0	Slurry Seal	11/6/2024	72	100	$ 7,000.00
COACH::CECLIPSE::1	CORTE ECLIPSE	CALLE OCASO	CDS	Residential	14,134.0	Slurry Seal	11/6/2024	72	100	$ 7,067.00
COACH::HUNTINGTON::1	HUNTINGTON AVE	VENICE LN	MONARCH RD	Residential	14,400.0	Slurry Seal	11/6/2024	81	100	$ 7,200.00
COACH::52NDAVEE::7	52ND AVE	CALLE TORRES ORDUNO	CALLE EMPALME	Arterial	1,456.0	1.5" Thin Overlay	11/6/2024	57	100	$ 7,280.00
COACH::AMETHYSTCT::1	AMETHYST CT	CDS	SCARLET WAY	Residential	14,760.0	Slurry Seal	11/6/2024	81	100	$ 7,380.00

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::PEDRODR::2	PEDRO DR	AVENIDA DEL PARQUE	AVENIDA ADOBE	Residential	14,796.0	Slurry Seal	11/6/2024	72	100	$ 7,398.00
COACH::52NDAVEW::17	52ND AVE	CALLE EMPALME	CALLE TORRES ORDUNO	Arterial	1,482.0	1.5" Thin Overlay	11/6/2024	60	100	$ 7,410.00
COACH::TODOSSANTO::3	TODOS SANTOS AVE	420' W/O CAMINO CORTEZ	CAMINO CORTEZ	Residential	15,048.0	Slurry Seal	11/6/2024	72	100	$ 7,524.00
COACH::SCARLETWAY::2	SCARLET WAY	SAPPHIRE LN	E SIENNA CIR	Residential	15,156.0	Slurry Seal	11/6/2024	72	100	$ 7,578.00
COACH::CLEON::1	CALLE LEON	CALLE DE VEGA	AVENIDA CORTEZ	Residential	15,280.0	Slurry Seal	11/6/2024	84	100	$ 7,640.00
COACH::CELALBA::1	CORTE EL ALBA	CDS	CALLE EL SOL	Residential	15,392.0	Slurry Seal	11/6/2024	78	100	$ 7,696.00
COACH::SOLEDAD PL::1	SOLEDAD PL	SAN ASIS DR	SANTO LN	Residential	15,400.0	Slurry Seal	11/6/2024	72	100	$ 7,700.00
COACH::CPIZANO::2	CALLE PIZANO	COURTE STELLA	CALLE MENDOZA	Residential	15,444.0	Slurry Seal	11/6/2024	72	100	$ 7,722.00
COACH::SHADYLN::8	SHADY LN	GUADALUPANA CT	VIA TEPEYAC	Residential	15,456.0	Slurry Seal	11/6/2024	81	100	$ 7,728.00
COACH::SHADYLN::6	SHADY LN	VIA MISIONERO	DIEGO CT	Residential	15,456.0	Slurry Seal	11/6/2024	84	100	$ 7,728.00
COACH::GUADALUPAN::1	GUADALUPANA CT	CDS	SHADY LN	Residential	15,624.0	Slurry Seal	11/6/2024	72	100	$ 7,812.00
COACH::DIEGOCT::1	DIEGO CT	CDS	SHADY LN	Residential	15,624.0	Slurry Seal	11/6/2024	81	100	$ 7,812.00
COACH::SHADYLN::7	SHADY LN	DIEGO CT	GUADALUPANA CT	Residential	15,960.0	Slurry Seal	11/6/2024	75	100	$ 7,980.00
COACH::PLAZADEORO::1	PLAZA DE ORO AVE	SOL DE LINDA ST	LUNA DE NICOLETA ST	Residential	15,984.0	Slurry Seal	11/6/2024	72	100	$ 7,992.00
COACH::CREAL::2	CAMINO REAL	CAMINO PELICANO	CALLE COLIMA	Residential	16,056.0	Slurry Seal	11/6/2024	78	100	$ 8,028.00
COACH::SEDONACT::1	SEDONA CT	LAS LUNAS AVE	CDS	Residential	16,200.0	Slurry Seal	11/6/2024	75	100	$ 8,100.00
COACH::RIORANCHO::1	RIO RANCHO CT	LAS LUNAS AVE	CDS	Residential	16,200.0	Slurry Seal	11/6/2024	75	100	$ 8,100.00
COACH::MESACT::1	MESA CT	LAS LUNAS AVE	CDS	Residential	16,200.0	Slurry Seal	11/6/2024	78	100	$ 8,100.00
COACH::CBOUGANVIL::3	CALLE BOUGANVILIA	EL SOL ST	CALLE GARDENIA	Residential	16,272.0	Slurry Seal	11/6/2024	72	100	$ 8,136.00
COACH::TOMASLN::2	TOMAS LN	CHRISTINA RD	PEDRO DR	Residential	16,308.0	Slurry Seal	11/6/2024	78	100	$ 8,154.00
COACH::LAPLAYAST::4	LA PLAYA ST	EL MAR AVE	LA COSTA AVE	Residential	16,380.0	Slurry Seal	11/6/2024	78	100	$ 8,190.00
COACH::SANSOLANO::1	SAN SOLANO RD	SAN ASIS DR	SAGRADO DR	Residential	16,400.0	Slurry Seal	11/6/2024	72	100	$ 8,200.00
COACH::AMARIA::2	AVENIDA MARIA	CALLE DANIELLE	CALLE ANABELLA	Residential	16,401.0	Slurry Seal	11/6/2024	72	100	$ 8,200.50
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2024	85	100	$ 8,250.00
COACH::CNOGAL::1	CALLE NOGAL	CALLE OLIVO	CALLE AVILA	Residential	16,740.0	Slurry Seal	11/6/2024	84	100	$ 8,370.00
COACH::CPINO::1	CALLE PINO	CALLE OLIVO	CALLE AVILA	Residential	16,740.0	Slurry Seal	11/6/2024	84	100	$ 8,370.00
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2024	85	100	$ 8,442.00
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.0	Slurry Seal	11/6/2024	74	100	$ 8,455.00
COACH::ELCASTILLO::2	EL CASTILLO RD	CAMINO LAS BRISAS	PUEBLO BONITO AVE	Residential	17,024.0	Slurry Seal	11/6/2024	78	100	$ 8,512.00
COACH::SH-86N::7	SH-86	ALLEY	CAIRO AVE	Arterial	8,560.0	Microsurfacing	11/6/2024	78	100	$ 8,560.00
COACH::PEREZST::3	PEREZ ST	ORTIZ ST	HERNANDEZ ST	Residential	17,240.0	Slurry Seal	11/6/2024	81	100	$ 8,620.00
COACH::MAZATLANDR::8	MAZATLAN DR	MAZATLAN DR PARKING LOOP	MAZATLAN DR PARKING LOOP	Residential	17,280.0	Slurry Seal	11/6/2024	81	100	$ 8,640.00
COACH::ORTIZST::1	ORTIZ ST	PEREZ ST	HERNANDEZ ST	Residential	17,680.0	Slurry Seal	11/6/2024	84	100	$ 8,840.00
COACH::AIRPORTBL::5	AIRPORT BLVD	1395' W/O FILLMORE ST	1215' W/O FILLMORE ST	Collector	8,900.0	Microsurfacing	11/6/2024	81	100	$ 8,900.00
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.0	Slurry Seal	11/6/2024	85	100	$ 9,000.00
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.0	Slurry Seal	11/6/2024	80	100	$ 9,036.00
COACH::52NDAVEE::5	52ND AVE	DOUMA ST	DOUMA CT	Arterial	9,412.0	Microsurfacing	11/6/2024	72	100	$ 9,412.00
COACH::ADELPARQUE::3	AVENIDA DEL PARQUE	COURTE DEL PARQUE	AVENIDA DE ORO	Residential	18,880.0	Slurry Seal	11/6/2024	84	100	$ 9,440.00
COACH::SHADYLN::9	SHADY LN	VIA TEPEYAC	53RD AVE	Residential	19,488.0	Slurry Seal	11/6/2024	78	100	$ 9,744.00
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.0	1.5" Thin Overlay	11/6/2024	56	100	$ 10,080.00
COACH::AGUACALIEN::2	AGUA CALIENTE ST	CAMINO LAS BRISAS	CALLE COLIMA	Residential	20,202.0	Slurry Seal	11/6/2024	72	100	$ 10,101.00
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.0	Microsurfacing	11/6/2024	74	100	$ 10,400.00
COACH::VALLEYRD::6	VALLEY RD	LAS PALMAS ST	OASIS PALM AVE	Collector	10,400.0	Microsurfacing	11/6/2024	78	100	$ 10,400.00
COACH::CVIOLETA::1	CALLE VIOLETA	CALLE CLAVEL	CALLE GARDENIA	Residential	20,856.0	Slurry Seal	11/6/2024	75	100	$ 10,428.00
COACH::CGERANIO::1	CALLE GERANIO	CALLE CLAVEL	CALLE GARDENIA	Residential	20,889.0	Slurry Seal	11/6/2024	72	100	$ 10,444.50
COACH::52NDAVE::43	52ND AVE	5300' E/O FILLMORE ST	CITY LIMITS	Rural	13,515.0	Chip Seal	11/6/2024	75	100	$ 10,812.00
COACH::52NDAVE::24	52ND AVE	LAS PALMAS ST	OASIS PALM AVE	Arterial	11,396.0	Microsurfacing	11/6/2024	72	100	$ 11,396.00
COACH::52NDAVE::25	52ND AVE	OASIS PALM AVE	DOS PALMAS AVE	Arterial	11,440.0	Microsurfacing	11/6/2024	72	100	$ 11,440.00
COACH::52NDAVE::27	52ND AVE	CYPRESS ST	SHADY LN	Arterial	11,440.0	Microsurfacing	11/6/2024	78	100	$ 11,440.00
COACH::52NDAVE::26	52ND AVE	DOS PALMAS AVE	CYPRESS ST	Arterial	11,440.0	Microsurfacing	11/6/2024	78	100	$ 11,440.00
COACH::LAGUNALN::1	LAGUNA LN	CDS	LAGUNA LN	Residential	23,148.0	Slurry Seal	11/6/2024	72	100	$ 11,574.00
COACH::LASCRUCES::2	LAS CRUCES ST	LA LUNAS AVE	49TH AVE	Residential	23,292.0	Slurry Seal	11/6/2024	78	100	$ 11,646.00
COACH::CDIEGO::2	CALLE DIEGO	VIA SANTIAGO	CALLE LEANDRO	Residential	23,664.0	Slurry Seal	11/6/2024	81	100	$ 11,832.00
COACH::CEMPALME::2	CALLE EMPALME	53RD AVE	CALLE ZAMORA	Residential	23,796.0	Slurry Seal	11/6/2024	78	100	$ 11,898.00
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.0	Slurry Seal	11/6/2024	80	100	$ 11,898.00
COACH::CESARCHAVE::1	CESAR CHAVEZ ST	53RD AVE	CALLE ZAMORA	Residential	24,457.0	Slurry Seal	11/6/2024	72	100	$ 12,228.50
COACH::CBAHIAAVE::1	CAMINO BAHIA AVE	PLAYA DEL AMOR ST	CAMINO ROSARITO	Residential	24,480.0	Slurry Seal	11/6/2024	72	100	$ 12,240.00
COACH::FIESTARD::5	FIESTA RD	SIERRA ST	BRIANNE LN	Residential	24,876.0	Slurry Seal	11/6/2024	72	100	$ 12,438.00
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2024	74	100	$ 12,540.00
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.0	Slurry Seal	11/6/2024	85	100	$ 12,580.00
COACH::CTECHA::6	CALLE TECHA	CALLE VERDE	CALLE ROJO	Residential	25,920.0	Slurry Seal	11/6/2024	72	100	$ 12,960.00
COACH::CCAMACHO::4	CALLE CAMACHO	CALLE VERDE	CALLE ROJO	Residential	25,920.0	Slurry Seal	11/6/2024	75	100	$ 12,960.00
COACH::CVERDE::2	CALLE VERDE	CALLE TECHA	CALLE AVILA	Collector	12,960.0	Microsurfacing	11/6/2024	75	100	$ 12,960.00
COACH::CEMPALME::3	CALLE EMPALME	CALLE VERDE	CALLE ROJO	Residential	25,920.0	Slurry Seal	11/6/2024	75	100	$ 12,960.00
COACH::CVERDE::1	CALLE VERDE	CALLE EMPALME	CALLE TECHA	Collector	12,960.0	Microsurfacing	11/6/2024	78	100	$ 12,960.00
COACH::CMAYA::1	CAMINO MAYA	AGUA BLANCA AVE	CALLE COLIMA	Residential	26,136.0	Slurry Seal	11/6/2024	72	100	$ 13,068.00
COACH::LUNADENICO::1	LUNA DE NICOLETA ST	AGUA BLANCA AVE	CALLE COLIMA	Residential	26,136.0	Slurry Seal	11/6/2024	75	100	$ 13,068.00
COACH::CCAMACHO::1	CALLE CAMACHO	D/E	53RD AVE	Residential	26,400.0	Slurry Seal	11/6/2024	81	100	$ 13,200.00
COACH::CAVILA::4	CALLE AVILA	53RD AVE	CALLE ZAMORA	Residential	26,440.0	Slurry Seal	11/6/2024	72	100	$ 13,220.00
COACH::CCAMACHO::3	CALLE CAMACHO	CALLE ZAMORA	CALLE VERDE	Residential	26,440.0	Slurry Seal	11/6/2024	78	100	$ 13,220.00
COACH::CTECHA::1	CALLE TECHA	53RD AVE	CALLE ZAMORA	Residential	26,440.0	Slurry Seal	11/6/2024	78	100	$ 13,220.00
COACH::CCAMACHO::2	CALLE CAMACHO	53RD AVE	CALLE ZAMORA	Residential	26,440.0	Slurry Seal	11/6/2024	81	100	$ 13,220.00
COACH::CORONADOST::1	CORONADO ST	D/E	50TH AVE	Residential	26,840.0	Slurry Seal	11/6/2024	75	100	$ 13,420.00
COACH::KENMOREST::1	KENMORE ST	D/E	50TH AVE	Residential	26,880.0	Slurry Seal	11/6/2024	75	100	$ 13,440.00
COACH::SLATEDR::3	SLATE DR	SCARLET WAY	N SIENNA CIR	Residential	27,432.0	Slurry Seal	11/6/2024	75	100	$ 13,716.00
COACH::CLASBRISAS::1	CAMINO LAS BRISAS	EL CASTILLO RD	AGLIA CALIENTE ST	Residential	27,576.0	Slurry Seal	11/6/2024	75	100	$ 13,788.00
COACH::52NDAVE::21	52ND AVE	MORGAN AVE	NELSON ST	Arterial	13,800.0	Microsurfacing	11/6/2024	75	100	$ 13,800.00
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.0	Slurry Seal	11/6/2024	85	100	$ 14,094.00
COACH::DILLONRD::10	DILLON RD	800' S/O VISTA DEL NORTE	650' S/O VISTA DEL NORTE	Arterial	14,208.0	Microsurfacing	11/6/2024	81	100	$ 14,208.00
COACH::AADOBE::11	AVENIDA ADOBE	CHRISTINA RD	45' N/O CHRISTINA RD	Residential	1,620.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 14,580.00
COACH::AADOBE::9	AVENIDA ADOBE	LINDA AVE	215' S/O CHRISTINA RD	Residential	1,620.0	3" Mill & Overlay	11/6/2024	45	100	$ 14,580.00
COACH::PLAYADELAM::3	PLAYA DEL AMOR ST	PUERTECITOS AVE	LOS MOCHIS AVE	Residential	29,160.0	Slurry Seal	11/6/2024	72	100	$ 14,580.00
COACH::51STAVE::7	51ST AVE	AVENIDA ADOBE	MECCA LANE	Collector	14,756.0	Microsurfacing	11/6/2024	72	100	$ 14,756.00
COACH::GRAPEFRUIT::1	GRAPEFRUIT BLVD	CITY LIMITS	3310' S/O 54TH AVE	Arterial	14,905.0	Microsurfacing	11/6/2024	78	100	$ 14,905.00
COACH::PARKLN::2	PARK LN	SH-86	130' W/O SH-111	Arterial	3,000.0	1.5" Thin Overlay	11/6/2024	57	100	$ 15,000.00
COACH::52NDAVEW::6	52ND AVE	SUNSET DR	CALLE LIMON	Arterial	15,075.0	Microsurfacing	11/6/2024	72	100	$ 15,075.00
COACH::CSOLEDAD::1	CALLE SOLEDAD	VIA MISIONERO	VIA TEPEYAC	Residential	31,248.0	Slurry Seal	11/6/2024	75	100	$ 15,624.00
COACH::52NDAVEE::10	52ND AVE	CALLE TECHA	CALLE TECHA	Arterial	3,146.0	1.5" Thin Overlay	11/6/2024	57	100	$ 15,730.00
COACH::52NDAVEW::14	52ND AVE	CALLE TECHA	CALLE TECHA	Arterial	3,146.0	1.5" Thin Overlay	11/6/2024	63	100	$ 15,730.00
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	Arterial	16,250.0	Microsurfacing	11/6/2024	74	100	$ 16,250.00
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.0	Microsurfacing	11/6/2024	85	100	$ 16,250.00
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.0	Microsurfacing	11/6/2024	85	100	$ 16,250.00
COACH::53RDAVE::13	53RD AVE	ADAM LN	LEE LN	Collector	16,320.0	Microsurfacing	11/6/2024	72	100	$ 16,320.00
COACH::ELGRECOAVE::1	EL GRECO AVE	PLAYA DEL AMOR ST	TAXCO AVE	Residential	32,908.0	Slurry Seal	11/6/2024	75	100	$ 16,454.00
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.0	Slurry Seal	11/6/2024	85	100	$ 16,650.00
COACH::AVENUE49::1	AVENUE 49	CALHOUN ST	GARNET RIDGE ST	Collector	17,784.0	Microsurfacing	11/6/2024	78	100	$ 17,784.00
COACH::AALEENAH::4	AVENIDA ALEENAH	JULIA CT	'160 W/O CALLE FLORENA	Residential	3,564.0	1.5" Thin Overlay	11/6/2024	57	100	$ 17,820.00
COACH::AVENUE53::3	AVENUE 53	CALLE EMILIA	TYLER ST	Collector	18,012.0	Microsurfacing	11/6/2024	72	100	$ 18,012.00
COACH::52NDAVEW::15	52ND AVE	CALLE TECHA	CALLE EMPALME	Arterial	3,640.0	1.5" Thin Overlay	11/6/2024	57	100	$ 18,200.00
COACH::52NDAVEE::4	52ND AVE	FREDERICK ST	DOUMA ST	Arterial	18,278.0	Microsurfacing	11/6/2024	72	100	$ 18,278.00
COACH::NICKLECREEK::1	NICKLECREEK DR	COPPERIDGE ST	CINNABAR LN	Residential	36,593.0	Slurry Seal	11/6/2024	75	100	$ 18,296.50
COACH::JULIADR::1	JULIA DR	ANDREA LN	AVENIDA ADOBE	Residential	36,756.0	Slurry Seal	11/6/2024	75	100	$ 18,378.00
COACH::LINDAAVE::1	LINDA AVE	ANDREA LN	AVENIDA ADOBE	Residential	36,756.0	Slurry Seal	11/6/2024	78	100	$ 18,378.00
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.0	Microsurfacing	11/6/2024	85	100	$ 18,750.00
COACH::AIRPORTBL::9	AIRPORT BLVD	FILLMORE ST	CITY LIMITS	Collector	18,760.0	Microsurfacing	11/6/2024	81	100	$ 18,760.00
COACH::CFLORENA::2	CALLE FLORENA	AVENIDA ALEENAH	110' N/O AVENIDA ALEENAH	Residential	3,924.0	1.5" Thin Overlay	11/6/2024	63	100	$ 19,620.00
COACH::CSTELLA::1	CORTE STELLA	CALLE PIZANO	CDS	Residential	3,993.0	1.5" Thin Overlay	11/6/2024	63	100	$ 19,965.00
COACH::SANREYDR::2	SAN REY DR	COLONIA DR	SAN CAPISTRANO DR	Residential	4,000.0	1.5" Thin Overlay	11/6/2024	57	100	$ 20,000.00
COACH::52NDAVEW::9	52ND AVE	SH-86	CESAR CHAVEZ ST	Arterial	2,236.0	3" Mill & Overlay	11/6/2024	45	100	$ 20,124.00
COACH::PROSECCO::2	PROSECCO WAY	RODREJO WAY	PROSECCO WAY	Residential	4,064.0	1.5" Thin Overlay	11/6/2024	60	100	$ 20,320.00
COACH::SALTILLOCR::3	SALTILLO CIR	MAZATLAN DR	JALISCO AVE	Residential	4,108.0	1.5" Thin Overlay	11/6/2024	60	100	$ 20,540.00
COACH::53RDAVE::4	53RD AVE	CALLE TECHA	CALLE AVILA	Collector	21,090.0	Microsurfacing	11/6/2024	72	100	$ 21,090.00
COACH::53RDAVE::3	53RD AVE	CALLE EMPALME	CALLE TECHA	Collector	21,147.0	Microsurfacing	11/6/2024	84	100	$ 21,147.00
COACH::53RDAVE::8	53RD AVE	115' W/O CESAR CHAVEZ ST	CESAR CHAVEZ ST	Collector	4,255.0	1.5" Thin Overlay	11/6/2024	63	100	$ 21,275.00
COACH::51STAVE::9	51ST AVE	SUNCREST ST	SH-86	Collector	21,600.0	Microsurfacing	11/6/2024	72	100	$ 21,600.00
COACH::50THAVEE::16	50TH AVE	CORONADO ST	AVENIDA DE PLATINA	Arterial	4,389.0	1.5" Thin Overlay	11/6/2024	57	100	$ 21,945.00
COACH::50THAVEE::18	50TH AVE	KENMORE ST	SH-86	Arterial	22,209.0	Microsurfacing	11/6/2024	84	100	$ 22,209.00
COACH::DILLONRD::7	DILLON RD	VISTA DEL SUR	1070' S/O VISTA DEL NORTE	Arterial	22,272.0	Microsurfacing	11/6/2024	84	100	$ 22,272.00
COACH::FREDERICK::1	FREDERICK ST	54TH AVE	SCARLET WAY	Collector	22,752.0	Microsurfacing	11/6/2024	72	100	$ 22,752.00
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	Residential	4,608.0	1.5" Thin Overlay	11/6/2024	56	100	$ 23,040.00
COACH::GENOAST::10	GENOA ST	CALLE LIMON	VINETA LN	Residential	4,662.0	1.5" Thin Overlay	11/6/2024	63	100	$ 23,310.00
COACH::JALISCOAVE::1	JALISCO AVE	SALTILLO CIR	JALISCO AVE	Residential	4,676.0	1.5" Thin Overlay	11/6/2024	63	100	$ 23,380.00
COACH::50THAVEW::16	50TH AVE	HORNBLEND ST	CALHOUN ST	Arterial	23,392.0	Microsurfacing	11/6/2024	84	100	$ 23,392.00
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	Residential	46,980.0	Slurry Seal	11/6/2024	74	100	$ 23,490.00
COACH::SALTILLOCR::4	SALTILLO CIR	MAZATLAN DR	MAZATLAN DR	Residential	4,706.0	1.5" Thin Overlay	11/6/2024	57	100	$ 23,530.00
COACH::52NDAVEW::8	52ND AVE	GENOA ST	SHADY LN	Arterial	23,625.0	Microsurfacing	11/6/2024	81	100	$ 23,625.00
COACH::9THST::2	9TH ST	ORCHARD AVE	VINE AVE	Collector	23,744.0	Microsurfacing	11/6/2024	84	100	$ 23,744.00
COACH::CESARCHAVE::2	CESAR CHAVEZ ST	CALLE VERDE	CALLE ROJO	Collector	23,976.0	Microsurfacing	11/6/2024	72	100	$ 23,976.00
COACH::SH-86N::9	SH-86	CAIRO AVE	DAMASCUS AVE	Arterial	24,160.0	Microsurfacing	11/6/2024	72	100	$ 24,160.00
COACH::SH-86S::10	SH-86	DAMASCUS AVE	CAIRO AVE	Arterial	24,160.0	Microsurfacing	11/6/2024	84	100	$ 24,160.00
COACH::1STST::3	1ST ST	ORCHARD AVE	VINE AVE	Collector	24,225.0	Microsurfacing	11/6/2024	81	100	$ 24,225.00
COACH::PROSECCO::4	PROSECCO WAY	SOLARCE ST	MALVASIA WAY	Residential	4,864.0	1.5" Thin Overlay	11/6/2024	60	100	$ 24,320.00
COACH::GUITRONST::3	GUITRON ST	NIETO ST	AVENIDA DE ORO	Residential	4,930.0	1.5" Thin Overlay	11/6/2024	57	100	$ 24,650.00
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	Residential	49,552.0	Slurry Seal	11/6/2024	74	100	$ 24,776.00
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	Residential	49,704.0	Slurry Seal	11/6/2024	74	100	$ 24,852.00
COACH::LASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	Residential	49,742.0	Slurry Seal	11/6/2024	74	100	$ 24,871.00
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	Residential	49,818.0	Slurry Seal	11/6/2024	74	100	$ 24,909.00
COACH::51STAVE::6	51ST AVE	400' W/O AVENIDA ADOBE	AVENIDA ADOBE	Collector	24,924.0	Microsurfacing	11/6/2024	72	100	$ 24,924.00
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	Residential	49,856.0	Slurry Seal	11/6/2024	80	100	$ 24,928.00
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.0	Slurry Seal	11/6/2024	85	100	$ 24,947.00
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	Residential	49,932.0	Slurry Seal	11/6/2024	74	100	$ 24,966.00
COACH::LAPLAYAST::2	LA PLAYA ST	CALLE COLIMA	140' N/O CALLE COLIMA	Residential	5,040.0	1.5" Thin Overlay	11/6/2024	60	100	$ 25,200.00
COACH::FILLMOREST::4	FILLMORE ST	54TH AVE	CITY LIMIT	Rural	31,680.0	Chip Seal	11/6/2024	78	100	$ 25,344.00

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::50THAVE::6	50TH AVE	TYLER ST	50TH AVE	Rural	31,890.0	Chip Seal	11/6/2024	78	100	$ 25,512.00
COACH::SH-86S::8	SH-86	BAGDAD AVE	BAGDAD AVE	Arterial	5,120.0	1.5" Thin Overlay	11/6/2024	63	100	$ 25,600.00
COACH::ADEORO::1	AVENIDA DE ORO	50TH AVE	AVENIDA DEL PARQUE	Collector	25,715.0	Microsurfacing	11/6/2024	84	100	$ 25,715.00
COACH::CNINOS::4	CALLE NINOS	140' W/O CALLE BELLA	CALLE AMIGOS	Residential	5,148.0	1.5" Thin Overlay	11/6/2024	57	100	$ 25,740.00
COACH::CNINOS::3	CALLE NINOS	CALLE BELLA	140' W/O CALLE BELLA	Residential	5,148.0	1.5" Thin Overlay	11/6/2024	63	100	$ 25,740.00
COACH::1STST::4	1ST ST	VINE AVE	SH-111	Collector	25,878.0	Microsurfacing	11/6/2024	78	100	$ 25,878.00
COACH::PINTOLN::1	PINTO LN	EAGLE AVE	120' S/O MCCOY PEAK AVE	Residential	5,184.0	1.5" Thin Overlay	11/6/2024	57	100	$ 25,920.00
COACH::CCORTO::1	CAMINO CORTO	CALLE LIMON	CDS	Residential	5,250.0	1.5" Thin Overlay	11/6/2024	57	100	$ 26,250.00
COACH::52NDAVEE::11	52ND AVE	CALLE TECHA	CALLE AVILA	Arterial	5,278.0	1.5" Thin Overlay	11/6/2024	60	100	$ 26,390.00
COACH::52NDAVEW::13	52ND AVE	CALLE AVILA	CALLE TECHA	Arterial	5,278.0	1.5" Thin Overlay	11/6/2024	60	100	$ 26,390.00
COACH::52NDAVEW::5	52ND AVE	SH-111	SUNSET DR	Arterial	26,415.0	Microsurfacing	11/6/2024	75	100	$ 26,415.00
COACH::AALEENAH::2	AVENIDA ALEENAH	'150 E/O GENOA ST	ADRIANA CT	Residential	5,328.0	1.5" Thin Overlay	11/6/2024	57	100	$ 26,640.00
COACH::SH-86N::10	SH-86	DAMASCUS AVE	BAGDAD AVE	Arterial	26,720.0	Microsurfacing	11/6/2024	81	100	$ 26,720.00
COACH::SH-86S::9	SH-86	BAGDAD AVE	DAMASCUS AVE	Arterial	26,720.0	Microsurfacing	11/6/2024	81	100	$ 26,720.00
COACH::52NDAVEE::32	52ND AVE	SUNSET DR	SH-111	Arterial	27,270.0	Microsurfacing	11/6/2024	75	100	$ 27,270.00
COACH::WESTERFLD::4	WESTERFIELD WAY	140' E/O S CORONADO ST	S CORONADO ST	Residential	5,480.0	1.5" Thin Overlay	11/6/2024	60	100	$ 27,400.00
COACH::SH-86S::7	SH-86	6TH ST	BAGDAD AVE	Arterial	27,760.0	Microsurfacing	11/6/2024	84	100	$ 27,760.00
COACH::SH-86N::12	SH-86	BAGDAD AVE	6TH ST	Arterial	27,760.0	Microsurfacing	11/6/2024	84	100	$ 27,760.00
COACH::PRIMITIVO::2	PRIMITIVO DR	PRIMITIVO DR	PRIMITIVO DR	Residential	3,104.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 27,936.00
COACH::48THAVEE::3	48TH AVE	CALHOUN ST	CHAPARROSA ST	Arterial	28,400.0	Microsurfacing	11/6/2024	75	100	$ 28,400.00
COACH::48THAVEW::4	48TH AVE	CHAPARROSA ST	CALHOUN ST	Arterial	28,400.0	Microsurfacing	11/6/2024	75	100	$ 28,400.00
COACH::AALEENAH::5	AVENIDA ALEENAH	'160 W/O CALLE FLORENA	CALLE FLORENA	Residential	5,760.0	1.5" Thin Overlay	11/6/2024	60	100	$ 28,800.00
COACH::JALISCOAVE::3	JALISCO AVE	JALISCO AVE	JALISCO ACE PARKING LOOP	Residential	5,768.0	1.5" Thin Overlay	11/6/2024	60	100	$ 28,840.00
COACH::CQUINTERRA::2	CALLE QUINTERRA	REDONDO SUR	CORTE SANTOS	Residential	5,883.0	1.5" Thin Overlay	11/6/2024	57	100	$ 29,415.00
COACH::CPERCEBE::1	CORTE PERCEBE	REDONDO SUR	CDS	Residential	5,904.0	1.5" Thin Overlay	11/6/2024	60	100	$ 29,520.00
COACH::MCCOYPEAK::3	MCCOY PEAK AVE	CHAPARROSA ST	SAN JACINTO LN	Residential	5,904.0	1.5" Thin Overlay	11/6/2024	60	100	$ 29,520.00
COACH::MAZATLANDR::1	MAZATLAN DR	SALTILLO CIR	MAZATLAN DR	Residential	5,952.0	1.5" Thin Overlay	11/6/2024	63	100	$ 29,760.00
COACH::ADEORO::2	AVENIDA DE ORO	AVENIDA DEL PARQUE	GUITRON ST	Collector	29,970.0	Microsurfacing	11/6/2024	84	100	$ 29,970.00
COACH::MAZATLANDR::2	MAZATLAN DR	MAZATLAN DR	SALTILLO CIR	Residential	6,048.0	1.5" Thin Overlay	11/6/2024	60	100	$ 30,240.00
COACH::CROJO::4	CALLE ROJO	85' W/O CALLE EMPALME	CALLE EMPALME	Residential	3,400.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 30,600.00
COACH::MARYCT::1	MARY CT	CHRISTINA RD	CDS	Residential	6,176.0	1.5" Thin Overlay	11/6/2024	63	100	$ 30,880.00
COACH::CTECHA::2	CALLE TECHA	CALLE ZAMORA	CALLE LYA	Residential	6,200.0	1.5" Thin Overlay	11/6/2024	57	100	$ 31,000.00
COACH::SABALCT::1	SABAL CT	CDS	PHOENIX AVE	Residential	6,240.0	1.5" Thin Overlay	11/6/2024	57	100	$ 31,200.00
COACH::AHALAWAY::1	AVENIDA HALAWAY	FREDERICK ST	AVENIDA RAZON	Residential	6,264.0	1.5" Thin Overlay	11/6/2024	60	100	$ 31,320.00
COACH::CROJO::3	CALLE ROJO	85' W/O CALLE EMPALME	170' W/O CALLE EMPALME	Residential	3,520.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 31,680.00
COACH::SANREYDR::1	SAN REY DR	CALLE TOLOSA	COLONIA DR	Residential	6,400.0	1.5" Thin Overlay	11/6/2024	60	100	$ 32,000.00
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	Collector	6,400.0	1.5" Thin Overlay	11/6/2024	62	100	$ 32,000.00
COACH::ZUMADR::1	ZUMA DR	LA JOLLA AVE	51ST AVE	Residential	6,408.0	1.5" Thin Overlay	11/6/2024	63	100	$ 32,040.00
COACH::CHIHUAHUA::1	CHIHUAHUA CT	CDS	MAZATLAN DR	Residential	6,608.0	1.5" Thin Overlay	11/6/2024	60	100	$ 33,040.00
COACH::POLKST::2	POLK ST	1330' S/O INDUSTRIAL WAY	610' S/O INDUSTRIAL WAY	Collector	33,166.0	Microsurfacing	11/6/2024	72	100	$ 33,166.00
COACH::AGUACALIEN::1	AGUA CALIENTE ST	AGUA BLANCA AVE	CAMINO LAS BRISAS	Residential	6,660.0	1.5" Thin Overlay	11/6/2024	60	100	$ 33,300.00
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	Residential	6,666.0	1.5" Thin Overlay	11/6/2024	56	100	$ 33,330.00
COACH::SUEZRD::1	SUEZ RD	CAIRO AVE	DAMASCUS AVE	Residential	6,680.0	1.5" Thin Overlay	11/6/2024	60	100	$ 33,400.00
COACH::CPERA::1	CALLE PERA	HILL DR	CDS	Residential	6,688.0	1.5" Thin Overlay	11/6/2024	63	100	$ 33,440.00
COACH::54THAVEE::6	54TH AVE	SHADY LN	TYLER ST	Arterial	33,972.0	Microsurfacing	11/6/2024	75	100	$ 33,972.00
COACH::FREDERICK::11	FREDERICK ST	BAJA WAY	520' N/O BAJA WAY	Collector	34,056.0	Microsurfacing	11/6/2024	81	100	$ 34,056.00
COACH::CGREGORIO::1	CALLE GREGORIO	FREDERICK ST	CALLE DIEGO	Residential	6,916.0	1.5" Thin Overlay	11/6/2024	57	100	$ 34,580.00
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	Arterial	36,300.0	Microsurfacing	11/6/2024	85	100	$ 36,300.00
COACH::MALVASIA::2	MALVASIA WAY	RODREJO WAY	MERCADO CIR	Residential	4,128.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 37,152.00
COACH::BAJAWAY::1	BAJA WAY	CHIAPAS DR	FREDERICK ST	Residential	7,500.0	1.5" Thin Overlay	11/6/2024	57	100	$ 37,500.00
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	Residential	7,704.0	1.5" Thin Overlay	11/6/2024	62	100	$ 38,520.00
COACH::TABASCOCT::1	TABASCO CT	CHIAPAS DR	CDS	Residential	4,284.0	3" Mill & Overlay	11/6/2024	45	100	$ 38,556.00
COACH::50THAVEE::13	50TH AVE	AVENIDA DE ORO	BALBOA ST	Arterial	4,356.0	3" Mill & Overlay	11/6/2024	45	100	$ 39,204.00
COACH::50THAVEW::3	50TH AVE	AVENIDA DE PLATINA	CORONADO ST	Arterial	4,389.0	3" Mill & Overlay	11/6/2024	36	100	$ 39,501.00
COACH::ADELPARQUE::1	AVENIDA DEL PARQUE	PEDRO DR	50TH AVE	Residential	8,000.0	1.5" Thin Overlay	11/6/2024	60	100	$ 40,000.00
COACH::SOLARCEST::3	SOLARCE ST	SOLARCE ST	ALLENDE DR	Residential	4,454.0	3" Mill & Overlay	11/6/2024	45	100	$ 40,086.00
COACH::AFLORABUND::1	AVENIDA FLORABUNDA	CALLE CARMELLO	CALLE ABELIA	Residential	4,464.0	3" Mill & Overlay	11/6/2024	45	100	$ 40,176.00
COACH::AIRPORTBL::3	AIRPORT BLVD	2640' W/O FILLMORE ST	1830' W/O FILLMORE ST	Collector	40,450.0	Microsurfacing	11/6/2024	81	100	$ 40,450.00
COACH::CALHOUNST::11	CALHOUN ST	EL MAR AVE	48TH AVE	Collector	40,610.0	Microsurfacing	11/6/2024	75	100	$ 40,610.00
COACH::ARAZON::5	AVENIDA RAZON	VIA ZAHIDI	CDS	Residential	8,140.0	1.5" Thin Overlay	11/6/2024	60	100	$ 40,700.00
COACH::HILLDR::2	HILL DR	CALLE PERA	SUNSET DR	Residential	8,160.0	1.5" Thin Overlay	11/6/2024	57	100	$ 40,800.00
COACH::JALISCOAVE::2	JALISCO AVE	SALTILLO CIR	JALISCO AVE	Residential	4,592.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 41,328.00
COACH::ANERIUM::2	AVENIDA NERIUM	CALLE GLORIOSA	CALLE TECOMARIA	Residential	8,280.0	1.5" Thin Overlay	11/6/2024	63	100	$ 41,400.00
COACH::ADRIANACT::1	ADRIANA CT	AVENIDA ALEENAH	CDS	Residential	8,424.0	1.5" Thin Overlay	11/6/2024	63	100	$ 42,120.00
COACH::CNINOS::2	CALLE NINOS	50' W/O CALLE BONITA	CALLE BELLA	Residential	8,460.0	1.5" Thin Overlay	11/6/2024	63	100	$ 42,300.00
COACH::ELMARAVE::1	EL MAR AVE	LA PLAYA ST	CALHOUN ST	Residential	8,536.0	1.5" Thin Overlay	11/6/2024	60	100	$ 42,680.00
COACH::51STAVE::5	51ST AVE	FREDERICK ST	690' E/O FREDRICK ST	Collector	42,718.0	Microsurfacing	11/6/2024	72	100	$ 42,718.00
COACH::BAGDADAVE::6	BAGDAD AVE	SUEZ RD	SH-86	Residential	8,560.0	1.5" Thin Overlay	11/6/2024	57	100	$ 42,800.00
COACH::FREDERICK::13	FREDERICK ST	JALISCO AVE	50TH AVE	Collector	42,966.0	Microsurfacing	11/6/2024	75	100	$ 42,966.00
COACH::MAZATLANDR::7	MAZATLAN DR	MAZATLAN DR PARKING LOOP	MAZATLAN DR PARKING LOOP	Residential	8,640.0	1.5" Thin Overlay	11/6/2024	57	100	$ 43,200.00
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	Residential	8,640.0	1.5" Thin Overlay	11/6/2024	62	100	$ 43,200.00
COACH::DILLONRD::12	DILLON RD	450' S/O VISTA DEL NORTE	VISTA DEL NORTE	Arterial	43,488.0	Microsurfacing	11/6/2024	78	100	$ 43,488.00
COACH::VALENCIALN::1	VALENCIA LN	CDS	CYPRESS ST	Residential	8,820.0	1.5" Thin Overlay	11/6/2024	56	100	$ 44,100.00
COACH::FREDERICK::12	FREDERICK ST	660' S/O CHRISTINA RD	JALISCO AVE	Collector	44,154.0	Microsurfacing	11/6/2024	78	100	$ 44,154.00
COACH::53RDAVE::17	53RD AVE	SHADY LN	SHADY LN	Collector	8,835.0	1.5" Thin Overlay	11/6/2024	60	100	$ 44,175.00
COACH::CHIAPASDR::5	CHIAPAS DR	315' E/O BAJA WAY	BAJA WAY	Residential	8,848.0	1.5" Thin Overlay	11/6/2024	57	100	$ 44,240.00
COACH::53RDAVE::7	53RD AVE	CALLE CAMACHO	130' E/O CALLE CAMACHO	Collector	4,995.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 44,955.00
COACH::WASHINGTON::5	WASHINGTONIA AVE	RHAPIS CT	PHOENIX AVE	Residential	9,144.0	1.5" Thin Overlay	11/6/2024	60	100	$ 45,720.00
COACH::ARAZON::2	AVENIDA RAZON	CORTE YAGER	CORTE GILLAN	Residential	9,250.0	1.5" Thin Overlay	11/6/2024	57	100	$ 46,250.00
COACH::GENOAST::11	GENOA ST	VINETA LN	SYLMAR LN	Residential	9,250.0	1.5" Thin Overlay	11/6/2024	57	100	$ 46,250.00
COACH::NEWPORTST::3	NEWPORT ST	MALIBU AVE	CATALINA AVE	Residential	9,288.0	1.5" Thin Overlay	11/6/2024	57	100	$ 46,440.00
COACH::CHRISTINA::6	CHRISTINA RD	MARY CT	AVENIDA ADOBE	Residential	9,288.0	1.5" Thin Overlay	11/6/2024	60	100	$ 46,440.00
COACH::AADOBE::8	AVENIDA ADOBE	JULIA DR	LINDA AVE	Residential	9,324.0	1.5" Thin Overlay	11/6/2024	57	100	$ 46,620.00
COACH::LAGUNALN::2	LAGUNA LN	LAGUNA LN	CAPITOLA AVE	Residential	9,324.0	1.5" Thin Overlay	11/6/2024	57	100	$ 46,620.00
COACH::CATARINACT::1	CATARINA CT	AVENIDA NICOLE	CDS	Residential	9,360.0	1.5" Thin Overlay	11/6/2024	60	100	$ 46,800.00
COACH::CHARLTONPK::1	CHARLTON PEAK ST	SAN MATEO AVE	MECCA HILLS AVE	Residential	9,360.0	1.5" Thin Overlay	11/6/2024	63	100	$ 46,800.00
COACH::BRIANNELN::2	BRIANNE LN	CALENDULA AVE	MAGNOLIA ST	Residential	9,361.0	1.5" Thin Overlay	11/6/2024	60	100	$ 46,805.00
COACH::VENENTABLD::2	VENENTA BLVD	PISMO CT	HUNTINGTON AVE	Residential	9,396.0	1.5" Thin Overlay	11/6/2024	57	100	$ 46,980.00
COACH::BRIANNELN::3	BRIANNE LN	MAGNOLIA ST	FIESTA RD	Residential	9,435.0	1.5" Thin Overlay	11/6/2024	63	100	$ 47,175.00
COACH::HILLDR::4	HILL DR	240' W/O SH-111	SH-111	Residential	9,440.0	1.5" Thin Overlay	11/6/2024	57	100	$ 47,200.00
COACH::CALHOUNST::8	CALHOUN ST	AVENUE 49	SAN IGNACIO AVE	Collector	47,306.0	Microsurfacing	11/6/2024	72	100	$ 47,306.00
COACH::SIERRAST::1	SIERRA ST	FIESTA RD	TERA VISTA	Residential	9,472.0	1.5" Thin Overlay	11/6/2024	63	100	$ 47,360.00
COACH::ESIENNACIR::2	E SIENNA CIR	INDIGO CT	N SIENNA CIR	Residential	9,504.0	1.5" Thin Overlay	11/6/2024	60	100	$ 47,520.00
COACH::REYESST::1	REYES ST	GUITRON ST	ROMERO ST	Residential	9,520.0	1.5" Thin Overlay	11/6/2024	57	100	$ 47,600.00
COACH::SH-86S::14	SH-86	52ND AVE	CALLE ROJO	Arterial	47,680.0	Microsurfacing	11/6/2024	72	100	$ 47,680.00
COACH::BRIANNELN::5	BRIANNE LN	TERA VISTA	MEADOWS LN	Residential	9,546.0	1.5" Thin Overlay	11/6/2024	63	100	$ 47,730.00
COACH::CHAPARROSA::2	CHAPARROSA ST	MECCA HILLS AVE	GLENDORA RIDGE AVE	Residential	9,648.0	1.5" Thin Overlay	11/6/2024	57	100	$ 48,240.00
COACH::SUMMERST::1	SUMMER ST	CALENDULA AVE	MAGNOLIA ST	Residential	9,694.0	1.5" Thin Overlay	11/6/2024	63	100	$ 48,470.00
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	Residential	9,720.0	1.5" Thin Overlay	11/6/2024	62	100	$ 48,600.00
COACH::CALHOUNST::9	CALHOUN ST	SAN IGNACIO AVE	EAGLE AVE	Collector	48,794.0	Microsurfacing	11/6/2024	81	100	$ 48,794.00
COACH::VINEAVE::10	VINE AVE	ALLEY	1ST ST	Collector	9,776.0	1.5" Thin Overlay	11/6/2024	57	100	$ 48,880.00
COACH::WESTERFLD::3	WESTERFIELD WAY	S BALBOA ST	140' E/O S CORONADO ST	Residential	5,480.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 49,320.00
COACH::WESTERFLD::2	WESTERFIELD WAY	140' W/O S BALBOA ST	S BALBOA ST	Residential	5,480.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 49,320.00
COACH::WESTERFLD::5	WESTERFIELD WAY	S CORONADO ST	140' E/O S CORONADO ST	Residential	5,480.0	3" Mill & Overlay	11/6/2024	45	100	$ 49,320.00
COACH::FREDERICK::19	FREDERICK ST	IRIS AVE	150' N/O IRIS AVE	Collector	9,900.0	1.5" Thin Overlay	11/6/2024	57	100	$ 49,500.00
COACH::52NDAVEE::33	52ND AVE	SH-111	TYLER ST	Arterial	49,770.0	Microsurfacing	11/6/2024	81	100	$ 49,770.00
COACH::CNINOS::5	CALLE NINOS	CALLE AMIGOS	CALLE LA PAZ	Residential	9,972.0	1.5" Thin Overlay	11/6/2024	60	100	$ 49,860.00
COACH::51STAVE::4	51ST AVE	CHIAPAS DR	FREDERICK ST	Collector	49,968.0	Microsurfacing	11/6/2024	84	100	$ 49,968.00
COACH::REDONDOSUR::3	REDONDO SUR	CORTE PERCEBE	REDONDO ESTE	Residential	10,027.0	1.5" Thin Overlay	11/6/2024	63	100	$ 50,135.00
COACH::AFLORABUND::4	AVENIDA FLORABUNDA	CALLE ELDARICA	CALLE CANTARA	Residential	10,080.0	1.5" Thin Overlay	11/6/2024	57	100	$ 50,400.00
COACH::ARAYLYNN::1	AVENIDA RAYLYNN	GENOA ST	CALLE JOYCE	Residential	10,080.0	1.5" Thin Overlay	11/6/2024	57	100	$ 50,400.00
COACH::AFLORABUND::3	AVENIDA FLORABUNDA	CALLE TECOMARIA	CALLE ELDARICA	Residential	10,080.0	1.5" Thin Overlay	11/6/2024	60	100	$ 50,400.00
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	Residential	10,080.0	1.5" Thin Overlay	11/6/2024	62	100	$ 50,400.00
COACH::ANERIUM::4	AVENIDA NERIUM	CALLE ELDARICA	CALLE CANTARA	Residential	10,080.0	1.5" Thin Overlay	11/6/2024	63	100	$ 50,400.00
COACH::ANERIUM::3	AVENIDA NERIUM	CALLE TECOMARIA	CALLE ELDARICA	Residential	10,080.0	1.5" Thin Overlay	11/6/2024	63	100	$ 50,400.00
COACH::CAPITOLAAV::2	CAPITOLA AVE	MONARCH RD	LAGUNA LN	Residential	10,116.0	1.5" Thin Overlay	11/6/2024	63	100	$ 50,580.00
COACH::52NDAVEW::4	52ND AVE	TYLER ST	SH-111	Arterial	50,670.0	Microsurfacing	11/6/2024	75	100	$ 50,670.00
COACH::CFLORENA::1	CALLE FLORENA	AVENIDA RAYLYNN	AVENIDA GRACE	Residential	10,152.0	1.5" Thin Overlay	11/6/2024	60	100	$ 50,760.00
COACH::CBERNARDO::3	CALLE BERNARDO	CALLE LEANDRO	CDS	Residential	10,234.0	1.5" Thin Overlay	11/6/2024	63	100	$ 51,170.00
COACH::SH-111::14	SH-111	50TH AVE	PARK LN	Arterial	51,250.0	Microsurfacing	11/6/2024	84	100	$ 51,250.00
COACH::GLENDORARG::1	GLENDORA RIDGE AVE	CHIRIACO SUMMIT ST	CHAPARROSA ST	Residential	10,296.0	1.5" Thin Overlay	11/6/2024	63	100	$ 51,480.00
COACH::AADOBE::5	AVENIDA ADOBE	VIA ZAHIDI	CORTE ALTURIAN	Residential	10,320.0	1.5" Thin Overlay	11/6/2024	57	100	$ 51,600.00
COACH::COPPERIDGE::1	COPPERIDGE ST	JADEROCK RD	NICKLECREEK DR	Residential	10,360.0	1.5" Thin Overlay	11/6/2024	57	100	$ 51,800.00
COACH::CELSOL::3	CALLE EL SOL	CORTE LA MORADA	CORTE SOLEADO	Residential	10,360.0	1.5" Thin Overlay	11/6/2024	57	100	$ 51,800.00
COACH::COCASO::3	CALLE OCASO	CORTE ESTIVO	CORTE SOLIS	Residential	10,360.0	1.5" Thin Overlay	11/6/2024	60	100	$ 51,800.00
COACH::CELSOL::4	CALLE EL SOL	CORTE SOLEADO	AVENIDA LA LUNA	Residential	10,360.0	1.5" Thin Overlay	11/6/2024	60	100	$ 51,800.00
COACH::SH-86S::15	SH-86	CALLE ROJO	CALLE VERDE	Arterial	51,840.0	Microsurfacing	11/6/2024	78	100	$ 51,840.00
COACH::SH-86N::4	SH-86	CALLE VERDE	CALLE ROJO	Arterial	51,840.0	Microsurfacing	11/6/2024	84	100	$ 51,840.00
COACH::50THAVEW::10	50TH AVE	FREDERICK ST	MAZATLAN DR	Arterial	10,373.0	1.5" Thin Overlay	11/6/2024	63	100	$ 51,865.00
COACH::VALLEYRD::2	VALLEY RD	JENNIFER WAY	TRIPOLI WAY	Collector	10,400.0	1.5" Thin Overlay	11/6/2024	56	100	$ 52,000.00
COACH::1STST::1	1ST ST	SH-86	PALM AVE	Collector	10,431.0	1.5" Thin Overlay	11/6/2024	57	100	$ 52,155.00
COACH::REDONDONOR::2	REDONDO NORTE	CORTE MOLINO	CALLE QUINTERRA	Residential	10,440.0	1.5" Thin Overlay	11/6/2024	60	100	$ 52,200.00
COACH::CQUINTERRA::4	CALLE QUINTERRA	CORTE LORETO	REDONDO NORTE	Residential	5,846.0	3" Mill & Overlay	11/6/2024	45	100	$ 52,614.00
COACH::SH-86N::3	SH-86	CALLE ZAMORA	CALLE VERDE	Arterial	52,720.0	Microsurfacing	11/6/2024	81	100	$ 52,720.00
COACH::SH-86S::16	SH-86	CALLE VERDE	CALLE ZAMORA	Arterial	52,720.0	Microsurfacing	11/6/2024	81	100	$ 52,720.00
COACH::VANBURENST::1	VAN BUREN ST	AIRPORT BLVD	55TH AVE	Collector	52,880.0	Microsurfacing	11/6/2024	75	100	$ 52,880.00
COACH::SH-86N::2	SH-86	53RD AVE	CALLE ZAMORA	Arterial	52,880.0	Microsurfacing	11/6/2024	78	100	$ 52,880.00
COACH::SH-86S::17	SH-86	CALLE ZAMORA	53RD AVE	Arterial	52,880.0	Microsurfacing	11/6/2024	78	100	$ 52,880.00
COACH::NAPOLILN::1	NAPOLI LN	CDS	GENOA ST	Residential	10,590.0	1.5" Thin Overlay	11/6/2024	57	100	$ 52,950.00
COACH::SYLMARLN::1	SYLMAR LN	CDS	GENOA ST	Residential	10,590.0	1.5" Thin Overlay	11/6/2024	63	100	$ 52,950.00
COACH::NILELN::1	NILE LN	CDS	GENOA ST	Residential	10,590.0	1.5" Thin Overlay	11/6/2024	63	100	$ 52,950.00
COACH::VINETALN::1	VINETA LN	CDS	GENOA ST	Residential	10,590.0	1.5" Thin Overlay	11/6/2024	63	100	$ 52,950.00
COACH::FREDERICK::9	FREDERICK ST	51ST AVE	AVENIDA HALAWAY	Collector	53,064.0	Microsurfacing	11/6/2024	81	100	$ 53,064.00

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::REDONDOSUR::2	REDONDO SUR	CALLE QUINTERRA	CORTE PERCEBE	Residential	10,656.0	1.5" Thin Overlay	11/6/2024	57	100	$ 53,280.00
COACH::48THAVEW::6	48TH AVE	CIELO VICTORIA ST	JACKSON ST	Arterial	53,400.0	Microsurfacing	11/6/2024	78	100	$ 53,400.00
COACH::JACKSONST::2	JACKSON ST	PUERTECITOS AVE	LOS MOCHIS AVE	Arterial	53,460.0	Microsurfacing	11/6/2024	72	100	$ 53,460.00
COACH::ASANDOMING::3	AVENIDA SAN DOMINGO	CAMINO EL FARO	CAMINO LORETO	Residential	10,693.0	1.5" Thin Overlay	11/6/2024	63	100	$ 53,465.00
COACH::VALLEYRD::5	VALLEY RD	NELSON ST	LAS PALMAS ST	Collector	10,720.0	1.5" Thin Overlay	11/6/2024	62	100	$ 53,600.00
COACH::TRIPOLIWAY::2	TRIPOLI WAY	52ND AVE	ARABY AVE	Residential	10,800.0	1.5" Thin Overlay	11/6/2024	63	100	$ 54,000.00
COACH::MARIANAAVE::2	MARIANA AVE	CIELO VICTORIA ST	LUNA DE NICOLETA ST	Residential	10,841.0	1.5" Thin Overlay	11/6/2024	60	100	$ 54,205.00
COACH::PINTOLN::3	PINTO LN	MCCOY PEAK AVE	RIMROCK LN	Residential	11,160.0	1.5" Thin Overlay	11/6/2024	63	100	$ 55,800.00
COACH::CYPRESSST::1	CYPRESS ST	VALENCIA LN	VALLEY RD	Residential	11,172.0	1.5" Thin Overlay	11/6/2024	56	100	$ 55,860.00
COACH::MAZATLANDR::3	MAZATLAN DR	MAZATLAN DR	MAZATLAN DR PARKING LOOP	Residential	6,208.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 55,872.00
COACH::SANJACINTO::1	SAN JACINTO LN	MCCOY PEAK AVE	RIMROCK LN	Residential	11,196.0	1.5" Thin Overlay	11/6/2024	60	100	$ 55,980.00
COACH::CHAPARROSA::5	CHAPARROSA ST	COXCOMB DR	EAGLE AVE	Residential	11,196.0	1.5" Thin Overlay	11/6/2024	63	100	$ 55,980.00
COACH::MALVASIA::4	MALVASIA WAY	CHARDONNAY CIR	PROSECCO WAY	Residential	6,240.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 56,160.00
COACH::CROBERTO::1	CALLE ROBERTO	CALLE TECHA	CDS	Residential	11,232.0	1.5" Thin Overlay	11/6/2024	63	100	$ 56,160.00
COACH::PALMAVE::5	PALM AVE	3RD ST	ALLEY	Collector	11,280.0	1.5" Thin Overlay	11/6/2024	57	100	$ 56,400.00
COACH::PALMAVE::6	PALM AVE	ALLEY	2ND ST	Collector	11,280.0	1.5" Thin Overlay	11/6/2024	60	100	$ 56,400.00
COACH::QUAILMOUNT::1	QUAIL MOUNTAIN TER	SAN GORGONIO ST	ARICA DR	Residential	11,520.0	1.5" Thin Overlay	11/6/2024	63	100	$ 57,600.00
COACH::2NDST::5	2ND ST	ALLEY	SH-111	Collector	11,536.0	1.5" Thin Overlay	11/6/2024	57	100	$ 57,680.00
COACH::51STAVE::8	51ST AVE	MECCA LANE	SUNCREST ST	Collector	58,140.0	Microsurfacing	11/6/2024	78	100	$ 58,140.00
COACH::DATEAVE::10	DATE AVE	7TH ST	6TH ST	Collector	11,700.0	1.5" Thin Overlay	11/6/2024	57	100	$ 58,500.00
COACH::TRIPOLIWAY::12	TRIPOLI WAY	7TH ST	6TH ST	Collector	11,700.0	1.5" Thin Overlay	11/6/2024	57	100	$ 58,500.00
COACH::REDONDOEST::2	REDONDO ESTE	AVENIDA VESTAGO	REDONDO NORTE	Residential	11,916.0	1.5" Thin Overlay	11/6/2024	63	100	$ 59,580.00
COACH::CVERDE::4	CALLE VERDE	CALLE CAMACHO	CESAR CHAVEZ ST	Collector	12,080.0	1.5" Thin Overlay	11/6/2024	60	100	$ 60,400.00
COACH::PRIMAVERA::1	PRIMA VERA	MEADOWS LN	49TH AVE	Residential	6,768.0	3" Mill & Overlay	11/6/2024	45	100	$ 60,912.00
COACH::BAGDADAVE::10	BAGDAD AVE	TRIPOLI WAY	DATE AVE	Collector	12,440.0	1.5" Thin Overlay	11/6/2024	57	100	$ 62,200.00
COACH::MEADOWSLN::2	MEADOWS LN	PRIMA VERA	BRIANNE LN	Residential	12,469.0	1.5" Thin Overlay	11/6/2024	63	100	$ 62,345.00
COACH::IRISAVE::1	IRIS AVE	HIBISCO ST	FREDERICK ST	Residential	6,956.0	3" Mill & Overlay	11/6/2024	36	100	$ 62,604.00
COACH::ESTRELLAPE::1	ESTRELLA PEDRO ST	CAMINO BONITO AVE	LA COSTA AVE	Residential	12,600.0	1.5" Thin Overlay	11/6/2024	60	100	$ 63,000.00
COACH::DATEAVE::8	DATE AVE	BAGDAD AVE	8TH ST	Collector	7,020.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 63,180.00
COACH::TRIPOLIWAY::11	TRIPOLI WAY	BAGDAD AVE	7TH ST	Collector	12,636.0	1.5" Thin Overlay	11/6/2024	60	100	$ 63,180.00
COACH::ALLENDEDR::4	ALLENDE DR	ALLENDE DR	VERMOUTH DR	Residential	3,168.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	13.5	100	$ 63,360.00
COACH::JALISCOAVE::6	JALISCO AVE	TAXCO WAY	FREDERICK ST	Residential	7,056.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 63,504.00
COACH::SHADOWROCK::1	SHADOWROCK DR	CALHOUN ST	COPPERIDGE ST	Residential	7,067.0	3" Mill & Overlay	11/6/2024	39	100	$ 63,603.00
COACH::PALMERASCR::5	PALMERAS CIR	CARDELINA DR	PALMERAS CIR	Residential	7,200.0	3" Mill & Overlay	11/6/2024	45	100	$ 64,800.00
COACH::SH-111::2	SH-111	TYLER ST	52ND AVE	Arterial	65,050.0	Microsurfacing	11/6/2024	81	100	$ 65,050.00
COACH::MEADOWSLN::1	MEADOWS LN	SIERRA ST	PRIMA VERA	Residential	13,024.0	1.5" Thin Overlay	11/6/2024	60	100	$ 65,120.00
COACH::CRESCENTW::1	CRESCENT WAY	MOONLIT DR	FIESTA RD	Residential	13,104.0	1.5" Thin Overlay	11/6/2024	57	100	$ 65,520.00
COACH::FIESTARD::3	FIESTA RD	VAN BUREN ST	SUMMER ST	Residential	7,380.0	3" Mill & Overlay	11/6/2024	39	100	$ 66,420.00
COACH::50THAVE::1	50TH AVE	SH-86	PETER RABBIT LN	Arterial	67,160.0	Microsurfacing	11/6/2024	78	100	$ 67,160.00
COACH::CCAMACHO::6	CALLE CAMACHO	52ND AVE	CAIRO AVE	Residential	13,480.0	1.5" Thin Overlay	11/6/2024	60	100	$ 67,400.00
COACH::CLEANDRO::4	CALLE LEANDRO	CALLE GREGORIO	CDS	Residential	13,560.0	1.5" Thin Overlay	11/6/2024	60	100	$ 67,800.00
COACH::MCCOYPEAK::4	MCCOY PEAK AVE	SAN JACINTO LN	PINTO LN	Residential	13,680.0	1.5" Thin Overlay	11/6/2024	60	100	$ 68,400.00
COACH::CABELIA::1	CALLE ABELIA	49TH AVE	AVENIDA FLORABUNDA	Residential	13,920.0	1.5" Thin Overlay	11/6/2024	57	100	$ 69,600.00
COACH::CHIAPASDR::3	CHIAPAS DR	TABASCO CT	500' E/O TABASCO CT	Residential	13,972.0	1.5" Thin Overlay	11/6/2024	63	100	$ 69,860.00
COACH::ORCHARDAVE::2	ORCHARD AVE	ORCHARD AVE	9TH ST	Collector	14,040.0	1.5" Thin Overlay	11/6/2024	60	100	$ 70,200.00
COACH::AALEENAH::3	AVENIDA ALEENAH	ADRIANA CT	JULIA CT	Residential	14,112.0	1.5" Thin Overlay	11/6/2024	57	100	$ 70,560.00
COACH::CQUINTERRA::1	CALLE QUINTERRA	50TH AVE	REDONDO SUR	Residential	7,844.0	3" Mill & Overlay	11/6/2024	45	100	$ 70,596.00
COACH::CSOLIS::1	CORTE SOLIS	CALLE OCASO	CDS	Residential	14,134.0	1.5" Thin Overlay	11/6/2024	57	100	$ 70,670.00
COACH::MICHELLEDR::3	MICHELLE DR	AVENIDA NICOLE	MICHELLE DR	Residential	14,148.0	1.5" Thin Overlay	11/6/2024	63	100	$ 70,740.00
COACH::ACRYSTAL::1	AVENIDA CRYSTAL	CALLE DANIELLE	CALLE ANABELLA	Residential	14,160.0	1.5" Thin Overlay	11/6/2024	63	100	$ 70,800.00
COACH::CTOLOSA::1	CALLE TOLOSA	SAN ASIS DR	SANTO LN	Residential	14,245.0	1.5" Thin Overlay	11/6/2024	63	100	$ 71,225.00
COACH::CBERNO::1	CORTE BERNARDO	CDS	AVENIDA ADOBE	Residential	14,400.0	1.5" Thin Overlay	11/6/2024	63	100	$ 72,000.00
COACH::ALLENDEDR::1	ALLENDE DR	D/E	PROSECCO WAY	Residential	8,032.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 72,288.00
COACH::SOLARCEST::4	SOLARCE ST	ALLENDE DR	FREDERICK ST	Residential	8,092.0	3" Mill & Overlay	11/6/2024	45	100	$ 72,828.00
COACH::PHOENIXCT::1	PHOENIX CT	CDS	WASHINGTONIA AVE	Residential	14,616.0	1.5" Thin Overlay	11/6/2024	60	100	$ 73,080.00
COACH::AADOBE::12	AVENIDA ADOBE	45' N/O CHRISTINA RD	PEDRO DR	Residential	14,688.0	1.5" Thin Overlay	11/6/2024	63	100	$ 73,440.00
COACH::SH-86N::13	SH-86	6TH ST	4TH ST	Arterial	73,920.0	Microsurfacing	11/6/2024	72	100	$ 73,920.00
COACH::SH-86S::6	SH-86	4TH ST	6TH ST	Arterial	73,920.0	Microsurfacing	11/6/2024	75	100	$ 73,920.00
COACH::SHADYLN::11	SHADY LN	STACIE LN	BRENDA LN	Residential	14,840.0	1.5" Thin Overlay	11/6/2024	62	100	$ 74,200.00
COACH::SHADYLN::12	SHADY LN	BRENDA LN	HEATHER LN	Residential	15,120.0	1.5" Thin Overlay	11/6/2024	56	100	$ 75,600.00
COACH::CMENDOZA::3	CALLE MENDOZA	LAS FLORES AVE	CALLE PIZANO	Residential	15,279.0	1.5" Thin Overlay	11/6/2024	63	100	$ 76,395.00
COACH::MECCAHILLS::2	MECCA HILLS AVE	CHAPARROSA ST	CDS	Residential	15,300.0	1.5" Thin Overlay	11/6/2024	57	100	$ 76,500.00
COACH::SANMATEOAV::3	SAN MATEO AVE	CHAPARROSA ST	CDS	Residential	15,300.0	1.5" Thin Overlay	11/6/2024	57	100	$ 76,500.00
COACH::52NDAVE::16	52ND AVE	SH-86	TIJSSELING CT	Arterial	15,312.0	1.5" Thin Overlay	11/6/2024	60	100	$ 76,560.00
COACH::CSOLEADO::1	CORTE SOLEADO	CDS	CALLE EL SOL	Residential	15,355.0	1.5" Thin Overlay	11/6/2024	57	100	$ 76,775.00
COACH::CLAMORADA::1	CORTE LA MORADA	CDS	CALLE EL SOL	Residential	15,392.0	1.5" Thin Overlay	11/6/2024	57	100	$ 76,960.00
COACH::GRANITEPAS::1	GRANITE PASS TRL	CHAPARROSA ST	RED MOUNTAIN PL	Residential	15,444.0	1.5" Thin Overlay	11/6/2024	60	100	$ 77,220.00
COACH::OCEANORD::3	OCEANO RD	CATALINA AVE	CDS	Residential	8,604.0	3" Mill & Overlay	11/6/2024	45	100	$ 77,436.00
COACH::48THAVEW::3	48TH AVE	VAN BUREN ST	CHAPARROSA ST	Arterial	77,600.0	Microsurfacing	11/6/2024	72	100	$ 77,600.00
COACH::48THAVEE::4	48TH AVE	CHAPARROSA ST	VAN BUREN ST	Arterial	77,600.0	Microsurfacing	11/6/2024	78	100	$ 77,600.00
COACH::COXCOMBDR::1	COXCOMB DR	CHAPARROSA ST	RED MOUNTAIN PL	Residential	15,624.0	1.5" Thin Overlay	11/6/2024	57	100	$ 78,120.00
COACH::50THAVEW::17	50TH AVE	CALHOUN ST	COLONIA DR	Arterial	15,630.0	1.5" Thin Overlay	11/6/2024	57	100	$ 78,150.00
COACH::SH-86N::14	4TH ST	4TH ST	ALLEY	Arterial	78,880.0	Microsurfacing	11/6/2024	72	100	$ 78,880.00
COACH::VALLEYRD::1	VALLEY RD	SH-86	JENNIFER WAY	Collector	15,840.0	1.5" Thin Overlay	11/6/2024	56	100	$ 79,200.00
COACH::REDONDOSUR::1	REDONDO SUR	REDONDO PONIENTE	CALLE QUINTERRA	Residential	15,910.0	1.5" Thin Overlay	11/6/2024	60	100	$ 79,550.00
COACH::CALICIA::1	CALLE ALICIA	AVENIDA NICOLE	MICHELLE DR	Residential	16,050.0	1.5" Thin Overlay	11/6/2024	60	100	$ 80,250.00
COACH::ALLEY::2	ALLEY	52ND AVE	ALLEY	Alley	16,350.0	1.5" Thin Overlay	11/6/2024	62	100	$ 81,750.00
COACH::SH-86S::2	SH-86	PARK LN	50TH AVE	Arterial	81,920.0	Microsurfacing	11/6/2024	78	100	$ 81,920.00
COACH::WASHINGTON::4	WASHINGTONIA AVE	QUEEN CT	RHAPIS CT	Residential	9,144.0	3" Mill & Overlay	11/6/2024	45	100	$ 82,296.00
COACH::PALMERASCR::6	PALMERAS CIR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.0	1.5" Thin Overlay	11/6/2024	57	100	$ 82,440.00
COACH::CAIROAVE::7	CAIRO AVE	ALLEY	TRIPOLI WAY	Residential	16,539.0	1.5" Thin Overlay	11/6/2024	62	100	$ 82,695.00
COACH::GENOAST::12	GENOA ST	SYLMAR LN	NAPOLI LN	Residential	9,250.0	3" Mill & Overlay	11/6/2024	45	100	$ 83,250.00
COACH::HIBISCOST::4	HIBISCO ST	AMAPOLA LN	ROSAL AVE	Residential	9,287.0	3" Mill & Overlay	11/6/2024	36	100	$ 83,583.00
COACH::CEMELIA::2	CALLE EMELIA	AVENIDA RAYLYNN	AVENIDA GRACE	Residential	9,288.0	3" Mill & Overlay	11/6/2024	36	100	$ 83,592.00
COACH::OCEANORD::1	OCEANO RD	CAPITOLA AVE	MALIBU AVE	Residential	9,288.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 83,592.00
COACH::OCEANORD::2	OCEANO RD	MALIBU AVE	CATALINA AVE	Residential	9,288.0	3" Mill & Overlay	11/6/2024	45	100	$ 83,592.00
COACH::NEWPORTST::2	NEWPORT ST	CAPITOLA AVE	MALIBU AVE	Residential	9,288.0	3" Mill & Overlay	11/6/2024	45	100	$ 83,592.00
COACH::AMARIA::1	AVENIDA MARIA	GENOA ST	CALLE DANIELLE	Residential	16,797.0	1.5" Thin Overlay	11/6/2024	57	100	$ 83,985.00
COACH::CALENDULA::4	CALENDULA AVE	TULIPAN ST	ORQUIDEA LN	Residential	9,361.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 84,249.00
COACH::53RDAVE::12	53RD AVE	CALLE BONITA	ADAM LN	Collector	16,920.0	1.5" Thin Overlay	11/6/2024	63	100	$ 84,600.00
COACH::CAIROAVE::5	CAIRO AVE	SH-86	ALLEY	Residential	9,416.0	3" Mill & Overlay	11/6/2024	38	100	$ 84,744.00
COACH::NEWPORTST::4	NEWPORT ST	CATALINA AVE	LA JOLLA AVE	Residential	9,432.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 84,888.00
COACH::VALENCIALN::2	VALENCIA LN	CYPRESS ST	SHADY LN	Residential	9,540.0	3" Mill & Overlay	11/6/2024	44	100	$ 85,860.00
COACH::CLIMON::2	CALLE LIMON	52ND AVE	CAMINO CORTO	Residential	17,430.0	1.5" Thin Overlay	11/6/2024	57	100	$ 87,150.00
COACH::PHOENIXAVE::2	PHOENIX AVE	LIVISTONA CT	KENTIA CT	Residential	9,720.0	3" Mill & Overlay	11/6/2024	42	100	$ 87,480.00
COACH::PHOENIXAVE::3	PHOENIX AVE	KENTIA CT	SABAL CT	Residential	9,720.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 87,480.00
COACH::VINEAVE::7	VINE AVE	3RD ST	ALLEY	Collector	9,776.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 87,984.00
COACH::BAGDADAVE::8	BAGDAD AVE	PARKING LOT ENTRANCE	TRIPOLI WAY	Collector	17,760.0	1.5" Thin Overlay	11/6/2024	63	100	$ 88,800.00
COACH::50THAVEE::12	50TH AVE	AVENIDA DEL PARQUE	AVENIDA DE ORO	Arterial	17,853.0	1.5" Thin Overlay	11/6/2024	57	100	$ 89,265.00
COACH::GRAPEFRUIT::2	GRAPEFRUIT BLVD	3310' S/O 54TH AVE	1660' S/O 54TH AVE	Arterial	90,530.0	Microsurfacing	11/6/2024	84	100	$ 90,530.00
COACH::IXTAPAAVE::2	IXTAPA AVE	COZUMEL ST	CHICHEN ITZA RD	Residential	10,080.0	3" Mill & Overlay	11/6/2024	45	100	$ 90,720.00
COACH::COZUMELST::1	COZUMEL ST	IXTAPA AVE	TODOS SANTOS AVE	Residential	10,080.0	3" Mill & Overlay	11/6/2024	45	100	$ 90,720.00
COACH::GRAPEFRUIT::3	GRAPEFRUIT BLVD	1660' S/O 54TH AVE	54TH AVE	Arterial	91,135.0	Microsurfacing	11/6/2024	81	100	$ 91,135.00
COACH::CTECOMARIA::2	CALLE TECOMARIA	AVENIDA EUROPA	AVENIDA CEDRUS	Residential	10,296.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 92,664.00
COACH::NARCISOLN::1	NARCISO LN	CALENDULA AVE	CDS	Residential	10,296.0	3" Mill & Overlay	11/6/2024	42	100	$ 92,664.00
COACH::CCARMELLO::3	CALLE CARMELLO	AVENIDA CEDRUS	AVENIDA NERIUM	Residential	10,296.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 92,664.00
COACH::CINNABARLN::1	CINNABAR LN	JADEROCK RD	NICKLECREEK DR	Residential	10,360.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 93,240.00
COACH::MIRAMARCT::1	MIRAMAR CT	CDS	NEWPORT ST	Residential	10,404.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 93,636.00
COACH::CAIROAVE::2	CAIRO AVE	CALLE TECHA	CALLE AVILA	Residential	10,440.0	3" Mill & Overlay	11/6/2024	42	100	$ 93,960.00
COACH::CEMELIA::3	CALLE EMELIA	AVENIDA GRACE	AVENIDA ALEENAH	Residential	10,476.0	3" Mill & Overlay	11/6/2024	45	100	$ 94,284.00
COACH::SUNSETDR::1	SUNSET DR	52ND AVE	SH-111	Arterial	94,336.0	Microsurfacing	11/6/2024	75	100	$ 94,336.00
COACH::CBERNARDO::1	CALLE BERNARDO	CDS	CALLE LEANDRO	Residential	19,006.0	1.5" Thin Overlay	11/6/2024	63	100	$ 95,030.00
COACH::CAIROAVE::1	CAIRO AVE	CALLE EMPALME	CALLE TECHA	Residential	10,560.0	3" Mill & Overlay	11/6/2024	45	100	$ 95,040.00
COACH::JALISCOAVE::4	JALISCO AVE	JALISCO ACE PARKING LOOP	100' S/O TAXCO WAY	Residential	19,404.0	1.5" Thin Overlay	11/6/2024	60	100	$ 97,020.00
COACH::CBOUGANVILI::1	CALLE BOUGANVILIA	TYLER ST	CALLE CLAVEL	Residential	19,476.0	1.5" Thin Overlay	11/6/2024	60	100	$ 97,380.00
COACH::DAMASCUSAV::1	DAMASCUS AVE	DOUMA ST	CALLE TORRES ORDUNO	Residential	19,532.0	1.5" Thin Overlay	11/6/2024	57	100	$ 97,660.00
COACH::SUNDANCELN::1	SUNDANCE LN	CDS	SUNCREST ST	Residential	19,920.0	1.5" Thin Overlay	11/6/2024	60	100	$ 99,600.00
COACH::53RDAVE::6	53RD AVE	130' W/O CALLE CAMACHO	CALLE CAMACHO	Collector	4,995.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	30	100	$ 99,900.00
COACH::MECCAHILLS::1	MECCA HILLS AVE	CHARLTON PEAK ST	CHAPARROSA ST	Residential	20,052.0	1.5" Thin Overlay	11/6/2024	63	100	$ 100,260.00
COACH::CBONITA::1	CALLE BONITA	CALLE NINOS	CALLE FELIZ	Residential	11,232.0	3" Mill & Overlay	11/6/2024	45	100	$ 101,088.00
COACH::PALMAVE::7	PALM AVE	2ND ST	ALLEY	Collector	11,280.0	3" Mill & Overlay	11/6/2024	45	100	$ 101,520.00
COACH::ORCHARDAVE::11	ORCHARD AVE	2ND ST	ALLEY	Collector	11,280.0	3" Mill & Overlay	11/6/2024	45	100	$ 101,520.00
COACH::EAGLEAVE::3	EAGLE AVE	CHAPARROSA ST	PINTO LN	Residential	20,558.0	1.5" Thin Overlay	11/6/2024	60	100	$ 102,790.00
COACH::ARAYLYNN::3	AVENIDA RAYLYNN	CALLE FLORENA	150' E/O CALLE FLORENA	Residential	5,184.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	24	100	$ 103,680.00
COACH::SH-86S::3	SH-86	50TH AVE	WESTERFIELD WAY	Arterial	105,760.0	Microsurfacing	11/6/2024	75	100	$ 105,760.00
COACH::GENOAST::3	GENOA ST	AVENIDA ALEENAH	150' N/O AVENIDA ALEENAH	Residential	5,291.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	22.5	100	$ 105,820.00
COACH::GENOAST::7	GENOA ST	AVENIDA MARIA	52ND AVE	Residential	21,312.0	1.5" Thin Overlay	11/6/2024	63	100	$ 106,560.00
COACH::OASISPALM::1	OASIS PALM AVE	HEATHER LN	VALLEY RD	Residential	21,318.0	1.5" Thin Overlay	11/6/2024	62	100	$ 106,590.00
COACH::ANERIUM::1	AVENIDA NERIUM	CALLE CARMELLO	CALLE GLORIOSA	Residential	11,880.0	3" Mill & Overlay	11/6/2024	45	100	$ 106,920.00
COACH::BAGDADAVE::3	BAGDAD AVE	MECCA LANE	CALLE AVILA	Residential	21,480.0	1.5" Thin Overlay	11/6/2024	57	100	$ 107,400.00
COACH::50THAVEW::13	50TH AVE	VAN BUREN ST	CALLE PUERTA DEL SOL	Arterial	21,728.0	1.5" Thin Overlay	11/6/2024	63	100	$ 108,640.00
COACH::GENOAST::5	GENOA ST	AVENIDA VERONICA	150' N/O AVENIDA VERONICA	Residential	5,476.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	28.5	100	$ 109,520.00
COACH::SANGORGONI::2	SAN GORGONIO ST	MCCOY PEAK AVE	QUAIL MOUNTAIN TER	Residential	21,960.0	1.5" Thin Overlay	11/6/2024	60	100	$ 109,800.00
COACH::50THAVEW::1	50TH AVE	SH-86	KENMORE ST	Arterial	22,209.0	1.5" Thin Overlay	11/6/2024	63	100	$ 111,045.00
COACH::50THAVEW::9	50TH AVE	PAVON PALMA	FREDERICK ST	Arterial	12,375.0	3" Mill & Overlay	11/6/2024	45	100	$ 111,375.00
COACH::8THST::1	8TH ST	DATE AVE	PENDLETON WAY	Collector	22,400.0	1.5" Thin Overlay	11/6/2024	63	100	$ 112,000.00
COACH::ASHLERCT::1	ASHLER CT	COPPERIDGE ST	CDS	Residential	12,469.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 112,221.00
COACH::ORCHARDAVE::4	ORCHARD AVE	8TH ST	7TH ST	Collector	22,500.0	1.5" Thin Overlay	11/6/2024	57	100	$ 112,500.00
COACH::CAIROAVE::3	CAIRO AVE	CALLE AVILA	CALLE CAMACHO	Residential	12,520.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 112,680.00
COACH::HILLDR::3	HILL DR	SUNSET DR	240' W/O SH-111	Residential	5,640.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	18	100	$ 112,800.00
COACH::HARRISONST::1	HARRISON ST	D/E	48TH AVE	Collector	113,670.0	Microsurfacing	11/6/2024	72	100	$ 113,670.00
COACH::CBONITA::2	CALLE BONITA	CALLE FELIZ	CALLE ROSA	Residential	22,752.0	1.5" Thin Overlay	11/6/2024	60	100	$ 113,760.00
COACH::CTOLOSA::2	CALLE TOLOSA	SANTO LN	SAN REY DR	Residential	22,792.0	1.5" Thin Overlay	11/6/2024	60	100	$ 113,960.00

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::MALVASIA::3	MALVASIA WAY	MERCADO CIR	CHARDONNAY CIR	Residential	12,704.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 114,336.00
COACH::ENTERPRISE::1	ENTERPRISE WAY	D/E	54TH AVE	Collector	22,905.0	1.5" Thin Overlay	11/6/2024	63	100	$ 114,525.00
COACH::55THAVE::1	55TH AVE	CITY LIMITS	VAN BUREN ST	Collector	13,210.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 118,890.00
COACH::PALMERASCR::12	PALMERAS CIR	CARDINAL DR	PALMERAS CIR	Residential	5,976.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2024	16.5	100	$ 119,520.00
COACH::LAPONDEROS::3	LA PONDEROSA DR	HERNANDEZ ST	CDS	Residential	4,140.0	Slurry Seal	11/6/2025	84	100	2070
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.0	Slurry Seal	11/6/2025	85	100	3204
COACH::CHRISTINA::1	CHRISTINA RD	FREDERICK ST	ANDREA LN	Residential	6,480.0	Slurry Seal	11/6/2025	84	100	3240
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.0	Slurry Seal	11/6/2025	85	100	3888
COACH::HORNBLEND::1	HORNBLEND ST	50TH AVE	JADEROCK RD	Residential	8,436.0	Slurry Seal	11/6/2025	84	100	4218
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2025	85	100	4320
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.0	Slurry Seal	11/6/2025	85	100	4320
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2025	85	100	4320
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.0	Slurry Seal	11/6/2025	85	100	4458.5
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2025	85	100	4680
COACH::CCARRASCO::2	CALLE CARRASCO	CALLE CHAVEZ	CALLE YSIANO	Residential	9,576.0	Slurry Seal	11/6/2025	84	100	4788
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.0	Slurry Seal	11/6/2025	85	100	5577
COACH::52NDAVEE::12	52ND AVE	CALLE AVILA	CALLE AVILA	Arterial	1,508.0	1.5" Thin Overlay	11/6/2025	63	100	7540
COACH::PASEOLAREDO::2	PASEO LAREDO	CALLE DE VEGA	AVENIDA CORTEZ	Residential	15,280.0	Slurry Seal	11/6/2025	84	100	7640
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2025	85	100	8442
COACH::CEMPALME::1	CALLE EMPALME	BELLISSIMA AVE	53RD AVE	Residential	18,720.0	Slurry Seal	11/6/2025	84	100	9360
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.0	Slurry Seal	11/6/2025	85	100	9996
COACH::AIRPORTBL::7	AIRPORT BLVD	1085' W/O FILLMORE ST	860' W/O FILLMORE ST	Collector	11,300.0	Microsurfacing	11/6/2025	84	100	11300
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.0	1.5" Thin Overlay	11/6/2025	62	100	12780
COACH::VIASANTIAG::1	VIA SANTIAGO	CDS	CALLE DIEGO	Residential	2,556.0	1.5" Thin Overlay	11/6/2025	63	100	12780
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.0	Slurry Seal	11/6/2025	85	100	14436
COACH::54THAVEE::4	54TH AVE	SH-86	CALLE BALDERAS	Arterial	16,605.0	Microsurfacing	11/6/2025	84	100	16605
COACH::CVERDE::5	CALLE VERDE	CESAR CHAVEZ ST	SH-86	Collector	3,400.0	1.5" Thin Overlay	11/6/2025	63	100	17000
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.0	Slurry Seal	11/6/2025	85	100	17075.5
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.0	Slurry Seal	11/6/2025	85	100	17537
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.0	Slurry Seal	11/6/2025	85	100	17613
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.0	Microsurfacing	11/6/2025	85	100	18750
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.0	Microsurfacing	11/6/2025	85	100	18900
COACH::PARKLN::3	PARK LN	130' W/O SH-111	SH-111	Arterial	3,810.0	1.5" Thin Overlay	11/6/2025	63	100	19050
COACH::CZAMORA::5	CALLE ZAMORA	CESAR CHAVEZ ST	SH-86	Residential	3,852.0	1.5" Thin Overlay	11/6/2025	63	100	19260
COACH::54THAVEE::5	54TH AVE	CALLE BALDERAS	SHADY LN	Arterial	20,985.0	Microsurfacing	11/6/2025	84	100	20985
COACH::AIRPORTBL::4	AIRPORT BLVD	1830' W/O FILLMORE ST	1395' W/O FILLMORE ST	Collector	21,750.0	Microsurfacing	11/6/2025	84	100	21750
COACH::52NDAVEE::29	52ND AVE	SHADY LN	GENOA ST	Arterial	23,625.0	Microsurfacing	11/6/2025	84	100	23625
COACH::ARAZON::4	AVENIDA RAZON	AVENIDA HALAWAY	VIA ZAHIDI	Residential	4,810.0	1.5" Thin Overlay	11/6/2025	63	100	24050
COACH::SALTILLOCR::1	SALTILLO CIR	CHIAPAS DR	JALISCO AVE	Residential	4,992.0	1.5" Thin Overlay	11/6/2025	63	100	24960
COACH::LUNADENICO::3	LUNA DE NICOLETA ST	140' S/O PLAZA DE ORO AVE	PLAZA DE ORO AVE	Residential	5,040.0	1.5" Thin Overlay	11/6/2025	63	100	25200
COACH::BAGDADAVE::2	BAGDAD AVE	LIBNAN ST	MECCA LANE	Residential	5,200.0	1.5" Thin Overlay	11/6/2025	63	100	26000
COACH::52NDAVEE::6	52ND AVE	DOUMA CT	CALLE TORRES ORDUNO	Arterial	5,304.0	1.5" Thin Overlay	11/6/2025	63	100	26520
COACH::SH-86N::15	SH-86	ALLEY	WESTERFIELD WAY	Arterial	26,880.0	Microsurfacing	11/6/2025	84	100	26880
COACH::MARIANAAVE::1	MARIANA AVE	SOL DE LINDA ST	CIELO VICTORIA ST	Residential	5,587.0	1.5" Thin Overlay	11/6/2025	63	100	27935
COACH::BELLISSIMA::1	BELLISSIMA AVE	FREDERICK ST	MODENA TER	Residential	6,160.0	1.5" Thin Overlay	11/6/2025	63	100	30800
COACH::CHIAPASDR::7	CHIAPAS DR	220' S/O SALTILLO CT	SALTILLO CIR	Residential	6,188.0	1.5" Thin Overlay	11/6/2025	63	100	30940
COACH::AMARIA::3	AVENIDA MARIA	CALLE ANABELLA	CALLE ALICIA	Residential	6,270.0	1.5" Thin Overlay	11/6/2025	63	100	31350
COACH::LAJOLLAAVE::4	LA JOLLA AVE	NEWPORT ST	CDS	Residential	3,564.0	3" Mill & Overlay	11/6/2025	45	100	32076
COACH::LASFLORES::3	LAS FLORES AVE	CALLE MENDOZA	CDS	Residential	6,468.0	1.5" Thin Overlay	11/6/2025	63	100	32340
COACH::CLIMON::1	CALLE LIMON	GENOA ST	CAMINO CORTO	Residential	6,570.0	1.5" Thin Overlay	11/6/2025	63	100	32850
COACH::CMOLINO::1	CORTE MOLINO	CDS	REDONDO NORTE	Residential	6,600.0	1.5" Thin Overlay	11/6/2025	63	100	33000
COACH::KENTIACT::1	KENTIA CT	CDS	PHOENIX AVE	Residential	6,656.0	1.5" Thin Overlay	11/6/2025	63	100	33280
COACH::52NDAVEW::11	52ND AVE	CALLE CAMACHO	CALLE AVILA	Arterial	6,916.0	1.5" Thin Overlay	11/6/2025	63	100	34580
COACH::SALTILLOCR::5	SALTILLO CIR	CHIAPAS DR	MAZATLAN DR	Residential	7,254.0	1.5" Thin Overlay	11/6/2025	63	100	36270
COACH::CHIAPASDR::2	CHIAPAS DR	500' N/O 51ST AVE	TABASCO CT	Residential	7,392.0	1.5" Thin Overlay	11/6/2025	63	100	36960
COACH::GARNETRIDG::1	GARNET RIDGE ST	AVENUE 49	SAN MATEO AVE	Residential	7,560.0	1.5" Thin Overlay	11/6/2025	63	100	37800
COACH::50THAVEW::2	50TH AVE	KENMORE ST	AVENIDA DE PLATINA	Arterial	4,323.0	3" Mill & Overlay	11/6/2025	45	100	38907
COACH::50THAVEE::14	50TH AVE	BALBOA ST	AVENIDA DE PLATA	Arterial	4,356.0	3" Mill & Overlay	11/6/2025	45	100	39204
COACH::CLAMIRADAW::1	CORTE LA MIRADA	VAN BUREN ST	CALLE EL SOL	Residential	8,029.0	1.5" Thin Overlay	11/6/2025	63	100	40145
COACH::CSANTOS::1	CORTE SANTOS	CDS	CALLE QUINTERRA	Residential	8,748.0	1.5" Thin Overlay	11/6/2025	63	100	43740
COACH::ACORTEZ::2	AVENIDA CORTEZ	VIA HERMOSA	VIA DURANGO	Residential	8,748.0	1.5" Thin Overlay	11/6/2025	63	100	43740
COACH::AEUROPA::1	AVENIDA EUROPA	D/E	CALLE CARMELLO	Residential	4,932.0	3" Mill & Overlay	11/6/2025	45	100	44388
COACH::MCCOYPEAK::1	MCCOY PEAK AVE	SAN GORGONIO ST	ARICA DR	Residential	9,360.0	1.5" Thin Overlay	11/6/2025	63	100	46800
COACH::REDMOUNT::1	RED MOUNTAIN PL	GRANITE PASS TRL	COXCOMB DR	Residential	9,360.0	1.5" Thin Overlay	11/6/2025	63	100	46800
COACH::BIGBEARPL::1	BIG BEAR PL	CHARLTON PEAK ST	CHIRIACO SUMMIT ST	Residential	9,360.0	1.5" Thin Overlay	11/6/2025	63	100	46800
COACH::SIERRAST::2	SIERRA ST	TERA VISTA	MEADOWS LN	Residential	9,398.0	1.5" Thin Overlay	11/6/2025	63	100	46990
COACH::52NDAVEW::19	52ND AVE	DOUMA CT	DOUMA ST	Arterial	9,412.0	1.5" Thin Overlay	11/6/2025	63	100	47060
COACH::SUMMERST::3	SUMMER ST	MAGNOLIA ST	FIESTA RD	Residential	9,435.0	1.5" Thin Overlay	11/6/2025	63	100	47175
COACH::BRIANNELN::4	BRIANNE LN	FIESTA RD	TERA VISTA	Residential	9,472.0	1.5" Thin Overlay	11/6/2025	63	100	47360
COACH::REDONDONOR::1	REDONDO NORTE	REDONDO PONIENTE	CORTE MOLINO	Residential	9,540.0	1.5" Thin Overlay	11/6/2025	63	100	47700
COACH::NSIENNACIR::2	N SIENNA CIR	SLATE DR	SAPPHIRE LN	Residential	9,576.0	1.5" Thin Overlay	11/6/2025	63	100	47880
COACH::ANDREALN::2	ANDREA LN	LINDA AVE	CHRISTINA RD	Residential	9,583.0	1.5" Thin Overlay	11/6/2025	63	100	47915
COACH::WESTERFILD::7	WESTERFIELD WAY	S KENMORE ST	SUNCREST ST	Residential	5,400.0	3" Mill & Overlay	11/6/2025	45	100	48600
COACH::CHAPARROSA::6	CHAPARROSA ST	EAGLE AVE	MCCOY PEAK AVE	Residential	9,720.0	1.5" Thin Overlay	11/6/2025	63	100	48600
COACH::CZAMORA::3	CALLE ZAMORA	CALLE AVILA	CALLE CAMACHO	Residential	9,720.0	1.5" Thin Overlay	11/6/2025	63	100	48600
COACH::SANGORGONI::1	SAN GORGONIO ST	EAGLE AVE	MCCOY PEAK AVE	Residential	9,720.0	1.5" Thin Overlay	11/6/2025	63	100	48600
COACH::SOLARCEST::2	SOLARCE ST	PROSECCO WAY	SOLARCE ST	Residential	5,406.0	3" Mill & Overlay	11/6/2025	45	100	48654
COACH::PALOMARCT::1	PALOMAR CT	SAN JACINTO LN	CDS	Residential	9,972.0	1.5" Thin Overlay	11/6/2025	63	100	49860
COACH::CALENDULA::2	CALENDULA AVE	BRIANNE LN	JAZMIN ST	Residential	10,027.0	1.5" Thin Overlay	11/6/2025	63	100	50135
COACH::TODOSSANTO::1	TODOS SANTOS AVE	EL ARCO ST	EL CASTILLO RD	Residential	10,080.0	1.5" Thin Overlay	11/6/2025	63	100	50400
COACH::GENOAST::13	GENOA ST	NAPOLI LN	BAGDAD ST	Residential	10,175.0	1.5" Thin Overlay	11/6/2025	63	100	50875
COACH::CCARMELLO::1	CALLE CARMELLO	AVENIDA FLORABUNDA	AVENIDA EUROPA	Residential	10,296.0	1.5" Thin Overlay	11/6/2025	63	100	51480
COACH::ANICOLE::1	AVENIDA NICOLE	CALLE ALICIA	CATARINA CT	Residential	10,332.0	1.5" Thin Overlay	11/6/2025	63	100	51660
COACH::SANMATEOAV::2	SAN MATEO AVE	GARNET RIDGE ST	CHAPARROSA ST	Residential	10,332.0	1.5" Thin Overlay	11/6/2025	63	100	51660
COACH::CHIAPASDR::4	CHIAPAS DR	500' E/O TABASCO CT	BAJA WAY	Residential	10,332.0	1.5" Thin Overlay	11/6/2025	63	100	51660
COACH::CELSOL::2	CALLE EL SOL	CORTE EL ALBA	CORTE LA MORADA	Residential	10,360.0	1.5" Thin Overlay	11/6/2025	63	100	51800
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	Collector	10,400.0	1.5" Thin Overlay	11/6/2025	62	100	52000
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	Collector	10,400.0	1.5" Thin Overlay	11/6/2025	62	100	52000
COACH::SANASISDR::4	SAN ASIS DR	SAN CAPISTRANO DR	SAN SOLANO RD	Residential	10,400.0	1.5" Thin Overlay	11/6/2025	63	100	52000
COACH::52NDAVE::41	52ND AVE	2200' W/O FILLMORE ST	FILLMORE ST	Rural	65,400.0	Chip Seal	11/6/2025	84	100	52320
COACH::SANTOLN::1	SANTO LN	SOLEDAD PL	CALLE TOLOSA	Residential	10,600.0	1.5" Thin Overlay	11/6/2025	63	100	53000
COACH::CJOYCE::1	CALLE JOYCE	AVENIDA RAYLYNN	AVENIDA GRACE	Residential	10,620.0	1.5" Thin Overlay	11/6/2025	63	100	53100
COACH::PROSECCO::1	PROSECCO WAY	RODREJO WAY	ALLENDE DR	Residential	5,920.0	3" Mill & Overlay	11/6/2025	45	100	53280
COACH::HIBISCOST::1	HIBISCO ST	PHOENIX AVE	CALENDULA AVE	Residential	5,994.0	3" Mill & Overlay	11/6/2025	45	100	53946
COACH::VERMOUTHDR::1	VERMOUTH DR	D/E	PRIMITIVO DR	Residential	6,080.0	3" Mill & Overlay	11/6/2025	45	100	54720
COACH::VALLEYRD::4	VALLEY RD	MORGAN AVE	NELSON ST	Collector	11,040.0	1.5" Thin Overlay	11/6/2025	62	100	55200
COACH::CAIROAVE::4	CAIRO AVE	CALLE CAMACHO	SUEZ RD	Residential	6,240.0	3" Mill & Overlay	11/6/2025	45	100	56160
COACH::LASLUNASAV::3	LAS LUNAS AVE	MESA CT	RIO RANCHO CT	Residential	11,376.0	1.5" Thin Overlay	11/6/2025	63	100	56880
COACH::SANJACINTO::2	SAN JACINTO LN	RIMROCK LN	PALOMAR CT	Residential	11,376.0	1.5" Thin Overlay	11/6/2025	63	100	56880
COACH::CLAPAZ::2	CALLE LA PAZ	CALLE ROSA	53RD AVE	Residential	6,444.0	3" Mill & Overlay	11/6/2025	45	100	57996
COACH::LIVISTONA::1	LIVISTONA CT	CDS	PHOENIX AVE	Residential	6,656.0	3" Mill & Overlay	11/6/2025	45	100	59904
COACH::REDONDOEST::1	REDONDO ESTE	REDONDO SUR	AVENIDA VESTAGO	Residential	12,168.0	1.5" Thin Overlay	11/6/2025	63	100	60840
COACH::PHOENIXAVE::5	PHOENIX AVE	HIBISCO ST	FREDERICK ST	Residential	6,912.0	3" Mill & Overlay	11/6/2025	45	100	62208
COACH::BAGDADAVE::11	BAGDAD AVE	DATE AVE	DATE AVE	Collector	12,480.0	1.5" Thin Overlay	11/6/2025	63	100	62400
COACH::MERCADOCIR::1	MERCADO CIR	MALVASIA WAY	CDS	Residential	6,944.0	3" Mill & Overlay	11/6/2025	45	100	62496
COACH::DOUMAST::2	DOUMA ST	DAMASCUS AVE	BAGDAD AVE	Residential	12,654.0	1.5" Thin Overlay	11/6/2025	63	100	63270
COACH::CVERDE::3	CALLE VERDE	CALLE AVILA	CALLE CAMACHO	Collector	12,960.0	1.5" Thin Overlay	11/6/2025	63	100	64800
COACH::VIAMERIDA::1	VIA MERIDA	VAN BUREN ST	PASEO BARCELONA	Residential	7,272.0	3" Mill & Overlay	11/6/2025	44	100	65448
COACH::RIMROCKLN::1	RIMROCK LN	SAN JACINTO LN	PINTO LN	Residential	13,320.0	1.5" Thin Overlay	11/6/2025	63	100	66600
COACH::SHADYLN::4	SHADY LN	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	13,440.0	1.5" Thin Overlay	11/6/2025	62	100	67200
COACH::LASFLORES::2	LAS FLORES AVE	EL SOL ST	CALLE MENDOZA	Residential	13,497.0	1.5" Thin Overlay	11/6/2025	63	100	67485
COACH::MOONLITDR::2	MOONLIT DR	VALLE POSADA	VAN BUREN ST	Residential	7,560.0	3" Mill & Overlay	11/6/2025	45	100	68040
COACH::RHAPISCT::1	RHAPIS CT	CDS	WASHINGTONIA AVE	Residential	13,838.0	1.5" Thin Overlay	11/6/2025	63	100	69190
COACH::FIESTARD::2	FIESTA RD	VALLE POSADA	VAN BUREN ST	Residential	7,704.0	3" Mill & Overlay	11/6/2025	45	100	69336
COACH::CROJO::2	CALLE ROJO	170 W/O CALLE EMPALME	260' W/O CALLE EMPALME	Residential	3,520.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	70400
COACH::CHIAPASDR::6	CHIAPAS DR	220' S/O SALTILLO CT	315' E/O BAJA WAY	Residential	8,064.0	3" Mill & Overlay	11/6/2025	45	100	72576
COACH::52NDAVEW::10	52ND AVE	CESAR CHAVEZ ST	CALLE CAMACHO	Arterial	8,138.0	3" Mill & Overlay	11/6/2025	45	100	73242
COACH::GLENDORARG::2	GLENDORA RIDGE AVE	CHAPARROSA ST	CDS	Residential	15,300.0	1.5" Thin Overlay	11/6/2025	63	100	76500
COACH::VIATEPEYAC::1	VIA TEPEYAC	CALLE SOLEDAD	TEPEYAC CT	Residential	15,336.0	1.5" Thin Overlay	11/6/2025	63	100	76680
COACH::LAPLAYAST::1	LA PLAYA ST	CAMINO PELICANO	CALLE COLIMA	Residential	16,056.0	1.5" Thin Overlay	11/6/2025	63	100	80280
COACH::53RDAVE::15	53RD AVE	CALLE LA PAZ	CALLE SOLEDAD	Collector	16,320.0	1.5" Thin Overlay	11/6/2025	63	100	81600
COACH::WASHINGTON::2	WASHINGTONIA AVE	ROYAL CT	KING CT	Residential	9,144.0	3" Mill & Overlay	11/6/2025	45	100	82296
COACH::WASHINGTON::3	WASHINGTONIA AVE	KING CT	QUEEN CT	Residential	9,144.0	3" Mill & Overlay	11/6/2025	45	100	82296
COACH::EAGLEAVE::2	EAGLE AVE	SAN GORGONIO ST	CHAPARROSA ST	Residential	16,530.0	1.5" Thin Overlay	11/6/2025	63	100	82650
COACH::NSIENNACIR::3	N SIENNA CIR	SAPPHIRE LN	E SIENNA CIR	Residential	16,560.0	1.5" Thin Overlay	11/6/2025	63	100	82800
COACH::NEWPORTST::1	NEWPORT ST	MIRAMAR CT	CAPITOLA AVE	Residential	9,324.0	3" Mill & Overlay	11/6/2025	45	100	83916
COACH::CROJO::9	CALLE ROJO	CESAR CHAVEZ ST	SH-86	Residential	4,280.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	85600
COACH::NIETOST::1	NIETO ST	GUITRON ST	ROMERO ST	Residential	9,520.0	3" Mill & Overlay	11/6/2025	45	100	85680
COACH::50THAVEW::5	50TH AVE	AVENIDA DE PLATA	BALBOA ST	Arterial	4,356.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	87120
COACH::VINEAVE::8	VINE AVE	ALLEY	2ND ST	Collector	9,776.0	3" Mill & Overlay	11/6/2025	45	100	87984
COACH::CCORTEZ::2	CAMINO CORTEZ	LOS CABOS AVE	TODOS SANTOS AVE	Residential	10,080.0	3" Mill & Overlay	11/6/2025	45	100	90720
COACH::CINNABARLN::4	CINNABAR LN	LAPIS DR	SERPENTINE WAY	Residential	10,175.0	3" Mill & Overlay	11/6/2025	45	100	91575
COACH::GENOAST::8	GENOA ST	52ND AVE	NILE LN	Residential	10,323.0	3" Mill & Overlay	11/6/2025	45	100	92907
COACH::LAJOLLAAVE::3	LA JOLLA AVE	ZUMA DR	NEWPORT ST	Residential	10,332.0	3" Mill & Overlay	11/6/2025	45	100	92988
COACH::CINNABARLN::2	CINNABAR LN	NICKLECREEK DR	SHADOWROCK DR	Residential	10,360.0	3" Mill & Overlay	11/6/2025	45	100	93240
COACH::CELSOL::1	CALLE EL SOL	AVENIDA VERANO	CORTE EL ALBA	Residential	10,360.0	3" Mill & Overlay	11/6/2025	45	100	93240
COACH::SANREYDR::3	SAN REY DR	SAN CAPISTRANO DR	SAN SOLANO RD	Residential	10,400.0	3" Mill & Overlay	11/6/2025	45	100	93600
COACH::VIACONCHIL::1	VIA CONCHILLA	AVENIDA DE PLATA	AVENIDA DE PLATINA	Residential	10,600.0	3" Mill & Overlay	11/6/2025	45	100	95400
COACH::VALLEYRD::3	VALLEY RD	TRIPOLI WAY	MORGAN AVE	Collector	10,720.0	3" Mill & Overlay	11/6/2025	44	100	96480
COACH::ORCHARDAVE::8	ORCHARD AVE	4TH ST	3RD ST	Collector	19,500.0	1.5" Thin Overlay	11/6/2025	63	100	97500
COACH::53RDAVE::14	53RD AVE	LEE LN	CALLE LA PAZ	Collector	19,620.0	1.5" Thin Overlay	11/6/2025	63	100	98100
COACH::53RDAVE::5	53RD AVE	CALLE AVILA	130' E/O CALLE AVILA	Collector	4,995.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	99900
COACH::CTORRESORD::2	CALLE TORRES ORDUNO	DOUMA CT	DAMASCUS AVE	Residential	11,424.0	3" Mill & Overlay	11/6/2025	45	100	102816

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::SKENMOREST::1	S KENMORE ST	WESTERFIELD WAY	CDS	Residential	20,664.0	1.5" Thin Overlay	11/6/2025	63	100	103320
COACH::SCORONADO::1	S CORONADO ST	WESTERFIELD WAY	CDS	Residential	20,664.0	1.5" Thin Overlay	11/6/2025	63	100	103320
COACH::AADOBE::3	AVENIDA ADOBE	CORTE CINDARELLA	CORTE BERNARDO	Residential	11,560.0	3" Mill & Overlay	11/6/2025	45	100	104040
COACH::3RDST::5	3RD ST	ALLEY	SH-111	Collector	11,592.0	3" Mill & Overlay	11/6/2025	45	100	104328
COACH::CALHOUNST::7	CALHOUN ST	LAS PLUMAS CT	AVENUE 49	Collector	104,470.0	Microsurfacing	11/6/2025	84	100	104470
COACH::BAGDADAVE::15	BAGDAD AVE	SHADY LN	GENOA ST	Collector	20,920.0	1.5" Thin Overlay	11/6/2025	63	100	104600
COACH::CMENDOZA::1	CALLE MENDOZA	TYLER ST	CORTE OLIVIA	Residential	20,955.0	1.5" Thin Overlay	11/6/2025	63	100	104775
COACH::MANHATTAN::1	MANHATTAN AVE	VAN BUREN ST	MONARCH RD	Residential	21,132.0	1.5" Thin Overlay	11/6/2025	63	100	105660
COACH::ARICADR::1	ARICA DR	MCCOY PEAK AVE	QUAIL MOUNTAIN TER	Residential	22,176.0	1.5" Thin Overlay	11/6/2025	63	100	110880
COACH::GENOAST::1	GENOA ST	AVENUE 53	AVENIDA RAYLYNN	Residential	12,358.0	3" Mill & Overlay	11/6/2025	45	100	111222
COACH::CHIRIACOSU::1	CHIRIACO SUMMIT ST	GLENDORA RIDGE AVE	BIG BEAR PL	Residential	22,248.0	1.5" Thin Overlay	11/6/2025	63	100	111240
COACH::CLOSHERMAN::1	CALLE LOS HERMANOS	CALLE FELIZ	CALLE ROSA	Residential	22,536.0	1.5" Thin Overlay	11/6/2025	63	100	112680
COACH::AMAPOLALN::1	AMAPOLA LN	CDS	HIBISCO ST	Residential	12,728.0	3" Mill & Overlay	11/6/2025	45	100	114552
COACH::HUNTINGTON::3	HUNTINGTON AVE	HERMOSA BLVD	VENENTA BLVD	Residential	12,996.0	3" Mill & Overlay	11/6/2025	45	100	116964
COACH::SERPENTINE::1	SERPENTINE WAY	CDS	CINNABAR LN	Residential	13,024.0	3" Mill & Overlay	11/6/2025	45	100	117216
COACH::SANSOLANO::2	SAN SOLANO RD	SAGRADO DR	SAN REY DR	Residential	23,640.0	1.5" Thin Overlay	11/6/2025	63	100	118200
COACH::LASFLORES::1	LAS FLORES AVE	TYLER ST	EL SOL ST	Residential	23,727.0	1.5" Thin Overlay	11/6/2025	63	100	118635
COACH::AGRACE::1	AVENIDA GRACE	CALLE JOYCE	CALLE FLORENA	Residential	23,976.0	1.5" Thin Overlay	11/6/2025	60	100	119880
COACH::AIRPORTBL::8	AIRPORT BLVD	860' W/O FILLMORE ST	FILLMORE ST	Collector	24,024.0	1.5" Thin Overlay	11/6/2025	63	100	120120
COACH::MALIBUAVE::1	MALIBU AVE	NEWPORT ST	OCEANO RD	Residential	13,428.0	3" Mill & Overlay	11/6/2025	39	100	120852
COACH::CAPITOLAAV::5	CAPITOLA AVE	NEWPORT ST	OCEANO RD	Residential	13,428.0	3" Mill & Overlay	11/6/2025	42	100	120852
COACH::CATALINAAV::1	CATALINA AVE	NEWPORT ST	OCEANO RD	Residential	13,428.0	3" Mill & Overlay	11/6/2025	43.5	100	120852
COACH::CCAMACHO::5	CALLE CAMACHO	CALLE ROJO	52ND AVE	Residential	24,280.0	1.5" Thin Overlay	11/6/2025	57	100	121400
COACH::1STST::2	1ST ST	PALM AVE	ORCHARD AVE	Collector	24,282.0	1.5" Thin Overlay	11/6/2025	60	100	121410
COACH::52NDAVEE::30	52ND AVE	GENOA ST	CALLE LIMON	Arterial	24,615.0	1.5" Thin Overlay	11/6/2025	63	100	123075
COACH::GUITRONST::1	GUITRON ST	FREDERICK ST	REYES ST	Residential	6,154.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	123080
COACH::2NDST::4	2ND ST	VINE AVE	ALLEY	Collector	13,720.0	3" Mill & Overlay	11/6/2025	45	100	123480
COACH::MALVASIA::1	MALVASIA WAY	PRIMITIVO DR	RODREJO WAY	Residential	6,176.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	28.5	100	123520
COACH::50THAVEW::8	50TH AVE	AVENIDA DEL PARQUE	PAVON PALMA	Arterial	13,728.0	3" Mill & Overlay	11/6/2025	36	100	123552
COACH::MEDINAAVE::1	MEDINA AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	1.5" Thin Overlay	11/6/2025	62	100	125400
COACH::DAMASCUSAV::5	DAMASCUS AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	1.5" Thin Overlay	11/6/2025	62	100	125400
COACH::CAIROAVE::8	CAIRO AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	1.5" Thin Overlay	11/6/2025	62	100	125400
COACH::MITCHELLDR::1	MITCHELL DR	FREDERICK ST	SH-111	Collector	25,346.0	1.5" Thin Overlay	11/6/2025	60	100	126730
COACH::6THST::6	6TH ST	VINE AVE	SH-111	Collector	25,368.0	1.5" Thin Overlay	11/6/2025	63	100	126840
COACH::PARKINGLOT::1	PARKING LOT	200' S/O BAGDAD AVE	BAGDAD AVE	Residential	6,368.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	27	100	127360
COACH::CFLORENA::4	CALLE FLORENA	110' N/O AVENIDA ALEENAH	AVENIDA VERONICA	Residential	14,184.0	3" Mill & Overlay	11/6/2025	43.5	100	127656
COACH::VALLEPOSAD::1	VALLE POSADA	MOONLIT DR	FIESTA RD	Residential	14,508.0	3" Mill & Overlay	11/6/2025	45	100	130572
COACH::JAZMINST::2	JAZMIN ST	MARGARITA AVE	49TH AVE	Residential	6,549.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	22.5	100	130980
COACH::CALHOUNST::10	CALHOUN ST	EAGLE AVE	EL MAR AVE	Collector	26,350.0	1.5" Thin Overlay	11/6/2025	57	100	131750
COACH::55THAVE::2	55TH AVE	FILLMORE ST	1330' E/O FILLMORE ST	Rural	26,540.0	1.5" Thin Overlay	11/6/2025	57	100	132700
COACH::BAGDADAVE::1	BAGDAD AVE	DOUMA ST	LIBNAN ST	Residential	26,560.0	1.5" Thin Overlay	11/6/2025	57	100	132800
COACH::DOUMACT::2	DOUMA CT	DOUMA CT	CALLE TORRES ORDUNO	Residential	6,660.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	25.5	100	133200
COACH::ALLENDEDR::3	ALLENDE DR	SOLARCE ST	ALLENDE DR	Residential	15,008.0	3" Mill & Overlay	11/6/2025	39	100	135072
COACH::CBELLA::1	CALLE BELLA	CALLE NINOS	CDS	Residential	15,444.0	3" Mill & Overlay	11/6/2025	45	100	138996
COACH::AADOBE::1	AVENIDA ADOBE	51ST AVE	CALLE CATHRON	Residential	6,960.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	9	100	139200
COACH::REDONDONOR::3	REDONDO NORTE	CALLE QUINTERRA	REDONDO ESTE	Residential	15,480.0	3" Mill & Overlay	11/6/2025	36	100	139320
COACH::POLKST::3	POLK ST	610' S/O INDUSTRIAL WAY	INDUSTRIAL WAY	Collector	28,290.0	1.5" Thin Overlay	11/6/2025	63	100	141450
COACH::AFLORABUND::2	AVENIDA FLORABUNDA	CALLE ABELIA	CALLE TECOMARIA	Residential	15,732.0	3" Mill & Overlay	11/6/2025	39	100	141588
COACH::SHADYLN::13	SHADY LN	HEATHER LN	VALENCIA LN	Residential	15,904.0	3" Mill & Overlay	11/6/2025	38	100	143136
COACH::PALMERASCR::4	PALMERAS CIR	CHUPAROSA DR	CARDELINA DR	Residential	7,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	13.5	100	144000
COACH::PALMERASCR::10	PALMERAS CIR	PALOMA DR	MARIPOSA DR	Residential	7,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	15	100	144000
COACH::TODOSSANTO::4	TODOS SANTOS AVE	CAMINO CORTEZ	COZUMEL ST	Residential	29,340.0	1.5" Thin Overlay	11/6/2025	63	100	146700
COACH::CHUPAROSA::1	CHUPAROSA DR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.0	3" Mill & Overlay	11/6/2025	37.5	100	148392
COACH::MARIPOSADR::1	MARIPOSA DR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.0	3" Mill & Overlay	11/6/2025	39	100	148392
COACH::CARDELINAD::1	CARDELINA DR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.0	3" Mill & Overlay	11/6/2025	43.5	100	148392
COACH::PALOMADR::1	PALOMA DR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.0	3" Mill & Overlay	11/6/2025	43.5	100	148392
COACH::CHAPARROSA::7	CHAPARROSA ST	MCCOY PEAK AVE	48TH AVE	Residential	29,700.0	1.5" Thin Overlay	11/6/2025	60	100	148500
COACH::PENDLETON::1	PENDLETON WAY	7TH ST	9TH ST	Collector	30,080.0	1.5" Thin Overlay	11/6/2025	63	100	150400
COACH::VINEAVE::4	VINE AVE	6TH ST	5TH ST	Collector	16,900.0	3" Mill & Overlay	11/6/2025	36	100	152100
COACH::VINEAVE::6	VINE AVE	4TH ST	3RD ST	Collector	16,900.0	3" Mill & Overlay	11/6/2025	43.5	100	152100
COACH::ORCHARDAVE::1	ORCHARD AVE	280' W/O SHADY LN	SHADY LN	Collector	17,040.0	3" Mill & Overlay	11/6/2025	36	100	153360
COACH::AADOBE::10	AVENIDA ADOBE	215' S/O CHRISTINA RD	CHRISTINA RD	Residential	7,704.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	154080
COACH::CCANTARA::1	CALLE CANTARA	AVENIDA FLORABUNDA	AVENIDA NERIUM	Residential	30,924.0	1.5" Thin Overlay	11/6/2025	57	100	154620
COACH::CELDARICA::1	CALLE ELDARICA	AVENIDA FLORABUNDA	AVENIDA NERIUM	Residential	30,924.0	1.5" Thin Overlay	11/6/2025	63	100	154620
COACH::OATESLN::1	OATES LN	OATES LN	PETER RABBIT LN	Collector	17,688.0	3" Mill & Overlay	11/6/2025	37.5	100	159192
COACH::CHARLTONPK::2	CHARLTON PEAK ST	MECCA HILLS AVE	BIG BEAR PL	Residential	32,220.0	1.5" Thin Overlay	11/6/2025	60	100	161100
COACH::WSIENNACIR::1	W SIENNA CIR	TOPAZ CT	N SIENNA CIR	Residential	32,760.0	1.5" Thin Overlay	11/6/2025	57	100	163800
COACH::DILLONRD::11	DILLON RD	650' S/O VISTA DEL NORTE	450' S/O VISTA DEL NORTE	Arterial	18,624.0	3" Mill & Overlay	11/6/2025	45	100	167616
COACH::SUNBURSTST::1	SUNBURST ST	SUNSHINE AVE	SUNRISE AVE	Residential	33,840.0	1.5" Thin Overlay	11/6/2025	63	100	169200
COACH::JADEROCKRD::1	JADEROCK RD	COPPERIDGE ST	HORNBLEND ST	Residential	18,833.0	3" Mill & Overlay	11/6/2025	40.5	100	169497
COACH::CLAPAZ::1	CALLE LA PAZ	CALLE NINOS	CALLE ROSA	Residential	34,056.0	1.5" Thin Overlay	11/6/2025	57	100	170280
COACH::PRIMITIVO::1	PRIMITIVO DR	PRIMITIVO DR	MALVASIA WAY	Residential	8,544.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	28.5	100	170880
COACH::VINEAVE::2	VINE AVE	8TH ST	7TH ST	Collector	19,500.0	3" Mill & Overlay	11/6/2025	39	100	175500
COACH::PALMAVE::3	PALM AVE	5TH ST	4TH ST	Collector	19,500.0	3" Mill & Overlay	11/6/2025	45	100	175500
COACH::ORCHARDAVE::5	ORCHARD AVE	7TH ST	6TH ST	Collector	19,500.0	3" Mill & Overlay	11/6/2025	45	100	175500
COACH::6THST::1	6TH ST	SH-86	TRIPOLI WAY	Collector	20,048.0	3" Mill & Overlay	11/6/2025	40.5	100	180432
COACH::MAGNOLIAST::1	MAGNOLIA ST	SUMMER ST	BRIANNE LN	Residential	36,149.0	1.5" Thin Overlay	11/6/2025	60	100	180745
COACH::CALENDULA::1	CALENDULA AVE	SUMMER ST	BRIANNE LN	Residential	36,149.0	1.5" Thin Overlay	11/6/2025	63	100	180745
COACH::CAPITOLAAV::4	CAPITOLA AVE	VENENTA BLVD	NEWPORT ST	Residential	9,072.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	181440
COACH::WESTERFILD::8	WESTERFIELD WAY	SUNCREST ST	SH-86	Residential	20,400.0	3" Mill & Overlay	11/6/2025	36	100	183600
COACH::GENOAST::2	GENOA ST	AVENIDA RAYLYNN	AVENIDA ALEENAH	Residential	20,720.0	3" Mill & Overlay	11/6/2025	42	100	186480
COACH::HIBISCOST::5	HIBISCO ST	ROSAL AVE	MARGARITA AVE	Residential	9,398.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	21	100	187960
COACH::CALENDULA::5	CALENDULA AVE	ORQUIDEA LN	NARCISO LN	Residential	9,435.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	25.5	100	188700
COACH::54THAVEW::6	54TH AVE	SHADY LN	CALLE BALDERAS	Arterial	20,985.0	3" Mill & Overlay	11/6/2025	45	100	188865
COACH::HIBISCOST::2	HIBISCO ST	CALENDULA AVE	IRIS AVE	Residential	9,472.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	22.5	100	189440
COACH::CALENDULA::3	CALENDULA AVE	JAZMIN ST	TULIPAN ST	Residential	9,583.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	13.5	100	191660
COACH::DOUMAST::1	DOUMA ST	52ND AVE	DAMASCUS AVE	Residential	38,950.0	1.5" Thin Overlay	11/6/2025	60	100	194750
COACH::3RDST::1	3RD ST	D/E	PALM AVE	Collector	21,672.0	3" Mill & Overlay	11/6/2025	45	100	195048
COACH::CALENDULA::6	CALENDULA AVE	NARCISO LN	HIBISCO ST	Residential	9,768.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	30	100	195360
COACH::VINEAVE::9	VINE AVE	2ND ST	ALLEY	Collector	9,776.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	25.5	100	195520
COACH::50THAVE::5	50TH AVE	CALLE PUERTA DEL SOL	VAN BUREN ST	Arterial	21,728.0	3" Mill & Overlay	11/6/2025	43.5	100	195552
COACH::HIBISCOST::3	HIBISCO ST	IRIS AVE	AMAPOLA LN	Residential	9,842.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	21	100	196840
COACH::54THAVEE::3	54TH AVE	FREDERICK ST	SH-86	Arterial	39,585.0	1.5" Thin Overlay	11/6/2025	60	100	197925
COACH::54THAVEW::1	54TH AVE	POLK ST	CITY LIMITS	Arterial	22,140.0	3" Mill & Overlay	11/6/2025	45	100	199260
COACH::ADEPLATINA::1	AVENIDA DE PLATINA	50TH AVE	VIA CONCHILLA	Residential	22,160.0	3" Mill & Overlay	11/6/2025	37.5	100	199440
COACH::ORCHARDAVE::3	ORCHARD AVE	9TH ST	8TH ST	Collector	22,500.0	3" Mill & Overlay	11/6/2025	45	100	202500
COACH::VIAVALENCI::3	VIA VALENCIA	CALLE MARBELLA	PASEO CORDOVA	Residential	4,851.0	Slurry Seal	11/6/2026	85	100	2425.5
COACH::NAOMICT::2	NAOMI CT	PEREZ ST	CDS	Residential	6,240.0	Slurry Seal	11/6/2026	84	100	3120
COACH::COLIVO::1	CALLE OLIVO	CALLE NOGAL	CALLE PINO	Residential	10,440.0	Slurry Seal	11/6/2026	84	100	5220
COACH::CGRANADA::1	CALLE GRANADA	PASEO MADRID	PASEO CORDOVA	Residential	10,800.0	Slurry Seal	11/6/2026	85	100	5400
COACH::CNINOS::1	CALLE NINOS	CALLE BONITA	50' W/O CALLE BONITA	Residential	1,548.0	1.5" Thin Overlay	11/6/2026	63	100	7740
COACH::PASEOCORDO::1	PASEO CORDOVA	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2026	85	100	8250
COACH::BAGDADAVE::7	BAGDAD AVE	SH-86	ALLEY	Collector	8,560.0	Microsurfacing	11/6/2026	84	100	8560
COACH::PASEOBARCE::1	PASEO BARCELONA	CALLE SEVILLE	VIA MERIDA	Residential	18,216.0	Slurry Seal	11/6/2026	85	100	9108
COACH::AIRPORTBL::2	AIRPORT BLVD	CITY LIMITS	2640' W/O FILLMORE ST	Collector	9,250.0	Microsurfacing	11/6/2026	84	100	9250
COACH::SH-86N::8	SH-86	CAIRO AVE	CAIRO AVE	Arterial	2,560.0	1.5" Thin Overlay	11/6/2026	63	100	12800
COACH::53RDAVE::9	53RD AVE	CESAR CHAVEZ ST	50' W/O CESAR CHAVEZ ST	Collector	3,145.0	1.5" Thin Overlay	11/6/2026	63	100	15725
COACH::SH-111S::7	SH-111	3RD ST	4TH ST	Arterial	16,250.0	Microsurfacing	11/6/2026	85	100	16250
COACH::CALICIA::2	CALLE ALICIA	MICHELLE DR	AVENIDA MARIA	Residential	3,270.0	1.5" Thin Overlay	11/6/2026	63	100	16350
COACH::SH-111S::11	SH-111	7TH ST	8TH ST	Arterial	18,750.0	Microsurfacing	11/6/2026	85	100	18750
COACH::DILLONRD::1	DILLON RD	CITY LIMITS	HARRISON ST	Arterial	20,064.0	Microsurfacing	11/6/2026	84	100	20064
COACH::TOPAZCT::1	TOPAZ CT	CDS	W SIENNA CIR	Residential	4,070.0	1.5" Thin Overlay	11/6/2026	63	100	20350
COACH::LAPONDEROS::2	LA PONDEROSA DR	NAOMI CT	HERNANDEZ ST	Residential	42,012.0	Slurry Seal	11/6/2026	84	100	21006
COACH::SALTILLOCR::2	SALTILLO CIR	JALISCO AVE	JALISCO AVE	Residential	4,290.0	1.5" Thin Overlay	11/6/2026	63	100	21450
COACH::PINTOLN::2	PINTO LN	120' S/O MCCOY PEAK AVE	MCCOY PEAK AVE	Residential	4,536.0	1.5" Thin Overlay	11/6/2026	63	100	22680
COACH::PIERCEST::1	PIERCE ST	55TH AVE	CITY LIMITS	Rural	31,896.0	Chip Seal	11/6/2026	84	100	25516.8
COACH::CROSA::4	CALLE ROSA	140' W/O CALLE ESTRELLA	CALLE ESTRELLA	Residential	5,148.0	1.5" Thin Overlay	11/6/2026	63	100	25740
COACH::DILLONRD::8	DILLON RD	1070' S/O VISTA DEL NORTE	800' S/O VISTA DEL NORTE	Arterial	25,824.0	Microsurfacing	11/6/2026	84	100	25824
COACH::JALISCOAV::5	JALISCO AVE	100' S/O TAXCO WAY	TAXCO WAY	Residential	3,024.0	3" Mill & Overlay	11/6/2026	45	100	27216
COACH::CBOUGANVIL::2	CALLE BOUGANVILIA	CALLE CLAVEL	EL SOL ST	Residential	6,444.0	1.5" Thin Overlay	11/6/2026	63	100	32220
COACH::52NDAVEE::9	52ND AVE	CALLE EMPALME	CALLE TECHA	Arterial	3,640.0	3" Mill & Overlay	11/6/2026	45	100	32760
COACH::54THAVEW::5	54TH AVE	TYLER ST	SHADY LN	Arterial	33,972.0	Microsurfacing	11/6/2026	84	100	33972
COACH::52NDAVEE::13	52ND AVE	CALLE AVILA	CALLE CAMACHO	Arterial	6,916.0	1.5" Thin Overlay	11/6/2026	63	100	34580
COACH::PAVONPALMA::1	PAVON PALMA	50TH AVE	VERA CRUZ	Residential	7,200.0	1.5" Thin Overlay	11/6/2026	63	100	36000
COACH::TODOSSANTO::2	TODOS SANTOS AVE	EL CASTILLO RD	420' W/O CAMINO CORTEZ	Residential	7,272.0	1.5" Thin Overlay	11/6/2026	63	100	36360
COACH::SUNCRESTST::1	SUNCREST ST	51ST AVE	SUNSHINE AVE	Residential	7,520.0	1.5" Thin Overlay	11/6/2026	63	100	37600
COACH::GENOAST::6	GENOA ST	200' S/O AVENIDA MARIA	AVENIDA MARIA	Residential	7,548.0	1.5" Thin Overlay	11/6/2026	63	100	37740
COACH::51STAVE::1	51ST AVE	CITY LIMITS	VAN BUREN ST	Collector	39,360.0	Microsurfacing	11/6/2026	84	100	39360
COACH::CLAMIRADAE::1	CORTE LA MIRADA	CALLE EL SOL	VAN BUREN ST	Residential	8,066.0	1.5" Thin Overlay	11/6/2026	63	100	40330
COACH::CLORETO::1	CORTE LORETO	CALLE QUINTERRA	CDS	Residential	8,172.0	1.5" Thin Overlay	11/6/2026	63	100	40860
COACH::SH-86S::12	SH-86	CAIRO AVE	ALLEY	Arterial	8,560.0	1.5" Thin Overlay	11/6/2026	63	100	42800
COACH::CESTRELLA::1	CALLE ESTRELLA	CDS	CALLE ROSA	Residential	8,712.0	1.5" Thin Overlay	11/6/2026	63	100	43560
COACH::ELSOLST::1	EL SOL ST	CALLE BOUGANVILIA	LAS FLORES AVE	Residential	8,778.0	1.5" Thin Overlay	11/6/2026	63	100	43890
COACH::NSIENNACIR::1	N SIENNA CIR	W SIENNA CIR	SLATE DR	Residential	9,036.0	1.5" Thin Overlay	11/6/2026	63	100	45180
COACH::52NDAVE::18	52ND AVE	JENNIFER WAY	ALLEY	Arterial	5,060.0	3" Mill & Overlay	11/6/2026	45	100	45540
COACH::CDIEGO::3	CALLE DIEGO	CALLE LEANDRO	150' E/O CALLE LEANDRO	Residential	5,202.0	3" Mill & Overlay	11/6/2026	45	100	46818
COACH::ARAZON::1	AVENIDA RAZON	CALLE CATHRON	CORTE YAGER	Residential	9,435.0	1.5" Thin Overlay	11/6/2026	63	100	47175
COACH::AALEENAH::1	AVENIDA ALEENAH	GENOA ST	'150 E/O GENOA ST	Residential	5,364.0	3" Mill & Overlay	11/6/2026	45	100	48276
COACH::CDANIELLE::1	CALLE DANIELLE	AVENIDA MARIA	AVENIDA CRYSTAL	Residential	9,720.0	1.5" Thin Overlay	11/6/2026	63	100	48600
COACH::SCARLETWAY::1	SCARLET WAY	SLATE DR	SAPPHIRE LN	Residential	9,828.0	1.5" Thin Overlay	11/6/2026	63	100	49140
COACH::WESTERFILD::6	WESTERFIELD WAY	140' E/O S CORONADO ST	S KENMORE ST	Residential	5,480.0	3" Mill & Overlay	11/6/2026	45	100	49320
COACH::CTECHA::3	CALLE TECHA	CALLE LYA	CALLE ROBERTO	Residential	10,040.0	1.5" Thin Overlay	11/6/2026	63	100	50200
COACH::CREAL::1	CAMINO REAL	AGUA BLANCA AVE	CAMINO PELICANO	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	50400

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::AGUABLANCA::3	AGUA BLANCA AVE	CAMINO MAYA	CAMINO REAL	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	50400
COACH::PUEBLOBONI::2	PUEBLO BONITO AVE	EL ACRO ST	EL CASTILLO RD	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	50400
COACH::CBONITOAVE::1	CAMINO BONITO AVE	ESTRELLA TOMAS ST	ESTRELLA PEDRO ST	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	50400
COACH::CPELICANO::1	CAMINO PELICANO	CAMINO REAL	LA PLAYA ST	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	50400
COACH::ANICOLE::2	AVENIDA NICOLE	CATARINA CT	MICHELLE DR	Residential	10,332.0	1.5" Thin Overlay	11/6/2026	63	100	51660
COACH::FIESTARD::4	FIESTA RD	SUMMER ST	SIERRA ST	Residential	10,332.0	1.5" Thin Overlay	11/6/2026	63	100	51660
COACH::MARIANAAVE::3	MARIANA AVE	LUNA DE NICOLETA ST	ESTRELLA TOMAS ST	Residential	10,360.0	1.5" Thin Overlay	11/6/2026	63	100	51800
COACH::CHARDONNAY::1	CHARDONNAY CIR	MALVASIA WAY	CDS	Residential	5,760.0	3" Mill & Overlay	11/6/2026	45	100	51840
COACH::SANASISDR::2	SAN ASIS DR	SOLEDAD PL	CALLE TOLOSA	Residential	10,600.0	1.5" Thin Overlay	11/6/2026	63	100	53000
COACH::CLYA::1	CALLE LYA	CALLE TECHA	CDS	Residential	10,860.0	1.5" Thin Overlay	11/6/2026	63	100	54300
COACH::CROSA::5	CALLE ROSA	CALLE ESTRELLA	CALLE LA PAZ	Residential	10,908.0	1.5" Thin Overlay	11/6/2026	63	100	54540
COACH::52ND AVE::19	52ND AVE	ALLEY	TRIPOLI WAY	Arterial	6,160.0	3" Mill & Overlay	11/6/2026	45	100	55440
COACH::COLIVIA::1	CORTE OLIVIA	CDS	CALLE MENDOZA	Residential	11,187.0	1.5" Thin Overlay	11/6/2026	63	100	55935
COACH::BAGDADAVE::5	BAGDAD AVE	CALLE CAMACHO	SUEZ RD	Residential	6,240.0	3" Mill & Overlay	11/6/2026	45	100	56160
COACH::PALMAVE::8	PALM AVE	ALLEY	1ST ST	Collector	11,280.0	1.5" Thin Overlay	11/6/2026	63	100	56400
COACH::48THAVEE::6	48TH AVE	CITY LIMITS	HARRISON ST	Arterial	57,480.0	Microsurfacing	11/6/2026	84	100	57480
COACH::TUSSELINGC::1	TUSSELING CT	52ND AVE	CDS	Residential	11,592.0	1.5" Thin Overlay	11/6/2026	63	100	57960
COACH::MAZATLANDR::9	MAZATLAN DR	MAZATLAN DR PARKING LOOP	50TH AVE	Residential	11,712.0	1.5" Thin Overlay	11/6/2026	63	100	58560
COACH::CSOLEDAD::2	CALLE SOLEDAD	VIA TEPEYAC	53RD AVE	Residential	11,844.0	1.5" Thin Overlay	11/6/2026	63	100	59220
COACH::SOLARCEST::1	SOLARCE ST	PROSECCO WAY	SOLARCE ST	Residential	6,596.0	3" Mill & Overlay	11/6/2026	45	100	59364
COACH::SUNCRESTST::2	SUNCREST ST	SUNSHINE AVE	SUNDANCE LN	Residential	12,080.0	1.5" Thin Overlay	11/6/2026	63	100	60400
COACH::MAHOGANYCT::1	MAHOGANY CT	CDS	SCARLET WAY	Residential	12,348.0	1.5" Thin Overlay	11/6/2026	63	100	61740
COACH::ESTRELLATO::1	ESTRELLA TOMAS ST	CAMINO BONITO AVE	MARIANA AVE	Residential	12,600.0	1.5" Thin Overlay	11/6/2026	63	100	63000
COACH::LUNADENICO::4	LUNA DE NICOLETA ST	PLAZA DE ORO AVE	MARIANA AVE	Residential	12,600.0	1.5" Thin Overlay	11/6/2026	63	100	63000
COACH::EAGLEAVE::1	EAGLE AVE	CALHOUN ST	SAN GORGONIO ST	Residential	7,144.0	3" Mill & Overlay	11/6/2026	45	100	64296
COACH::PALMERASCR::7	PALMERAS CIR	CARDELINA DR	PALMERAS CIR	Residential	7,200.0	3" Mill & Overlay	11/6/2026	45	100	64800
COACH::PALMERASCR::3	PALMERAS CIR	MARIPOSA DR	CHUPAROSA DR	Residential	7,200.0	3" Mill & Overlay	11/6/2026	45	100	64800
COACH::CROJO::6	CALLE ROJO	CALLE TECHA	CALLE AVILA	Residential	12,960.0	1.5" Thin Overlay	11/6/2026	63	100	64800
COACH::CROJO::5	CALLE ROJO	CALLE EMPALME	CALLE TECHA	Residential	12,960.0	1.5" Thin Overlay	11/6/2026	63	100	64800
COACH::CAPITOLAAV::1	CAPITOLA AVE	CDS	MONARCH RD	Residential	12,996.0	1.5" Thin Overlay	11/6/2026	63	100	64980
COACH::CZAMORA::2	CALLE ZAMORA	CALLE TECHA	CALLE AVILA	Residential	13,320.0	1.5" Thin Overlay	11/6/2026	63	100	66600
COACH::52NDAVE::20	52ND AVE	TRIPOLI WAY	MORGAN AVE	Arterial	13,700.0	1.5" Thin Overlay	11/6/2026	63	100	68500
COACH::CESTIVO::1	CORTE ESTIVO	CALLE OCASO	CDS	Residential	14,134.0	1.5" Thin Overlay	11/6/2026	63	100	70670
COACH::LOSCABOSAV::1	LOS CABOS AVE	EL ARCO ST	CAMINO ROSARITO	Residential	14,400.0	1.5" Thin Overlay	11/6/2026	63	100	72000
COACH::CGILLAN::1	CORTE GILLAN	AVENIDA RAZON	CDS	Residential	14,400.0	1.5" Thin Overlay	11/6/2026	63	100	72000
COACH::CYAGER::1	CORTE YAGER	AVENIDA RAZON	CDS	Residential	14,400.0	1.5" Thin Overlay	11/6/2026	63	100	72000
COACH::52NDAVEE::14	52ND AVE	CALLE CAMACHO	CESAR CHAVEZ ST	Arterial	8,138.0	3" Mill & Overlay	11/6/2026	45	100	73242
COACH::52NDAVEE::31	52ND AVE	CALLE LIMON	SUNSET DR	Arterial	15,075.0	1.5" Thin Overlay	11/6/2026	63	100	75375
COACH::CAMIGOS::1	CALLE AMIGOS	CALLE LA PAZ	CDS	Residential	15,444.0	1.5" Thin Overlay	11/6/2026	63	100	77220
COACH::CLEANDRO::3	CALLE LEANDRO	CALLE BERNARDO	CALLE GREGORIO	Residential	15,560.0	1.5" Thin Overlay	11/6/2026	63	100	77800
COACH::CHICHENITZ::2	CHICHEN ITZA RD	IXTAPA AVE	SAN IGNACIO AVE	Residential	8,964.0	3" Mill & Overlay	11/6/2026	45	100	80676
COACH::CHRISTINA::5	CHRISTINA RD	RIGO CT	MARY CT	Residential	9,216.0	3" Mill & Overlay	11/6/2026	45	100	82944
COACH::54THAVEW::7	54TH AVE	CALLE BALDERAS	SH-86	Arterial	16,605.0	1.5" Thin Overlay	11/6/2026	63	100	83025
COACH::SUMMERST::2	SUMMER ST	FIESTA RD	CDS	Residential	17,686.0	1.5" Thin Overlay	11/6/2026	63	100	88430
COACH::AVERANO::1	AVENIDA VERANO	CALLE OCASO	CALLE PUERTA DEL SOL	Residential	17,908.0	1.5" Thin Overlay	11/6/2026	63	100	89540
COACH::MAZATLANDR::6	MAZATLAN DR	MAZATLAN DR PARKING LOOP	TAXCO WAY	Residential	9,952.0	3" Mill & Overlay	11/6/2026	45	100	89568
COACH::LOSCABOSAV::2	LOS CABOS AVE	CAMINO ROSARITO	CAMINO CORTEZ	Residential	18,036.0	1.5" Thin Overlay	11/6/2026	63	100	90180
COACH::CCORTEZ::1	CAMINO CORTEZ	PUERTO ESCONDIDO AVE	LOS CABOS AVE	Residential	10,080.0	3" Mill & Overlay	11/6/2026	45	100	90720
COACH::52NDAVEW::20	52ND AVE	DOUMA ST	FREDERICK ST	Arterial	18,278.0	1.5" Thin Overlay	11/6/2026	63	100	91390
COACH::COPPERIDGE::4	COPPERIDGE ST	LAPIS DR	ASHLER CT	Residential	10,175.0	3" Mill & Overlay	11/6/2026	45	100	91575
COACH::AADOBE::4	AVENIDA ADOBE	CORTE BERNARDO	VIA ZAHIDI	Residential	10,240.0	3" Mill & Overlay	11/6/2026	45	100	92160
COACH::CMENDOZA::2	CALLE MENDOZA	CORTE OLIVIA	CALLE PIZANO	Residential	18,480.0	1.5" Thin Overlay	11/6/2026	63	100	92400
COACH::CPIZANO::1	CALLE PIZANO	TYLER ST	COURTE STELLA	Residential	18,480.0	1.5" Thin Overlay	11/6/2026	63	100	92400
COACH::CINNABARLN::3	CINNABAR LN	SHADOWROCK DR	LAPIS DR	Residential	10,360.0	3" Mill & Overlay	11/6/2026	45	100	93240
COACH::COCASO::4	CALLE OCASO	CORTE SOLIS	AVENIDA LA LUNA	Residential	10,360.0	3" Mill & Overlay	11/6/2026	45	100	93240
COACH::50THAVEE::9	50TH AVE	MAZATLAN DR	FREDERICK ST	Arterial	10,373.0	3" Mill & Overlay	11/6/2026	45	100	93357
COACH::CDIEGO::1	CALLE DIEGO	VIA SANTIAGO	CALLE GREGORIO	Residential	19,788.0	1.5" Thin Overlay	11/6/2026	63	100	98940
COACH::SBALBOAST::1	S BALBOA ST	WESTERFIELD WAY	CDS	Residential	20,628.0	1.5" Thin Overlay	11/6/2026	63	100	103140
COACH::PISMOCT::1	PISMO CT	CDS	VENENTA BLVD	Residential	11,520.0	3" Mill & Overlay	11/6/2026	45	100	103680
COACH::50THAVEW::11	50TH AVE	MAZATLAN DR	CALLE QUINTERRA	Arterial	20,746.0	1.5" Thin Overlay	11/6/2026	63	100	103730
COACH::54THAVEE::2	54TH AVE	SLATE DR	FREDERICK ST	Arterial	12,420.0	3" Mill & Overlay	11/6/2026	45	100	111780
COACH::SAPPHIRELN::1	SAPPHIRE LN	SCARLET WAY	N SIENNA CIR	Residential	23,472.0	1.5" Thin Overlay	11/6/2026	63	100	117360
COACH::VIAMISIONE::1	VIA MISIONERO	CALLE SOLEDAD	SHADY LN	Residential	23,724.0	1.5" Thin Overlay	11/6/2026	63	100	118620
COACH::6THST::5	6TH ST	ORCHARD AVE	VINE AVE	Collector	23,800.0	1.5" Thin Overlay	11/6/2026	63	100	119000
COACH::52NDAVEW::7	52ND AVE	CALLE LIMON	GENOA ST	Arterial	24,615.0	1.5" Thin Overlay	11/6/2026	63	100	123075
COACH::3RDST::4	3RD ST	VINE AVE	ALLEY	Collector	13,720.0	3" Mill & Overlay	11/6/2026	45	100	123480
COACH::TERAVISTA::1	TERA VISTA	SIERRA ST	BRIANNE LN	Residential	25,567.0	1.5" Thin Overlay	11/6/2026	63	100	127835
COACH::CAVILA::5	CALLE AVILA	CALLE VERDE	CALLE ROJO	Residential	25,920.0	1.5" Thin Overlay	11/6/2026	63	100	129600
COACH::CAVILA::8	CALLE AVILA	CAIRO AVE	BAGDAD AVE	Residential	26,640.0	1.5" Thin Overlay	11/6/2026	63	100	133200
COACH::CCAMACHO::7	CALLE CAMACHO	CAIRO AVE	BAGDAD AVE	Residential	26,680.0	1.5" Thin Overlay	11/6/2026	63	100	133400
COACH::REDONDOPON::1	REDONDO PONIENTE	REDONDO SUR	REDONDO NORTE	Residential	26,800.0	1.5" Thin Overlay	11/6/2026	63	100	134000
COACH::BALBOAST::1	BALBOA ST	D/E	50TH AVE	Residential	26,840.0	1.5" Thin Overlay	11/6/2026	63	100	134200
COACH::SH-86S::4	SH-86	WESTERFIELD WAY	ALLEY	Arterial	26,880.0	1.5" Thin Overlay	11/6/2026	63	100	134400
COACH::ELARCOST::2	EL ARCO ST	TODOS SANTOS AVE	PUEBLO BONITO AVE	Residential	27,664.0	1.5" Thin Overlay	11/6/2026	63	100	138320
COACH::BELLISSIMA::3	BELLISSIMA AVE	BELLA ROMA LN	CALLE EMPALME	Residential	15,890.0	3" Mill & Overlay	11/6/2026	45	100	143010
COACH::PALMERASCR::9	PALMERAS CIR	MARIPOSA DR	CHUPAROSA DR	Residential	7,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	30	100	144000
COACH::AVERANO::2	AVENIDA VERANO	CALLE PUERTA DEL SOL	CALLE EL SOL	Residential	17,575.0	3" Mill & Overlay	11/6/2026	45	100	158175
COACH::50THAVEW::7	50TH AVE	AVENIDA DE ORO	AVENIDA DEL PARQUE	Arterial	17,853.0	3" Mill & Overlay	11/6/2026	45	100	160677
COACH::FREDERICK::18	FREDERICK ST	GUITRON ST	IRIS AVE	Collector	18,216.0	3" Mill & Overlay	11/6/2026	45	100	163944
COACH::TYLERLN::1	TYLER LN	TYLER ST	CDS	Collector	34,092.0	1.5" Thin Overlay	11/6/2026	63	100	170460
COACH::RODREJOWAY::1	RODREJO WAY	MALVASIA WAY	PROSECCO WAY	Residential	19,040.0	3" Mill & Overlay	11/6/2026	45	100	171360
COACH::JACKSONST::1	JACKSON ST	CITY LIMITS	PUERTECITOS AVE	Arterial	34,584.0	1.5" Thin Overlay	11/6/2026	63	100	172920
COACH::IXTAPAAVE::1	IXTAPA AVE	CDS	COZUMEL ST	Residential	19,260.0	3" Mill & Overlay	11/6/2026	45	100	173340
COACH::ORQUIDEALN::1	ORQUIDEA LN	CALENDULA AVE	CDS	Residential	19,260.0	3" Mill & Overlay	11/6/2026	45	100	173340
COACH::ORCHARDAVE::7	ORCHARD AVE	5TH ST	4TH ST	Collector	19,500.0	3" Mill & Overlay	11/6/2026	45	100	175500
COACH::CALHOUNST::6	CALHOUN ST	SHADOWROCK DR	LAS PLUMAS CT	Collector	19,654.0	3" Mill & Overlay	11/6/2026	45	100	176886
COACH::AEUROPA::2	AVENIDA EUROPA	CALLE CARMELLO	CALLE TECOMARIA	Residential	20,160.0	3" Mill & Overlay	11/6/2026	45	100	181440
COACH::ACEDRUS::1	AVENIDA CEDRUS	CALLE CARMELLO	CALLE TECOMARIA	Residential	20,160.0	3" Mill & Overlay	11/6/2026	45	100	181440
COACH::54THAVEE::9	54TH AVE	ENTERPRISE WAY	POLK ST	Arterial	36,504.0	1.5" Thin Overlay	11/6/2026	63	100	182520
COACH::2NDST::1	2ND ST	D/E	PALM AVE	Collector	21,672.0	3" Mill & Overlay	11/6/2026	45	100	195048
COACH::50THAVEW::15	50TH AVE	CALLE PUERTA DEL SOL	HORNBLEND ST	Arterial	39,680.0	1.5" Thin Overlay	11/6/2026	63	100	198400
COACH::VIAZAHIDI::1	VIA ZAHIDI	AVENIDA RAZON	AVENIDA ADOBE	Residential	41,040.0	1.5" Thin Overlay	11/6/2026	57	100	205200
COACH::COPPERIDGE::3	COPPERIDGE ST	SHADOWROCK DR	LAPIS DR	Residential	10,360.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	27	100	207200
COACH::COPPERIDGE::2	COPPERIDGE ST	NICKLECREEK DR	SHADOWROCK DR	Residential	10,360.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	28.5	100	207200
COACH::49THAVE::2	49TH AVE	PRIMA VERA	JAZMIN ST	Collector	23,218.0	3" Mill & Overlay	11/6/2026	42	100	208962
COACH::CTORRESORD::1	CALLE TORRES ORDUNO	52ND AVE	DOUMA CT	Residential	23,290.0	3" Mill & Overlay	11/6/2026	45	100	209610
COACH::TYLERST::16	TYLER ST	50TH AVE	50TH AVE	Rural	23,580.0	3" Mill & Overlay	11/6/2026	45	100	212220
COACH::VISTADELNO::6	VISTA DEL NORTE	980' E/O TYLER AVE	1580' E/O TYLER AVE	Collector	23,680.0	3" Mill & Overlay	11/6/2026	42	100	213120
COACH::FREDERICK::21	FREDERICK ST	LAS LUNAS AVE	49TH AVE	Collector	42,702.0	1.5" Thin Overlay	11/6/2026	63	100	213510
COACH::8THST::2	8TH ST	ORCHARD AVE	VINE AVE	Collector	23,744.0	3" Mill & Overlay	11/6/2026	43.5	100	213696
COACH::7THST::3	7TH ST	PALM AVE	ORCHARD AVE	Collector	23,744.0	3" Mill & Overlay	11/6/2026	45	100	213696
COACH::2NDST::3	2ND ST	ORCHARD AVE	VINE AVE	Collector	23,800.0	3" Mill & Overlay	11/6/2026	40.5	100	214200
COACH::4THST::2	4TH ST	PALM AVE	ORCHARD AVE	Collector	23,800.0	3" Mill & Overlay	11/6/2026	43.5	100	214200
COACH::53RDAVE::16	53RD AVE	CALLE SOLEDAD	SHADY LN	Collector	42,840.0	1.5" Thin Overlay	11/6/2026	60	100	214200
COACH::2NDST::2	2ND ST	PALM AVE	ORCHARD AVE	Collector	23,856.0	3" Mill & Overlay	11/6/2026	43.5	100	214704
COACH::TYLERST::9	TYLER ST	CALLE BOUGANVILA	LAS FLORES AVE	Collector	10,800.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	15	100	216000
COACH::SHADYLN::10	SHADY LN	53RD AVE	STACIE LN	Residential	10,808.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	16	100	216160
COACH::BRENDALN::1	BRENDA LN	CDS	SHADY LN	Residential	24,092.0	3" Mill & Overlay	11/6/2026	38	100	216828
COACH::ADAMLN::1	ADAM LN	53RD AVE	CDS	Residential	24,120.0	3" Mill & Overlay	11/6/2026	45	100	217080
COACH::ARAYLYNN::2	AVENIDA RAYLYNN	CALLE JOYCE	CALLE FLORENA	Residential	24,228.0	3" Mill & Overlay	11/6/2026	45	100	218052
COACH::CAVILA::6	CALLE AVILA	CALLE ROJO	52ND AVE	Residential	24,280.0	3" Mill & Overlay	11/6/2026	42	100	218520
COACH::CTECHA::7	CALLE TECHA	CALLE ROJO	52ND AVE	Residential	24,280.0	3" Mill & Overlay	11/6/2026	45	100	218520
COACH::TYLERST::11	TYLER ST	LAS FLORES AVE	CALLE PIZANO	Collector	10,960.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	27	100	219200
COACH::VISTADELNO::4	VISTA DEL NORTE	1630' E/O DILLON RD	TYLER ST	Collector	24,600.0	3" Mill & Overlay	11/6/2026	40.5	100	221400
COACH::ALLENDEDR::5	ALLENDE DR	ALLENDE DR	VERMOUTH DR	Residential	11,104.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	25.5	100	222080
COACH::DOUMACT::1	DOUMA CT	52ND AVE	DOUMA CT	Residential	24,948.0	3" Mill & Overlay	11/6/2026	37.5	100	224532
COACH::ORCHARDAVE::10	ORCHARD AVE	ALLEY	2ND ST	Collector	11,280.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	25.5	100	225600
COACH::ORCHARDAVE::9	ORCHARD AVE	3RD ST	ALLEY	Collector	11,280.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	25.5	100	225600
COACH::STACIELN::1	STACIE LN	CDS	SHADY LN	Residential	25,360.0	3" Mill & Overlay	11/6/2026	44	100	228240
COACH::5THST::3	5TH ST	VINE AVE	SH-111	Collector	25,368.0	3" Mill & Overlay	11/6/2026	39	100	228312
COACH::8THST::3	8TH ST	VINE AVE	SH-111	Collector	25,424.0	3" Mill & Overlay	11/6/2026	43.5	100	228816
COACH::7THST::5	7TH ST	VINE AVE	SH-111	Collector	25,424.0	3" Mill & Overlay	11/6/2026	45	100	228816
COACH::PRIMITIVO::4	PRIMITIVO DR	VERMOUTH DR	52ND AVE	Residential	11,616.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	25.5	100	232320
COACH::FREDERICK::4	FREDERICK ST	53RD AVE	CALLE GREGORIO	Collector	25,890.0	3" Mill & Overlay	11/6/2026	39	100	233010
COACH::CAPITOLAAV::3	CAPITOLA AVE	LAGUNA LN	VENENTA BLVD	Residential	11,880.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	25.5	100	237600
COACH::SH-86N::5	SH-86	CALLE ROJO	52ND AVE	Arterial	47,680.0	1.5" Thin Overlay	11/6/2026	60	100	238400
COACH::55THAVE::3	55TH AVE	1330' E/O FILLMORE ST	2660' E/O FILLMORE ST	Rural	26,580.0	3" Mill & Overlay	11/6/2026	42	100	239220
COACH::CALHOUNST::5	CALHOUN ST	50TH AVE	SHADOWROCK DR	Collector	48,174.0	1.5" Thin Overlay	11/6/2026	60	100	240870
COACH::CTECHA::8	CALLE TECHA	52ND AVE	CAIRO AVE	Residential	27,120.0	3" Mill & Overlay	11/6/2026	43.5	100	244080
COACH::50THAVEE::10	50TH AVE	FREDERICK ST	PAVON PALMA	Arterial	12,375.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	13.5	100	247500
COACH::MORGANAVE::1	MORGAN AVE	VALLEY RD	52ND AVE	Residential	49,666.0	1.5" Thin Overlay	11/6/2026	56	100	248330
COACH::FREDERICK::5	FREDERICK ST	CALLE GREGORIO	SOLARCE ST	Collector	27,780.0	3" Mill & Overlay	11/6/2026	42	100	250020
COACH::BAGDADAVE::4	BAGDAD AVE	CALLE AVILA	CALLE CAMACHO	Residential	12,520.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	21	100	250400
COACH::54THAVEE::1	54TH AVE	VAN BUREN ST	SLATE DR	Arterial	27,960.0	3" Mill & Overlay	11/6/2026	45	100	251640
COACH::TYLERST::2	TYLER ST	54TH AVE	TYLER LN	Collector	51,050.0	1.5" Thin Overlay	11/6/2026	57	100	255250
COACH::50THAVEW::12	50TH AVE	CALLE QUINTERRA	WASHINGTONIA AVE	Arterial	28,905.0	3" Mill & Overlay	11/6/2026	45	100	260145
COACH::ROMUALDACT::1	ROMUALDA CT	PEREZ ST	CDS	Residential	6,120.0	Slurry Seal	11/6/2027	84	100	3060
COACH::CRUIZ::3	CALLE RUIZ	AVENIDA ZOCALO	AVENIDA REFORMA	Residential	6,444.0	Slurry Seal	11/6/2027	85	100	3222
COACH::MODENATER::1	MODENA TER	BELLISSIMA AVE	SIENO LN	Residential	7,680.0	Slurry Seal	11/6/2027	84	100	3840
COACH::CRUIZ::4	CALLE RUIZ	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	8,640.0	Slurry Seal	11/6/2027	85	100	4320
COACH::ASANDOMING::1	AVENIDA SAN DOMINGO	CAMINO FRONTERA	CAMINO CORAS	Residential	9,879.0	Slurry Seal	11/6/2027	84	100	4939.5
COACH::SHADYLN::3	SHADY LN	AVENIDA TACUBA	AVENIDA REFORMA	Residential	20,048.0	Slurry Seal	11/6/2027	85	100	10024
COACH::CCEBRINO::1	CALLE CEBRINO	CALLE CHAVEZ	CDS	Residential	24,696.0	Slurry Seal	11/6/2027	84	100	12348

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::52NDAVEW::12	52ND AVE	CALLE AVILA	CALLE AVILA	Arterial	1,508.0	3" Mill & Overlay	11/6/2027	45	100	13572
COACH::52NDAVEE::15	52ND AVE	CESAR CHAVEZ ST	SH-86	Arterial	2,236.0	3" Mill & Overlay	11/6/2027	45	100	20124
COACH::HERNANDEZ::3	HERNANDEZ ST	52ND AVE	ORTIZ ST	Residential	43,040.0	Slurry Seal	11/6/2027	84	100	21520
COACH::TYLERST::19	TYLER ST	3485' S/O VISTA DEL SUR	2125' S/O VISTA DEL SUR	Rural	40,740.0	Chip Seal	11/6/2027	84	100	32592
COACH::50THAVEE::17	50TH AVE	AVENIDA DE PLATINA	KENMORE ST	Arterial	4,323.0	3" Mill & Overlay	11/6/2027	45	100	38907
COACH::50THAVEE::15	50TH AVE	AVENIDA DE PLATA	CORONADO ST	Arterial	4,356.0	3" Mill & Overlay	11/6/2027	45	100	39204
COACH::GENOAST::9	GENOA ST	NILE LN	CALLE LIMON	Residential	4,588.0	3" Mill & Overlay	11/6/2027	45	100	41292
COACH::ARAZON::3	AVENIDA RAZON	CORTE GILLAN	AVENIDA HALAWAY	Residential	4,625.0	3" Mill & Overlay	11/6/2027	45	100	41625
COACH::52NDAVEW::16	52ND AVE	CALLE EMPALME	CALLE EMPALME	Arterial	4,784.0	3" Mill & Overlay	11/6/2027	45	100	43056
COACH::52NDAVEE::8	52ND AVE	CALLE EMPALME	CALLE EMPALME	Arterial	4,784.0	3" Mill & Overlay	11/6/2027	45	100	43056
COACH::AADOBE::6	AVENIDA ADOBE	CORTE ALTURIAN	WESTERFIELD WAY	Residential	5,120.0	3" Mill & Overlay	11/6/2027	45	100	46080
COACH::AGRACE::2	AVENIDA GRACE	CALLE FLORENA	150' E/O CALLE FLORENA	Residential	5,400.0	3" Mill & Overlay	11/6/2027	45	100	48600
COACH::AMARONECIR::1	AMARONE CIR	MALVASIA WAY	CDS	Residential	5,760.0	3" Mill & Overlay	11/6/2027	45	100	51840
COACH::MAZATLANDR::5	MAZATLAN DR	CHIHUAHUA CT	TAXCO WAY	Residential	6,240.0	3" Mill & Overlay	11/6/2027	45	100	56160
COACH::PROSECCO::3	PROSECCO WAY	SOLARCE ST	SOLARCE ST	Residential	6,400.0	3" Mill & Overlay	11/6/2027	45	100	57600
COACH::CBONITA::3	CALLE BONITA	CALLE ROSA	53RD AVE	Residential	6,444.0	3" Mill & Overlay	11/6/2027	45	100	57996
COACH::SUEZRD::2	SUEZ RD	DAMASCUS AVE	BAGDAD AVE	Residential	6,680.0	3" Mill & Overlay	11/6/2027	45	100	60120
COACH::MAZATLANDR::4	MAZATLAN DR	MAZATLAN DR PARKING LOOP	CHIHUAHUA CT	Residential	6,912.0	3" Mill & Overlay	11/6/2027	45	100	62208
COACH::CARDINALDR::1	CARDINAL DR	TYLER ST	PALMERAS CIR	Residential	6,960.0	3" Mill & Overlay	11/6/2027	45	100	62640
COACH::CEMELIA::1	CALLE EMELIA	AVENUE 53	AVENIDA RAYLYNN	Residential	7,092.0	3" Mill & Overlay	11/6/2027	45	100	63828
COACH::WASHINGTON::1	WASHINGTONIA AVE	50TH AVE	ROYAL CT	Residential	8,100.0	3" Mill & Overlay	11/6/2027	45	100	72900
COACH::CLEANDRO::1	CALLE LEANDRO	53RD AVE	CALLE DIEGO	Residential	8,440.0	3" Mill & Overlay	11/6/2027	45	100	75960
COACH::CAIROAVE::6	CAIRO AVE	SUEZ RD	SH-86	Residential	8,560.0	3" Mill & Overlay	11/6/2027	45	100	77040
COACH::54THAVEW::4	54TH AVE	SH-111	TYLER ST	Arterial	80,525.0	Microsurfacing	11/6/2027	84	100	80525
COACH::CZAMORA::4	CALLE ZAMORA	CALLE CAMACHO	CESAR CHAVEZ ST	Residential	9,216.0	3" Mill & Overlay	11/6/2027	45	100	82944
COACH::AVESTAGO::1	AVENIDA VESTAGO	REDONDO ESTE	FREDERICK ST	Residential	9,246.0	3" Mill & Overlay	11/6/2027	45	100	83214
COACH::CHAPARROSA::4	CHAPARROSA ST	GRANITE PASS TRL	COXCOMB DR	Residential	9,360.0	3" Mill & Overlay	11/6/2027	45	100	84240
COACH::ALLENDEDR::2	ALLENDE DR	PROSECCO WAY	SOLARCE ST	Residential	9,376.0	3" Mill & Overlay	11/6/2027	45	100	84384
COACH::VENENTABLD::1	VENENTA BLVD	CAPITOLA AVE	PISMO CT	Residential	9,396.0	3" Mill & Overlay	11/6/2027	45	100	84564
COACH::CHAPARROSA::3	CHAPARROSA ST	GLENDORA RIDGE AVE	GRANITE PASS TRL	Residential	9,432.0	3" Mill & Overlay	11/6/2027	45	100	84888
COACH::AADOBE::2	AVENIDA ADOBE	CALLE CATHRON	CORTE CINDARELLA	Residential	9,560.0	3" Mill & Overlay	11/6/2027	45	100	86040
COACH::FREDERICK::17	FREDERICK ST	PHOENIX AVE	GUITRON ST	Collector	9,636.0	3" Mill & Overlay	11/6/2027	45	100	86724
COACH::50THAVEW::4	50TH AVE	CORONADO ST	AVENIDA DE PLATA	Arterial	4,356.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	87120
COACH::SANMATEOAV::1	SAN MATEO AVE	CHARLTON PEAK ST	GARNET RIDGE ST	Residential	9,684.0	3" Mill & Overlay	11/6/2027	45	100	87156
COACH::CHAPARROSA::1	CHAPARROSA ST	SAN MATEO AVE	MECCA HILLS AVE	Residential	9,720.0	3" Mill & Overlay	11/6/2027	45	100	87480
COACH::HILLDR::1	HILL DR	GENOA ST	CALLE PERA	Residential	10,120.0	3" Mill & Overlay	11/6/2027	45	100	91080
COACH::CTECOMARIA::1	CALLE TECOMARIA	AVENIDA FLORABUNDA	AVENIDA EUROPA	Residential	10,296.0	3" Mill & Overlay	11/6/2027	45	100	92664
COACH::CCARMELLO::2	CALLE CARMELLO	AVENIDA EUROPA	AVENIDA CEDRUS	Residential	10,296.0	3" Mill & Overlay	11/6/2027	45	100	92664
COACH::TAXCOWAY::1	TAXCO WAY	MAZATLAN DR	JALISCO AVE	Residential	10,332.0	3" Mill & Overlay	11/6/2027	45	100	92988
COACH::CTECOMARIA::3	CALLE TECOMARIA	AVENIDA CEDRUS	AVENIDA NERIUM	Residential	10,332.0	3" Mill & Overlay	11/6/2027	45	100	92988
COACH::SUNCRESTST::4	SUNCREST ST	SUNDOWN LN	SUNRISE AVE	Residential	10,800.0	3" Mill & Overlay	11/6/2027	45	100	97200
COACH::CLEANDRO::2	CALLE LEANDRO	CALLE DIEGO	CALLE BERNARDO	Residential	11,280.0	3" Mill & Overlay	11/6/2027	45	100	101520
COACH::ORCHARDAVE::12	ORCHARD AVE	ALLEY	1ST ST	Collector	11,280.0	3" Mill & Overlay	11/6/2027	45	100	101520
COACH::SUNCRESTST::5	SUNCREST ST	SUNRISE AVE	WESTERFIELD WAY	Residential	11,520.0	3" Mill & Overlay	11/6/2027	45	100	103680
COACH::WESTERFILD::1	WESTERFIELD WAY	AVENIDA ADOBE	140' W/O S BALBOA ST	Residential	5,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	104000
COACH::AADOBE::7	AVENIDA ADOBE	WESTERFIELD WAY	JULIA DR	Residential	5,364.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	107280
COACH::54THAVEW::9	54TH AVE	FREDERICK ST	SLATE DR	Arterial	12,420.0	3" Mill & Overlay	11/6/2027	45	100	111780
COACH::DATEAVE::9	DATE AVE	8TH ST	7TH ST	Collector	13,536.0	3" Mill & Overlay	11/6/2027	45	100	121824
COACH::50THAVEE::11	50TH AVE	PAVON PALMA	AVENIDA DEL PARQUE	Arterial	13,728.0	3" Mill & Overlay	11/6/2027	45	100	123552
COACH::CHIAPASDR::1	CHIAPAS DR	51ST AVE	500' N/O 51ST AVE	Residential	14,168.0	3" Mill & Overlay	11/6/2027	45	100	127512
COACH::53RDAVE::20	53RD AVE	CALLE LEANDRO	CALLE EMPALME	Collector	15,109.5	3" Mill & Overlay	11/6/2027	45	100	135985.5
COACH::52NDAVE::40	52ND AVE	2700' W/O FILLMORE ST	2200' W/O FILLMORE ST	Rural	15,150.0	3" Mill & Overlay	11/6/2027	45	100	136350
COACH::MICHELLEDR::1	MICHELLE DR	CALLE ALICIA	MICHELLE DR	Residential	15,444.0	3" Mill & Overlay	11/6/2027	45	100	138996
COACH::CALHOUNST::12	CALHOUN ST	CITY LIMITS	VIA PICON	Collector	15,816.6	3" Mill & Overlay	11/6/2027	45	100	142349.4
COACH::PALMERASCR::8	PALMERAS CIR	CHUPAROSA DR	CARDELINA DR	Residential	7,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	144000
COACH::JADEROCKRD::2	JADEROCK RD	HORNBLEND ST	CINNABAR LN	Residential	17,760.0	3" Mill & Overlay	11/6/2027	45	100	159840
COACH::SUNDOWNLN::1	SUNDOWN LN	CDS	SUNCREST ST	Residential	18,000.0	3" Mill & Overlay	11/6/2027	45	100	162000
COACH::PARKLN::1	PARK LN	CITY LIMITS	SH-86	Collector	18,030.0	3" Mill & Overlay	11/6/2027	45	100	162270
COACH::PALMAVE::4	PALM AVE	4TH ST	3RD ST	Collector	19,500.0	3" Mill & Overlay	11/6/2027	45	100	175500
COACH::ORCHARDAVE::6	ORCHARD AVE	6TH ST	5TH ST	Collector	19,500.0	3" Mill & Overlay	11/6/2027	45	100	175500
COACH::7THST::1	7TH ST	TRIPOLI WAY	DATE AVE	Collector	20,496.0	3" Mill & Overlay	11/6/2027	45	100	184464
COACH::50THAVEE::8	50TH AVE	CALLE QUINTERRA	MAZATLAN DR	Arterial	20,746.0	3" Mill & Overlay	11/6/2027	45	100	186714
COACH::BAGDADAVE::16	BAGDAD AVE	GENOA ST	SH-111	Collector	21,120.0	3" Mill & Overlay	11/6/2027	45	100	190080
COACH::PALMERASCR::11	PALMERAS CIR	PALMERAS CIR	PALOMA DR	Residential	9,756.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	195120
COACH::CALHOUNST::13	CALHOUN ST	VIA PICON	50TH AVE	Collector	23,250.3	3" Mill & Overlay	11/6/2027	45	100	209252.7
COACH::5THST::2	5TH ST	PALM AVE	ORCHARD AVE	Collector	23,800.0	3" Mill & Overlay	11/6/2027	45	100	214200
COACH::6THST::4	6TH ST	PALM AVE	ORCHARD AVE	Collector	23,800.0	3" Mill & Overlay	11/6/2027	45	100	214200
COACH::BELLISSIMA::2	BELLISSIMA AVE	MODENA TER	BELLA ROMA LN	Residential	24,080.0	3" Mill & Overlay	11/6/2027	45	100	216720
COACH::LEELN::1	LEE LN	53RD AVE	CDS	Residential	24,160.0	3" Mill & Overlay	11/6/2027	45	100	217440
COACH::CGREGORIO::2	CALLE GREGORIO	CALLE DIEGO	CALLE LEANDRO	Residential	25,308.0	3" Mill & Overlay	11/6/2027	45	100	227772
COACH::48THAVEE::2	48TH AVE	CIELO VICTORIA ST	CALHOUN ST	Arterial	53,080.0	1.5" Thin Overlay	11/6/2027	57	100	265400
COACH::48THAVEW::5	48TH AVE	CALHOUN ST	CIELO VICTORIA ST	Arterial	53,080.0	1.5" Thin Overlay	11/6/2027	60	100	265400
COACH::CEMPALME::5	CALLE EMPALME	52ND AVE	CAIRO AVE	Residential	29,788.0	3" Mill & Overlay	11/6/2027	43.5	100	268092
COACH::HEATHERLN::1	HEATHER LN	OASIS PALM AVE	SHADY LN	Residential	29,830.0	3" Mill & Overlay	11/6/2027	38	100	268470
COACH::CQUINTERRA::3	CALLE QUINTERRA	CORTE SANTOS	CORTE LORETO	Residential	13,690.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	27	100	273800
COACH::52NDAVE::38	52ND AVE	POLK ST	1030' E/O POLK ST	Rural	30,900.0	3" Mill & Overlay	11/6/2027	45	100	278100
COACH::GENOAST::4	GENOA ST	380' S/O AVENIDA VERONICA	AVENIDA VERONICA	Residential	14,134.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	27	100	282680
COACH::GUITRONST::2	GUITRON ST	REYES ST	NIETO ST	Residential	33,898.0	3" Mill & Overlay	11/6/2027	37.5	100	305082
COACH::ROMEROST::1	ROMERO ST	REYES ST	NIETO ST	Residential	33,898.0	3" Mill & Overlay	11/6/2027	42	100	305082
COACH::VANBURENST::12	VAN BUREN ST	MOONLIT DR	FIESTA RD	Collector	34,048.0	3" Mill & Overlay	11/6/2027	43.5	100	306432
COACH::PHOENIXAVE::1	PHOENIX AVE	WASHINGTONIA AVE	LIVISTONA CT	Residential	34,092.0	3" Mill & Overlay	11/6/2027	42	100	306828
COACH::SH-111::3	SH-111	52ND AVE	HILL DR	Arterial	61,500.0	1.5" Thin Overlay	11/6/2027	57	100	307500
COACH::MOONLITDR::1	MOONLIT DR	CRESCENT WAY	VALLE POSADA	Residential	34,308.0	3" Mill & Overlay	11/6/2027	40.5	100	308772
COACH::FIESTARD::1	FIESTA RD	CRESCENT WAY	VALLE POSADA	Residential	34,452.0	3" Mill & Overlay	11/6/2027	45	100	310068
COACH::50THAVEE::2	50TH AVE	COLONIA DR	CALHOUN ST	Arterial	15,630.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	18	100	312600
COACH::SH-111::15	SH-111	PARK LN	SH-86	Arterial	34,950.0	3" Mill & Overlay	11/6/2027	45	100	314550
COACH::AVERONICA::1	AVENIDA VERONICA	GENOA ST	CALLE FLORENA	Residential	35,039.0	3" Mill & Overlay	11/6/2027	43.5	100	315351
COACH::ALALUNA::1	AVENIDA LA LUNA	CALLE OCASO	CALLE EL SOL	Residential	35,409.0	3" Mill & Overlay	11/6/2027	43.5	100	318681
COACH::53RDAVE::18	53RD AVE	SHADY LN	CDS	Collector	35,872.0	3" Mill & Overlay	11/6/2027	43.5	100	322848
COACH::TYLERST::6	TYLER ST	410' S/O CARDINAL DR	CARDINAL DR	Collector	16,400.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	27	100	328000
COACH::SHADOWROCK::2	SHADOWROCK DR	COPPERIDGE ST	CINNABAR LN	Residential	36,593.0	3" Mill & Overlay	11/6/2027	36	100	329337
COACH::LAPISDR::1	LAPIS DR	COPPERIDGE ST	CINNABAR LN	Residential	36,593.0	3" Mill & Overlay	11/6/2027	40.5	100	329337
COACH::CCATHRON::1	CALLE CATHRON	AVENIDA RAZON	AVENIDA ADOBE	Residential	36,720.0	3" Mill & Overlay	11/6/2027	45	100	330480
COACH::AALEENAH::7	AVENIDA ALEENAH	'150 E/O CALLE FLORENA	CALLE EMELIA	Residential	36,756.0	3" Mill & Overlay	11/6/2027	45	100	330804
COACH::ARAYLYNN::4	AVENIDA RAYLYNN	150' E/O CALLE FLORENA	CALLE EMELIA	Residential	36,792.0	3" Mill & Overlay	11/6/2027	40.5	100	331128
COACH::PALMERASCR::1	PALMERAS CIR	PALOMA DR	CARDINAL DR	Residential	16,560.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	16.5	100	331200
COACH::SHADYLN::18	SHADY LN	CAIRO AVE	BAGDAD AVE	Collector	36,960.0	3" Mill & Overlay	11/6/2027	40.5	100	332640
COACH::VINEAVE::3	VINE AVE	7TH ST	6TH ST	Collector	16,900.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	21	100	338000
COACH::VINEAVE::5	VINE AVE	5TH ST	4TH ST	Collector	16,900.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	27	100	338000
COACH::FREDERICK::2	FREDERICK ST	SCARLET WAY	BELLISSIMA AVE	Collector	38,844.0	3" Mill & Overlay	11/6/2027	42	100	349596
COACH::PUERTOESCO::1	PUERTO ESCONDIDO AVE	CAMINO CORTEZ	CHICHEN ITZA RD	Residential	39,420.0	3" Mill & Overlay	11/6/2027	42	100	354780
COACH::54THAVEW::8	54TH AVE	SH-86	FREDERICK ST	Arterial	39,585.0	3" Mill & Overlay	11/6/2027	43.5	100	356265
COACH::SANCAPISTR::1	SAN CAPISTRANO DR	SAN ASIS DR	SAN REY DR	Residential	40,000.0	3" Mill & Overlay	11/6/2027	43.5	100	360000
COACH::SHADYLN::16	SHADY LN	ARABY AVE	CAIRO AVE	Collector	18,144.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	24	100	362880
COACH::52NDAVEE::35	52ND AVE	LA PONDEROSA DR	ENTERPRISE WAY	Arterial	18,810.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	6	100	376200
COACH::52NDAVEW::2	52ND AVE	ENTERPRISE WAY	LA PONDEROSA DR	Arterial	18,810.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	9	100	376200
COACH::SHADYLN::15	SHADY LN	52ND AVE	ARABY AVE	Collector	18,816.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	376320
COACH::50THAVE::2	50TH AVE	PETER RABBIT LN	1660' W/O TYLER ST	Arterial	42,480.0	3" Mill & Overlay	11/6/2027	37.5	100	382320
COACH::VINEAVE::1	VINE AVE	9TH ST	8TH ST	Collector	19,500.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	22.5	100	390000
COACH::PALMAVE::2	PALM AVE	6TH ST	5TH ST	Collector	19,500.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	390000
COACH::VISTADELSU::1	VISTA DEL SUR	DILLON RD	CAMP CT	Collector	43,360.0	3" Mill & Overlay	11/6/2027	40.5	100	390240
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.0	Slurry Seal	11/6/2028	85	100	540
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.0	Slurry Seal	11/6/2028	85	100	1008
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.0	Slurry Seal	11/6/2028	85	100	1440
COACH::VIAPICON::1	VIA PICON	CALHOUN ST	CALLE FRONTERA	Residential	3,989.8	Slurry Seal	11/6/2028	84	100	1994.9
COACH::VIAPICON::2	VIA PICON	CALHOUN ST	CALLE FRONTERA	Residential	4,022.8	Slurry Seal	11/6/2028	84	100	2011.4
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2028	85	100	2068.34
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2028	85	100	2068.34
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.0	Slurry Seal	11/6/2028	85	100	2160
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	Residential	4,608.0	Slurry Seal	11/6/2028	85	100	2304
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.0	Slurry Seal	11/6/2028	85	100	2340
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.0	Slurry Seal	11/6/2028	85	100	2520
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.0	Slurry Seal	11/6/2028	85	100	2524.5
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.0	Slurry Seal	11/6/2028	85	100	2556
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.0	Slurry Seal	11/6/2028	85	100	2700
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.0	Slurry Seal	11/6/2028	85	100	3222
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.0	Slurry Seal	11/6/2028	85	100	3222
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.0	Slurry Seal	11/6/2028	85	100	3240
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.0	Slurry Seal	11/6/2028	85	100	3256
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.0	Slurry Seal	11/6/2028	85	100	3258
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	Residential	6,666.0	Slurry Seal	11/6/2028	85	100	3333
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.0	Slurry Seal	11/6/2028	85	100	3344
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.0	Slurry Seal	11/6/2028	85	100	3582
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.0	Slurry Seal	11/6/2028	85	100	3648
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	Residential	7,704.0	Slurry Seal	11/6/2028	85	100	3852
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.0	Slurry Seal	11/6/2028	85	100	3888
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	Residential	8,640.0	Slurry Seal	11/6/2028	85	100	4320
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2028	85	100	4320
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2028	85	100	4320
COACH::VALENCIALN::1	VALENCIA LN	CDS	CYPRESS ST	Residential	8,820.0	Slurry Seal	11/6/2028	85	100	4410
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.0	Slurry Seal	11/6/2028	85	100	4560
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.0	Slurry Seal	11/6/2028	85	100	4590
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2028	85	100	4680

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::CAIROAVE::5	CAIRO AVE	SH-86	ALLEY	Residential	9,416.0	Slurry Seal	11/6/2028	85	100	4708
COACH::VALENCIALN::2	VALENCIA LN	CYPRESS ST	SHADY LN	Residential	9,540.0	Slurry Seal	11/6/2028	85	100	4770
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.0	Slurry Seal	11/6/2028	85	100	4860
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	Residential	9,720.0	Slurry Seal	11/6/2028	85	100	4860
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	Residential	10,080.0	Slurry Seal	11/6/2028	85	100	5040
COACH::CCERVANTES::3	CALLE CERVANTES	CALLE CHAVEZ	CALLE YSIANO	Residential	10,224.0	Slurry Seal	11/6/2028	84	100	5112
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	5238
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	5238
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	5238
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	5238
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.0	Slurry Seal	11/6/2028	85	100	5328
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.0	Slurry Seal	11/6/2028	85	100	5400
COACH::CYPRESSST::1	CYPRESS ST	VALENCIA LN	VALLEY RD	Residential	11,172.0	Slurry Seal	11/6/2028	85	100	5586
COACH::PEREZST::1	PEREZ ST	NAOMI CT	ROMUALDA CT	Residential	11,200.0	Slurry Seal	11/6/2028	84	100	5600
COACH::52NDAVE::28	52ND AVE	SHADY LN	SHADY LN	Arterial	6,248.0	Microsurfacing	11/6/2028	84	100	6248
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	Collector	6,400.0	Microsurfacing	11/6/2028	85	100	6400
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.0	Slurry Seal	11/6/2028	85	100	6720
COACH::SHADYLN::11	SHADY LN	STACIE LN	BRENDA LN	Residential	14,840.0	Slurry Seal	11/6/2028	85	100	7420
COACH::SHADYLN::12	SHADY LN	BRENDA LN	HEATHER LN	Residential	15,120.0	Slurry Seal	11/6/2028	85	100	7560
COACH::HERNANDEZ::1	HERNANDEZ ST	LA PONDEROSA DR	PEREZ ST	Residential	15,920.0	Slurry Seal	11/6/2028	84	100	7960
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2028	85	100	8250
COACH::CAIROAVE::7	CAIRO AVE	ALLEY	TRIPOLI WAY	Residential	16,539.0	Slurry Seal	11/6/2028	85	100	8269.5
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2028	85	100	8442
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.0	Slurry Seal	11/6/2028	85	100	8455
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.0	Slurry Seal	11/6/2028	85	100	9000
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.0	Slurry Seal	11/6/2028	85	100	9036
COACH::HERNANDEZ::2	HERNANDEZ ST	PEREZ ST	ORTIZ ST	Residential	19,320.0	Slurry Seal	11/6/2028	84	100	9660
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.0	Microsurfacing	11/6/2028	85	100	10400
COACH::VALLEYRD::2	VALLEY RD	JENNIFER WAY	TRIPOLI WAY	Collector	10,400.0	Microsurfacing	11/6/2028	85	100	10400
COACH::OASISPALM::1	OASIS PALM AVE	HEATHER LN	VALLEY RD	Residential	21,318.0	Slurry Seal	11/6/2028	85	100	10659
COACH::VALLEYRD::5	VALLEY RD	NELSON ST	LAS PALMAS ST	Collector	10,720.0	Microsurfacing	11/6/2028	85	100	10720
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.0	Slurry Seal	11/6/2028	85	100	11898
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2028	85	100	12540
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.0	Slurry Seal	11/6/2028	85	100	12580
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.0	Slurry Seal	11/6/2028	85	100	14094
COACH::VALLEYRD::1	VALLEY RD	SH-86	JENNIFER WAY	Collector	15,840.0	Microsurfacing	11/6/2028	85	100	15840
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.0	Microsurfacing	11/6/2028	85	100	16250
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.0	Microsurfacing	11/6/2028	85	100	16250
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	Arterial	16,250.0	Microsurfacing	11/6/2028	85	100	16250
COACH::CALHOUNST::3	CALHOUN ST	CITY LIMITS	VIA PICON	Collector	16,260.0	Microsurfacing	11/6/2028	84	100	16260
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.0	Slurry Seal	11/6/2028	85	100	16650
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.0	Microsurfacing	11/6/2028	85	100	18750
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	Residential	46,980.0	Slurry Seal	11/6/2028	85	100	23490
COACH::CALHOUNST::4	CALHOUN ST	VIA PICON	50TH AVE	Collector	23,820.0	Microsurfacing	11/6/2028	84	100	23820
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	Residential	49,552.0	Slurry Seal	11/6/2028	85	100	24776
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	Residential	49,704.0	Slurry Seal	11/6/2028	85	100	24852
COACH::LASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	Residential	49,742.0	Slurry Seal	11/6/2028	85	100	24871
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	Residential	49,818.0	Slurry Seal	11/6/2028	85	100	24909
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	Residential	49,856.0	Slurry Seal	11/6/2028	85	100	24928
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.0	Slurry Seal	11/6/2028	85	100	24947
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	Residential	49,932.0	Slurry Seal	11/6/2028	85	100	24966
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	Arterial	36,300.0	Microsurfacing	11/6/2028	85	100	36300
COACH::TYLERST::20	TYLER ST	2125' S/O VISTA DEL SUR	VISTA DEL SUR	Rural	63,780.0	Chip Seal	11/6/2028	84	100	51024
COACH::48THAVEN::1	48TH AVE	HARRISON ST	CITY LIMITS	Arterial	57,240.0	Microsurfacing	11/6/2028	84	100	57240
COACH::TYLERST::1	TYLER ST	CITY LIMITS	54TH AVE	Collector	66,700.0	Microsurfacing	11/6/2028	84	100	66700
COACH::44THAVEE::1	44TH AVE	HARRISON ST	DILLON RD	Arterial	72,150.0	Microsurfacing	11/6/2028	84	100	72150
COACH::VISTADELNO::1	VISTA DEL NORTE	HARRISON ST	CITY LIMITS	Collector	79,500.0	Microsurfacing	11/6/2028	84	100	79500
COACH::54THAVEE::7	54TH AVE	TYLER ST	SH-111	Arterial	80,800.0	Microsurfacing	11/6/2028	84	100	80800
COACH::52NDAVE::1	52ND AVE	CALHOUN ST	VAN BUREN ST	Arterial	158,220.0	Microsurfacing	11/6/2028	84	100	158220
COACH::CEMPALME::4	CALLE EMPALME	CALLE ROJO	52ND AVE	Residential	24,280.0	3" Mill & Overlay	11/6/2028	45	100	218520
COACH::BELLAROMA::1	BELLA ROMA LN	D/E	BELLISSIMA AVE	Residential	25,888.0	3" Mill & Overlay	11/6/2028	45	100	232992
COACH::CALTURIAN::1	CORTE ALTURIAN	CDS	AVENIDA ADOBE	Residential	26,160.0	3" Mill & Overlay	11/6/2028	45	100	235440
COACH::SUNRISEAVE::1	SUNRISE AVE	SUNBURST ST	SUNCREST ST	Residential	27,440.0	3" Mill & Overlay	11/6/2028	45	100	246960
COACH::49THAVE::1	49TH AVE	VAN BUREN ST	PRIMA VERA	Collector	32,262.0	3" Mill & Overlay	11/6/2028	45	100	290358
COACH::SUNSHINEAV::1	SUNSHINE AVE	SUNBURST ST	SUNCREST ST	Residential	32,920.0	3" Mill & Overlay	11/6/2028	45	100	296280
COACH::50THAVEW::18	50TH AVE	COLONIA DR	CITY LIMITS	Arterial	33,690.0	3" Mill & Overlay	11/6/2028	45	100	303210
COACH::SUNSETDR::2	SUNSET DR	52ND AVE	HILL DR	Residential	35,492.0	3" Mill & Overlay	11/6/2028	45	100	319428
COACH::54THAVEW::2	54TH AVE	ENTERPRISE WAY	POLK ST	Arterial	36,504.0	3" Mill & Overlay	11/6/2028	45	100	328536
COACH::53RDAVE::19	53RD AVE	FREDERICK ST	CALLE LEANDRO	Collector	38,668.1	3" Mill & Overlay	11/6/2028	45	100	348013.26
COACH::54THAVEE::8	54TH AVE	SH-111	ENTERPRISE WAY	Arterial	38,952.0	3" Mill & Overlay	11/6/2028	45	100	350568
COACH::CAMPCT::1	CAMP CT	CDS	VISTA DEL SUR	Collector	39,248.0	3" Mill & Overlay	11/6/2028	45	100	353232
COACH::54THAVEW::3	54TH AVE	SH-111	ENTERPRISE WAY	Arterial	39,348.0	3" Mill & Overlay	11/6/2028	45	100	354132
COACH::50THAVEE::4	50TH AVE	HORNBLEND ST	CALLE PUERTA DEL SOL	Arterial	39,680.0	3" Mill & Overlay	11/6/2028	45	100	357120
COACH::PALMAVE::1	PALM AVE	7TH ST	6TH ST	Collector	19,500.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	30	100	390000
COACH::7THST::2	7TH ST	DATE AVE	PALM AVE	Collector	44,128.0	3" Mill & Overlay	11/6/2028	45	100	397152
COACH::SH-86N::18	SH-86	PARK LN	SH-111	Arterial	44,640.0	3" Mill & Overlay	11/6/2028	37.5	100	401760
COACH::SH-86S::13	SH-86	ALLEY	52ND AVE	Arterial	44,800.0	3" Mill & Overlay	11/6/2028	43.5	100	403200
COACH::VISTADELNO::7	VISTA DEL NORTE	1580' E/O TYLER AVE	CITY LIMITS	Collector	46,240.0	3" Mill & Overlay	11/6/2028	39	100	416160
COACH::SH-111::4	SH-111	HILL DR	9TH ST	Arterial	86,200.0	1.5" Thin Overlay	11/6/2028	57	100	431000
COACH::FILLMOREST::2	FILLMORE ST	55TH AVE	900' N/O 55TH AVE	Rural	21,600.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	25.5	100	432000
COACH::5THST::1	5TH ST	D/E	PALM AVE	Collector	21,672.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	28.5	100	433440
COACH::PETERRABBT::1	PETER RABBIT LN	D/E	50TH AVE	Collector	48,816.0	3" Mill & Overlay	11/6/2028	39	100	439344
COACH::51STAVE::2	51ST AVE	VAN BUREN ST	ZUMA DR	Collector	48,972.0	3" Mill & Overlay	11/6/2028	42	100	440748
COACH::ADEPLATA::1	AVENIDA DE PLATA	50TH AVE	VIA CONCHILLA	Residential	22,120.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	25.5	100	442400
COACH::54THAVEE::10	54TH AVE	POLK ST	CITY LIMITS	Arterial	22,140.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	24	100	442800
COACH::CESARCHAVE::3	CESAR CHAVEZ ST	CALLE ROJO	52ND AVE	Collector	22,459.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	6	100	449180
COACH::BAGDADAVE::13	BAGDAD AVE	9TH ST	SHADY LN	Collector	50,320.0	3" Mill & Overlay	11/6/2028	43.5	100	452880
COACH::FREDERICK::15	FREDERICK ST	AVENIDA VESTAGO	PASEO LAREDO	Collector	22,902.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	19.5	100	458040
COACH::ARABYAVE::2	ARABY AVE	DATE AVE	SHADY LN	Residential	52,182.0	3" Mill & Overlay	11/6/2028	44	100	469638
COACH::SHADYLN::17	SHADY LN	BAGDAD AVE	ORCHARD AVE	Collector	23,632.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	22.5	100	472640
COACH::TYLERST::5	TYLER ST	52ND AVE	410' S/O CARDINAL DR	Collector	52,640.0	3" Mill & Overlay	11/6/2028	37.5	100	473760
COACH::7THST::4	7TH ST	ORCHARD AVE	VINE AVE	Collector	23,744.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	28.5	100	474880
COACH::4THST::3	4TH ST	ORCHARD AVE	VINE AVE	Collector	23,800.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	19.5	100	476000
COACH::3RDST::3	3RD ST	ORCHARD AVE	VINE AVE	Collector	23,800.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	28.5	100	476000
COACH::55THAVE::4	55TH AVE	2675' W/O PEIRCE ST	PIERCE ST	Rural	53,440.0	3" Mill & Overlay	11/6/2028	39	100	480960
COACH::CAIROAVE::9	CAIRO AVE	DATE AVE	SHADY LN	Residential	53,520.0	3" Mill & Overlay	11/6/2028	44	100	481680
COACH::PRIMITIVO::3	PRIMITIVO DR	PRIMITIVO DR	VERMOUTH DR	Residential	24,256.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	22.5	100	485120
COACH::4THST::4	4TH ST	VINE AVE	SH-111	Collector	25,312.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	30	100	506240
COACH::MECCALANE::1	MECCA LANE	BAGDAD AVE	670' N/O BAGDAD AVE	Residential	25,460.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	16.5	100	509200
COACH::50THAVE::1	50TH AVE	TYLER ST	660' W/O TYLER ST	Arterial	26,320.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	0	100	526400
COACH::49THAVE::5	49TH AVE	LAS CRUCES ST	SH-111	Collector	26,796.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	15	100	535920
COACH::54THAVE::12	54TH AVE	2645' E/O FILLMORE ST	CITY LIMITS	Rural	26,820.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	13.5	100	536400
COACH::MECCALANE::2	MECCA LANE	670' N/O BAGDAD AVE	51ST AVE	Residential	26,866.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	28.5	100	537320
COACH::52NDAVE::37	52ND AVE	HERNANDEZ ST	POLK ST	Arterial	59,970.0	3" Mill & Overlay	11/6/2028	39	100	539730
COACH::CAVILA::7	CALLE AVILA	52ND AVE	CAIRO AVE	Residential	27,120.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	30	100	542400
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.0	Slurry Seal	11/6/2029	85	100	1278
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.0	Slurry Seal	11/6/2029	85	100	3204
COACH::VIAMERIDA::1	VIA MERIDA	VAN BUREN ST	PASEO BARCELONA	Residential	7,272.0	Slurry Seal	11/6/2029	85	100	3636
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.0	Slurry Seal	11/6/2029	85	100	3888
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	4320
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	4320
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	4320
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.0	Slurry Seal	11/6/2029	85	100	4458.5
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2029	85	100	4680
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.0	Slurry Seal	11/6/2029	85	100	5577
COACH::SHADYLN::4	SHADY LN	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	13,440.0	Slurry Seal	11/6/2029	85	100	6720
COACH::SHADYLN::13	SHADY LN	HEATHER LN	VALENCIA LN	Residential	15,904.0	Slurry Seal	11/6/2029	85	100	7952
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2029	85	100	8442
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.0	Slurry Seal	11/6/2029	85	100	9996
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	Collector	10,400.0	Microsurfacing	11/6/2029	85	100	10400
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	Collector	10,400.0	Microsurfacing	11/6/2029	85	100	10400
COACH::VALLEYRD::3	VALLEY RD	TRIPOLI WAY	MORGAN AVE	Collector	10,720.0	Microsurfacing	11/6/2029	85	100	10720
COACH::VALLEYRD::4	VALLEY RD	MORGAN AVE	NELSON ST	Collector	11,040.0	Microsurfacing	11/6/2029	85	100	11040
COACH::MEDINAAVE::1	MEDINA AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2029	85	100	12540
COACH::DAMASCUSAV::5	DAMASCUS AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2029	85	100	12540
COACH::CAIROAVE::8	CAIRO AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2029	85	100	12540
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.0	Slurry Seal	11/6/2029	85	100	14436
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.0	Slurry Seal	11/6/2029	85	100	17075.5
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.0	Slurry Seal	11/6/2029	85	100	17537
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.0	Slurry Seal	11/6/2029	85	100	17613
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.0	Microsurfacing	11/6/2029	85	100	18750
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.0	Microsurfacing	11/6/2029	85	100	18900
COACH::SH-86N::6	SH-86	52ND AVE	ALLEY	Arterial	44,800.0	3" Mill & Overlay	11/6/2029	45	100	403200
COACH::FREDERICK::6	FREDERICK ST	SOLARCE ST	52ND AVE	Collector	51,348.0	3" Mill & Overlay	11/6/2029	45	100	462132
COACH::3RDST::2	3RD ST	PALM AVE	ORCHARD AVE	Collector	23,800.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	30	100	476000
COACH::48THAVEE::1	48TH AVE	JACKSON ST	CIELO VICTORIA ST	Arterial	53,400.0	3" Mill & Overlay	11/6/2029	45	100	480600
COACH::AVENUE53::2	AVENUE 53	1000' E/O CALLE EMELIA	CALLE EMELIA	Collector	56,715.0	3" Mill & Overlay	11/6/2029	45	100	510435
COACH::SHADYLN::19	SHADY LN	ORCHARD AVE	9TH ST	Collector	25,760.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	30	100	515200
COACH::9THST::1	9TH ST	BAGDAD AVE	ORCHARD AVE	Collector	57,624.0	3" Mill & Overlay	11/6/2029	45	100	518616
COACH::CROJO::1	CALLE ROJO	260' W/O CALLE EMPALME	D/E	Residential	26,400.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	30	100	528000
COACH::TYLERST::13	TYLER ST	CALLE PIZANO	CALLE MENDOZA	Collector	27,440.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	27	100	548800
COACH::VERMOUTHDR::2	VERMOUTH DR	PRIMITIVO DR	ALLENDE DR	Residential	27,712.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	27	100	554240
COACH::TULIPANST::1	TULIPAN ST	CALENDULA AVE	ROSAL AVE	Residential	27,864.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	30	100	557280

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::54THAVEW::10	54TH AVE	SLATE DR	VAN BUREN ST	Arterial	27,960.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	30	100	559200
COACH::50THAVE::5	50TH AVE	940' E/O TYLER ST	TYLER ST	Rural	28,020.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	3	100	560400
COACH::52NDAVEW::1	52ND AVE	HERNANDEZ ST	ENTERPRISE WAY	Arterial	28,395.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	12	100	567900
COACH::ROSALAVE::1	ROSAL AVE	TULIPAN ST	HIBISCO ST	Residential	28,416.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	21	100	568320
COACH::52NDAVE::39	52ND AVE	1030' E/O POLK ST	2700' W/O FILLMORE ST	Rural	63,270.0	3" Mill & Overlay	11/6/2029	45	100	569430
COACH::52NDAVE::36	52ND AVE	ENTERPRISE WAY	HERNANDEZ ST	Arterial	28,530.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	0	100	570600
COACH::FILLMOREST::1	FILLMORE ST	AIRPORT BLVD	55TH AVE	Rural	63,840.0	3" Mill & Overlay	11/6/2029	40.5	100	574560
COACH::50THAVEE::7	50TH AVE	WASHINGTONIA AVE	CALLE QUINTERRA	Arterial	28,905.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	21	100	578100
COACH::VANBURENST::9	VAN BUREN ST	VIA MERIDA	VIA VALENCIA	Collector	30,432.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	19.5	100	608640
COACH::FREDERICK::16	FREDERICK ST	PASEO LAREDO	PHOENIX AVE	Collector	30,822.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	15	100	616440
COACH::SH-111N::16	SH-111	SH-86	SH-86	Arterial	71,750.0	3" Mill & Overlay	11/6/2029	45	100	645750
COACH::VANBURENST::10	VAN BUREN ST	VIA VALENCIA	50TH AVE	Collector	33,360.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	30	100	667200
COACH::51STAVE::3	51ST AVE	ZUMA DR	CHIAPAS DR	Collector	33,558.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	12	100	671160
COACH::OATESLN::2	OATES LN	OATES LN	CITY LIMITS	Collector	33,660.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	9	100	673200
COACH::50THAVEE::1	50TH AVE	CITY LIMITS	COLONIA DR	Arterial	33,690.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	9	100	673800
COACH::EDMITCHELL::1	ED MITCHELL DR	VAN BUREN ST	MITCHELL DR	Collector	74,880.0	3" Mill & Overlay	11/6/2029	42	100	673920
COACH::SH-111N::17	SH-111	49TH AVE	MITCHELL DR	Arterial	78,450.0	3" Mill & Overlay	11/6/2029	42	100	706050
COACH::FREDERICK::14	FREDERICK ST	50TH AVE	AVENIDA VESTAGO	Collector	35,442.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	18	100	708840
COACH::SH-111S::2	SH-111	49TH AVE	MITCHELL DR	Arterial	78,900.0	3" Mill & Overlay	11/6/2029	43.5	100	710100
COACH::49THAVE::3	49TH AVE	JAZMIN ST	FREDERICK ST	Collector	79,134.0	3" Mill & Overlay	11/6/2029	36	100	712206
COACH::52NDAVE::2	52ND AVE	VAN BUREN ST	PRIMITIVO DR	Arterial	79,500.0	3" Mill & Overlay	11/6/2029	43.5	100	715500
COACH::TYLERST::4	TYLER ST	1615' S/O SH-111	SH-111	Collector	80,700.0	3" Mill & Overlay	11/6/2029	43.5	100	726300
COACH::TYLERST::7	TYLER ST	CARDINAL DR	CALLE BOUGANVILIA	Collector	36,840.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	30	100	736800
COACH::VIAVALENCI::3	VIA VALENCIA	CALLE MARBELLA	PASEO CORDOVA	Residential	4,851.0	Slurry Seal	11/6/2030	85	100	2425.5
COACH::CGRANADA::1	CALLE GRANADA	PASEO MADRID	PASEO CORDOVA	Residential	10,800.0	Slurry Seal	11/6/2030	85	100	5400
COACH::SHADYLN::10	SHADY LN	53RD AVE	STACIE LN	Residential	10,808.0	Slurry Seal	11/6/2030	85	100	5404
COACH::PASEOCORDO::1	PASEO CORDOVA	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2030	85	100	8250
COACH::PASEOBARCE::1	PASEO BARCELONA	CALLE SEVILLE	VIA MERIDA	Residential	18,216.0	Slurry Seal	11/6/2030	85	100	9108
COACH::BRENDALN::1	BRENDA LN	CDS	SHADY LN	Residential	24,092.0	Slurry Seal	11/6/2030	85	100	12046
COACH::STACIELN::1	STACIE LN	CDS	SHADY LN	Residential	25,360.0	Slurry Seal	11/6/2030	85	100	12680
COACH::SH-111S::7	SH-111	3RD ST	4TH ST	Arterial	16,250.0	Microsurfacing	11/6/2030	85	100	16250
COACH::SH-111S::11	SH-111	7TH ST	8TH ST	Arterial	18,750.0	Microsurfacing	11/6/2030	85	100	18750
COACH::MORGANAVE::1	MORGAN AVE	VALLEY RD	52ND AVE	Residential	49,666.0	Slurry Seal	11/6/2030	85	100	24833
COACH::SH-111S::3	SH-111	49TH AVE	SH-86	Arterial	73,100.0	3" Mill & Overlay	11/6/2030	45	100	657900
COACH::AGRACE::3	AVENIDA GRACE	150' E/O CALLE FLORENA	CALLE EMELIA	Residential	36,792.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	30	100	735840
COACH::TYLERST::3	TYLER ST	TYLER LN	1640' N/O TYLER LN	Collector	81,850.0	3" Mill & Overlay	11/6/2030	45	100	736650
COACH::JAZMINST::1	JAZMIN ST	CALENDULA AVE	MARGARITA AVE	Residential	37,044.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	30	100	740880
COACH::SH-86N::17	SH-86	50TH AVE	PARK LN	Arterial	82,720.0	3" Mill & Overlay	11/6/2030	45	100	744480
COACH::MARGARITA::1	MARGARITA AVE	JAZMIN ST	HIBISCO ST	Residential	37,851.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	25.5	100	757020
COACH::JACKSONST::3	JACKSON ST	LOS MOCHIS AVE	48TH AVE	Arterial	85,668.0	3" Mill & Overlay	11/6/2030	42	100	771012
COACH::52NDAVEW::21	52ND AVE	FREDERICK ST	PRIMITIVO DR	Arterial	38,580.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	12	100	771600
COACH::53RDAVE::11	53RD AVE	SH-86	CALLE BONITA	Collector	38,580.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	15	100	771600
COACH::52NDAVE::3	52ND AVE	PRIMITIVO DR	FREDERICK ST	Arterial	38,640.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	19.5	100	772800
COACH::VISTADELNO::5	VISTA DEL NORTE	TYLER ST	980' E/O TYLER AVE	Collector	39,080.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	25.5	100	781600
COACH::50THAVE::3	50TH AVE	660' W/O TYLER ST	160' W/O TYLER ST	Arterial	40,000.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	10.5	100	800000
COACH::SH-111N::18	SH-111	MITCHELL DR	48TH AVE	Arterial	90,350.0	3" Mill & Overlay	11/6/2030	43.5	100	813150
COACH::FILLMOREST::3	FILLMORE ST	1750' S/O 54TH AVE	54TH AVE	Rural	41,736.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	0	100	834720
COACH::SH-86S::1	SH-86	SH-111	PARK LN	Arterial	43,600.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	24	100	872000
COACH::48THAVEW::2	48TH AVE	SH-111	VAN BUREN ST	Arterial	44,180.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	19.5	100	883600
COACH::48THAVEE::5	48TH AVE	VAN BUREN ST	SH-111	Arterial	44,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	21	100	884000
COACH::VANBURENST::14	VAN BUREN ST	49TH AVE	ED MITCHELL DR	Collector	45,430.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	22.5	100	908600
COACH::52NDAVEW::3	52ND AVE	LA PONDEROSA DR	TYLER ST	Arterial	104,355.0	3" Mill & Overlay	11/6/2030	40.5	100	939195
COACH::SH-86N::16	SH-86	WESTERFIELD WAY	50TH AVE	Arterial	105,760.0	3" Mill & Overlay	11/6/2030	45	100	951840
COACH::VANBURENST::15	VAN BUREN ST	ED MITCHELL DR	48TH AVE	Collector	48,965.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	22.5	100	979300
COACH::50THAVEW::14	50TH AVE	WASHINGTONIA AVE	VAN BUREN ST	Arterial	49,323.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	12	100	986460
COACH::50THAVEE::6	50TH AVE	VAN BUREN ST	WASHINGTONIA AVE	Arterial	49,323.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	28.5	100	986460
COACH::DILLONRDS::1	DILLON RD	44TH AVE	DILLON RD	Arterial	49,830.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	13.5	100	996600
COACH::CRUIZ::3	CALLE RUIZ	AVENIDA ZOCALO	AVENIDA REFORMA	Residential	6,444.0	Slurry Seal	11/6/2031	85	100	3222
COACH::CRUIZ::4	CALLE RUIZ	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	8,640.0	Slurry Seal	11/6/2031	85	100	4320
COACH::AIRPORTBL::6	AIRPORT BLVD	1215' W/O FILLMORE ST	1085' W/O FILLMORE ST	Collector	6,500.0	Microsurfacing	11/6/2031	84	100	6500
COACH::SHADYLN::3	SHADY LN	AVENIDA TACUBA	AVENIDA REFORMA	Residential	20,048.0	Slurry Seal	11/6/2031	85	100	10024
COACH::HEATHERLN::1	HEATHER LN	OASIS PALM AVE	SHADY LN	Residential	29,830.0	Slurry Seal	11/6/2031	85	100	14915
COACH::SH-86S::5	SH-86	ALLEY	4TH ST	Arterial	78,880.0	3" Mill & Overlay	11/6/2031	45	100	709920
COACH::AVENUE53::1	AVENUE 53	SHADY LN	1000' E/O CALLE EMELIA	Collector	94,791.0	3" Mill & Overlay	11/6/2031	45	100	853119
COACH::VISTADELNO::2	VISTA DEL NORTE	760' W/O DILLON RD	DILLON RD	Collector	45,360.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	30	100	907200
COACH::VANBURENST::7	VAN BUREN ST	MANHATTAN AVE	51ST AVE	Collector	49,968.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	21	100	999360
COACH::DILLONRDN::14	DILLON RD	DILLON RD	44TH AVE	Arterial	50,358.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	25.5	100	1007160
COACH::54THAVE::11	54TH AVE	FILLMORE ST	2645' E/O FILLMORE ST	Rural	52,920.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	4.5	100	1058400
COACH::VANBURENST::13	VAN BUREN ST	FIESTA RD	49TH AVE	Collector	53,048.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	4.5	100	1060960
COACH::4THST::1	4TH ST	SH-86	PALM AVE	Collector	54,432.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	22.5	100	1088640
COACH::POLKST::1	POLK ST	54TH AVE	1330' S/O INDUSTRIAL WAY	Collector	125,994.0	3" Mill & Overlay	11/6/2031	45	100	1133946
COACH::FREDERICK::7	FREDERICK ST	52ND AVE	1330' N/O 52ND AVE	Collector	57,018.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	28.5	100	1140360
COACH::POLKST::5	POLK ST	2160' N/O 52ND AVE	50TH AVE	Rural	57,960.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	18	100	1159200
COACH::FREDERICK::8	FREDERICK ST	1350' S/O 51ST AVE	51ST AVE	Collector	58,050.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	28.5	100	1161000
COACH::ENTERPRISE::3	ENTERPRISE WAY	INDUSTRIAL WAY	52ND AVE	Collector	58,995.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	0	100	1179900
COACH::50THAVE::7	50TH AVE	50TH AVE	POLK ST	Rural	132,780.0	3" Mill & Overlay	11/6/2031	36	100	1195020
COACH::VANBURENST::8	VAN BUREN ST	51ST AVE	VIA MERIDA	Collector	62,736.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	28.5	100	1254720
COACH::FILLMOREST::6	FILLMORE ST	2650' S/O 50TH AVE	50TH AVE	Rural	63,120.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	6	100	1262400
COACH::FILLMOREST::5	FILLMORE ST	52ND AVE	2650' N/O 52ND AVE	Rural	63,576.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	0	100	1271520
COACH::VISTADELNO::3	VISTA DEL NORTE	DILLON RD	1630' E/O DILLON RD	Collector	64,960.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	21	100	1299200
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.0	Slurry Seal	11/6/2032	85	100	540
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.0	Slurry Seal	11/6/2032	85	100	1008
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.0	Slurry Seal	11/6/2032	85	100	1440
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2032	85	100	2068.34
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2032	85	100	2068.34
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.0	Slurry Seal	11/6/2032	85	100	2160
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	Residential	4,608.0	Slurry Seal	11/6/2032	85	100	2304
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.0	Slurry Seal	11/6/2032	85	100	2340
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.0	Slurry Seal	11/6/2032	85	100	2520
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.0	Slurry Seal	11/6/2032	85	100	2524.5
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.0	Slurry Seal	11/6/2032	85	100	2556
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.0	Slurry Seal	11/6/2032	85	100	2700
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.0	Slurry Seal	11/6/2032	85	100	3222
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.0	Slurry Seal	11/6/2032	85	100	3222
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.0	Slurry Seal	11/6/2032	85	100	3240
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.0	Slurry Seal	11/6/2032	85	100	3256
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.0	Slurry Seal	11/6/2032	85	100	3258
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	Residential	6,666.0	Slurry Seal	11/6/2032	85	100	3333
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.0	Slurry Seal	11/6/2032	85	100	3344
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.0	Slurry Seal	11/6/2032	85	100	3582
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.0	Slurry Seal	11/6/2032	85	100	3648
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	Residential	7,704.0	Slurry Seal	11/6/2032	85	100	3852
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.0	Slurry Seal	11/6/2032	85	100	3888
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2032	85	100	4320
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	Residential	8,640.0	Slurry Seal	11/6/2032	85	100	4320
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2032	85	100	4320
COACH::VALENCIALN::1	VALENCIA LN	CDS	CYPRESS ST	Residential	8,820.0	Slurry Seal	11/6/2032	85	100	4410
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.0	Slurry Seal	11/6/2032	85	100	4560
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.0	Slurry Seal	11/6/2032	85	100	4590
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2032	85	100	4680
COACH::CAIROAVE::5	CAIRO AVE	SH-86	ALLEY	Residential	9,416.0	Slurry Seal	11/6/2032	85	100	4708
COACH::VALENCIALN::2	VALENCIA LN	CYPRESS ST	SHADY LN	Residential	9,540.0	Slurry Seal	11/6/2032	85	100	4770
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.0	Slurry Seal	11/6/2032	85	100	4860
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	Residential	9,720.0	Slurry Seal	11/6/2032	85	100	4860
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	Residential	10,080.0	Slurry Seal	11/6/2032	85	100	5040
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	5238
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	5238
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	5238
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	5238
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.0	Slurry Seal	11/6/2032	85	100	5328
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.0	Slurry Seal	11/6/2032	85	100	5400
COACH::CYPRESSST::1	CYPRESS ST	VALENCIA LN	VALLEY RD	Residential	11,172.0	Slurry Seal	11/6/2032	85	100	5586
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	Collector	6,400.0	Microsurfacing	11/6/2032	85	100	6400
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.0	Slurry Seal	11/6/2032	85	100	6720
COACH::SHADYLN::11	SHADY LN	STACIE LN	BRENDA LN	Residential	14,840.0	Slurry Seal	11/6/2032	85	100	7420
COACH::SHADYLN::12	SHADY LN	BRENDA LN	HEATHER LN	Residential	15,120.0	Slurry Seal	11/6/2032	85	100	7560
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2032	85	100	8250
COACH::CAIROAVE::7	CAIRO AVE	ALLEY	TRIPOLI WAY	Residential	16,539.0	Slurry Seal	11/6/2032	85	100	8269.5
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2032	85	100	8442
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.0	Slurry Seal	11/6/2032	85	100	8455
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.0	Slurry Seal	11/6/2032	85	100	9000
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.0	Slurry Seal	11/6/2032	85	100	9036
COACH::VALLEYRD::2	VALLEY RD	JENNIFER WAY	TRIPOLI WAY	Collector	10,400.0	Microsurfacing	11/6/2032	85	100	10400
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.0	Microsurfacing	11/6/2032	85	100	10400
COACH::OASISPALM::1	OASIS PALM AVE	HEATHER LN	VALLEY RD	Residential	21,318.0	Slurry Seal	11/6/2032	85	100	10659
COACH::VALLEYRD::5	VALLEY RD	NELSON ST	LAS PALMAS ST	Collector	10,720.0	Microsurfacing	11/6/2032	85	100	10720
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.0	Slurry Seal	11/6/2032	85	100	11898
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2032	85	100	12540
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.0	Slurry Seal	11/6/2032	85	100	12580
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.0	Slurry Seal	11/6/2032	85	100	14094
COACH::VALLEYRD::1	VALLEY RD	SH-86	JENNIFER WAY	Collector	15,840.0	Microsurfacing	11/6/2032	85	100	15840
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.0	Microsurfacing	11/6/2032	85	100	16250
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.0	Microsurfacing	11/6/2032	85	100	16250

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	Arterial	16,250.0	Microsurfacing	11/6/2032	85	100	16250
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.0	Slurry Seal	11/6/2032	85	100	16650
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.0	Microsurfacing	11/6/2032	85	100	18750
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	Residential	46,980.0	Slurry Seal	11/6/2032	85	100	23490
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	Residential	49,552.0	Slurry Seal	11/6/2032	85	100	24776
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	Residential	49,704.0	Slurry Seal	11/6/2032	85	100	24852
COACH::LASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	Residential	49,742.0	Slurry Seal	11/6/2032	85	100	24871
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	Residential	49,818.0	Slurry Seal	11/6/2032	85	100	24909
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	Residential	49,856.0	Slurry Seal	11/6/2032	85	100	24928
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.0	Slurry Seal	11/6/2032	85	100	24947
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	Residential	49,932.0	Slurry Seal	11/6/2032	85	100	24966
COACH::ARABYAVE::2	ARABY AVE	DATE AVE	SHADY LN	Residential	52,182.0	Slurry Seal	11/6/2032	85	100	26091
COACH::CAIROAVE::9	CAIRO AVE	DATE AVE	SHADY LN	Residential	53,520.0	Slurry Seal	11/6/2032	85	100	26760
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	Arterial	36,300.0	Microsurfacing	11/6/2032	85	100	36300
COACH::HARRISONST::2	HARRISON ST	CITY LIMITS	CITY LIMITS	Residential	126,912.0	3" Mill & Overlay	11/6/2032	45	100	1142208
COACH::VANBURENST::6	VAN BUREN ST	52ND AVE	MANHATTAN AVE	Collector	142,488.0	3" Mill & Overlay	11/6/2032	45	100	1282392
COACH::POLKST::4	POLK ST	52ND AVE	2160' N/O 52ND AVE	Rural	65,040.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	1.5	100	1300800
COACH::TYLERST::15	TYLER ST	CALLE MENDOZA	50TH AVE	Collector	75,320.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	9	100	1506400
COACH::INDUSTRIAL::2	INDUSTRIAL WAY	ENTERPRISE WAY	POLK ST	Collector	75,780.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	25.5	100	1515600
COACH::49THAVE::4	49TH AVE	FREDERICK ST	LAS CRUCES ST	Collector	76,428.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	15	100	1528560
COACH::52NDAVE::42	52ND AVE	FILLMORE ST	5300' E/O FILLMORE ST	Rural	79,530.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	6	100	1590600
COACH::VISTADELSU::2	VISTA DEL SUR	CAMP CT	TYLER ST	Collector	81,720.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	22.5	100	1634400
COACH::ENTERPRISE::2	ENTERPRISE WAY	54TH AVE	INDUSTRIAL WAY	Collector	195,030.0	3" Mill & Overlay	11/6/2032	45	100	1755270
COACH::SH-111S::1	SH-111	48TH AVE	MITCHELL DR	Arterial	88,550.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	24	100	1771000
COACH::SH-86S::18	SH-86	53RD AVE	54TH AVE	Arterial	212,000.0	3" Mill & Overlay	11/6/2032	45	100	1908000
COACH::52NDAVEE::34	52ND AVE	TYLER ST	LA PONDEROSA DR	Arterial	104,355.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	22.5	100	2087100
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.0	Slurry Seal	11/6/2033	85	100	1278
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.0	Slurry Seal	11/6/2033	85	100	3204
COACH::VIAMERIDA::1	VIA MERIDA	VAN BUREN ST	PASEO BARCELONA	Residential	7,272.0	Slurry Seal	11/6/2033	85	100	3636
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.0	Slurry Seal	11/6/2033	85	100	3888
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	4320
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	4320
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	4320
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.0	Slurry Seal	11/6/2033	85	100	4458.5
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2033	85	100	4680
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.0	Slurry Seal	11/6/2033	85	100	5577
COACH::SHADYLN::4	SHADY LN	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	13,440.0	Slurry Seal	11/6/2033	85	100	6720
COACH::SHADYLN::13	SHADY LN	HEATHER LN	VALENCIA LN	Residential	15,904.0	Slurry Seal	11/6/2033	85	100	7952
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2033	85	100	8442
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.0	Slurry Seal	11/6/2033	85	100	9996
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	Collector	10,400.0	Microsurfacing	11/6/2033	85	100	10400
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	Collector	10,400.0	Microsurfacing	11/6/2033	85	100	10400
COACH::VALLEYRD::3	VALLEY RD	TRIPOLI WAY	MORGAN AVE	Collector	10,720.0	Microsurfacing	11/6/2033	85	100	10720
COACH::VALLEYRD::4	VALLEY RD	MORGAN AVE	NELSON ST	Collector	11,040.0	Microsurfacing	11/6/2033	85	100	11040
COACH::MEDINAAVE::1	MEDINA AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2033	85	100	12540
COACH::CAIROAVE::8	CAIRO AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2033	85	100	12540
COACH::DAMASCUSAV::5	DAMASCUS AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2033	85	100	12540
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.0	Slurry Seal	11/6/2033	85	100	14436
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.0	Slurry Seal	11/6/2033	85	100	17075.5
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.0	Slurry Seal	11/6/2033	85	100	17537
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.0	Slurry Seal	11/6/2033	85	100	17613
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.0	Microsurfacing	11/6/2033	85	100	18750
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.0	Microsurfacing	11/6/2033	85	100	18900
COACH::VISTADELSU::3	VISTA DEL SUR	TYLER ST	CITY LIMITS	Collector	112,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	15	100	2244000
COACH::VANBURENST::11	VAN BUREN ST	50TH AVE	MOONLIT DR	Collector	120,080.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	24	100	2401600
COACH::DILLONRD::5	DILLON RD	3135' S/O VISTA DEL SUR	VISTA DEL SUR	Arterial	301,056.0	3" Mill & Overlay	11/6/2033	45	100	2709504
COACH::TYLERST::17	TYLER ST	50TH AVE	4540' N/O 50TH AVE	Rural	136,050.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	18	100	2721000
COACH::50THAVE::8	50TH AVE	POLK ST	FILLMORE ST	Rural	138,060.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	3	100	2761200
COACH::DILLONRD::13	DILLON RD	VISTA DEL NORTE	DILLON RD	Arterial	280,416.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	0	100	5608320

APPENDIX D:
WORK PLAN FOR SCENARIO 4: MAINTAIN CURRENT CONDITION

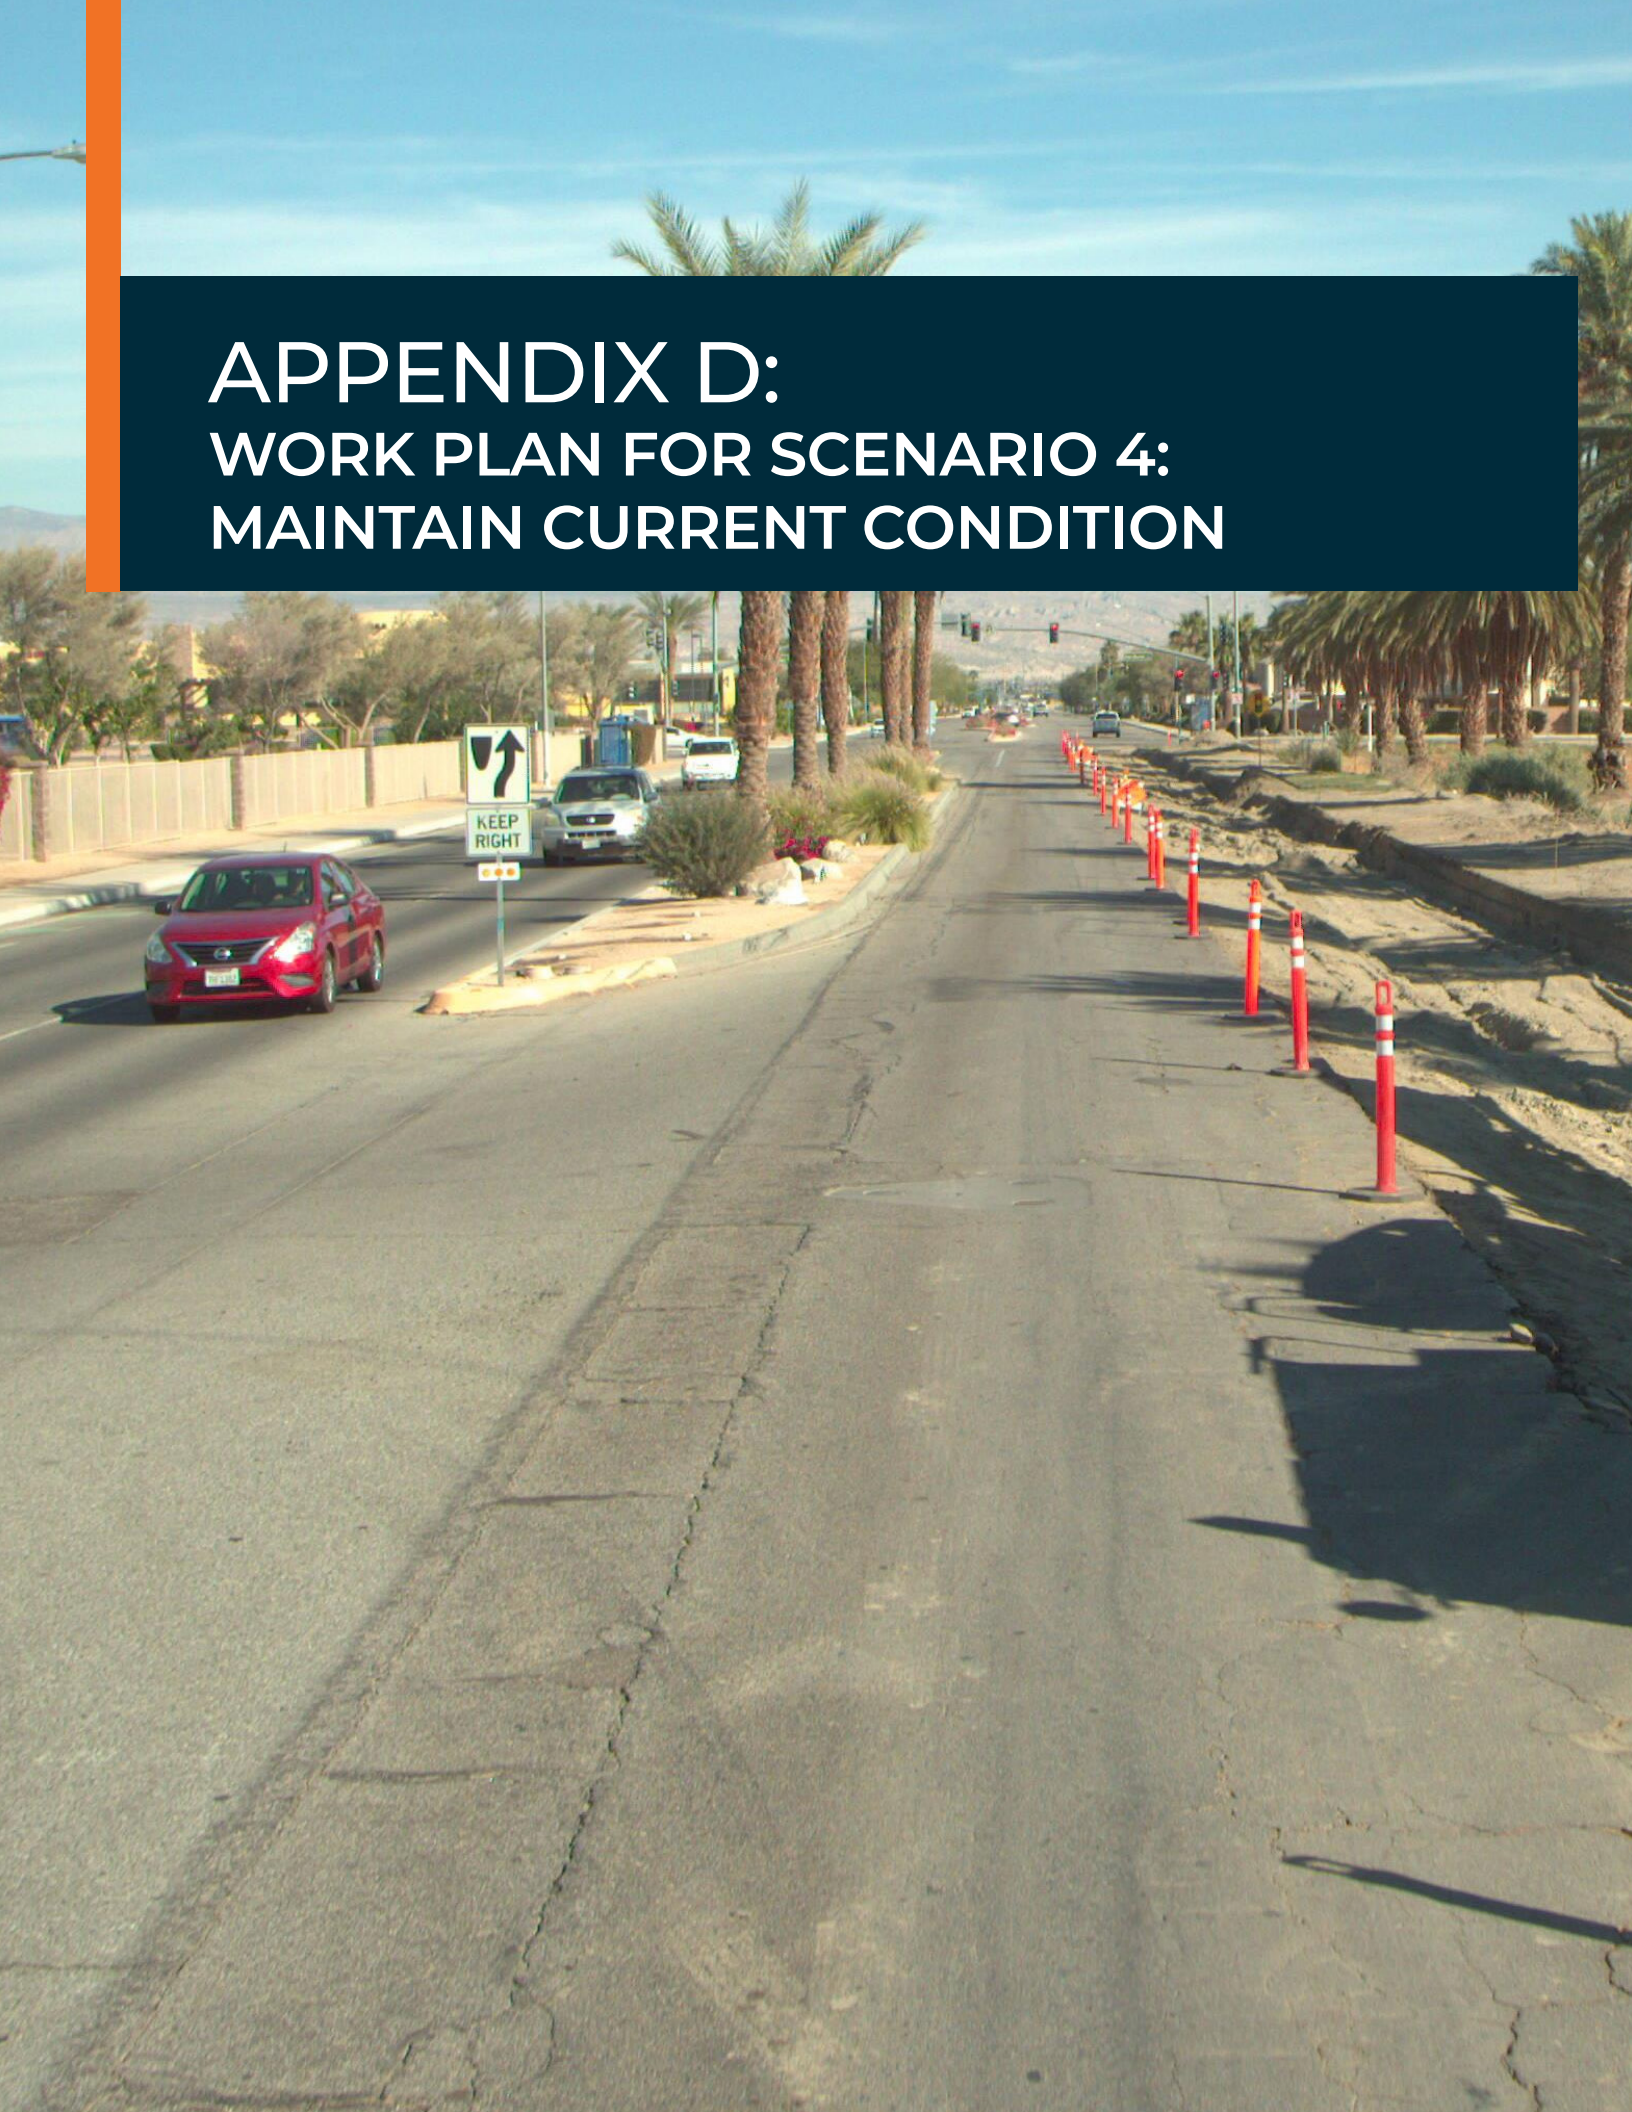

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.0	Slurry Seal	11/6/2024	74	100	$ 540.0
COACH::LAPLAYAST::3	LA PLAYA ST	50' S/O EL MAR AVE	EL MAR AVE	Residential	1,260.0	Slurry Seal	11/6/2024	78	100	$ 630.0
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.0	Slurry Seal	11/6/2024	80	100	$ 1,440.0
COACH::CDIEGO::4	CALLE DIEGO	150' E/O CALLE LEANDRO	CDS	Residential	3,128.0	Slurry Seal	11/6/2024	75	100	$ 1,564.0
COACH::52NDAVE::17	52ND AVE	TIJSSELING CT	JENNIFER WAY	Arterial	1,716.0	Microsurfacing	11/6/2024	78	100	$ 1,716.0
COACH::WSIENNACIR::3	W SIENNA CIR	100' W/O SLATE DR	SLATE DR	Residential	3,600.0	Slurry Seal	11/6/2024	72	100	$ 1,800.0
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2024	74	100	$ 2,068.3
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2024	74	100	$ 2,068.3
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.0	Slurry Seal	11/6/2024	80	100	$ 2,160.0
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.0	Slurry Seal	11/6/2024	74	100	$ 2,340.0
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.0	Slurry Seal	11/6/2024	74	100	$ 2,520.0
COACH::CAVILA::1	CALLE AVILA	D/E	CALLE NOGAL	Residential	5,040.0	Slurry Seal	11/6/2024	84	100	$ 2,520.0
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.0	Slurry Seal	11/6/2024	80	100	$ 2,524.5
COACH::LUNADENICO::2	LUNA DE NICOLETA ST	CALLE COLIMA	140' N/O CALLE COLIMA	Residential	5,076.0	Slurry Seal	11/6/2024	78	100	$ 2,538.0
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.0	Slurry Seal	11/6/2024	74	100	$ 2,556.0
COACH::SLATEDR::4	SLATE DR	N SIENNA CIR	D/E	Residential	5,112.0	Slurry Seal	11/6/2024	75	100	$ 2,556.0
COACH::SH-86S::11	SH-86	CAIRO AVE	CAIRO AVE	Arterial	2,560.0	Microsurfacing	11/6/2024	84	100	$ 2,560.0
COACH::CROSA::3	CALLE ROSA	CALLE LINDA	140' W/O CALLE ESTRELLA	Residential	5,148.0	Slurry Seal	11/6/2024	75	100	$ 2,574.0
COACH::TEPEYACCT::1	TEPEYAC CT	VIA TEPEYAC	CDS	Residential	5,256.0	Slurry Seal	11/6/2024	72	100	$ 2,628.0
COACH::AALEENAH::6	AVENIDA ALEENAH	CALLE FLORENA	'150 E/O CALLE FLORENA	Residential	5,328.0	Slurry Seal	11/6/2024	72	100	$ 2,664.0
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.0	Slurry Seal	11/6/2024	74	100	$ 2,700.0
COACH::CGLORIOSA::1	CALLE GLORIOSA	AVENIDA NERIUM	D/E	Residential	5,508.0	Slurry Seal	11/6/2024	75	100	$ 2,754.0
COACH::DAMASCUSAV::2	DAMASCUS AVE	CALLE TORRES ORDUNO	LIBNAN ST	Residential	5,700.0	Slurry Seal	11/6/2024	72	100	$ 2,850.0
COACH::MICHELLEDR::4	MICHELLE DR	AVENIDA ALEENAH	AVENIDA NICOLE	Residential	5,940.0	Slurry Seal	11/6/2024	78	100	$ 2,970.0
COACH::RIGOCT::1	RIGO CT	CHRISTINA RD	CDS	Residential	5,952.0	Slurry Seal	11/6/2024	72	100	$ 2,976.0
COACH::MCCOYPEAK::2	MCCOY PEAK AVE	ARICA DR	CHAPARROSA ST	Residential	6,192.0	Slurry Seal	11/6/2024	72	100	$ 3,096.0
COACH::CROSARITO::1	CAMINO ROSARITO	D/E	CAMINO BAHIA AVE	Residential	6,440.0	Slurry Seal	11/6/2024	75	100	$ 3,220.0
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.0	Slurry Seal	11/6/2024	80	100	$ 3,222.0
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.0	Slurry Seal	11/6/2024	85	100	$ 3,222.0
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.0	Slurry Seal	11/6/2024	85	100	$ 3,240.0
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.0	Slurry Seal	11/6/2024	85	100	$ 3,256.0
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.0	Slurry Seal	11/6/2024	85	100	$ 3,258.0
COACH::SCARLETWAY::3	SCARLET WAY	E SIENNA CIR	FREDERICK ST	Residential	6,624.0	Slurry Seal	11/6/2024	75	100	$ 3,312.0
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.0	Slurry Seal	11/6/2024	85	100	$ 3,344.0
COACH::PLAYADELAM::4	PLAYA DEL AMOR ST	LOS MOCHIS AVE	PUEBLO BONITO AVE	Residential	6,768.0	Slurry Seal	11/6/2024	75	100	$ 3,384.0
COACH::WSIENNACIR::2	W SIENNA CIR	TOPAZ CT	100' W/O SLATE DR	Residential	6,804.0	Slurry Seal	11/6/2024	72	100	$ 3,402.0
COACH::LASLUNASAV::1	LAS LUNAS AVE	FREDERICK ST	SEDONA CT	Residential	7,164.0	Slurry Seal	11/6/2024	72	100	$ 3,582.0
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.0	Slurry Seal	11/6/2024	80	100	$ 3,582.0
COACH::PALMERASCR::2	PALMERAS CIR	PALOMA DR	MARIPOSA DR	Residential	7,200.0	Slurry Seal	11/6/2024	72	100	$ 3,600.0
COACH::SHADYLN::5	SHADY LN	D/E	VIA MISIONERO	Residential	7,224.0	Slurry Seal	11/6/2024	78	100	$ 3,612.0
COACH::CLINDA::1	CALLE LINDA	CDS	CALLE ROSA	Residential	7,260.0	Slurry Seal	11/6/2024	72	100	$ 3,630.0
COACH::SLATEDR::1	SLATE DR	54TH AVE	W SIENNA CIR	Residential	7,272.0	Slurry Seal	11/6/2024	81	100	$ 3,636.0
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.0	Slurry Seal	11/6/2024	85	100	$ 3,648.0
COACH::CAVILA::3	CALLE AVILA	CALLE PINO	53RD AVE	Residential	7,400.0	Slurry Seal	11/6/2024	81	100	$ 3,700.0
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.0	Slurry Seal	11/6/2024	80	100	$ 3,888.0
COACH::HUXLEYCT::1	HUXLEY CT	MICHELLE DR	CDS	Residential	8,064.0	Slurry Seal	11/6/2024	75	100	$ 4,032.0
COACH::MICHELLEDR::2	MICHELLE DR	MICHELLE DR	MICHELLE DR	Residential	8,100.0	Slurry Seal	11/6/2024	72	100	$ 4,050.0
COACH::JULIACT::1	JULIA CT	AVENIDA ALEENAH	CDS	Residential	8,280.0	Slurry Seal	11/6/2024	72	100	$ 4,140.0
COACH::VERACRUZ::1	VERA CRUZ	CDS	PAVON PALMA	Residential	8,320.0	Slurry Seal	11/6/2024	84	100	$ 4,160.0
COACH::VENICELN::1	VENICE LN	HUNTINGTON AVE	CDS	Residential	8,352.0	Slurry Seal	11/6/2024	78	100	$ 4,176.0
COACH::CCLAVEL::2	CALLE CLAVEL	CALLE VIOLETA	CALLE BOUGANVILIA	Residential	8,415.0	Slurry Seal	11/6/2024	78	100	$ 4,207.5
COACH::CCLAVEL::1	CALLE CLAVEL	CALLE GERANIO	CALLE VIOLETA	Residential	8,448.0	Slurry Seal	11/6/2024	72	100	$ 4,224.0
COACH::CGARDENIA::2	CALLE GARDENIA	CALLE VIOLETA	CALLE BOUGANVILIA	Residential	8,448.0	Slurry Seal	11/6/2024	72	100	$ 4,224.0
COACH::CGARDENIA::1	CALLE GARDENIA	CALLE GERANIO	CALLE VIOLETA	Residential	8,481.0	Slurry Seal	11/6/2024	75	100	$ 4,240.5
COACH::SANIGNACIO::1	SAN IGNACIO AVE	CHICHEN ITZA RD	CALHOUN ST	Residential	8,536.0	Slurry Seal	11/6/2024	84	100	$ 4,268.0
COACH::ACORTEZ::3	AVENIDA CORTEZ	VIA DURANGO	PASEO LAREDO	Residential	8,604.0	Slurry Seal	11/6/2024	75	100	$ 4,302.0
COACH::LOSMOCHIS::1	LOS MOCHIS AVE	JACKSON ST	PLAYA DEL AMOR ST	Residential	8,624.0	Slurry Seal	11/6/2024	78	100	$ 4,312.0
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2024	85	100	$ 4,320.0
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2024	85	100	$ 4,320.0
COACH::50THAVEW::6	50TH AVE	BALBOA ST	AVENIDA DE ORO	Arterial	4,356.0	Microsurfacing	11/6/2024	72	100	$ 4,356.0
COACH::PUERTECITO::1	PUERTECITOS AVE	JACKSON ST	PLAYA DEL AMOR ST	Residential	8,756.0	Slurry Seal	11/6/2024	81	100	$ 4,378.0
COACH::HUNTINGTON::2	HUNTINGTON AVE	MONARCH RD	HERMOSA BLVD	Residential	9,000.0	Slurry Seal	11/6/2024	72	100	$ 4,500.0
COACH::CHRISTINA::4	CHRISTINA RD	TOMAS LN	RIGO CT	Residential	9,108.0	Slurry Seal	11/6/2024	75	100	$ 4,554.0
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.0	Slurry Seal	11/6/2024	85	100	$ 4,560.0
COACH::CHRISTINA::3	CHRISTINA RD	ANDREA LN	TOMAS LN	Residential	9,144.0	Slurry Seal	11/6/2024	81	100	$ 4,572.0
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.0	Slurry Seal	11/6/2024	74	100	$ 4,590.0
COACH::CIELOVICTR::1	CIELO VICTORIA ST	MARIANA AVE	48TH AVE	Residential	9,200.0	Slurry Seal	11/6/2024	72	100	$ 4,600.0
COACH::HERMOSABL::1	HERMOSA BLVD	HUNTINGTON AVE	LA JOLLA AVE	Residential	9,216.0	Slurry Seal	11/6/2024	78	100	$ 4,608.0
COACH::SLATEDR::2	SLATE DR	W SIENNA CIR	SCARLET WAY	Residential	9,252.0	Slurry Seal	11/6/2024	72	100	$ 4,626.0
COACH::CROSA::1	CALLE ROSA	CALLE LOS HERMANOS	CALLE BONITA	Residential	9,360.0	Slurry Seal	11/6/2024	72	100	$ 4,680.0
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2024	80	100	$ 4,680.0
COACH::FREDERICK::20	FREDERICK ST	140' S/O LAS LUNAS AVE	LAS LUNAS AVE	Residential	9,372.0	Slurry Seal	11/6/2024	84	100	$ 4,686.0
COACH::CFELIZ::1	CALLE FELIZ	CALLE LOS HERMANOS	CALLE BONITA	Residential	9,396.0	Slurry Seal	11/6/2024	72	100	$ 4,698.0
COACH::MONARCHRD::2	MONARCH RD	MANHATTAN AVE	HUNTINGTON AVE	Residential	9,396.0	Slurry Seal	11/6/2024	75	100	$ 4,698.0
COACH::MONARCHRD::1	MONARCH RD	CAPITOLA AVE	MANHATTAN AVE	Residential	9,396.0	Slurry Seal	11/6/2024	78	100	$ 4,698.0
COACH::LACOSTAAVE::1	LA COSTA AVE	ESTRELLA PEDRO ST	LA PLAYA ST	Residential	9,520.0	Slurry Seal	11/6/2024	75	100	$ 4,760.0
COACH::ANDREALN::1	ANDREA LN	JULIA DR	LINDA AVE	Residential	9,620.0	Slurry Seal	11/6/2024	84	100	$ 4,810.0
COACH::CHANNINGCT::1	CHANNING CT	AVENIDA MARIA	CDS	Residential	9,720.0	Slurry Seal	11/6/2024	72	100	$ 4,860.0
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.0	Slurry Seal	11/6/2024	74	100	$ 4,860.0
COACH::CCERVANTES::2	CALLE CERVANTES	CALLE LARRIVA	CALLE CHAVEZ	Residential	9,792.0	Slurry Seal	11/6/2024	72	100	$ 4,896.0
COACH::CANABELLA::1	CALLE ANABELLA	AVENIDA MARIA	AVENIDA CRYSTAL	Residential	9,900.0	Slurry Seal	11/6/2024	72	100	$ 4,950.0
COACH::KINGCT::1	KING CT	CDS	WASHINGTONIA AVE	Residential	10,016.0	Slurry Seal	11/6/2024	78	100	$ 5,008.0
COACH::CCOLIMA::2	CALLE COLIMA	LUNA DE NICOLETA ST	CAMINO MAYA	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CCOLIMA::4	CALLE COLIMA	CAMINO REAL	LA PLAYA ST	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::AGUABLANCA::2	AGUA BLANCA AVE	LUNA DE NICOLETA ST	CAMINO MAYA	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CFLORENA::3	CALLE FLORENA	AVENIDA GRACE	AVENIDA ALEENAH	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CHICHENITZ::1	CHICHEN ITZA RD	PUERTO ESCONDIDO AVE	IXTAPA AVE	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::AGUABLANCA::4	AGUA BLANCA AVE	CAMINO REAL	CHICHEN ITZA RD	Residential	10,080.0	Slurry Seal	11/6/2024	75	100	$ 5,040.0
COACH::CCOLIMA::3	CALLE COLIMA	CAMINO MAYA	CAMINO REAL	Residential	10,080.0	Slurry Seal	11/6/2024	75	100	$ 5,040.0
COACH::PUEBLOBONI::1	PUEBLO BONITO AVE	PLAYA DEL AMOR ST	EL ACRO ST	Residential	10,080.0	Slurry Seal	11/6/2024	78	100	$ 5,040.0
COACH::PLAYADELAM::5	PLAYA DEL AMOR ST	PUEBLO BONITO AVE	EL GRECO AVE	Residential	10,080.0	Slurry Seal	11/6/2024	84	100	$ 5,040.0
COACH::CTECHA::4	CALLE TECHA	CALLE ROBERTO	CALLE VERDE	Residential	10,240.0	Slurry Seal	11/6/2024	72	100	$ 5,120.0
COACH::SH-86N::11	SH-86	BAGDAD AVE	BAGDAD AVE	Arterial	5,120.0	Microsurfacing	11/6/2024	81	100	$ 5,120.0
COACH::CPUERTADEL::1	CALLE PUERTA DEL SOL	50TH AVE	AVENIDA VERANO	Residential	10,272.0	Slurry Seal	11/6/2024	78	100	$ 5,136.0
COACH::CROSA::2	CALLE ROSA	CALLE BONITA	CALLE LINDA	Residential	10,332.0	Slurry Seal	11/6/2024	72	100	$ 5,166.0
COACH::COCASO::2	CALLE OCASO	CORTE ECLIPSE	CORTE ESTIVO	Residential	10,360.0	Slurry Seal	11/6/2024	72	100	$ 5,180.0
COACH::COCASO::1	CALLE OCASO	AVENIDA VERANO	CORTE ECLIPSE	Residential	10,360.0	Slurry Seal	11/6/2024	78	100	$ 5,180.0
COACH::VIATEPEYAC::2	VIA TEPEYAC	TEPEYAC CT	SHADY LN	Residential	10,368.0	Slurry Seal	11/6/2024	72	100	$ 5,184.0
COACH::SANASISDR::3	SAN ASIS DR	CALLE TOLOSA	SAN CAPISTRANO DR	Residential	10,400.0	Slurry Seal	11/6/2024	75	100	$ 5,200.0
COACH::CCOLIMA::1	CALLE COLIMA	AGUA CALIENTE ST	LUNA DE NICOLETA ST	Residential	10,440.0	Slurry Seal	11/6/2024	72	100	$ 5,220.0
COACH::AGUABLANCA::1	AGUA BLANCA AVE	AGUA CALIENTE ST	LUNA DE NICOLETA ST	Residential	10,440.0	Slurry Seal	11/6/2024	72	100	$ 5,220.0
COACH::PLAYADELAM::1	PLAYA DEL AMOR ST	CAMINO BAHIA AVE	PUERTECITOS AVE	Residential	10,440.0	Slurry Seal	11/6/2024	75	100	$ 5,220.0
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2024	74	100	$ 5,238.0
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2024	80	100	$ 5,238.0
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2024	80	100	$ 5,238.0
COACH::ESIENNACIR::1	E SIENNA CIR	SCARLET WAY	INDIGO CT	Residential	10,476.0	Slurry Seal	11/6/2024	81	100	$ 5,238.0
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2024	85	100	$ 5,238.0
COACH::ROYALCT::1	ROYAL CT	CDS	WASHINGTONIA AVE	Residential	10,540.0	Slurry Seal	11/6/2024	75	100	$ 5,270.0
COACH::52NDAVEW::18	52ND AVE	CALLE TORRES ORDUNO	DOUMA CT	Arterial	5,278.0	Microsurfacing	11/6/2024	72	100	$ 5,278.0
COACH::ELCASTILLO::1	EL CASTILLO RD	TODOS SANTOS AVE	CAMINO LAS BRISAS	Residential	10,640.0	Slurry Seal	11/6/2024	78	100	$ 5,320.0
COACH::ELARCOST::1	EL ARCO ST	LOS CABOS AVE	TODOS SANTOS AVE	Residential	10,640.0	Slurry Seal	11/6/2024	78	100	$ 5,320.0
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.0	Slurry Seal	11/6/2024	85	100	$ 5,328.0
COACH::QUEENCT::1	QUEEN CT	CDS	WASHINGTONIA AVE	Residential	10,778.0	Slurry Seal	11/6/2024	75	100	$ 5,389.0
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.0	Slurry Seal	11/6/2024	74	100	$ 5,400.0
COACH::SANASISDR::1	SAN ASIS DR	CDS	SOLEDAD PL	Residential	10,800.0	Slurry Seal	11/6/2024	75	100	$ 5,400.0
COACH::INDIGOCT::1	INDIGO CT	CDS	E SIENNA CIR	Residential	10,944.0	Slurry Seal	11/6/2024	78	100	$ 5,472.0
COACH::52NDAVE::22	52ND AVE	NELSON ST	DATE AVE	Arterial	5,500.0	Microsurfacing	11/6/2024	75	100	$ 5,500.0
COACH::PUEBLOBONI::3	PUEBLO BONITO AVE	EL CASTILLO RD	TAXCO AVE	Residential	11,016.0	Slurry Seal	11/6/2024	81	100	$ 5,508.0
COACH::CHICHENITZ::4	CHICHEN ITZA RD	SAN IGNACIO AVE	AGUA BLANCA AVE	Residential	11,196.0	Slurry Seal	11/6/2024	84	100	$ 5,598.0
COACH::CROSARITO::2	CAMINO ROSARITO	CAMINO BAHIA AVE	LOS CABOS AVE	Residential	11,200.0	Slurry Seal	11/6/2024	75	100	$ 5,600.0
COACH::TAXCOAVE::1	TAXCO AVE	PUEBLO BONITO AVE	EL GRECO AVE	Residential	11,200.0	Slurry Seal	11/6/2024	84	100	$ 5,600.0
COACH::LASLUNASAV::2	LAS LUNAS AVE	SEDONA CT	MESA CT	Residential	11,376.0	Slurry Seal	11/6/2024	75	100	$ 5,688.0
COACH::SUNCRESTST::3	SUNCREST ST	SUNDANCE LN	SUNDOWN LN	Residential	11,440.0	Slurry Seal	11/6/2024	75	100	$ 5,720.0
COACH::LASLUNASAV::4	LAS LUNAS AVE	RIO RANCHO CT	LAS CRUCES ST	Residential	11,556.0	Slurry Seal	11/6/2024	75	100	$ 5,778.0
COACH::LAJOLLAAVE::2	LA JOLLA AVE	HERMOSA BLVD	ZUMA DR	Residential	11,736.0	Slurry Seal	11/6/2024	72	100	$ 5,868.0
COACH::9THST::3	9TH ST	VINE AVE	SHADY LN	Collector	5,880.0	Microsurfacing	11/6/2024	84	100	$ 5,880.0
COACH::ACORTEZ::4	AVENIDA CORTEZ	PASEO LAREDO	CALLE LEON	Residential	11,952.0	Slurry Seal	11/6/2024	75	100	$ 5,976.0
COACH::LAPONDEROS::1	LA PONDEROSA DR	52ND AVE	NAOMI CT	Residential	12,204.0	Slurry Seal	11/6/2024	81	100	$ 6,102.0
COACH::CROJO::8	CALLE ROJO	CALLE CAMACHO	CESAR CHAVEZ ST	Residential	12,320.0	Slurry Seal	11/6/2024	81	100	$ 6,160.0
COACH::LAJOLLAAVE::1	LA JOLLA AVE	CDS	HERMOSA BLVD	Residential	12,780.0	Slurry Seal	11/6/2024	75	100	$ 6,390.0
COACH::PEDRODR::1	PEDRO DR	TOMAS LN	AVENIDA DEL PARQUE	Residential	12,816.0	Slurry Seal	11/6/2024	78	100	$ 6,408.0
COACH::CROJO::7	CALLE ROJO	CALLE AVILA	CALLE CAMACHO	Residential	12,960.0	Slurry Seal	11/6/2024	75	100	$ 6,480.0
COACH::CZAMORA::1	CALLE ZAMORA	CALLE EMPALME	CALLE TECHA	Residential	13,356.0	Slurry Seal	11/6/2024	72	100	$ 6,678.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::CCINDARELA::1	CORTE CINDARELLA	CDS	AVENIDA ADOBE	Residential	13,360.0	Slurry Seal	11/6/2024	84	100	$ 6,680.0
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.0	Slurry Seal	11/6/2024	80	100	$ 6,720.0
COACH::52NDAVE::23	52ND AVE	DATE AVE	LAS PALMAS ST	Arterial	6,952.0	Microsurfacing	11/6/2024	81	100	$ 6,952.0
COACH::ANDREALN::4	ANDREA LN	'45' N/O CHRISTINA RD	CDS	Residential	13,949.0	Slurry Seal	11/6/2024	84	100	$ 6,974.5
COACH::CAVILA::2	CALLE AVILA	CALLE NOGAL	CALLE PINO	Residential	13,960.0	Slurry Seal	11/6/2024	81	100	$ 6,980.0
COACH::SOLDELINDA::1	SOL DE LINDA ST	PLAZA DE ORO AVE	MARIANA AVE	Residential	14,000.0	Slurry Seal	11/6/2024	72	100	$ 7,000.0
COACH::CECLIPSE::1	CORTE ECLIPSE	CALLE OCASO	CDS	Residential	14,134.0	Slurry Seal	11/6/2024	72	100	$ 7,067.0
COACH::HUNTINGTON::1	HUNTINGTON AVE	VENICE LN	MONARCH RD	Residential	14,400.0	Slurry Seal	11/6/2024	81	100	$ 7,200.0
COACH::52NDAVEE::7	52ND AVE	CALLE TORRES ORDUNO	CALLE EMPALME	Arterial	1,456.0	1.5" Thin Overlay	11/6/2024	57	100	$ 7,280.0
COACH::AMETHYSTCT::1	AMETHYST CT	CDS	SCARLET WAY	Residential	14,760.0	Slurry Seal	11/6/2024	81	100	$ 7,380.0
COACH::PEDRODR::2	PEDRO DR	AVENIDA DEL PARQUE	AVENIDA ADOBE	Residential	14,796.0	Slurry Seal	11/6/2024	72	100	$ 7,398.0
COACH::52NDAVEW::17	52ND AVE	CALLE EMPALME	CALLE TORRES ORDUNO	Arterial	1,482.0	1.5" Thin Overlay	11/6/2024	60	100	$ 7,410.0
COACH::TODOSSANTO::3	TODOS SANTOS AVE	420' W/O CAMINO CORTEZ	CAMINO CORTEZ	Residential	15,048.0	Slurry Seal	11/6/2024	72	100	$ 7,524.0
COACH::SCARLETWAY::2	SCARLET WAY	SAPPHIRE LN	E SIENNA CIR	Residential	15,156.0	Slurry Seal	11/6/2024	72	100	$ 7,578.0
COACH::CLEON::1	CALLE LEON	CALLE DE VEGA	AVENIDA CORTEZ	Residential	15,280.0	Slurry Seal	11/6/2024	84	100	$ 7,640.0
COACH::CELALBA::1	CORTE EL ALBA	CDS	CALLE EL SOL	Residential	15,392.0	Slurry Seal	11/6/2024	78	100	$ 7,696.0
COACH::SOLEDADPL::1	SOLEDAD PL	SAN ASIS DR	SANTO LN	Residential	15,400.0	Slurry Seal	11/6/2024	72	100	$ 7,700.0
COACH::CPIZANO::2	CALLE PIZANO	COURTE STELLA	CALLE MENDOZA	Residential	15,444.0	Slurry Seal	11/6/2024	72	100	$ 7,722.0
COACH::SHADYLN::8	SHADY LN	GUADALUPANA CT	VIA TEPEYAC	Residential	15,456.0	Slurry Seal	11/6/2024	81	100	$ 7,728.0
COACH::SHADYLN::6	SHADY LN	VIA MISIONERO	DIEGO CT	Residential	15,456.0	Slurry Seal	11/6/2024	84	100	$ 7,728.0
COACH::GUADALUPAN::1	GUADALUPANA CT	CDS	SHADY LN	Residential	15,624.0	Slurry Seal	11/6/2024	72	100	$ 7,812.0
COACH::DIEGOCT::1	DIEGO CT	CDS	SHADY LN	Residential	15,624.0	Slurry Seal	11/6/2024	81	100	$ 7,812.0
COACH::SHADYLN::7	SHADY LN	DIEGO CT	GUADALUPANA CT	Residential	15,960.0	Slurry Seal	11/6/2024	75	100	$ 7,980.0
COACH::PLAZADEORO::1	PLAZA DE ORO AVE	SOL DE LINDA ST	LUNA DE NICOLETA ST	Residential	15,984.0	Slurry Seal	11/6/2024	72	100	$ 7,992.0
COACH::CREAL::2	CAMINO REAL	CAMINO PELICANO	CALLE COLIMA	Residential	16,056.0	Slurry Seal	11/6/2024	78	100	$ 8,028.0
COACH::SEDONACT::1	SEDONA CT	LAS LUNAS AVE	CDS	Residential	16,200.0	Slurry Seal	11/6/2024	75	100	$ 8,100.0
COACH::RIORANCHO::1	RIO RANCHO CT	LAS LUNAS AVE	CDS	Residential	16,200.0	Slurry Seal	11/6/2024	75	100	$ 8,100.0
COACH::MESACT::1	MESA CT	LAS LUNAS AVE	CDS	Residential	16,200.0	Slurry Seal	11/6/2024	78	100	$ 8,100.0
COACH::CBOUGANVIL::3	CALLE BOUGANVILIA	EL SOL ST	CALLE GARDENIA	Residential	16,272.0	Slurry Seal	11/6/2024	72	100	$ 8,136.0
COACH::TOMASLN::2	TOMAS LN	CHRISTINA RD	PEDRO DR	Residential	16,308.0	Slurry Seal	11/6/2024	78	100	$ 8,154.0
COACH::LAPLAYAST::4	LA PLAYA ST	EL MAR AVE	LA COSTA AVE	Residential	16,380.0	Slurry Seal	11/6/2024	78	100	$ 8,190.0
COACH::SANSOLANO::1	SAN SOLANO RD	SAN ASIS DR	SAGRADO DR	Residential	16,400.0	Slurry Seal	11/6/2024	72	100	$ 8,200.0
COACH::AMARIA::2	AVENIDA MARIA	CALLE DANIELLE	CALLE ANABELLA	Residential	16,401.0	Slurry Seal	11/6/2024	72	100	$ 8,200.5
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2024	85	100	$ 8,250.0
COACH::CPINO::1	CALLE PINO	CALLE OLIVO	CALLE AVILA	Residential	16,740.0	Slurry Seal	11/6/2024	84	100	$ 8,370.0
COACH::CNOGAL::1	CALLE NOGAL	CALLE OLIVO	CALLE AVILA	Residential	16,740.0	Slurry Seal	11/6/2024	84	100	$ 8,370.0
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2024	85	100	$ 8,442.0
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.0	Slurry Seal	11/6/2024	74	100	$ 8,455.0
COACH::ELCASTILLO::2	EL CASTILLO RD	CAMINO LAS BRISAS	PUEBLO BONITO AVE	Residential	17,024.0	Slurry Seal	11/6/2024	78	100	$ 8,512.0
COACH::SH-86N::7	SH-86	ALLEY	CAIRO AVE	Arterial	8,560.0	Microsurfacing	11/6/2024	78	100	$ 8,560.0
COACH::PEREZST::3	PEREZ ST	ORTIZ ST	HERNANDEZ ST	Residential	17,240.0	Slurry Seal	11/6/2024	81	100	$ 8,620.0
COACH::MAZATLANDR::8	MAZATLAN DR	MAZATLAN DR PARKING LOOP	MAZATLAN DR PARKING LOOP	Residential	17,280.0	Slurry Seal	11/6/2024	81	100	$ 8,640.0
COACH::ORTIZST::1	ORTIZ ST	PEREZ ST	HERNANDEZ ST	Residential	17,680.0	Slurry Seal	11/6/2024	84	100	$ 8,840.0
COACH::AIRPORTBL::5	AIRPORT BLVD	1395' W/O FILLMORE ST	1215' W/O FILLMORE ST	Collector	8,900.0	Microsurfacing	11/6/2024	81	100	$ 8,900.0
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.0	Slurry Seal	11/6/2024	85	100	$ 9,000.0
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.0	Slurry Seal	11/6/2024	80	100	$ 9,036.0
COACH::52NDAVEE::5	52ND AVE	DOUMA ST	DOUMA CT	Arterial	9,412.0	Microsurfacing	11/6/2024	72	100	$ 9,412.0
COACH::ADELPARQUE::3	AVENIDA DEL PARQUE	COURTE DEL PARQUE	AVENIDA DE ORO	Residential	18,880.0	Slurry Seal	11/6/2024	84	100	$ 9,440.0
COACH::SHADYLN::9	SHADY LN	VIA TEPEYAC	53RD AVE	Residential	19,488.0	Slurry Seal	11/6/2024	78	100	$ 9,744.0
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.0	1.5" Thin Overlay	11/6/2024	56	100	$ 10,080.0
COACH::AGUACALIEN::2	AGUA CALIENTE ST	CAMINO LAS BRISAS	CALLE COLIMA	Residential	20,202.0	Slurry Seal	11/6/2024	72	100	$ 10,101.0
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.0	Microsurfacing	11/6/2024	74	100	$ 10,400.0
COACH::VALLEYRD::6	VALLEY RD	LAS PALMAS ST	OASIS PALM AVE	Collector	10,400.0	Microsurfacing	11/6/2024	78	100	$ 10,400.0
COACH::CVIOLETA::1	CALLE VIOLETA	CALLE CLAVEL	CALLE GARDENIA	Residential	20,856.0	Slurry Seal	11/6/2024	75	100	$ 10,428.0
COACH::CGERANIO::1	CALLE GERANIO	CALLE CLAVEL	CALLE GARDENIA	Residential	20,889.0	Slurry Seal	11/6/2024	72	100	$ 10,444.5
COACH::52NDAVE::43	52ND AVE	5300' E/O FILLMORE ST	CITY LIMITS	Rural	13,515.0	Chip Seal	11/6/2024	75	100	$ 10,812.0
COACH::52NDAVE::24	52ND AVE	LAS PALMAS ST	OASIS PALM AVE	Arterial	11,396.0	Microsurfacing	11/6/2024	72	100	$ 11,396.0
COACH::52NDAVE::25	52ND AVE	OASIS PALM AVE	DOS PALMAS AVE	Arterial	11,440.0	Microsurfacing	11/6/2024	72	100	$ 11,440.0
COACH::52NDAVE::26	52ND AVE	DOS PALMAS AVE	CYPRESS ST	Arterial	11,440.0	Microsurfacing	11/6/2024	78	100	$ 11,440.0
COACH::52NDAVE::27	52ND AVE	CYPRESS ST	SHADY LN	Arterial	11,440.0	Microsurfacing	11/6/2024	78	100	$ 11,440.0
COACH::LAGUNALN::1	LAGUNA LN	CDS	LAGUNA LN	Residential	23,148.0	Slurry Seal	11/6/2024	72	100	$ 11,574.0
COACH::LASCRUCES::2	LAS CRUCES ST	LA LUNAS AVE	49TH AVE	Residential	23,292.0	Slurry Seal	11/6/2024	78	100	$ 11,646.0
COACH::CDIEGO::2	CALLE DIEGO	VIA SANTIAGO	CALLE LEANDRO	Residential	23,664.0	Slurry Seal	11/6/2024	81	100	$ 11,832.0
COACH::CEMPALME::2	CALLE EMPALME	53RD AVE	CALLE ZAMORA	Residential	23,796.0	Slurry Seal	11/6/2024	78	100	$ 11,898.0
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.0	Slurry Seal	11/6/2024	80	100	$ 11,898.0
COACH::CESARCHAVE::1	CESAR CHAVEZ ST	53RD AVE	CALLE ZAMORA	Residential	24,457.0	Slurry Seal	11/6/2024	72	100	$ 12,228.5
COACH::CBAHIAAVE::1	CAMINO BAHIA AVE	PLAYA DEL AMOR ST	CAMINO ROSARITO	Residential	24,480.0	Slurry Seal	11/6/2024	72	100	$ 12,240.0
COACH::FIESTARD::5	FIESTA RD	SIERRA ST	BRIANNE LN	Residential	24,876.0	Slurry Seal	11/6/2024	72	100	$ 12,438.0
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2024	74	100	$ 12,540.0
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.0	Slurry Seal	11/6/2024	85	100	$ 12,580.0
COACH::CTECHA::6	CALLE TECHA	CALLE VERDE	CALLE ROJO	Residential	25,920.0	Slurry Seal	11/6/2024	72	100	$ 12,960.0
COACH::CVERDE::2	CALLE VERDE	CALLE TECHA	CALLE AVILA	Collector	12,960.0	Microsurfacing	11/6/2024	75	100	$ 12,960.0
COACH::CEMPALME::3	CALLE EMPALME	CALLE VERDE	CALLE ROJO	Residential	25,920.0	Slurry Seal	11/6/2024	75	100	$ 12,960.0
COACH::CCAMACHO::4	CALLE CAMACHO	CALLE VERDE	CALLE ROJO	Residential	25,920.0	Slurry Seal	11/6/2024	75	100	$ 12,960.0
COACH::CVERDE::1	CALLE VERDE	CALLE EMPALME	CALLE TECHA	Collector	12,960.0	Microsurfacing	11/6/2024	78	100	$ 12,960.0
COACH::CMAYA::1	CAMINO MAYA	AGUA BLANCA AVE	CALLE COLIMA	Residential	26,136.0	Slurry Seal	11/6/2024	72	100	$ 13,068.0
COACH::LUNADENICO::1	LUNA DE NICOLETA ST	AGUA BLANCA AVE	CALLE COLIMA	Residential	26,136.0	Slurry Seal	11/6/2024	75	100	$ 13,068.0
COACH::CCAMACHO::1	CALLE CAMACHO	D/E	53RD AVE	Residential	26,400.0	Slurry Seal	11/6/2024	81	100	$ 13,200.0
COACH::CAVILA::4	CALLE AVILA	53RD AVE	CALLE ZAMORA	Residential	26,440.0	Slurry Seal	11/6/2024	72	100	$ 13,220.0
COACH::CCAMACHO::3	CALLE CAMACHO	CALLE ZAMORA	CALLE VERDE	Residential	26,440.0	Slurry Seal	11/6/2024	78	100	$ 13,220.0
COACH::CTECHA::1	CALLE TECHA	53RD AVE	CALLE ZAMORA	Residential	26,440.0	Slurry Seal	11/6/2024	78	100	$ 13,220.0
COACH::CCAMACHO::2	CALLE CAMACHO	53RD AVE	CALLE ZAMORA	Residential	26,440.0	Slurry Seal	11/6/2024	81	100	$ 13,220.0
COACH::CORONADOST::1	CORONADO ST	D/E	50TH AVE	Residential	26,840.0	Slurry Seal	11/6/2024	75	100	$ 13,420.0
COACH::KENMOREST::1	KENMORE ST	D/E	50TH AVE	Residential	26,880.0	Slurry Seal	11/6/2024	75	100	$ 13,440.0
COACH::SLATEDR::3	SLATE DR	SCARLET WAY	N SIENNA CIR	Residential	27,432.0	Slurry Seal	11/6/2024	75	100	$ 13,716.0
COACH::CLASBRISAS::1	CAMINO LAS BRISAS	EL CASTILLO RD	AGLIA CALIENTE ST	Residential	27,576.0	Slurry Seal	11/6/2024	75	100	$ 13,788.0
COACH::52NDAVE::21	52ND AVE	MORGAN AVE	NELSON ST	Arterial	13,800.0	Microsurfacing	11/6/2024	75	100	$ 13,800.0
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.0	Slurry Seal	11/6/2024	85	100	$ 14,094.0
COACH::DILLONRD::10	DILLON RD	800' S/O VISTA DEL NORTE	650' S/O VISTA DEL NORTE	Arterial	14,208.0	Microsurfacing	11/6/2024	81	100	$ 14,208.0
COACH::AADOBE::11	AVENIDA ADOBE	CHRISTINA RD	45' N/O CHRISTINA RD	Residential	1,620.0	3" Mill & Overlay	11/6/2024	43.5	100	$ 14,580.0
COACH::AADOBE::9	AVENIDA ADOBE	LINDA AVE	215' S/O CHRISTINA RD	Residential	1,620.0	3" Mill & Overlay	11/6/2024	45	100	$ 14,580.0
COACH::PLAYADELAM::3	PLAYA DEL AMOR ST	PUERTECITOS AVE	LOS MOCHIS AVE	Residential	29,160.0	Slurry Seal	11/6/2024	72	100	$ 14,580.0
COACH::51STAVE::7	51ST AVE	AVENIDA ADOBE	MECCA LANE	Collector	14,756.0	Microsurfacing	11/6/2024	72	100	$ 14,756.0
COACH::GRAPEFRUIT::1	GRAPEFRUIT BLVD	CITY LIMITS	3310' S/O 54TH AVE	Arterial	14,905.0	Microsurfacing	11/6/2024	78	100	$ 14,905.0
COACH::PARKLN::2	PARK LN	SH-86	130' W/O SH-111	Arterial	3,000.0	1.5" Thin Overlay	11/6/2024	57	100	$ 15,000.0
COACH::52NDAVEW::6	52ND AVE	SUNSET DR	CALLE LIMON	Arterial	15,075.0	Microsurfacing	11/6/2024	72	100	$ 15,075.0
COACH::CSOLEDAD::1	CALLE SOLEDAD	VIA MISIONERO	VIA TEPEYAC	Residential	31,248.0	Slurry Seal	11/6/2024	75	100	$ 15,624.0
COACH::52NDAVEE::10	52ND AVE	CALLE TECHA	CALLE TECHA	Arterial	3,146.0	1.5" Thin Overlay	11/6/2024	57	100	$ 15,730.0
COACH::52NDAVEW::14	52ND AVE	CALLE TECHA	CALLE TECHA	Arterial	3,146.0	1.5" Thin Overlay	11/6/2024	63	100	$ 15,730.0
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	Arterial	16,250.0	Microsurfacing	11/6/2024	74	100	$ 16,250.0
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.0	Microsurfacing	11/6/2024	85	100	$ 16,250.0
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.0	Microsurfacing	11/6/2024	85	100	$ 16,250.0
COACH::53RDAVE::13	53RD AVE	ADAM LN	LEE LN	Collector	16,320.0	Microsurfacing	11/6/2024	72	100	$ 16,320.0
COACH::ELGRECOAVE::1	EL GRECO AVE	PLAYA DEL AMOR ST	TAXCO AVE	Residential	32,908.0	Slurry Seal	11/6/2024	75	100	$ 16,454.0
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.0	Slurry Seal	11/6/2024	85	100	$ 16,650.0
COACH::AVENUE49::1	AVENUE 49	CALHOUN ST	GARNET RIDGE ST	Collector	17,784.0	Microsurfacing	11/6/2024	78	100	$ 17,784.0
COACH::AALEENAH::4	AVENIDA ALEENAH	JULIA CT	'160 W/O CALLE FLORENA	Residential	3,564.0	1.5" Thin Overlay	11/6/2024	57	100	$ 17,820.0
COACH::AVENUE53::3	AVENUE 53	CALLE EMELIA	TYLER ST	Collector	18,012.0	Microsurfacing	11/6/2024	72	100	$ 18,012.0
COACH::52NDAVEW::15	52ND AVE	CALLE TECHA	CALLE EMPALME	Arterial	3,640.0	1.5" Thin Overlay	11/6/2024	57	100	$ 18,200.0
COACH::52NDAVEE::4	52ND AVE	FREDERICK ST	DOUMA ST	Arterial	18,278.0	Microsurfacing	11/6/2024	72	100	$ 18,278.0
COACH::NICKLECREK::1	NICKLECREEK DR	COPPERIDGE ST	CINNABAR LN	Residential	36,593.0	Slurry Seal	11/6/2024	75	100	$ 18,296.5
COACH::JULIADR::1	JULIA DR	ANDREA LN	AVENIDA ADOBE	Residential	36,756.0	Slurry Seal	11/6/2024	75	100	$ 18,378.0
COACH::LINDAAVE::1	LINDA AVE	ANDREA LN	AVENIDA ADOBE	Residential	36,756.0	Slurry Seal	11/6/2024	78	100	$ 18,378.0
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.0	Microsurfacing	11/6/2024	85	100	$ 18,750.0
COACH::AIRPORTBL::9	AIRPORT BLVD	FILLMORE ST	CITY LIMITS	Collector	18,760.0	Microsurfacing	11/6/2024	81	100	$ 18,760.0
COACH::CFLORENA::2	CALLE FLORENA	AVENIDA ALEENAH	110' N/O AVENIDA ALEENAH	Residential	3,924.0	1.5" Thin Overlay	11/6/2024	63	100	$ 19,620.0
COACH::CSTELLA::1	CORTE STELLA	CALLE PIZANO	CDS	Residential	3,993.0	1.5" Thin Overlay	11/6/2024	63	100	$ 19,965.0
COACH::SANREYDR::2	SAN REY DR	COLONIA DR	SAN CAPISTRANO DR	Residential	4,000.0	1.5" Thin Overlay	11/6/2024	57	100	$ 20,000.0
COACH::52NDAVEW::9	52ND AVE	SH-86	CESAR CHAVEZ ST	Arterial	2,236.0	3" Mill & Overlay	11/6/2024	45	100	$ 20,124.0
COACH::PROSECCO::2	PROSECCO WAY	RODREJO WAY	PROSECCO WAY	Residential	4,064.0	1.5" Thin Overlay	11/6/2024	60	100	$ 20,320.0
COACH::SALTILLOCR::3	SALTILLO CIR	MAZATLAN DR	JALISCO AVE	Residential	4,108.0	1.5" Thin Overlay	11/6/2024	60	100	$ 20,540.0
COACH::53RDAVE::4	53RD AVE	CALLE TECHA	CALLE AVILA	Collector	21,090.0	Microsurfacing	11/6/2024	72	100	$ 21,090.0
COACH::53RDAVE::3	53RD AVE	CALLE EMPALME	CALLE TECHA	Collector	21,147.0	Microsurfacing	11/6/2024	84	100	$ 21,147.0
COACH::53RDAVE::8	53RD AVE	115' W/O CESAR CHAVEZ ST	CESAR CHAVEZ ST	Collector	4,255.0	1.5" Thin Overlay	11/6/2024	63	100	$ 21,275.0
COACH::51STAVE::9	51ST AVE	SUNCREST ST	SH-86	Collector	21,600.0	Microsurfacing	11/6/2024	72	100	$ 21,600.0
COACH::50THAVEE::16	50TH AVE	CORONADO ST	AVENIDA DE PLATINA	Arterial	4,389.0	1.5" Thin Overlay	11/6/2024	57	100	$ 21,945.0
COACH::50THAVEE::18	50TH AVE	KENMORE ST	SH-86	Arterial	22,209.0	Microsurfacing	11/6/2024	84	100	$ 22,209.0
COACH::DILLONRD::7	DILLON RD	VISTA DEL SUR	1070' S/O VISTA DEL NORTE	Arterial	22,272.0	Microsurfacing	11/6/2024	84	100	$ 22,272.0
COACH::FREDERICK::1	FREDERICK ST	54TH AVE	SCARLET WAY	Collector	22,752.0	Microsurfacing	11/6/2024	72	100	$ 22,752.0
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	Residential	4,608.0	1.5" Thin Overlay	11/6/2024	56	100	$ 23,040.0
COACH::GENOAST::10	GENOA ST	CALLE LIMON	VINETA LN	Residential	4,662.0	1.5" Thin Overlay	11/6/2024	63	100	$ 23,310.0
COACH::JALISCOAVE::1	JALISCO AVE	SALTILLO CIR	JALISCO AVE	Residential	4,676.0	1.5" Thin Overlay	11/6/2024	63	100	$ 23,380.0
COACH::50THAVEW::16	50TH AVE	HORNBLEND ST	CALHOUN ST	Arterial	23,392.0	Microsurfacing	11/6/2024	84	100	$ 23,392.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	Residential	46,980.0	Slurry Seal	11/6/2024	74	100	$ 23,490.0
COACH::SALTILLOCR::4	SALTILLO CIR	MAZATLAN DR	MAZATLAN DR	Residential	4,706.0	1.5" Thin Overlay	11/6/2024	57	100	$ 23,530.0
COACH::52NDAVEW::8	52ND AVE	GENOA ST	SHADY LN	Arterial	23,625.0	Microsurfacing	11/6/2024	81	100	$ 23,625.0
COACH::9THST::2	9TH ST	ORCHARD AVE	VINE AVE	Collector	23,744.0	Microsurfacing	11/6/2024	84	100	$ 23,744.0
COACH::CESARCHAVE::2	CESAR CHAVEZ ST	CALLE VERDE	CALLE ROJO	Collector	23,976.0	Microsurfacing	11/6/2024	72	100	$ 23,976.0
COACH::SH-86N::9	SH-86	CAIRO AVE	DAMASCUS AVE	Arterial	24,160.0	Microsurfacing	11/6/2024	72	100	$ 24,160.0
COACH::SH-86S::10	SH-86	DAMASCUS AVE	CAIRO AVE	Arterial	24,160.0	Microsurfacing	11/6/2024	84	100	$ 24,160.0
COACH::1STST::3	1ST ST	ORCHARD AVE	VINE AVE	Collector	24,225.0	Microsurfacing	11/6/2024	81	100	$ 24,225.0
COACH::PROSECCO::4	PROSECCO WAY	SOLARCE ST	MALVASIA WAY	Residential	4,864.0	1.5" Thin Overlay	11/6/2024	60	100	$ 24,320.0
COACH::GUITRONST::3	GUITRON ST	NIETO ST	AVENIDA DE ORO	Residential	4,930.0	1.5" Thin Overlay	11/6/2024	57	100	$ 24,650.0
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	Residential	49,552.0	Slurry Seal	11/6/2024	74	100	$ 24,776.0
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	Residential	49,704.0	Slurry Seal	11/6/2024	74	100	$ 24,852.0
COACH::LASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	Residential	49,742.0	Slurry Seal	11/6/2024	74	100	$ 24,871.0
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	Residential	49,818.0	Slurry Seal	11/6/2024	74	100	$ 24,909.0
COACH::51STAVE::6	51ST AVE	400' W/O AVENIDA ADOBE	AVENIDA ADOBE	Collector	24,924.0	Microsurfacing	11/6/2024	72	100	$ 24,924.0
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	Residential	49,856.0	Slurry Seal	11/6/2024	80	100	$ 24,928.0
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.0	Slurry Seal	11/6/2024	85	100	$ 24,947.0
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	Residential	49,932.0	Slurry Seal	11/6/2024	74	100	$ 24,966.0
COACH::LAPLAYAST::2	LA PLAYA ST	CALLE COLIMA	140' N/O CALLE COLIMA	Residential	5,040.0	1.5" Thin Overlay	11/6/2024	60	100	$ 25,200.0
COACH::FILLMOREST::4	FILLMORE ST	54TH AVE	CITY LIMIT	Rural	31,680.0	Chip Seal	11/6/2024	78	100	$ 25,344.0
COACH::50THAVE::6	50TH AVE	TYLER ST	50TH AVE	Rural	31,890.0	Chip Seal	11/6/2024	78	100	$ 25,512.0
COACH::SH-86S::8	SH-86	BAGDAD AVE	BAGDAD AVE	Arterial	5,120.0	1.5" Thin Overlay	11/6/2024	63	100	$ 25,600.0
COACH::ADEORO::1	AVENIDA DE ORO	50TH AVE	AVENIDA DEL PARQUE	Collector	25,715.0	Microsurfacing	11/6/2024	84	100	$ 25,715.0
COACH::CNINOS::4	CALLE NINOS	140' W/O CALLE BELLA	CALLE AMIGOS	Residential	5,148.0	1.5" Thin Overlay	11/6/2024	57	100	$ 25,740.0
COACH::CNINOS::3	CALLE NINOS	CALLE BELLA	140' W/O CALLE BELLA	Residential	5,148.0	1.5" Thin Overlay	11/6/2024	63	100	$ 25,740.0
COACH::1STST::4	1ST ST	VINE AVE	SH-111	Collector	25,878.0	Microsurfacing	11/6/2024	78	100	$ 25,878.0
COACH::PINTOLN::1	PINTO LN	EAGLE AVE	120' S/O MCCOY PEAK AVE	Residential	5,184.0	1.5" Thin Overlay	11/6/2024	57	100	$ 25,920.0
COACH::CCORTO::1	CAMINO CORTO	CALLE LIMON	CDS	Residential	5,250.0	1.5" Thin Overlay	11/6/2024	57	100	$ 26,250.0
COACH::52NDAVEW::13	52ND AVE	CALLE AVILA	CALLE TECHA	Arterial	5,278.0	1.5" Thin Overlay	11/6/2024	60	100	$ 26,390.0
COACH::52NDAVEE::11	52ND AVE	CALLE TECHA	CALLE AVILA	Arterial	5,278.0	1.5" Thin Overlay	11/6/2024	60	100	$ 26,390.0
COACH::52NDAVEW::5	52ND AVE	SH-111	SUNSET DR	Arterial	26,415.0	Microsurfacing	11/6/2024	75	100	$ 26,415.0
COACH::AALEENAH::2	AVENIDA ALEENAH	'150 E/O GENOA ST	ADRIANA CT	Residential	5,328.0	1.5" Thin Overlay	11/6/2024	57	100	$ 26,640.0
COACH::SH-86S::9	SH-86	BAGDAD AVE	DAMASCUS AVE	Arterial	26,720.0	Microsurfacing	11/6/2024	81	100	$ 26,720.0
COACH::SH-86N::10	SH-86	DAMASCUS AVE	BAGDAD AVE	Arterial	26,720.0	Microsurfacing	11/6/2024	81	100	$ 26,720.0
COACH::52NDAVEE::32	52ND AVE	SUNSET DR	SH-111	Arterial	27,270.0	Microsurfacing	11/6/2024	75	100	$ 27,270.0
COACH::WESTERFILD::4	WESTERFIELD WAY	140' E/O S CORONADO ST	S CORONADO ST	Residential	5,480.0	1.5" Thin Overlay	11/6/2024	60	100	$ 27,400.0
COACH::SH-86S::7	SH-86	6TH ST	BAGDAD AVE	Arterial	27,760.0	Microsurfacing	11/6/2024	84	100	$ 27,760.0
COACH::SH-86N::12	SH-86	BAGDAD AVE	6TH ST	Arterial	27,760.0	Microsurfacing	11/6/2024	84	100	$ 27,760.0
COACH::PRIMITIVO::2	PRIMITIVO DR	PRIMITIVO DR	PRIMITIVO DR	Residential	3,104.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 27,936.0
COACH::48THAVEE::3	48TH AVE	CALHOUN ST	CHAPARROSA ST	Arterial	28,400.0	Microsurfacing	11/6/2024	75	100	$ 28,400.0
COACH::48THAVEW::4	48TH AVE	CHAPARROSA ST	CALHOUN ST	Arterial	28,400.0	Microsurfacing	11/6/2024	75	100	$ 28,400.0
COACH::AALEENAH::5	AVENIDA ALEENAH	'160 W/O CALLE FLORENA	CALLE FLORENA	Residential	5,760.0	1.5" Thin Overlay	11/6/2024	60	100	$ 28,800.0
COACH::JALISCOAVE::3	JALISCO AVE	JALISCO AVE	JALISCO ACE PARKING LOOP	Residential	5,768.0	1.5" Thin Overlay	11/6/2024	60	100	$ 28,840.0
COACH::CQUINTERRA::2	CALLE QUINTERRA	REDONDO SUR	CORTE SANTOS	Residential	5,883.0	1.5" Thin Overlay	11/6/2024	57	100	$ 29,415.0
COACH::CPERCEBE::1	CORTE PERCEBE	REDONDO SUR	CDS	Residential	5,904.0	1.5" Thin Overlay	11/6/2024	60	100	$ 29,520.0
COACH::MCCOYPEAK::3	MCCOY PEAK AVE	CHAPARROSA ST	SAN JACINTO LN	Residential	5,904.0	1.5" Thin Overlay	11/6/2024	60	100	$ 29,520.0
COACH::MAZATLANDR::1	MAZATLAN DR	SALTILLO CIR	MAZATLAN DR	Residential	5,952.0	1.5" Thin Overlay	11/6/2024	63	100	$ 29,760.0
COACH::ADEORO::2	AVENIDA DE ORO	AVENIDA DEL PARQUE	GUITRON ST	Collector	29,970.0	Microsurfacing	11/6/2024	84	100	$ 29,970.0
COACH::MAZATLANDR::2	MAZATLAN DR	MAZATLAN DR	SALTILLO CIR	Residential	6,048.0	1.5" Thin Overlay	11/6/2024	60	100	$ 30,240.0
COACH::CROJO::4	CALLE ROJO	85' W/O CALLE EMPALME	CALLE EMPALME	Residential	3,400.0	3" Mill & Overlay	11/6/2024	40.5	100	$ 30,600.0
COACH::MARYCT::1	MARY CT	CHRISTINA RD	CDS	Residential	6,176.0	1.5" Thin Overlay	11/6/2024	63	100	$ 30,880.0
COACH::CTECHA::2	CALLE TECHA	CALLE ZAMORA	CALLE LYA	Residential	6,200.0	1.5" Thin Overlay	11/6/2024	57	100	$ 31,000.0
COACH::SABALCT::1	SABAL CT	CDS	PHOENIX AVE	Residential	6,240.0	1.5" Thin Overlay	11/6/2024	57	100	$ 31,200.0
COACH::AHALAWAY::1	AVENIDA HALAWAY	FREDERICK ST	AVENIDA RAZON	Residential	6,264.0	1.5" Thin Overlay	11/6/2024	60	100	$ 31,320.0
COACH::CROJO::3	CALLE ROJO	85' W/O CALLE EMPALME	170' W/O CALLE EMPALME	Residential	3,520.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 31,680.0
COACH::SANREYDR::1	SAN REY DR	CALLE TOLOSA	COLONIA DR	Residential	6,400.0	1.5" Thin Overlay	11/6/2024	60	100	$ 32,000.0
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	Collector	6,400.0	1.5" Thin Overlay	11/6/2024	62	100	$ 32,000.0
COACH::ZUMADR::1	ZUMA DR	LA JOLLA AVE	51ST AVE	Residential	6,408.0	1.5" Thin Overlay	11/6/2024	63	100	$ 32,040.0
COACH::CHIHUAHUA::1	CHIHUAHUA CT	CDS	MAZATLAN DR	Residential	6,608.0	1.5" Thin Overlay	11/6/2024	60	100	$ 33,040.0
COACH::POLKST::2	POLK ST	1330' S/O INDUSTRIAL WAY	610' S/O INDUSTRIAL WAY	Collector	33,166.0	Microsurfacing	11/6/2024	72	100	$ 33,166.0
COACH::AGUACALIEN::1	AGUA CALIENTE ST	AGUA BLANCA AVE	CAMINO LAS BRISAS	Residential	6,660.0	1.5" Thin Overlay	11/6/2024	60	100	$ 33,300.0
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	Residential	6,666.0	1.5" Thin Overlay	11/6/2024	56	100	$ 33,330.0
COACH::SUEZRD::1	SUEZ RD	CAIRO AVE	DAMASCUS AVE	Residential	6,680.0	1.5" Thin Overlay	11/6/2024	60	100	$ 33,400.0
COACH::CPERA::1	CALLE PERA	HILL DR	CDS	Residential	6,688.0	1.5" Thin Overlay	11/6/2024	63	100	$ 33,440.0
COACH::54THAVEE::6	54TH AVE	SHADY LN	TYLER ST	Arterial	33,972.0	Microsurfacing	11/6/2024	75	100	$ 33,972.0
COACH::FREDERICK::11	FREDERICK ST	BAJA WAY	520' N/O BAJA WAY	Collector	34,056.0	Microsurfacing	11/6/2024	81	100	$ 34,056.0
COACH::CGREGORIO::1	CALLE GREGORIO	FREDERICK ST	CALLE DIEGO	Residential	6,916.0	1.5" Thin Overlay	11/6/2024	57	100	$ 34,580.0
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	Arterial	36,300.0	Microsurfacing	11/6/2024	85	100	$ 36,300.0
COACH::MALVASIA::2	MALVASIA WAY	RODREJO WAY	MERCADO CIR	Residential	4,128.0	3" Mill & Overlay	11/6/2024	37.5	100	$ 37,152.0
COACH::BAJAWAY::1	BAJA WAY	CHIAPAS DR	FREDERICK ST	Residential	7,500.0	1.5" Thin Overlay	11/6/2024	57	100	$ 37,500.0
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	Residential	7,704.0	1.5" Thin Overlay	11/6/2024	62	100	$ 38,520.0
COACH::TABASCOCT::1	TABASCO CT	CHIAPAS DR	CDS	Residential	4,284.0	3" Mill & Overlay	11/6/2024	45	100	$ 38,556.0
COACH::50THAVEE::13	50TH AVE	AVENIDA DE ORO	BALBOA ST	Arterial	4,356.0	3" Mill & Overlay	11/6/2024	45	100	$ 39,204.0
COACH::50THAVEW::3	50TH AVE	AVENIDA DE PLATINA	CORONADO ST	Arterial	4,389.0	3" Mill & Overlay	11/6/2024	36	100	$ 39,501.0
COACH::ADELPARQUE::1	AVENIDA DEL PARQUE	PEDRO DR	50TH AVE	Residential	8,000.0	1.5" Thin Overlay	11/6/2024	60	100	$ 40,000.0
COACH::SOLARCEST::3	SOLARCE ST	SOLARCE ST	ALLENDE DR	Residential	4,454.0	3" Mill & Overlay	11/6/2024	45	100	$ 40,086.0
COACH::AFLORABUND::1	AVENIDA FLORABUNDA	CALLE CARMELLO	CALLE ABELIA	Residential	4,464.0	3" Mill & Overlay	11/6/2024	45	100	$ 40,176.0
COACH::AIRPORTBL::3	AIRPORT BLVD	2640' W/O FILLMORE ST	1830' W/O FILLMORE ST	Collector	40,450.0	Microsurfacing	11/6/2024	81	100	$ 40,450.0
COACH::CALHOUNST::11	CALHOUN ST	EL MAR AVE	48TH AVE	Collector	40,610.0	Microsurfacing	11/6/2024	75	100	$ 40,610.0
COACH::ARAZON::5	AVENIDA RAZON	VIA ZAHIDI	CDS	Residential	8,140.0	1.5" Thin Overlay	11/6/2024	60	100	$ 40,700.0
COACH::LAPONDEROS::3	LA PONDEROSA DR	HERNANDEZ ST	CDS	Residential	4,140.0	Slurry Seal	11/6/2025	84	100	$ 2,070.0
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.0	Slurry Seal	11/6/2025	85	100	$ 3,204.0
COACH::CHRISTINA::1	CHRISTINA RD	FREDERICK ST	ANDREA LN	Residential	6,480.0	Slurry Seal	11/6/2025	84	100	$ 3,240.0
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.0	Slurry Seal	11/6/2025	85	100	$ 3,888.0
COACH::HORNBLEND::1	HORNBLEND ST	50TH AVE	JADEROCK RD	Residential	8,436.0	Slurry Seal	11/6/2025	84	100	$ 4,218.0
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2025	85	100	$ 4,320.0
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2025	85	100	$ 4,320.0
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.0	Slurry Seal	11/6/2025	85	100	$ 4,320.0
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.0	Slurry Seal	11/6/2025	85	100	$ 4,458.5
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2025	85	100	$ 4,680.0
COACH::CCARRASCO::2	CALLE CARRASCO	CALLE CHAVEZ	CALLE YSIANO	Residential	9,576.0	Slurry Seal	11/6/2025	84	100	$ 4,788.0
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.0	Slurry Seal	11/6/2025	85	100	$ 5,577.0
COACH::52NDAVEE::12	52ND AVE	CALLE AVILA	CALLE AVILA	Arterial	1,508.0	1.5" Thin Overlay	11/6/2025	63	100	$ 7,540.0
COACH::PASEOLAREDO::2	PASEO LAREDO	CALLE DE VEGA	AVENIDA CORTEZ	Residential	15,280.0	Slurry Seal	11/6/2025	84	100	$ 7,640.0
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2025	85	100	$ 8,442.0
COACH::CEMPALME::1	CALLE EMPALME	BELLISSIMA AVE	53RD AVE	Residential	18,720.0	Slurry Seal	11/6/2025	84	100	$ 9,360.0
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.0	Slurry Seal	11/6/2025	85	100	$ 9,996.0
COACH::AIRPORTBL::7	AIRPORT BLVD	1085' W/O FILLMORE ST	860' W/O FILLMORE ST	Collector	11,300.0	Microsurfacing	11/6/2025	84	100	$ 11,300.0
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.0	1.5" Thin Overlay	11/6/2025	62	100	$ 12,780.0
COACH::VIASANTIAG::1	VIA SANTIAGO	CDS	CALLE DIEGO	Residential	2,556.0	1.5" Thin Overlay	11/6/2025	63	100	$ 12,780.0
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.0	Slurry Seal	11/6/2025	85	100	$ 14,436.0
COACH::54THAVEE::4	54TH AVE	SH-86	CALLE BALDERAS	Arterial	16,605.0	Microsurfacing	11/6/2025	84	100	$ 16,605.0
COACH::CVERDE::5	CALLE VERDE	CESAR CHAVEZ ST	SH-86	Collector	3,400.0	1.5" Thin Overlay	11/6/2025	63	100	$ 17,000.0
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.0	Slurry Seal	11/6/2025	85	100	$ 17,075.5
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.0	Slurry Seal	11/6/2025	85	100	$ 17,537.0
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.0	Slurry Seal	11/6/2025	85	100	$ 17,613.0
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.0	Microsurfacing	11/6/2025	85	100	$ 18,750.0
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.0	Microsurfacing	11/6/2025	85	100	$ 18,900.0
COACH::PARKLN::3	PARK LN	130' W/O SH-111	SH-111	Arterial	3,810.0	1.5" Thin Overlay	11/6/2025	63	100	$ 19,050.0
COACH::CZAMORA::5	CALLE ZAMORA	CESAR CHAVEZ ST	SH-86	Residential	3,852.0	1.5" Thin Overlay	11/6/2025	63	100	$ 19,260.0
COACH::54THAVEE::5	54TH AVE	CALLE BALDERAS	SHADY LN	Arterial	20,985.0	Microsurfacing	11/6/2025	84	100	$ 20,985.0
COACH::AIRPORTBL::4	AIRPORT BLVD	1830' W/O FILLMORE ST	1395' W/O FILLMORE ST	Collector	21,750.0	Microsurfacing	11/6/2025	84	100	$ 21,750.0
COACH::52NDAVEE::29	52ND AVE	SHADY LN	GENOA ST	Arterial	23,625.0	Microsurfacing	11/6/2025	84	100	$ 23,625.0
COACH::ARAZON::4	AVENIDA RAZON	AVENIDA HALAWAY	VIA ZAHIDI	Residential	4,810.0	1.5" Thin Overlay	11/6/2025	63	100	$ 24,050.0
COACH::SALTILLOCR::1	SALTILLO CIR	CHIAPAS DR	JALISCO AVE	Residential	4,992.0	1.5" Thin Overlay	11/6/2025	63	100	$ 24,960.0
COACH::LUNADENICO::3	LUNA DE NICOLETA ST	140' S/O PLAZA DE ORO AVE	PLAZA DE ORO AVE	Residential	5,040.0	1.5" Thin Overlay	11/6/2025	63	100	$ 25,200.0
COACH::BAGDADAVE::2	BAGDAD AVE	LIBNAN ST	MECCA LANE	Residential	5,200.0	1.5" Thin Overlay	11/6/2025	63	100	$ 26,000.0
COACH::52NDAVEE::6	52ND AVE	DOUMA CT	CALLE TORRES ORDUNO	Arterial	5,304.0	1.5" Thin Overlay	11/6/2025	63	100	$ 26,520.0
COACH::SH-86N::15	SH-86	ALLEY	WESTERFIELD WAY	Arterial	26,880.0	Microsurfacing	11/6/2025	84	100	$ 26,880.0
COACH::MARIANAAVE::1	MARIANA AVE	SOL DE LINDA ST	CIELO VICTORIA ST	Residential	5,587.0	1.5" Thin Overlay	11/6/2025	63	100	$ 27,935.0
COACH::BELLISSIMA::1	BELLISSIMA AVE	FREDERICK ST	MODENA TER	Residential	6,160.0	1.5" Thin Overlay	11/6/2025	63	100	$ 30,800.0
COACH::CHIAPASDR::7	CHIAPAS DR	220' S/O SALTILLO CT	SALTILLO CIR	Residential	6,188.0	1.5" Thin Overlay	11/6/2025	63	100	$ 30,940.0
COACH::AMARIA::3	AVENIDA MARIA	CALLE ANABELLA	CALLE ALICIA	Residential	6,270.0	1.5" Thin Overlay	11/6/2025	63	100	$ 31,350.0
COACH::LAJOLLAAVE::4	LA JOLLA AVE	NEWPORT ST	CDS	Residential	3,564.0	3" Mill & Overlay	11/6/2025	45	100	$ 32,076.0
COACH::LASFLORES::3	LAS FLORES AVE	CALLE MENDOZA	CDS	Residential	6,468.0	1.5" Thin Overlay	11/6/2025	63	100	$ 32,340.0
COACH::CLIMON::1	CALLE LIMON	GENOA ST	CAMINO CORTO	Residential	6,570.0	1.5" Thin Overlay	11/6/2025	63	100	$ 32,850.0
COACH::CMOLINO::1	CORTE MOLINO	CDS	REDONDO NORTE	Residential	6,600.0	1.5" Thin Overlay	11/6/2025	63	100	$ 33,000.0
COACH::KENTIACT::1	KENTIA CT	CDS	PHOENIX AVE	Residential	6,656.0	1.5" Thin Overlay	11/6/2025	63	100	$ 33,280.0
COACH::52NDAVEW::11	52ND AVE	CALLE CAMACHO	CALLE AVILA	Arterial	6,916.0	1.5" Thin Overlay	11/6/2025	63	100	$ 34,580.0
COACH::SALTILLOCR::5	SALTILLO CIR	CHIAPAS DR	MAZATLAN DR	Residential	7,254.0	1.5" Thin Overlay	11/6/2025	63	100	$ 36,270.0
COACH::CHIAPASDR::2	CHIAPAS DR	500' N/O 51ST AVE	TABASCO CT	Residential	7,392.0	1.5" Thin Overlay	11/6/2025	63	100	$ 36,960.0
COACH::GARNETRIDG::1	GARNET RIDGE ST	AVENUE 49	SAN MATEO AVE	Residential	7,560.0	1.5" Thin Overlay	11/6/2025	63	100	$ 37,800.0
COACH::50THAVEW::2	50TH AVE	KENMORE ST	AVENIDA DE PLATINA	Arterial	4,323.0	3" Mill & Overlay	11/6/2025	45	100	$ 38,907.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::50THAVEE::14	50TH AVE	BALBOA ST	AVENIDA DE PLATA	Arterial	4,356.0	3" Mill & Overlay	11/6/2025	45	100	$ 39,204.0
COACH::CLAMIRADAW::1	CORTE LA MIRADA	VAN BUREN ST	CALLE EL SOL	Residential	8,029.0	1.5" Thin Overlay	11/6/2025	63	100	$ 40,145.0
COACH::IALISCOAVE::2	JALISCO AVE	SALTILLO CIR	JALISCO AVE	Residential	4,592.0	3" Mill & Overlay	11/6/2025	36	100	$ 41,328.0
COACH::ANERIUM::2	AVENIDA NERIUM	CALLE GLORIOSA	CALLE TECOMARIA	Residential	8,280.0	1.5" Thin Overlay	11/6/2025	60	100	$ 41,400.0
COACH::ADRIANACT::1	ADRIANA CT	AVENIDA ALEENAH	CDS	Residential	8,424.0	1.5" Thin Overlay	11/6/2025	60	100	$ 42,120.0
COACH::CNINOS::2	CALLE NINOS	50' W/O CALLE BONITA	CALLE BELLA	Residential	8,460.0	1.5" Thin Overlay	11/6/2025	60	100	$ 42,300.0
COACH::ELMARAVE::1	EL MAR AVE	LA PLAYA ST	CALHOUN ST	Residential	8,536.0	1.5" Thin Overlay	11/6/2025	57	100	$ 42,680.0
COACH::FREDERICK::13	FREDERICK ST	JALISCO AVE	50TH AVE	Collector	42,966.0	Microsurfacing	11/6/2025	72	100	$ 42,966.0
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	Residential	8,640.0	1.5" Thin Overlay	11/6/2025	56	100	$ 43,200.0
COACH::DILLONRD::12	DILLON RD	450' S/O VISTA DEL NORTE	VISTA DEL NORTE	Arterial	43,488.0	Microsurfacing	11/6/2025	75	100	$ 43,488.0
COACH::ACORTEZ::2	AVENIDA CORTEZ	VIA HERMOSA	VIA DURANGO	Residential	8,748.0	1.5" Thin Overlay	11/6/2025	63	100	$ 43,740.0
COACH::CSANTOS::1	CORTE SANTOS	CDS	CALLE QUINTERRA	Residential	8,748.0	1.5" Thin Overlay	11/6/2025	63	100	$ 43,740.0
COACH::FREDERICK::12	FREDERICK ST	660' S/O CHRISTINA RD	JALISCO AVE	Collector	44,154.0	Microsurfacing	11/6/2025	75	100	$ 44,154.0
COACH::53RDAVE::17	53RD AVE	SHADY LN	SHADY LN	Collector	8,835.0	1.5" Thin Overlay	11/6/2025	57	100	$ 44,175.0
COACH::AEUROPA::1	AVENIDA EUROPA	D\E	CALLE CARMELLO	Residential	4,932.0	3" Mill & Overlay	11/6/2025	45	100	$ 44,388.0
COACH::53RDAVE::7	53RD AVE	CALLE CAMACHO	130' E/O CALLE CAMACHO	Collector	4,995.0	3" Mill & Overlay	11/6/2025	36	100	$ 44,955.0
COACH::WASHINGTONA::5	WASHINGTONIA AVE	RHAPIS CT	PHOENIX AVE	Residential	9,144.0	1.5" Thin Overlay	11/6/2025	57	100	$ 45,720.0
COACH::CHRISTINA::6	CHRISTINA RD	MARY CT	AVENIDA ADOBE	Residential	9,288.0	1.5" Thin Overlay	11/6/2025	57	100	$ 46,440.0
COACH::CATARINACT::1	CATARINA CT	AVENIDA NICOLE	CDS	Residential	9,360.0	1.5" Thin Overlay	11/6/2025	57	100	$ 46,800.0
COACH::CHARLTONPK::1	CHARLTON PEAK ST	SAN MATEO AVE	MECCA HILLS AVE	Residential	9,360.0	1.5" Thin Overlay	11/6/2025	60	100	$ 46,800.0
COACH::MCCOYPEAK::1	MCCOY PEAK AVE	SAN GORGONIO ST	ARICA DR	Residential	9,360.0	1.5" Thin Overlay	11/6/2025	63	100	$ 46,800.0
COACH::REDMOUNT::1	RED MOUNTAIN PL	GRANITE PASS TRL	COXCOMB DR	Residential	9,360.0	1.5" Thin Overlay	11/6/2025	63	100	$ 46,800.0
COACH::BIGBEARPL::1	BIG BEAR PL	CHARLTON PEAK ST	CHIRIACO SUMMIT ST	Residential	9,360.0	1.5" Thin Overlay	11/6/2025	63	100	$ 46,800.0
COACH::BRIANNELN::2	BRIANNE LN	CALENDULA AVE	MAGNOLIA ST	Residential	9,361.0	1.5" Thin Overlay	11/6/2025	57	100	$ 46,805.0
COACH::SIERRAST::2	SIERRA ST	TERA VISTA	MEADOWS LN	Residential	9,398.0	1.5" Thin Overlay	11/6/2025	63	100	$ 46,990.0
COACH::52NDAVEW::19	52ND AVE	DOUMA CT	DOUMA ST	Arterial	9,412.0	1.5" Thin Overlay	11/6/2025	63	100	$ 47,060.0
COACH::BRIANNELN::3	BRIANNE LN	MAGNOLIA ST	FIESTA RD	Residential	9,435.0	1.5" Thin Overlay	11/6/2025	60	100	$ 47,175.0
COACH::SUMMERST::3	SUMMER ST	MAGNOLIA ST	FIESTA RD	Residential	9,435.0	1.5" Thin Overlay	11/6/2025	63	100	$ 47,175.0
COACH::SIERRAST::1	SIERRA ST	FIESTA RD	TERA VISTA	Residential	9,472.0	1.5" Thin Overlay	11/6/2025	60	100	$ 47,360.0
COACH::BRIANNELN::4	BRIANNE LN	FIESTA RD	TERA VISTA	Residential	9,472.0	1.5" Thin Overlay	11/6/2025	63	100	$ 47,360.0
COACH::ESIENNACIR::2	E SIENNA CIR	INDIGO CT	N SIENNA CIR	Residential	9,504.0	1.5" Thin Overlay	11/6/2025	57	100	$ 47,520.0
COACH::REDONDONOR::1	REDONDO NORTE	REDONDO PONIENTE	CORTE MOLINO	Residential	9,540.0	1.5" Thin Overlay	11/6/2025	63	100	$ 47,700.0
COACH::BRIANNELN::5	BRIANNE LN	TERA VISTA	MEADOWS LN	Residential	9,546.0	1.5" Thin Overlay	11/6/2025	60	100	$ 47,730.0
COACH::NSIENNACIR::2	N SIENNA CIR	SLATE DR	SAPPHIRE LN	Residential	9,576.0	1.5" Thin Overlay	11/6/2025	63	100	$ 47,880.0
COACH::ANDREALN::2	ANDREA LN	LINDA AVE	CHRISTINA RD	Residential	9,583.0	1.5" Thin Overlay	11/6/2025	63	100	$ 47,915.0
COACH::SUMMERST::1	SUMMER ST	CALENDULA AVE	MAGNOLIA ST	Residential	9,694.0	1.5" Thin Overlay	11/6/2025	60	100	$ 48,470.0
COACH::WESTERFILD::7	WESTERFIELD WAY	S KENMORE ST	SUNCREST ST	Residential	5,400.0	3" Mill & Overlay	11/6/2025	45	100	$ 48,600.0
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	Residential	9,720.0	1.5" Thin Overlay	11/6/2025	56	100	$ 48,600.0
COACH::CHAPARROSA::6	CHAPARROSA ST	EAGLE AVE	MCCOY PEAK AVE	Residential	9,720.0	1.5" Thin Overlay	11/6/2025	63	100	$ 48,600.0
COACH::CZAMORA::3	CALLE ZAMORA	CALLE AVILA	CALLE CAMACHO	Residential	9,720.0	1.5" Thin Overlay	11/6/2025	63	100	$ 48,600.0
COACH::SANGORGONI::1	SAN GORGONIO ST	EAGLE AVE	MCCOY PEAK AVE	Residential	9,720.0	1.5" Thin Overlay	11/6/2025	63	100	$ 48,600.0
COACH::SOLARCEST::2	SOLARCE ST	PROSECCO WAY	SOLARCE ST	Residential	5,406.0	3" Mill & Overlay	11/6/2025	45	100	$ 48,654.0
COACH::CALHOUNST::9	CALHOUN ST	SAN IGNACIO AVE	EAGLE AVE	Collector	48,794.0	Microsurfacing	11/6/2025	78	100	$ 48,794.0
COACH::WESTERFILD::3	WESTERFIELD WAY	S BALBOA ST	140' E/O S CORONADO ST	Residential	5,480.0	3" Mill & Overlay	11/6/2025	39	100	$ 49,320.0
COACH::WESTERFILD::2	WESTERFIELD WAY	140' W/O S BALBOA ST	S BALBOA ST	Residential	5,480.0	3" Mill & Overlay	11/6/2025	42	100	$ 49,320.0
COACH::WESTERFILD::5	WESTERFIELD WAY	S CORONADO ST	140' E/O S CORONADO ST	Residential	5,480.0	3" Mill & Overlay	11/6/2025	43.5	100	$ 49,320.0
COACH::52NDAVEE::33	52ND AVE	SH-111	TYLER ST	Arterial	49,770.0	Microsurfacing	11/6/2025	78	100	$ 49,770.0
COACH::CNINOS::5	CALLE NINOS	CALLE AMIGOS	CALLE LA PAZ	Residential	9,972.0	1.5" Thin Overlay	11/6/2025	57	100	$ 49,860.0
COACH::PALOMARCT::1	PALOMAR CT	SAN JACINTO LN	CDS	Residential	9,972.0	1.5" Thin Overlay	11/6/2025	63	100	$ 49,860.0
COACH::51STAVE::4	51ST AVE	CHIAPAS DR	FREDERICK ST	Collector	49,968.0	Microsurfacing	11/6/2025	81	100	$ 49,968.0
COACH::REDONDOSUR::3	REDONDO SUR	CORTE PERCEBE	REDONDO ESTE	Residential	10,027.0	1.5" Thin Overlay	11/6/2025	60	100	$ 50,135.0
COACH::CALENDULA::2	CALENDULA AVE	BRIANNE LN	JAZMIN ST	Residential	10,027.0	1.5" Thin Overlay	11/6/2025	63	100	$ 50,135.0
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	Residential	10,080.0	1.5" Thin Overlay	11/6/2025	56	100	$ 50,400.0
COACH::AFLORABUND::3	AVENIDA FLORABUNDA	CALLE TECOMARIA	CALLE ELDARICA	Residential	10,080.0	1.5" Thin Overlay	11/6/2025	57	100	$ 50,400.0
COACH::ANERIUM::4	AVENIDA NERIUM	CALLE ELDARICA	CALLE CANTARA	Residential	10,080.0	1.5" Thin Overlay	11/6/2025	60	100	$ 50,400.0
COACH::ANERIUM::3	AVENIDA NERIUM	CALLE TECOMARIA	CALLE ELDARICA	Residential	10,080.0	1.5" Thin Overlay	11/6/2025	60	100	$ 50,400.0
COACH::TODOSSANTO::1	TODOS SANTOS AVE	EL ARCO ST	EL CASTILLO RD	Residential	10,080.0	1.5" Thin Overlay	11/6/2025	63	100	$ 50,400.0
COACH::CAPITOLAAV::2	CAPITOLA AVE	MONARCH RD	LAGUNA LN	Residential	10,116.0	1.5" Thin Overlay	11/6/2025	60	100	$ 50,580.0
COACH::52NDAVEW::4	52ND AVE	TYLER ST	SH-111	Arterial	50,670.0	Microsurfacing	11/6/2025	72	100	$ 50,670.0
COACH::CFLORENA::1	CALLE FLORENA	AVENIDA RAYLYNN	AVENIDA GRACE	Residential	10,152.0	1.5" Thin Overlay	11/6/2025	57	100	$ 50,760.0
COACH::GENOAST::13	GENOA ST	NAPOLI LN	BAGDAD ST	Residential	10,175.0	1.5" Thin Overlay	11/6/2025	63	100	$ 50,875.0
COACH::CBERNARDO::3	CALLE BERNARDO	CALLE LEANDRO	CDS	Residential	10,234.0	1.5" Thin Overlay	11/6/2025	60	100	$ 51,170.0
COACH::SH-111::14	SH-111	50TH AVE	PARK LN	Arterial	51,250.0	Microsurfacing	11/6/2025	81	100	$ 51,250.0
COACH::GLENDORARG::1	GLENDORA RIDGE AVE	CHIRIACO SUMMIT ST	CHAPARROSA ST	Residential	10,296.0	1.5" Thin Overlay	11/6/2025	60	100	$ 51,480.0
COACH::CCARMELLO::1	CALLE CARMELLO	AVENIDA FLORABUNDA	AVENIDA EUROPA	Residential	10,296.0	1.5" Thin Overlay	11/6/2025	63	100	$ 51,480.0
COACH::CHIAPASDR::4	CHIAPAS DR	500' E/O TABASCO CT	BAJA WAY	Residential	10,332.0	1.5" Thin Overlay	11/6/2025	63	100	$ 51,660.0
COACH::SANMATEOAV::2	SAN MATEO AVE	GARNET RIDGE ST	CHAPARROSA ST	Residential	10,332.0	1.5" Thin Overlay	11/6/2025	63	100	$ 51,660.0
COACH::ANICOLE::1	AVENIDA NICOLE	CALLE ALICIA	CATARINA CT	Residential	10,332.0	1.5" Thin Overlay	11/6/2025	63	100	$ 51,660.0
COACH::COCASO::3	CALLE OCASO	CORTE ESTIVO	CORTE SOLIS	Residential	10,360.0	1.5" Thin Overlay	11/6/2025	57	100	$ 51,800.0
COACH::CELSOL::4	CALLE EL SOL	CORTE SOLEADO	AVENIDA LA LUNA	Residential	10,360.0	1.5" Thin Overlay	11/6/2025	57	100	$ 51,800.0
COACH::CELSOL::2	CALLE EL SOL	CORTE EL ALBA	CORTE LA MORADA	Residential	10,360.0	1.5" Thin Overlay	11/6/2025	63	100	$ 51,800.0
COACH::SH-86S::15	SH-86	CALLE ROJO	CALLE VERDE	Arterial	51,840.0	Microsurfacing	11/6/2025	75	100	$ 51,840.0
COACH::SH-86N::4	SH-86	CALLE VERDE	CALLE ROJO	Arterial	51,840.0	Microsurfacing	11/6/2025	81	100	$ 51,840.0
COACH::50THAVEW::10	50TH AVE	FREDERICK ST	MAZATLAN DR	Arterial	10,373.0	1.5" Thin Overlay	11/6/2025	60	100	$ 51,865.0
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	Collector	10,400.0	1.5" Thin Overlay	11/6/2025	62	100	$ 52,000.0
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	Collector	10,400.0	1.5" Thin Overlay	11/6/2025	62	100	$ 52,000.0
COACH::VIAVALENCI::3	VIA VALENCIA	CALLE MARBELLA	PASEO CORDOVA	Residential	4,851.0	Slurry Seal	11/6/2026	85	100	$ 2,425.5
COACH::NAOMICT::2	NAOMI CT	PEREZ ST	CDS	Residential	6,240.0	Slurry Seal	11/6/2026	84	100	$ 3,120.0
COACH::COLIVO::1	CALLE OLIVO	CALLE NOGAL	CALLE PINO	Residential	10,440.0	Slurry Seal	11/6/2026	84	100	$ 5,220.0
COACH::CGRANADA::1	CALLE GRANADA	PASEO MADRID	PASEO CORDOVA	Residential	10,800.0	Slurry Seal	11/6/2026	85	100	$ 5,400.0
COACH::CNINOS::1	CALLE NINOS	CALLE BONITA	50' W/O CALLE BONITA	Residential	1,548.0	1.5" Thin Overlay	11/6/2026	63	100	$ 7,740.0
COACH::PASEOCORDO::1	PASEO CORDOVA	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2026	85	100	$ 8,250.0
COACH::BAGDADAVE::7	BAGDAD AVE	SH-86	ALLEY	Collector	8,560.0	Microsurfacing	11/6/2026	84	100	$ 8,560.0
COACH::PASEOBARCE::1	PASEO BARCELONA	CALLE SEVILLE	VIA MERIDA	Residential	18,216.0	Slurry Seal	11/6/2026	85	100	$ 9,108.0
COACH::AIRPORTBL::2	AIRPORT BLVD	CITY LIMITS	2640' W/O FILLMORE ST	Collector	9,250.0	Microsurfacing	11/6/2026	84	100	$ 9,250.0
COACH::SH-86N::8	SH-86	CAIRO AVE	CAIRO AVE	Arterial	2,560.0	1.5" Thin Overlay	11/6/2026	63	100	$ 12,800.0
COACH::53RDAVE::9	53RD AVE	CESAR CHAVEZ ST	50' W/O CESAR CHAVEZ ST	Collector	3,145.0	1.5" Thin Overlay	11/6/2026	63	100	$ 15,725.0
COACH::SH-111S::7	SH-111	3RD ST	4TH ST	Arterial	16,250.0	Microsurfacing	11/6/2026	85	100	$ 16,250.0
COACH::CALICIA::2	CALLE ALICIA	MICHELLE DR	AVENIDA MARIA	Residential	3,270.0	1.5" Thin Overlay	11/6/2026	63	100	$ 16,350.0
COACH::SH-111S::11	SH-111	7TH ST	8TH ST	Arterial	18,750.0	Microsurfacing	11/6/2026	85	100	$ 18,750.0
COACH::DILLONRD::1	DILLON RD	CITY LIMITS	HARRISON ST	Arterial	20,064.0	Microsurfacing	11/6/2026	84	100	$ 20,064.0
COACH::TOPAZCT::1	TOPAZ CT	CDS	W SIENNA CIR	Residential	4,070.0	1.5" Thin Overlay	11/6/2026	63	100	$ 20,350.0
COACH::LAPONDEROS::2	LA PONDEROSA DR	NAOMI CT	HERNANDEZ ST	Residential	42,012.0	Slurry Seal	11/6/2026	84	100	$ 21,006.0
COACH::SALTILLOCR::2	SALTILLO CIR	JALISCO AVE	JALISCO AVE	Residential	4,290.0	1.5" Thin Overlay	11/6/2026	63	100	$ 21,450.0
COACH::PINTOLN::2	PINTO LN	120' S/O MCCOY PEAK AVE	MCCOY PEAK AVE	Residential	4,536.0	1.5" Thin Overlay	11/6/2026	63	100	$ 22,680.0
COACH::PIERCEST::1	PIERCE ST	55TH AVE	CITY LIMITS	Rural	31,896.0	Chip Seal	11/6/2026	84	100	$ 25,516.8
COACH::CROSA::4	CALLE ROSA	140' W/O CALLE ESTRELLA	CALLE ESTRELLA	Residential	5,148.0	1.5" Thin Overlay	11/6/2026	63	100	$ 25,740.0
COACH::DILLONRD::8	DILLON RD	1070' S/O VISTA DEL NORTE	800' S/O VISTA DEL NORTE	Arterial	25,824.0	Microsurfacing	11/6/2026	84	100	$ 25,824.0
COACH::IALISCOAVE::5	JALISCO AVE	100' S/O TAXCO WAY	TAXCO WAY	Residential	3,024.0	3" Mill & Overlay	11/6/2026	45	100	$ 27,216.0
COACH::CBOUGANVIL::2	CALLE BOUGANVILIA	CALLE CLAVEL	EL SOL ST	Residential	6,444.0	1.5" Thin Overlay	11/6/2026	63	100	$ 32,220.0
COACH::52NDAVEE::9	52ND AVE	CALLE EMPALME	CALLE TECHA	Arterial	3,640.0	3" Mill & Overlay	11/6/2026	45	100	$ 32,760.0
COACH::54THAVEW::5	54TH AVE	TYLER ST	SHADY LN	Arterial	33,972.0	Microsurfacing	11/6/2026	84	100	$ 33,972.0
COACH::52NDAVEE::13	52ND AVE	CALLE AVILA	CALLE CAMACHO	Arterial	6,916.0	1.5" Thin Overlay	11/6/2026	63	100	$ 34,580.0
COACH::PAVONPALMA::1	PAVON PALMA	50TH AVE	VERA CRUZ	Residential	7,200.0	1.5" Thin Overlay	11/6/2026	63	100	$ 36,000.0
COACH::TODOSSANTO::2	TODOS SANTOS AVE	EL CASTILLO RD	420' W/O CAMINO CORTEZ	Residential	7,272.0	1.5" Thin Overlay	11/6/2026	63	100	$ 36,360.0
COACH::SUNCRESTST::1	SUNCREST ST	51ST AVE	SUNSHINE AVE	Residential	7,520.0	1.5" Thin Overlay	11/6/2026	63	100	$ 37,600.0
COACH::GENOAST::6	GENOA ST	200' S/O AVENIDA MARIA	AVENIDA MARIA	Residential	7,548.0	1.5" Thin Overlay	11/6/2026	63	100	$ 37,740.0
COACH::51STAVE::1	51ST AVE	CITY LIMITS	VAN BUREN ST	Collector	39,360.0	Microsurfacing	11/6/2026	84	100	$ 39,360.0
COACH::CLAMIRADAE::1	CORTE LA MIRADA	CALLE EL SOL	VAN BUREN ST	Residential	8,066.0	1.5" Thin Overlay	11/6/2026	63	100	$ 40,330.0
COACH::CLORETO::1	CORTE LORETO	CALLE QUINTERRA	CDS	Residential	8,172.0	1.5" Thin Overlay	11/6/2026	63	100	$ 40,860.0
COACH::SH-86S::12	SH-86	CAIRO AVE	ALLEY	Arterial	8,560.0	1.5" Thin Overlay	11/6/2026	63	100	$ 42,800.0
COACH::CESTRELLA::1	CALLE ESTRELLA	CDS	CALLE ROSA	Residential	8,712.0	1.5" Thin Overlay	11/6/2026	63	100	$ 43,560.0
COACH::ELSOLST::1	EL SOL ST	CALLE BOUGANVILIA	LAS FLORES AVE	Residential	8,778.0	1.5" Thin Overlay	11/6/2026	63	100	$ 43,890.0
COACH::NSIENNACIR::1	N SIENNA CIR	W SIENNA CIR	SLATE DR	Residential	9,036.0	1.5" Thin Overlay	11/6/2026	63	100	$ 45,180.0
COACH::52NDAVE::18	52ND AVE	JENNIFER WAY	ALLEY	Arterial	5,060.0	3" Mill & Overlay	11/6/2026	45	100	$ 45,540.0
COACH::CDIEGO::3	CALLE DIEGO	CALLE LEANDRO	150' E/O CALLE LEANDRO	Residential	5,202.0	3" Mill & Overlay	11/6/2026	45	100	$ 46,818.0
COACH::ARAZON::1	AVENIDA RAZON	CALLE CATHRON	CORTE YAGER	Residential	9,435.0	1.5" Thin Overlay	11/6/2026	63	100	$ 47,175.0
COACH::AALEENAH::1	AVENIDA ALEENAH	GENOA ST	"150 E/O GENOA ST	Residential	5,364.0	3" Mill & Overlay	11/6/2026	45	100	$ 48,276.0
COACH::CDANIELLE::1	CALLE DANIELLE	AVENIDA MARIA	AVENIDA CRYSTAL	Residential	9,720.0	1.5" Thin Overlay	11/6/2026	63	100	$ 48,600.0
COACH::SCARLETWAY::1	SCARLET WAY	SLATE DR	SAPPHIRE LN	Residential	9,828.0	1.5" Thin Overlay	11/6/2026	63	100	$ 49,140.0
COACH::WESTERFILD::6	WESTERFIELD WAY	140' E/O S CORONADO ST	S KENMORE ST	Residential	5,480.0	3" Mill & Overlay	11/6/2026	45	100	$ 49,320.0
COACH::CTECHA::3	CALLE TECHA	CALLE LYA	CALLE ROBERTO	Residential	10,040.0	1.5" Thin Overlay	11/6/2026	63	100	$ 50,200.0
COACH::PUEBLOBONI::2	PUEBLO BONITO AVE	EL ACRO ST	EL CASTILLO RD	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 50,400.0
COACH::CPELICANO::1	CAMINO PELICANO	CAMINO REAL	LA PLAYA ST	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 50,400.0
COACH::CBONITOAVE::1	CAMINO BONITO AVE	ESTRELLA TOMAS ST	ESTRELLA PEDRO ST	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 50,400.0
COACH::CREAL::1	CAMINO REAL	AGUA BLANCA AVE	CAMINO PELICANO	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 50,400.0
COACH::AGUABLANCA::3	AGUA BLANCA AVE	CAMINO MAYA	CAMINO REAL	Residential	10,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 50,400.0
COACH::ANICOLE::2	AVENIDA NICOLE	CATARINA CT	MICHELLE DR	Residential	10,332.0	1.5" Thin Overlay	11/6/2026	63	100	$ 51,660.0
COACH::FIESTARD::4	FIESTA RD	SUMMER ST	SIERRA ST	Residential	10,332.0	1.5" Thin Overlay	11/6/2026	63	100	$ 51,660.0
COACH::MARIANAAVE::3	MARIANA AVE	LUNA DE NICOLETA ST	ESTRELLA TOMAS ST	Residential	10,360.0	1.5" Thin Overlay	11/6/2026	63	100	$ 51,800.0
COACH::CHARDONNAY::1	CHARDONNAY CIR	MALVASIA WAY	CDS	Residential	5,760.0	3" Mill & Overlay	11/6/2026	45	100	$ 51,840.0
COACH::SANASISDR::4	SAN ASIS DR	SAN CAPISTRANO DR	SAN SOLANO RD	Residential	10,400.0	1.5" Thin Overlay	11/6/2026	60	100	$ 52,000.0
COACH::52NDAVE::41	52ND AVE	2200' W/O FILLMORE ST	FILLMORE ST	Rural	65,400.0	Chip Seal	11/6/2026	81	100	$ 52,320.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::CQUINTERRA::4	CALLE QUINTERRA	CORTE LORETO	REDONDO NORTE	Residential	5,846.0	3" Mill & Overlay	11/6/2026	42	100	$ 52,614.0
COACH::SH-86N::3	SH-86	CALLE ZAMORA	CALLE VERDE	Arterial	52,720.0	Microsurfacing	11/6/2026	75	100	$ 52,720.0
COACH::SH-86S::16	SH-86	CALLE VERDE	CALLE ZAMORA	Arterial	52,720.0	Microsurfacing	11/6/2026	75	100	$ 52,720.0
COACH::SH-86N::2	SH-86	53RD AVE	CALLE ZAMORA	Arterial	52,880.0	Microsurfacing	11/6/2026	72	100	$ 52,880.0
COACH::SH-86S::17	SH-86	CALLE ZAMORA	53RD AVE	Arterial	52,880.0	Microsurfacing	11/6/2026	72	100	$ 52,880.0
COACH::VINETALN::1	VINETA LN	CDS	GENOA ST	Residential	10,590.0	1.5" Thin Overlay	11/6/2026	57	100	$ 52,950.0
COACH::SYLMARLN::1	SYLMAR LN	CDS	GENOA ST	Residential	10,590.0	1.5" Thin Overlay	11/6/2026	57	100	$ 52,950.0
COACH::NILELN::1	NILE LN	CDS	GENOA ST	Residential	10,590.0	1.5" Thin Overlay	11/6/2026	57	100	$ 52,950.0
COACH::SANTOLN::1	SANTO LN	SOLEDAD PL	CALLE TOLOSA	Residential	10,600.0	1.5" Thin Overlay	11/6/2026	60	100	$ 53,000.0
COACH::SANASISDR::2	SAN ASIS DR	SOLEDAD PL	CALLE TOLOSA	Residential	10,600.0	1.5" Thin Overlay	11/6/2026	63	100	$ 53,000.0
COACH::FREDERICK::9	FREDERICK ST	51ST AVE	AVENIDA HALAWAY	Collector	53,064.0	Microsurfacing	11/6/2026	75	100	$ 53,064.0
COACH::CJOYCE::1	CALLE JOYCE	AVENIDA RAYLYNN	AVENIDA GRACE	Residential	10,620.0	1.5" Thin Overlay	11/6/2026	60	100	$ 53,100.0
COACH::PROSECCO::1	PROSECCO WAY	RODREJO WAY	ALLENDE DR	Residential	5,920.0	3" Mill & Overlay	11/6/2026	43.5	100	$ 53,280.0
COACH::48THAVEW::6	48TH AVE	CIELO VICTORIA ST	JACKSON ST	Arterial	53,400.0	Microsurfacing	11/6/2026	72	100	$ 53,400.0
COACH::ASANDOMING::3	AVENIDA SAN DOMINGO	CAMINO EL FARO	CAMINO LORETO	Residential	10,693.0	1.5" Thin Overlay	11/6/2026	57	100	$ 53,465.0
COACH::HIBISCOST::1	HIBISCO ST	PHOENIX AVE	CALENDULA AVE	Residential	5,994.0	3" Mill & Overlay	11/6/2026	43.5	100	$ 53,946.0
COACH::TRIPOLIWAY::2	TRIPOLI WAY	52ND AVE	ARABY AVE	Residential	10,800.0	1.5" Thin Overlay	11/6/2026	57	100	$ 54,000.0
COACH::CLYA::1	CALLE LYA	CALLE TECHA	CDS	Residential	10,860.0	1.5" Thin Overlay	11/6/2026	63	100	$ 54,300.0
COACH::CROSA::5	CALLE ROSA	CALLE ESTRELLA	CALLE LA PAZ	Residential	10,908.0	1.5" Thin Overlay	11/6/2026	63	100	$ 54,540.0
COACH::VERMOUTHDR::1	VERMOUTH DR	D/E	PRIMITIVO DR	Residential	6,080.0	3" Mill & Overlay	11/6/2026	43.5	100	$ 54,720.0
COACH::VALLEYRD::4	VALLEY RD	MORGAN AVE	NELSON ST	Collector	11,040.0	1.5" Thin Overlay	11/6/2026	56	100	$ 55,200.0
COACH::52NDAVE::19	52ND AVE	ALLEY	TRIPOLI WAY	Arterial	6,160.0	3" Mill & Overlay	11/6/2026	45	100	$ 55,440.0
COACH::PINTOLN::3	PINTO LN	MCCOY PEAK AVE	RIMROCK LN	Residential	11,160.0	1.5" Thin Overlay	11/6/2026	57	100	$ 55,800.0
COACH::MAZATLANDR::3	MAZATLAN DR	MAZATLAN DR	MAZATLAN DR PARKING LOOP	Residential	6,208.0	3" Mill & Overlay	11/6/2026	40.5	100	$ 55,872.0
COACH::COLIVIA::1	CORTE OLIVIA	CDS	CALLE MENDOZA	Residential	11,187.0	1.5" Thin Overlay	11/6/2026	63	100	$ 55,935.0
COACH::CHAPARROSA::5	CHAPARROSA ST	COXCOMB DR	EAGLE AVE	Residential	11,196.0	1.5" Thin Overlay	11/6/2026	57	100	$ 55,980.0
COACH::MALVASIA::4	MALVASIA WAY	CHARDONNAY CIR	PROSECCO WAY	Residential	6,240.0	3" Mill & Overlay	11/6/2026	40.5	100	$ 56,160.0
COACH::CAIROAVE::4	CAIRO AVE	CALLE CAMACHO	SUEZ RD	Residential	6,240.0	3" Mill & Overlay	11/6/2026	43.5	100	$ 56,160.0
COACH::BAGDADAVE::5	BAGDAD AVE	CALLE CAMACHO	SUEZ RD	Residential	6,240.0	3" Mill & Overlay	11/6/2026	45	100	$ 56,160.0
COACH::CROBERTO::1	CALLE ROBERTO	CALLE TECHA	CDS	Residential	11,232.0	1.5" Thin Overlay	11/6/2026	57	100	$ 56,160.0
COACH::PALMAVE::8	PALM AVE	ALLEY	1ST ST	Collector	11,280.0	1.5" Thin Overlay	11/6/2026	63	100	$ 56,400.0
COACH::SANJACINTO::2	SAN JACINTO LN	RIMROCK LN	PALOMAR CT	Residential	11,376.0	1.5" Thin Overlay	11/6/2026	60	100	$ 56,880.0
COACH::LASLUNASAV::3	LAS LUNAS AVE	MESA CT	RIO RANCHO CT	Residential	11,376.0	1.5" Thin Overlay	11/6/2026	60	100	$ 56,880.0
COACH::48THAVEE::6	48TH AVE	CITY LIMITS	HARRISON ST	Arterial	57,480.0	Microsurfacing	11/6/2026	84	100	$ 57,480.0
COACH::QUAILMOUNT::1	QUAIL MOUNTAIN TER	SAN GORGONIO ST	ARICA DR	Residential	11,520.0	1.5" Thin Overlay	11/6/2026	57	100	$ 57,600.0
COACH::TIJSSELING::1	TIJSSELING CT	52ND AVE	CDS	Residential	11,592.0	1.5" Thin Overlay	11/6/2026	63	100	$ 57,960.0
COACH::CLAPAZ::2	CALLE LA PAZ	CALLE ROSA	53RD AVE	Residential	6,444.0	3" Mill & Overlay	11/6/2026	43.5	100	$ 57,996.0
COACH::51STAVE::8	51ST AVE	MECCA LANE	SUNCREST ST	Collector	58,140.0	Microsurfacing	11/6/2026	72	100	$ 58,140.0
COACH::MAZATLANDR::9	MAZATLAN DR	MAZATLAN DR PARKING LOOP	50TH AVE	Residential	11,712.0	1.5" Thin Overlay	11/6/2026	63	100	$ 58,560.0
COACH::CSOLEDAD::2	CALLE SOLEDAD	VIA TEPEYAC	53RD AVE	Residential	11,844.0	1.5" Thin Overlay	11/6/2026	63	100	$ 59,220.0
COACH::SOLARCEST::1	SOLARCE ST	PROSECCO WAY	SOLARCE ST	Residential	6,596.0	3" Mill & Overlay	11/6/2026	45	100	$ 59,364.0
COACH::REDONDOEST::2	REDONDO ESTE	AVENIDA VESTAGO	REDONDO NORTE	Residential	11,916.0	1.5" Thin Overlay	11/6/2026	57	100	$ 59,580.0
COACH::LIVISTONA::1	LIVISTONA CT	CDS	PHOENIX AVE	Residential	6,656.0	3" Mill & Overlay	11/6/2026	43.5	100	$ 59,904.0
COACH::SUNCRESTST::2	SUNCREST ST	SUNSHINE AVE	SUNDANCE LN	Residential	12,080.0	1.5" Thin Overlay	11/6/2026	63	100	$ 60,400.0
COACH::REDONDOEST::1	REDONDO ESTE	REDONDO SUR	AVENIDA VESTAGO	Residential	12,168.0	1.5" Thin Overlay	11/6/2026	60	100	$ 60,840.0
COACH::PRIMAVERA::1	PRIMA VERA	MEADOWS LN	49TH AVE	Residential	6,768.0	3" Mill & Overlay	11/6/2026	42	100	$ 60,912.0
COACH::MAHOGANYCT::1	MAHOGANY CT	CDS	SCARLET WAY	Residential	12,348.0	1.5" Thin Overlay	11/6/2026	63	100	$ 61,740.0
COACH::PHOENIXAVE::5	PHOENIX AVE	HIBISCO ST	FREDERICK ST	Residential	6,912.0	3" Mill & Overlay	11/6/2026	43.5	100	$ 62,208.0
COACH::MEADOWSLN::2	MEADOWS LN	PRIMA VERA	BRIANNE LN	Residential	12,469.0	1.5" Thin Overlay	11/6/2026	57	100	$ 62,345.0
COACH::ROMUALDACT::1	ROMUALDA CT	PEREZ ST	CDS	Residential	6,120.0	Slurry Seal	11/6/2027	84	100	$ 3,060.0
COACH::CRUIZ::3	CALLE RUIZ	AVENIDA ZOCALO	AVENIDA REFORMA	Residential	6,444.0	Slurry Seal	11/6/2027	85	100	$ 3,222.0
COACH::MODENATER::1	MODENA TER	BELLISSIMA AVE	SIENO LN	Residential	7,680.0	Slurry Seal	11/6/2027	84	100	$ 3,840.0
COACH::CRUIZ::4	CALLE RUIZ	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	8,640.0	Slurry Seal	11/6/2027	85	100	$ 4,320.0
COACH::ASANDOMING::1	AVENIDA SAN DOMINGO	CAMINO FRONTERA	CAMINO CORAS	Residential	9,879.0	Slurry Seal	11/6/2027	84	100	$ 4,939.5
COACH::SHADYLN::3	SHADY LN	AVENIDA TACUBA	AVENIDA REFORMA	Residential	20,048.0	Slurry Seal	11/6/2027	85	100	$ 10,024.0
COACH::CCEBRINO::1	CALLE CEBRINO	CALLE CHAVEZ	CDS	Residential	24,696.0	Slurry Seal	11/6/2027	84	100	$ 12,348.0
COACH::52NDAVEW::12	52ND AVE	CALLE AVILA	CALLE AVILA	Arterial	1,508.0	3" Mill & Overlay	11/6/2027	45	100	$ 13,572.0
COACH::52NDAVEE::15	52ND AVE	CESAR CHAVEZ ST	SH-86	Arterial	2,236.0	3" Mill & Overlay	11/6/2027	45	100	$ 20,124.0
COACH::HERNANDEZ::3	HERNANDEZ ST	52ND AVE	ORTIZ ST	Residential	43,040.0	Slurry Seal	11/6/2027	84	100	$ 21,520.0
COACH::TYLERST::19	TYLER ST	3485' S/O VISTA DEL SUR	2125' S/O VISTA DEL SUR	Rural	40,740.0	Chip Seal	11/6/2027	84	100	$ 32,592.0
COACH::50THAVEE::17	50TH AVE	AVENIDA DE PLATINA	KENMORE ST	Arterial	4,323.0	3" Mill & Overlay	11/6/2027	45	100	$ 38,907.0
COACH::50THAVEE::15	50TH AVE	AVENIDA DE PLATA	CORONADO ST	Arterial	4,356.0	3" Mill & Overlay	11/6/2027	45	100	$ 39,204.0
COACH::GENOAST::9	GENOA ST	NILE LN	CALLE LIMON	Residential	4,588.0	3" Mill & Overlay	11/6/2027	45	100	$ 41,292.0
COACH::ARAZON::3	AVENIDA RAZON	CORTE GILLAN	AVENIDA HALAWAY	Residential	4,625.0	3" Mill & Overlay	11/6/2027	45	100	$ 41,625.0
COACH::52NDAVEE::8	52ND AVE	CALLE EMPALME	CALLE EMPALME	Arterial	4,784.0	3" Mill & Overlay	11/6/2027	45	100	$ 43,056.0
COACH::52NDAVEW::16	52ND AVE	CALLE EMPALME	CALLE EMPALME	Arterial	4,784.0	3" Mill & Overlay	11/6/2027	45	100	$ 43,056.0
COACH::AADOBE::6	AVENIDA ADOBE	CORTE ALTURIAN	WESTERFIELD WAY	Residential	5,120.0	3" Mill & Overlay	11/6/2027	45	100	$ 46,080.0
COACH::AGRACE::2	AVENIDA GRACE	CALLE FLORENA	150' E/O CALLE FLORENA	Residential	5,400.0	3" Mill & Overlay	11/6/2027	45	100	$ 48,600.0
COACH::AMARONECIR::1	AMARONE CIR	MALVASIA WAY	CDS	Residential	5,760.0	3" Mill & Overlay	11/6/2027	45	100	$ 51,840.0
COACH::MAZATLANDR::5	MAZATLAN DR	CHIHUAHUA CT	TAXCO WAY	Residential	6,240.0	3" Mill & Overlay	11/6/2027	45	100	$ 56,160.0
COACH::PROSECCO::3	PROSECCO WAY	SOLARCE ST	SOLARCE ST	Residential	6,400.0	3" Mill & Overlay	11/6/2027	45	100	$ 57,600.0
COACH::CBONITA::3	CALLE BONITA	CALLE ROSA	53RD AVE	Residential	6,444.0	3" Mill & Overlay	11/6/2027	45	100	$ 57,996.0
COACH::SUEZRD::2	SUEZ RD	DAMASCUS AVE	BAGDAD AVE	Residential	6,680.0	3" Mill & Overlay	11/6/2027	45	100	$ 60,120.0
COACH::MAZATLANDR::4	MAZATLAN DR	MAZATLAN DR PARKING LOOP	CHIHUAHUA CT	Residential	6,912.0	3" Mill & Overlay	11/6/2027	45	100	$ 62,208.0
COACH::BAGDADAVE::11	BAGDAD AVE	DATE AVE	DATE AVE	Collector	12,480.0	1.5" Thin Overlay	11/6/2027	57	100	$ 62,400.0
COACH::MERCADOCIR::1	MERCADO CIR	MALVASIA WAY	CDS	Residential	6,944.0	3" Mill & Overlay	11/6/2027	42	100	$ 62,496.0
COACH::CARDINALDR::1	CARDINAL DR	TYLER ST	PALMERAS CIR	Residential	6,960.0	3" Mill & Overlay	11/6/2027	45	100	$ 62,640.0
COACH::LUNADENICO::4	LUNA DE NICOLETA ST	PLAZA DE ORO AVE	MARIANA AVE	Residential	12,600.0	1.5" Thin Overlay	11/6/2027	60	100	$ 63,000.0
COACH::ESTRELLATO::1	ESTRELLA TOMAS ST	CAMINO BONITO AVE	MARIANA AVE	Residential	12,600.0	1.5" Thin Overlay	11/6/2027	60	100	$ 63,000.0
COACH::DATEAVE::8	DATE AVE	BAGDAD AVE	8TH ST	Collector	7,020.0	3" Mill & Overlay	11/6/2027	39	100	$ 63,180.0
COACH::DOUMAST::2	DOUMA ST	DAMASCUS AVE	BAGDAD AVE	Residential	12,654.0	1.5" Thin Overlay	11/6/2027	57	100	$ 63,270.0
COACH::ALLENDEDR::4	ALLENDE DR	ALLENDE DR	VERMOUTH DR	Residential	3,168.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	9	100	$ 63,360.0
COACH::CEMELIA::1	CALLE EMELIA	AVENUE 53	AVENIDA RAYLYNN	Residential	7,092.0	3" Mill & Overlay	11/6/2027	45	100	$ 63,828.0
COACH::EAGLEAVE::1	EAGLE AVE	CALHOUN ST	SAN GORGONIO ST	Residential	7,144.0	3" Mill & Overlay	11/6/2027	43.5	100	$ 64,296.0
COACH::PALMERASCR::5	PALMERAS CIR	CARDELINA DR	PALMERAS CIR	Residential	7,200.0	3" Mill & Overlay	11/6/2027	40.5	100	$ 64,800.0
COACH::PALMERASCR::3	PALMERAS CIR	MARIPOSA DR	CHUPAROSA DR	Residential	7,200.0	3" Mill & Overlay	11/6/2027	43.5	100	$ 64,800.0
COACH::PALMERASCR::7	PALMERAS CIR	CARDELINA DR	PALMERAS CIR	Residential	7,200.0	3" Mill & Overlay	11/6/2027	43.5	100	$ 64,800.0
COACH::CVERDE::3	CALLE VERDE	CALLE AVILA	CALLE CAMACHO	Collector	12,960.0	1.5" Thin Overlay	11/6/2027	57	100	$ 64,800.0
COACH::CROJO::6	CALLE ROJO	CALLE TECHA	CALLE AVILA	Residential	12,960.0	1.5" Thin Overlay	11/6/2027	60	100	$ 64,800.0
COACH::CROJO::5	CALLE ROJO	CALLE EMPALME	CALLE TECHA	Residential	12,960.0	1.5" Thin Overlay	11/6/2027	60	100	$ 64,800.0
COACH::CAPITOLAAV::1	CAPITOLA AVE	CDS	MONARCH RD	Residential	12,996.0	1.5" Thin Overlay	11/6/2027	60	100	$ 64,980.0
COACH::SH-111::2	SH-111	TYLER ST	52ND AVE	Arterial	65,050.0	Microsurfacing	11/6/2027	72	100	$ 65,050.0
COACH::RIMROCKLN::1	RIMROCK LN	SAN JACINTO LN	PINTO LN	Residential	13,320.0	1.5" Thin Overlay	11/6/2027	57	100	$ 66,600.0
COACH::CZAMORA::2	CALLE ZAMORA	CALLE TECHA	CALLE AVILA	Residential	13,320.0	1.5" Thin Overlay	11/6/2027	60	100	$ 66,600.0
COACH::LASFLORES::2	LAS FLORES AVE	EL SOL ST	CALLE MENDOZA	Residential	13,497.0	1.5" Thin Overlay	11/6/2027	57	100	$ 67,485.0
COACH::MOONLITDR::2	MOONLIT DR	VALLE POSADA	VAN BUREN ST	Residential	7,560.0	3" Mill & Overlay	11/6/2027	42	100	$ 68,040.0
COACH::52NDAVE::20	52ND AVE	TRIPOLI WAY	MORGAN AVE	Arterial	13,700.0	1.5" Thin Overlay	11/6/2027	60	100	$ 68,500.0
COACH::RHAPISCT::1	RHAPIS CT	CDS	WASHINGTONIA AVE	Residential	13,838.0	1.5" Thin Overlay	11/6/2027	57	100	$ 69,190.0
COACH::FIESTARD::2	FIESTA RD	VALLE POSADA	VAN BUREN ST	Residential	7,704.0	3" Mill & Overlay	11/6/2027	42	100	$ 69,336.0
COACH::CROJO::2	CALLE ROJO	170 W/O CALLE EMPALME	260' W/O CALLE EMPALME	Residential	3,520.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	27	100	$ 70,400.0
COACH::CQUINTERRA::1	CALLE QUINTERRA	50TH AVE	REDONDO SUR	Residential	7,844.0	3" Mill & Overlay	11/6/2027	40.5	100	$ 70,596.0
COACH::CESTIVO::1	CORTE ESTIVO	CALLE OCASO	CDS	Residential	14,134.0	1.5" Thin Overlay	11/6/2027	60	100	$ 70,670.0
COACH::LOSCABOSAV::1	LOS CABOS AVE	EL ARCO ST	CAMINO ROSARITO	Residential	14,400.0	1.5" Thin Overlay	11/6/2027	60	100	$ 72,000.0
COACH::CYAGER::1	CORTE YAGER	AVENIDA RAZON	CDS	Residential	14,400.0	1.5" Thin Overlay	11/6/2027	60	100	$ 72,000.0
COACH::CGILLAN::1	CORTE GILLAN	AVENIDA RAZON	CDS	Residential	14,400.0	1.5" Thin Overlay	11/6/2027	60	100	$ 72,000.0
COACH::ALLENDEDR::1	ALLENDE DR	D/E	PROSECCO WAY	Residential	8,032.0	3" Mill & Overlay	11/6/2027	36	100	$ 72,288.0
COACH::CHIAPASDR::6	CHIAPAS DR	220' S/O SALTILLO CT	315' E/O BAJA WAY	Residential	8,064.0	3" Mill & Overlay	11/6/2027	42	100	$ 72,576.0
COACH::SOLARCEST::4	SOLARCE ST	ALLENDE DR	FREDERICK ST	Residential	8,092.0	3" Mill & Overlay	11/6/2027	40.5	100	$ 72,828.0
COACH::WASHINGTONI::1	WASHINGTONIA AVE	50TH AVE	ROYAL CT	Residential	8,100.0	3" Mill & Overlay	11/6/2027	45	100	$ 72,900.0
COACH::52NDAVEW::10	52ND AVE	CESAR CHAVEZ ST	CALLE CAMACHO	Arterial	8,138.0	3" Mill & Overlay	11/6/2027	42	100	$ 73,242.0
COACH::52NDAVEE::14	52ND AVE	CALLE CAMACHO	CESAR CHAVEZ ST	Arterial	8,138.0	3" Mill & Overlay	11/6/2027	43.5	100	$ 73,242.0
COACH::52NDAVEE::31	52ND AVE	CALLE LIMON	SUNSET DR	Arterial	15,075.0	1.5" Thin Overlay	11/6/2027	60	100	$ 75,375.0
COACH::CLEANDRO::1	CALLE LEANDRO	53RD AVE	CALLE DIEGO	Residential	8,440.0	3" Mill & Overlay	11/6/2027	45	100	$ 75,960.0
COACH::GLENDORARG::2	GLENDORA RIDGE AVE	CHAPARROSA ST	CDS	Residential	15,300.0	1.5" Thin Overlay	11/6/2027	57	100	$ 76,500.0
COACH::VIATEPEYAC::1	VIA TEPEYAC	CALLE SOLEDAD	TEPEYAC CT	Residential	15,336.0	1.5" Thin Overlay	11/6/2027	57	100	$ 76,680.0
COACH::CAIROAVE::6	CAIRO AVE	SUEZ RD	SH-86	Residential	8,560.0	3" Mill & Overlay	11/6/2027	45	100	$ 77,040.0
COACH::CAMIGOS::1	CALLE AMIGOS	CALLE LA PAZ	CDS	Residential	15,444.0	1.5" Thin Overlay	11/6/2027	60	100	$ 77,220.0
COACH::OCEANORD::3	OCEANO RD	CATALINA AVE	CDS	Residential	8,604.0	3" Mill & Overlay	11/6/2027	40.5	100	$ 77,436.0
COACH::CLEANDRO::3	CALLE LEANDRO	CALLE BERNARDO	CALLE GREGORIO	Residential	15,560.0	1.5" Thin Overlay	11/6/2027	60	100	$ 77,800.0
COACH::VALENCIALN::1	VALENCIA LN	CDS	CYPRESS ST	Residential	8,820.0	3" Mill & Overlay	11/6/2027	38	100	$ 79,380.0
COACH::LAPLAYAST::1	LA PLAYA ST	CAMINO PELICANO	CALLE COLIMA	Residential	16,056.0	1.5" Thin Overlay	11/6/2027	57	100	$ 80,280.0
COACH::54THAVEW::4	54TH AVE	SH-111	TYLER ST	Arterial	80,525.0	Microsurfacing	11/6/2027	84	100	$ 80,525.0
COACH::CHICHENITZ::2	CHICHEN ITZA RD	IXTAPA AVE	SAN IGNACIO AVE	Residential	8,964.0	3" Mill & Overlay	11/6/2027	43.5	100	$ 80,676.0
COACH::53RDAVE::15	53RD AVE	CALLE LA PAZ	CALLE SOLEDAD	Collector	16,320.0	1.5" Thin Overlay	11/6/2027	57	100	$ 81,600.0
COACH::ALLEY::2	ALLEY	52ND AVE	ALLEY	Alley	16,350.0	1.5" Thin Overlay	11/6/2027	56	100	$ 81,750.0
COACH::WASHINGTON::4	WASHINGTONIA AVE	QUEEN CT	RHAPIS CT	Residential	9,144.0	3" Mill & Overlay	11/6/2027	40.5	100	$ 82,296.0
COACH::WASHINGTON::3	WASHINGTONIA AVE	KING CT	QUEEN CT	Residential	9,144.0	3" Mill & Overlay	11/6/2027	42	100	$ 82,296.0
COACH::WASHINGTON::2	WASHINGTONIA AVE	ROYAL CT	KING CT	Residential	9,144.0	3" Mill & Overlay	11/6/2027	42	100	$ 82,296.0
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.0	Slurry Seal	11/6/2028	85	100	$ 540.0
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.0	Slurry Seal	11/6/2028	85	100	$ 1,008.0
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.0	Slurry Seal	11/6/2028	85	100	$ 1,440.0
COACH::VIAPICON::1	VIA PICON	CALHOUN ST	CALLE FRONTERA	Residential	3,989.8	Slurry Seal	11/6/2028	84	100	$ 1,994.9
COACH::VIAPICON::2	VIA PICON	CALHOUN ST	CALLE FRONTERA	Residential	4,022.8	Slurry Seal	11/6/2028	84	100	$ 2,011.4

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::IASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2028	85	100	$ 2,068.3
COACH::IASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2028	85	100	$ 2,068.3
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.0	Slurry Seal	11/6/2028	85	100	$ 2,160.0
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	Residential	4,608.0	Slurry Seal	11/6/2028	85	100	$ 2,304.0
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.0	Slurry Seal	11/6/2028	85	100	$ 2,340.0
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.0	Slurry Seal	11/6/2028	85	100	$ 2,520.0
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.0	Slurry Seal	11/6/2028	85	100	$ 2,524.5
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.0	Slurry Seal	11/6/2028	85	100	$ 2,556.0
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.0	Slurry Seal	11/6/2028	85	100	$ 2,700.0
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.0	Slurry Seal	11/6/2028	85	100	$ 3,222.0
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.0	Slurry Seal	11/6/2028	85	100	$ 3,222.0
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.0	Slurry Seal	11/6/2028	85	100	$ 3,240.0
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.0	Slurry Seal	11/6/2028	85	100	$ 3,256.0
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.0	Slurry Seal	11/6/2028	85	100	$ 3,258.0
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	Residential	6,666.0	Slurry Seal	11/6/2028	85	100	$ 3,333.0
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.0	Slurry Seal	11/6/2028	85	100	$ 3,344.0
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.0	Slurry Seal	11/6/2028	85	100	$ 3,582.0
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.0	Slurry Seal	11/6/2028	85	100	$ 3,648.0
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	Residential	7,704.0	Slurry Seal	11/6/2028	85	100	$ 3,852.0
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.0	Slurry Seal	11/6/2028	85	100	$ 3,888.0
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2028	85	100	$ 4,320.0
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2028	85	100	$ 4,320.0
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.0	Slurry Seal	11/6/2028	85	100	$ 4,560.0
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.0	Slurry Seal	11/6/2028	85	100	$ 4,590.0
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2028	85	100	$ 4,680.0
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.0	Slurry Seal	11/6/2028	85	100	$ 4,860.0
COACH::CCERVANTES::3	CALLE CERVANTES	CALLE CHAVEZ	CALLE YSIANO	Residential	10,224.0	Slurry Seal	11/6/2028	84	100	$ 5,112.0
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	$ 5,238.0
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	$ 5,238.0
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	$ 5,238.0
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	$ 5,238.0
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.0	Slurry Seal	11/6/2028	85	100	$ 5,328.0
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.0	Slurry Seal	11/6/2028	85	100	$ 5,400.0
COACH::PEREZST::1	PEREZ ST	NAOMI CT	ROMUALDA CT	Residential	11,200.0	Slurry Seal	11/6/2028	84	100	$ 5,600.0
COACH::52NDAVE::28	52ND AVE	SHADY LN	SHADY LN	Arterial	6,248.0	Microsurfacing	11/6/2028	84	100	$ 6,248.0
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	Collector	6,400.0	Microsurfacing	11/6/2028	85	100	$ 6,400.0
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.0	Slurry Seal	11/6/2028	85	100	$ 6,720.0
COACH::HERNANDEZ::1	HERNANDEZ ST	LA PONDEROSA DR	PEREZ ST	Residential	15,920.0	Slurry Seal	11/6/2028	84	100	$ 7,960.0
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2028	85	100	$ 8,250.0
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2028	85	100	$ 8,442.0
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.0	Slurry Seal	11/6/2028	85	100	$ 8,455.0
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.0	Slurry Seal	11/6/2028	85	100	$ 9,000.0
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.0	Slurry Seal	11/6/2028	85	100	$ 9,036.0
COACH::HERNANDEZ::2	HERNANDEZ ST	PEREZ ST	ORTIZ ST	Residential	19,320.0	Slurry Seal	11/6/2028	84	100	$ 9,660.0
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.0	Microsurfacing	11/6/2028	85	100	$ 10,400.0
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.0	Slurry Seal	11/6/2028	85	100	$ 11,898.0
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2028	85	100	$ 12,540.0
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.0	Slurry Seal	11/6/2028	85	100	$ 12,580.0
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.0	Slurry Seal	11/6/2028	85	100	$ 14,094.0
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.0	Microsurfacing	11/6/2028	85	100	$ 16,250.0
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	Arterial	16,250.0	Microsurfacing	11/6/2028	85	100	$ 16,250.0
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.0	Microsurfacing	11/6/2028	85	100	$ 16,250.0
COACH::CALHOUNST::3	CALHOUN ST	CITY LIMITS	VIA PICON	Collector	16,260.0	Microsurfacing	11/6/2028	84	100	$ 16,260.0
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.0	Slurry Seal	11/6/2028	85	100	$ 16,650.0
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.0	Microsurfacing	11/6/2028	85	100	$ 18,750.0
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	Residential	46,980.0	Slurry Seal	11/6/2028	85	100	$ 23,490.0
COACH::CALHOUNST::4	CALHOUN ST	VIA PICON	50TH AVE	Collector	23,820.0	Microsurfacing	11/6/2028	84	100	$ 23,820.0
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	Residential	49,552.0	Slurry Seal	11/6/2028	85	100	$ 24,776.0
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	Residential	49,704.0	Slurry Seal	11/6/2028	85	100	$ 24,852.0
COACH::IASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	Residential	49,742.0	Slurry Seal	11/6/2028	85	100	$ 24,871.0
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	Residential	49,818.0	Slurry Seal	11/6/2028	85	100	$ 24,909.0
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	Residential	49,856.0	Slurry Seal	11/6/2028	85	100	$ 24,928.0
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.0	Slurry Seal	11/6/2028	85	100	$ 24,947.0
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	Residential	49,932.0	Slurry Seal	11/6/2028	85	100	$ 24,966.0
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	Arterial	36,300.0	Microsurfacing	11/6/2028	85	100	$ 36,300.0
COACH::TYLERST::20	TYLER ST	2125' S/O VISTA DEL SUR	VISTA DEL SUR	Rural	63,780.0	Chip Seal	11/6/2028	84	100	$ 51,024.0
COACH::48THAVEW::1	48TH AVE	HARRISON ST	CITY LIMITS	Arterial	57,240.0	Microsurfacing	11/6/2028	84	100	$ 57,240.0
COACH::TYLERST::1	TYLER ST	CITY LIMITS	54TH AVE	Collector	66,700.0	Microsurfacing	11/6/2028	84	100	$ 66,700.0
COACH::44THAVEE::1	44TH AVE	HARRISON ST	DILLON RD	Arterial	72,150.0	Microsurfacing	11/6/2028	84	100	$ 72,150.0
COACH::HILLDR::2	HILL DR	CALLE PERA	SUNSET DR	Residential	8,160.0	3" Mill & Overlay	11/6/2028	45	100	$ 73,440.0
COACH::BAGDADAVE::6	BAGDAD AVE	SUEZ RD	SH-86	Residential	8,560.0	3" Mill & Overlay	11/6/2028	45	100	$ 77,040.0
COACH::MAZATLANDR::7	MAZATLAN DR	MAZATLAN DR PARKING LOOP	MAZATLAN DR PARKING LOOP	Residential	8,640.0	3" Mill & Overlay	11/6/2028	45	100	$ 77,760.0
COACH::VISTADELNO::1	VISTA DEL NORTE	HARRISON ST	CITY LIMITS	Collector	79,500.0	Microsurfacing	11/6/2028	84	100	$ 79,500.0
COACH::CHIAPASDR::5	CHIAPAS DR	315' E/O BAJA WAY	BAJA WAY	Residential	8,848.0	3" Mill & Overlay	11/6/2028	45	100	$ 79,632.0
COACH::54THAVEE::7	54TH AVE	TYLER ST	SH-111	Arterial	80,800.0	Microsurfacing	11/6/2028	84	100	$ 80,800.0
COACH::CHRISTINA::5	CHRISTINA RD	RIGO CT	MARY CT	Residential	9,216.0	3" Mill & Overlay	11/6/2028	42	100	$ 82,944.0
COACH::CZAMORA::4	CALLE ZAMORA	CALLE CAMACHO	CESAR CHAVEZ ST	Residential	9,216.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 82,944.0
COACH::54THAVEW::7	54TH AVE	CALLE BALDERAS	SH-86	Arterial	16,605.0	1.5" Thin Overlay	11/6/2028	57	100	$ 83,025.0
COACH::AVESTAGO::1	AVENIDA VESTAGO	REDONDO ESTE	FREDERICK ST	Residential	9,246.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 83,214.0
COACH::GENOAST::12	GENOA ST	SYLMAR LN	NAPOLI LN	Residential	9,250.0	3" Mill & Overlay	11/6/2028	39	100	$ 83,250.0
COACH::GENOAST::11	GENOA ST	VINETA LN	SYLMAR LN	Residential	9,250.0	3" Mill & Overlay	11/6/2028	45	100	$ 83,250.0
COACH::ARAZON::2	AVENIDA RAZON	CORTE YAGER	CORTE GILLAN	Residential	9,250.0	3" Mill & Overlay	11/6/2028	45	100	$ 83,250.0
COACH::NEWPORTST::2	NEWPORT ST	CAPITOLA AVE	MALIBU AVE	Residential	9,288.0	3" Mill & Overlay	11/6/2028	39	100	$ 83,592.0
COACH::OCEANORD::2	OCEANO RD	MALIBU AVE	CATALINA AVE	Residential	9,288.0	3" Mill & Overlay	11/6/2028	39	100	$ 83,592.0
COACH::NEWPORTST::3	NEWPORT ST	MALIBU AVE	CATALINA AVE	Residential	9,288.0	3" Mill & Overlay	11/6/2028	45	100	$ 83,592.0
COACH::NEWPORTST::1	NEWPORT ST	MIRAMAR CT	CAPITOLA AVE	Residential	9,324.0	3" Mill & Overlay	11/6/2028	40.5	100	$ 83,916.0
COACH::AADOBE::8	AVENIDA ADOBE	JULIA DR	LINDA AVE	Residential	9,324.0	3" Mill & Overlay	11/6/2028	45	100	$ 83,916.0
COACH::LAGUNALN::2	LAGUNA LN	LAGUNA LN	CAPITOLA AVE	Residential	9,324.0	3" Mill & Overlay	11/6/2028	45	100	$ 83,916.0
COACH::CHAPARROSA::4	CHAPARROSA ST	GRANITE PASS TRL	COXCOMB DR	Residential	9,360.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 84,240.0
COACH::CALENDULA::4	CALENDULA AVE	TULIPAN ST	ORQUIDEA LN	Residential	9,361.0	3" Mill & Overlay	11/6/2028	37.5	100	$ 84,249.0
COACH::ALLENDEDR::2	ALLENDE DR	PROSECCO WAY	SOLARCE ST	Residential	9,376.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 84,384.0
COACH::VENENTABLD::1	VENENTA BLVD	CAPITOLA AVE	PISMO CT	Residential	9,396.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 84,564.0
COACH::VENENTABLD::2	VENENTA BLVD	PISMO CT	HUNTINGTON AVE	Residential	9,396.0	3" Mill & Overlay	11/6/2028	45	100	$ 84,564.0
COACH::CHAPARROSA::3	CHAPARROSA ST	GLENDORA RIDGE AVE	GRANITE PASS TRL	Residential	9,432.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 84,888.0
COACH::HILLDR::4	HILL DR	240' W/O SH-111	SH-111	Residential	9,440.0	3" Mill & Overlay	11/6/2028	45	100	$ 84,960.0
COACH::CROJO::9	CALLE ROJO	CESAR CHAVEZ ST	SH-86	Residential	4,280.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	25.5	100	$ 85,600.0
COACH::NIETOST::1	NIETO ST	GUITRON ST	ROMERO ST	Residential	9,520.0	3" Mill & Overlay	11/6/2028	40.5	100	$ 85,680.0
COACH::REYESST::1	REYES ST	GUITRON ST	ROMERO ST	Residential	9,520.0	3" Mill & Overlay	11/6/2028	45	100	$ 85,680.0
COACH::AADOBE::2	AVENIDA ADOBE	CALLE CATHRON	CORTE CINDARELLA	Residential	9,560.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 86,040.0
COACH::FREDERICK::17	FREDERICK ST	PHOENIX AVE	GUITRON ST	Collector	9,636.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 86,724.0
COACH::CHAPARROSA::2	CHAPARROSA ST	MECCA HILLS AVE	GLENDORA RIDGE AVE	Residential	9,648.0	3" Mill & Overlay	11/6/2028	45	100	$ 86,832.0
COACH::50THAVEW::5	50TH AVE	AVENIDA DE PLATA	BALBOA ST	Arterial	4,356.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	25.5	100	$ 87,120.0
COACH::50THAVEW::4	50TH AVE	CORONADO ST	AVENIDA DE PLATA	Arterial	4,356.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	28.5	100	$ 87,120.0
COACH::SANMATEOAV::1	SAN MATEO AVE	CHARLTON PEAK ST	GARNET RIDGE ST	Residential	9,684.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 87,156.0
COACH::PHOENIXAVE::2	PHOENIX AVE	LIVISTONA CT	KENTIA CT	Residential	9,720.0	3" Mill & Overlay	11/6/2028	36	100	$ 87,480.0
COACH::PHOENIXAVE::3	PHOENIX AVE	KENTIA CT	SABAL CT	Residential	9,720.0	3" Mill & Overlay	11/6/2028	37.5	100	$ 87,480.0
COACH::CHAPARROSA::1	CHAPARROSA ST	SAN MATEO AVE	MECCA HILLS AVE	Residential	9,720.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 87,480.0
COACH::VINEAVE::7	VINE AVE	3RD ST	ALLEY	Collector	9,776.0	3" Mill & Overlay	11/6/2028	37.5	100	$ 87,984.0
COACH::VINEAVE::8	VINE AVE	ALLEY	2ND ST	Collector	9,776.0	3" Mill & Overlay	11/6/2028	40.5	100	$ 87,984.0
COACH::VINEAVE::10	VINE AVE	ALLEY	1ST ST	Collector	9,776.0	3" Mill & Overlay	11/6/2028	45	100	$ 87,984.0
COACH::SUMMERST::2	SUMMER ST	FIESTA RD	CDS	Residential	17,686.0	1.5" Thin Overlay	11/6/2028	57	100	$ 88,430.0
COACH::FREDERICK::19	FREDERICK ST	IRIS AVE	150' N/O IRIS AVE	Collector	9,900.0	3" Mill & Overlay	11/6/2028	45	100	$ 89,100.0
COACH::AVERANO::1	AVENIDA VERANO	CALLE OCASO	CALLE PUERTA DEL SOL	Residential	17,908.0	1.5" Thin Overlay	11/6/2028	57	100	$ 89,540.0
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.0	Slurry Seal	11/6/2029	85	100	$ 1,278.0
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.0	Slurry Seal	11/6/2029	85	100	$ 3,204.0
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.0	Slurry Seal	11/6/2029	85	100	$ 3,888.0
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	$ 4,320.0
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	$ 4,320.0
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	$ 4,320.0
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	$ 4,320.0
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.0	Slurry Seal	11/6/2029	85	100	$ 4,458.5
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2029	85	100	$ 4,680.0
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	Residential	9,720.0	Slurry Seal	11/6/2029	85	100	$ 4,860.0
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	Residential	10,080.0	Slurry Seal	11/6/2029	85	100	$ 5,040.0
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.0	Slurry Seal	11/6/2029	85	100	$ 5,577.0
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2029	85	100	$ 8,442.0
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.0	Slurry Seal	11/6/2029	85	100	$ 9,996.0
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	Collector	10,400.0	Microsurfacing	11/6/2029	85	100	$ 10,400.0
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	Collector	10,400.0	Microsurfacing	11/6/2029	85	100	$ 10,400.0
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.0	Slurry Seal	11/6/2029	85	100	$ 14,436.0
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.0	Slurry Seal	11/6/2029	85	100	$ 17,075.5
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.0	Slurry Seal	11/6/2029	85	100	$ 17,537.0
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.0	Slurry Seal	11/6/2029	85	100	$ 17,613.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.0	Microsurfacing	11/6/2029	85	100	$ 18,750.0
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.0	Microsurfacing	11/6/2029	85	100	$ 18,900.0
COACH::MAZATLANDR::6	MAZATLAN DR	MAZATLAN DR PARKING LOOP	TAXCO WAY	Residential	9,952.0	3" Mill & Overlay	11/6/2029	40.5	100	$ 89,568.0
COACH::COZUMELST::1	COZUMEL ST	IXTAPA AVE	TODOS SANTOS AVE	Residential	10,080.0	3" Mill & Overlay	11/6/2029	37.5	100	$ 90,720.0
COACH::IXTAPAAVE::2	IXTAPA AVE	COZUMEL ST	CHICHEN ITZA RD	Residential	10,080.0	3" Mill & Overlay	11/6/2029	37.5	100	$ 90,720.0
COACH::CCORTEZ::2	CAMINO CORTEZ	LOS CABOS AVE	TODOS SANTOS AVE	Residential	10,080.0	3" Mill & Overlay	11/6/2029	39	100	$ 90,720.0
COACH::CCORTEZ::1	CAMINO CORTEZ	PUERTO ESCONDIDO AVE	LOS CABOS AVE	Residential	10,080.0	3" Mill & Overlay	11/6/2029	40.5	100	$ 90,720.0
COACH::ARAYLYNN::1	AVENIDA RAYLYNN	GENOA ST	CALLE JOYCE	Residential	10,080.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 90,720.0
COACH::AFLORABUND::4	AVENIDA FLORABUNDA	CALLE ELDARICA	CALLE CANTARA	Residential	10,080.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 90,720.0
COACH::HILLDR::1	HILL DR	GENOA ST	CALLE PERA	Residential	10,120.0	3" Mill & Overlay	11/6/2029	42	100	$ 91,080.0
COACH::CINNABARLN::4	CINNABAR LN	LAPIS DR	SERPENTINE WAY	Residential	10,175.0	3" Mill & Overlay	11/6/2029	39	100	$ 91,575.0
COACH::COPPERIDGE::4	COPPERIDGE ST	LAPIS DR	ASHLER CT	Residential	10,175.0	3" Mill & Overlay	11/6/2029	40.5	100	$ 91,575.0
COACH::AADOBE::4	AVENIDA ADOBE	CORTE BERNARDO	VIA ZAHIDI	Residential	10,240.0	3" Mill & Overlay	11/6/2029	40.5	100	$ 92,160.0
COACH::CCARMELLO::3	CALLE CARMELLO	AVENIDA CEDRUS	AVENIDA NERIUM	Residential	10,296.0	3" Mill & Overlay	11/6/2029	36	100	$ 92,664.0
COACH::CTECOMARIA::1	CALLE TECOMARIA	AVENIDA FLORABUNDA	AVENIDA EUROPA	Residential	10,296.0	3" Mill & Overlay	11/6/2029	42	100	$ 92,664.0
COACH::CCARMELLO::2	CALLE CARMELLO	AVENIDA EUROPA	AVENIDA CEDRUS	Residential	10,296.0	3" Mill & Overlay	11/6/2029	42	100	$ 92,664.0
COACH::AADOBE::5	AVENIDA ADOBE	VIA ZAHIDI	CORTE ALTURIAN	Residential	10,320.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 92,880.0
COACH::GENOAST::8	GENOA ST	52ND AVE	NILE LN	Residential	10,323.0	3" Mill & Overlay	11/6/2029	39	100	$ 92,907.0
COACH::LAJOLLAAVE::3	LA JOLLA AVE	ZUMA DR	NEWPORT ST	Residential	10,332.0	3" Mill & Overlay	11/6/2029	39	100	$ 92,988.0
COACH::TAXCOWAY::1	TAXCO WAY	MAZATLAN DR	JALISCO AVE	Residential	10,332.0	3" Mill & Overlay	11/6/2029	42	100	$ 92,988.0
COACH::CTECOMARIA::3	CALLE TECOMARIA	AVENIDA CEDRUS	AVENIDA NERIUM	Residential	10,332.0	3" Mill & Overlay	11/6/2029	42	100	$ 92,988.0
COACH::CINNABARLN::1	CINNABAR LN	JADEROCK RD	NICKLECREEK DR	Residential	10,360.0	3" Mill & Overlay	11/6/2029	36	100	$ 93,240.0
COACH::CELSOL::1	CALLE EL SOL	AVENIDA VERANO	CORTE EL ALBA	Residential	10,360.0	3" Mill & Overlay	11/6/2029	39	100	$ 93,240.0
COACH::CINNABARLN::2	CINNABAR LN	NICKLECREEK DR	SHADOWROCK DR	Residential	10,360.0	3" Mill & Overlay	11/6/2029	39	100	$ 93,240.0
COACH::COCASO::4	CALLE OCASO	CORTE SOLIS	AVENIDA LA LUNA	Residential	10,360.0	3" Mill & Overlay	11/6/2029	40.5	100	$ 93,240.0
COACH::CINNABARLN::3	CINNABAR LN	SHADOWROCK DR	LAPIS DR	Residential	10,360.0	3" Mill & Overlay	11/6/2029	40.5	100	$ 93,240.0
COACH::COPPERIDGE::1	COPPERIDGE ST	JADEROCK RD	NICKLECREEK DR	Residential	10,360.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 93,240.0
COACH::CELSOL::3	CALLE EL SOL	CORTE LA MORADA	CORTE SOLEADO	Residential	10,360.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 93,240.0
COACH::50THAVEE::9	50TH AVE	MAZATLAN DR	FREDERICK ST	Arterial	10,373.0	3" Mill & Overlay	11/6/2029	40.5	100	$ 93,357.0
COACH::SANREYDR::3	SAN REY DR	SAN CAPISTRANO DR	SAN SOLANO RD	Residential	10,400.0	3" Mill & Overlay	11/6/2029	39	100	$ 93,600.0
COACH::MIRAMARCT::1	MIRAMAR CT	CDS	NEWPORT ST	Residential	10,404.0	3" Mill & Overlay	11/6/2029	36	100	$ 93,636.0
COACH::1STST::1	1ST ST	SH-86	PALM AVE	Collector	10,431.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 93,879.0
COACH::REDONDONOR::2	REDONDO NORTE	CORTE MOLINO	CALLE QUINTERRA	Residential	10,440.0	3" Mill & Overlay	11/6/2029	45	100	$ 93,960.0
COACH::CEMELIA::3	CALLE EMELIA	AVENIDA GRACE	AVENIDA ALEENAH	Residential	10,476.0	3" Mill & Overlay	11/6/2029	37.5	100	$ 94,284.0
COACH::CAIROAVE::1	CAIRO AVE	CALLE EMPALME	CALLE TECHA	Residential	10,560.0	3" Mill & Overlay	11/6/2029	37.5	100	$ 95,040.0
COACH::NAPOLILN::1	NAPOLI LN	CDS	GENOA ST	Residential	10,590.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 95,310.0
COACH::VIACONCHIL::1	VIA CONCHILLA	AVENIDA DE PLATA	AVENIDA DE PLATINA	Residential	10,600.0	3" Mill & Overlay	11/6/2029	39	100	$ 95,400.0
COACH::REDONDOSUR::2	REDONDO SUR	CALLE QUINTERRA	CORTE PERCEBE	Residential	10,656.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 95,904.0
COACH::SUNCRESTST::4	SUNCREST ST	SUNDOWN LN	SUNRISE AVE	Residential	10,800.0	3" Mill & Overlay	11/6/2029	42	100	$ 97,200.0
COACH::MARIANAAVE::2	MARIANA AVE	CIELO VICTORIA ST	LUNA DE NICOLETA ST	Residential	10,841.0	3" Mill & Overlay	11/6/2029	45	100	$ 97,569.0
COACH::53RDAVE::6	53RD AVE	130' W/O CALLE CAMACHO	CALLE CAMACHO	Collector	4,995.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	22.5	100	$ 99,900.0
COACH::53RDAVE::5	53RD AVE	CALLE AVILA	130' E/O CALLE AVILA	Collector	4,995.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	24	100	$ 99,900.0
COACH::SANJACINTO::1	SAN JACINTO LN	MCCOY PEAK AVE	RIMROCK LN	Residential	11,196.0	3" Mill & Overlay	11/6/2029	45	100	$ 100,764.0
COACH::CBONITA::1	CALLE BONITA	CALLE NINOS	CALLE FELIZ	Residential	11,232.0	3" Mill & Overlay	11/6/2029	37.5	100	$ 101,088.0
COACH::PALMAVE::7	PALM AVE	2ND ST	ALLEY	Collector	11,280.0	3" Mill & Overlay	11/6/2029	37.5	100	$ 101,520.0
COACH::ORCHARDAVE::11	ORCHARD AVE	2ND ST	ALLEY	Collector	11,280.0	3" Mill & Overlay	11/6/2029	37.5	100	$ 101,520.0
COACH::ORCHARDAVE::12	ORCHARD AVE	ALLEY	1ST ST	Collector	11,280.0	3" Mill & Overlay	11/6/2029	42	100	$ 101,520.0
COACH::CLEANDRO::2	CALLE LEANDRO	CALLE DIEGO	CALLE BERNARDO	Residential	11,280.0	3" Mill & Overlay	11/6/2029	42	100	$ 101,520.0
COACH::PALMAVE::5	PALM AVE	3RD ST	ALLEY	Collector	11,280.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 101,520.0
COACH::VIAVALENC::3	VIA VALENCIA	CALLE MARBELLA	PASEO CORDOVA	Residential	4,851.0	Slurry Seal	11/6/2030	85	100	$ 2,425.5
COACH::CGRANADA::1	CALLE GRANADA	PASEO MADRID	PASEO CORDOVA	Residential	10,800.0	Slurry Seal	11/6/2030	85	100	$ 5,400.0
COACH::PASEOCORDO::1	PASEO CORDOVA	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2030	85	100	$ 8,250.0
COACH::PASEOBARCE::1	PASEO BARCELONA	CALLE SEVILLE	VIA MERIDA	Residential	18,216.0	Slurry Seal	11/6/2030	85	100	$ 9,108.0
COACH::VALLEYRD::4	VALLEY RD	MORGAN AVE	NELSON ST	Collector	11,040.0	Microsurfacing	11/6/2030	85	100	$ 11,040.0
COACH::SH-111S::7	SH-111	3RD ST	4TH ST	Arterial	16,250.0	Microsurfacing	11/6/2030	85	100	$ 16,250.0
COACH::SH-111S::11	SH-111	7TH ST	8TH ST	Arterial	18,750.0	Microsurfacing	11/6/2030	85	100	$ 18,750.0
COACH::PALMAVE::6	PALM AVE	ALLEY	2ND ST	Collector	11,280.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 101,520.0
COACH::CTORRESORD::2	CALLE TORRES ORDUNO	DOUMA CT	DAMASCUS AVE	Residential	11,424.0	3" Mill & Overlay	11/6/2030	37.5	100	$ 102,816.0
COACH::ARAYLYNN::3	AVENIDA RAYLYNN	CALLE FLORENA	150' E/O CALLE FLORENA	Residential	5,184.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	15	100	$ 103,680.0
COACH::PISMOCT::1	PISMO CT	CDS	VENENTA BLVD	Residential	11,520.0	3" Mill & Overlay	11/6/2030	39	100	$ 103,680.0
COACH::SUNCRESTST::5	SUNCREST ST	SUNRISE AVE	WESTERFIELD WAY	Residential	11,520.0	3" Mill & Overlay	11/6/2030	40.5	100	$ 103,680.0
COACH::2NDST::5	2ND ST	ALLEY	SH-111	Collector	11,536.0	3" Mill & Overlay	11/6/2030	42	100	$ 103,824.0
COACH::WESTERFILD::1	WESTERFIELD WAY	AVENIDA ADOBE	140' W/O S BALBOA ST	Residential	5,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	25.5	100	$ 104,000.0
COACH::AADOBE::3	AVENIDA ADOBE	CORTE CINDARELLA	CORTE BERNARDO	Residential	11,560.0	3" Mill & Overlay	11/6/2030	37.5	100	$ 104,040.0
COACH::3RDST::5	3RD ST	ALLEY	SH-111	Collector	11,592.0	3" Mill & Overlay	11/6/2030	37.5	100	$ 104,328.0
COACH::TRIPOLIWAY::12	TRIPOLI WAY	7TH ST	6TH ST	Collector	11,700.0	3" Mill & Overlay	11/6/2030	42	100	$ 105,300.0
COACH::DATEAVE::10	DATE AVE	7TH ST	6TH ST	Collector	11,700.0	3" Mill & Overlay	11/6/2030	42	100	$ 105,300.0
COACH::GENOAST::3	GENOA ST	AVENIDA ALEENAH	150' N/O AVENIDA ALEENAH	Residential	5,291.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	13.5	100	$ 105,820.0
COACH::ANERIUM::1	AVENIDA NERIUM	CALLE CARMELLO	CALLE GLORIOSA	Residential	11,880.0	3" Mill & Overlay	11/6/2030	36	100	$ 106,920.0
COACH::AADOBE::7	AVENIDA ADOBE	WESTERFIELD WAY	JULIA DR	Residential	5,364.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	25.5	100	$ 107,280.0
COACH::CVERDE::4	CALLE VERDE	CALLE CAMACHO	CESAR CHAVEZ ST	Collector	12,080.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 108,720.0
COACH::GENOAST::5	GENOA ST	AVENIDA VERONICA	150' N/O AVENIDA VERONICA	Residential	5,476.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	19.5	100	$ 109,520.0
COACH::GENOAST::1	GENOA ST	AVENUE 53	AVENIDA RAYLYNN	Residential	12,358.0	3" Mill & Overlay	11/6/2030	37.5	100	$ 111,222.0
COACH::50THAVEW::9	50TH AVE	PAVON PALMA	FREDERICK ST	Arterial	12,375.0	3" Mill & Overlay	11/6/2030	36	100	$ 111,375.0
COACH::54THAVEE::2	54TH AVE	SLATE DR	FREDERICK ST	Arterial	12,420.0	3" Mill & Overlay	11/6/2030	39	100	$ 111,780.0
COACH::54THAVEW::9	54TH AVE	FREDERICK ST	SLATE DR	Arterial	12,420.0	3" Mill & Overlay	11/6/2030	40.5	100	$ 111,780.0
COACH::BAGDADAVE::10	BAGDAD AVE	TRIPOLI WAY	DATE AVE	Collector	12,440.0	3" Mill & Overlay	11/6/2030	42	100	$ 111,960.0
COACH::HILLDR::3	HILL DR	SUNSET DR	240' W/O SH-111	Residential	5,640.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	9	100	$ 112,800.0
COACH::ESTRELLAPE::1	ESTRELLA PEDRO ST	CAMINO BONITO AVE	LA COSTA AVE	Residential	12,600.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 113,400.0
COACH::TRIPOLIWAY::11	TRIPOLI WAY	BAGDAD AVE	7TH ST	Collector	12,636.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 113,724.0
COACH::AMAPOLALN::1	AMAPOLA LN	CDS	HIBISCO ST	Residential	12,728.0	3" Mill & Overlay	11/6/2030	37.5	100	$ 114,552.0
COACH::HUNTINGTON::3	HUNTINGTON AVE	HERMOSA BLVD	VENENTA BLVD	Residential	12,996.0	3" Mill & Overlay	11/6/2030	37.5	100	$ 116,964.0
COACH::SERPENTINE::1	SERPENTINE WAY	CDS	CINNABAR LN	Residential	13,024.0	3" Mill & Overlay	11/6/2030	37.5	100	$ 117,216.0
COACH::MEADOWSLN::1	MEADOWS LN	SIERRA ST	PRIMA VERA	Residential	13,024.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 117,216.0
COACH::CRESCENTW::1	CRESCENT WAY	MOONLIT DR	FIESTA RD	Residential	13,104.0	3" Mill & Overlay	11/6/2030	42	100	$ 117,936.0
COACH::PALMERASCR::12	PALMERAS CIR	CARDINAL DR	PALMERAS CIR	Residential	5,976.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	7.5	100	$ 119,520.0
COACH::CATALINAAV::1	CATALINA AVE	NEWPORT ST	OCEANO RD	Residential	13,428.0	3" Mill & Overlay	11/6/2030	36	100	$ 120,852.0
COACH::CCAMACHO::6	CALLE CAMACHO	52ND AVE	CAIRO AVE	Residential	13,480.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 121,320.0
COACH::DATEAVE::9	DATE AVE	8TH ST	7TH ST	Collector	13,536.0	3" Mill & Overlay	11/6/2030	40.5	100	$ 121,824.0
COACH::CLEANDRO::4	CALLE LEANDRO	CALLE GREGORIO	CDS	Residential	13,560.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 122,040.0
COACH::GUITRONST::1	GUITRON ST	FREDERICK ST	REYES ST	Residential	6,154.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	22.5	100	$ 123,080.0
COACH::MCCOYPEAK::4	MCCOY PEAK AVE	SAN JACINTO LN	PINTO LN	Residential	13,680.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 123,120.0
COACH::2NDST::4	2ND ST	VINE AVE	ALLEY	Collector	13,720.0	3" Mill & Overlay	11/6/2030	37.5	100	$ 123,480.0
COACH::3RDST::4	3RD ST	VINE AVE	ALLEY	Collector	13,720.0	3" Mill & Overlay	11/6/2030	39	100	$ 123,480.0
COACH::MALVASIA::1	MALVASIA WAY	PRIMITIVO DR	RODREJO WAY	Residential	6,176.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	21	100	$ 123,520.0
COACH::50THAVEE::11	50TH AVE	PAVON PALMA	AVENIDA DEL PARQUE	Arterial	13,728.0	3" Mill & Overlay	11/6/2030	40.5	100	$ 123,552.0
COACH::CRUIZ::3	CALLE RUIZ	AVENIDA ZOCALO	AVENIDA REFORMA	Residential	6,444.0	Slurry Seal	11/6/2031	85	100	$ 3,222.0
COACH::CRUIZ::4	CALLE RUIZ	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	8,640.0	Slurry Seal	11/6/2031	85	100	$ 4,320.0
COACH::VALENCIALN::1	VALENCIA LN	CDS	CYPRESS ST	Residential	8,820.0	Slurry Seal	11/6/2031	85	100	$ 4,410.0
COACH::AIRPORTBL::6	AIRPORT BLVD	1215' W/O FILLMORE ST	1085' W/O FILLMORE ST	Collector	6,500.0	Microsurfacing	11/6/2031	84	100	$ 6,500.0
COACH::SHADYLN::3	SHADY LN	AVENIDA TACUBA	AVENIDA REFORMA	Residential	20,048.0	Slurry Seal	11/6/2031	85	100	$ 10,024.0
COACH::CABELIA::1	CALLE ABELIA	49TH AVE	AVENIDA FLORABUNDA	Residential	13,920.0	3" Mill & Overlay	11/6/2031	40.5	100	$ 125,280.0
COACH::CHIAPASDR::3	CHIAPAS DR	TABASCO CT	500' E/O TABASCO CT	Residential	13,972.0	3" Mill & Overlay	11/6/2031	43.5	100	$ 125,748.0
COACH::ORCHARDAVE::2	ORCHARD AVE	ORCHARD AVE	9TH ST	Collector	14,040.0	3" Mill & Overlay	11/6/2031	42	100	$ 126,360.0
COACH::AALEENAH::3	AVENIDA ALEENAH	ADRIANA CT	JULIA CT	Residential	14,112.0	3" Mill & Overlay	11/6/2031	40.5	100	$ 127,008.0
COACH::CSOLIS::1	CORTE SOLIS	CALLE OCASO	CDS	Residential	14,134.0	3" Mill & Overlay	11/6/2031	40.5	100	$ 127,206.0
COACH::MICHELLEDR::3	MICHELLE DR	AVENIDA NICOLE	MICHELLE DR	Residential	14,148.0	3" Mill & Overlay	11/6/2031	43.5	100	$ 127,332.0
COACH::PARKINGLOT::1	PARKING LOT	200' S/O BAGDAD AVE	BAGDAD AVE	Residential	6,368.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	18	100	$ 127,360.0
COACH::ACRYSTAL::1	AVENIDA CRYSTAL	CALLE DANIELLE	CALLE ANABELLA	Residential	14,160.0	3" Mill & Overlay	11/6/2031	43.5	100	$ 127,440.0
COACH::CHIAPASDR::1	CHIAPAS DR	51ST AVE	500' N/O 51ST AVE	Residential	14,168.0	3" Mill & Overlay	11/6/2031	39	100	$ 127,512.0
COACH::CTOLOSA::1	CALLE TOLOSA	SAN ASIS DR	SANTO LN	Residential	14,245.0	3" Mill & Overlay	11/6/2031	43.5	100	$ 128,205.0
COACH::CBERNO::1	CORTE BERNARDO	CDS	AVENIDA ADOBE	Residential	14,400.0	3" Mill & Overlay	11/6/2031	43.5	100	$ 129,600.0
COACH::VALLEPOSAD::1	VALLE POSADA	MOONLIT DR	FIESTA RD	Residential	14,508.0	3" Mill & Overlay	11/6/2031	36	100	$ 130,572.0
COACH::JAZMINST::2	JAZMIN ST	MARGARITA AVE	49TH AVE	Residential	6,549.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	13.5	100	$ 130,980.0
COACH::PHOENIXCT::1	PHOENIX CT	CDS	WASHINGTONIA AVE	Residential	14,616.0	3" Mill & Overlay	11/6/2031	42	100	$ 131,544.0
COACH::AADOBE::12	AVENIDA ADOBE	45' N/O CHRISTINA RD	PEDRO DR	Residential	14,688.0	3" Mill & Overlay	11/6/2031	43.5	100	$ 132,192.0
COACH::DOUMACT::2	DOUMA CT	DOUMA CT	CALLE TORRES ORDUNO	Residential	6,660.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	16.5	100	$ 133,200.0
COACH::53RDAVE::20	53RD AVE	CALLE LEANDRO	CALLE EMPALME	Collector	15,109.5	3" Mill & Overlay	11/6/2031	39	100	$ 135,985.5
COACH::52NDAVE::40	52ND AVE	2700' W/O FILLMORE ST	2200' W/O FILLMORE ST	Rural	15,150.0	3" Mill & Overlay	11/6/2031	39	100	$ 136,350.0
COACH::CMENDOZA::3	CALLE MENDOZA	LAS FLORES AVE	CALLE PIZANO	Residential	15,279.0	3" Mill & Overlay	11/6/2031	43.5	100	$ 137,511.0
COACH::SANMATEOAV::3	SAN MATEO AVE	CHAPARROSA ST	CDS	Residential	15,300.0	3" Mill & Overlay	11/6/2031	40.5	100	$ 137,700.0
COACH::MECCAHILLS::2	MECCA HILLS AVE	CHAPARROSA ST	CDS	Residential	15,300.0	3" Mill & Overlay	11/6/2031	40.5	100	$ 137,700.0
COACH::52NDAVE::16	52ND AVE	SH-86	TUSSELING CT	Arterial	15,312.0	3" Mill & Overlay	11/6/2031	42	100	$ 137,808.0
COACH::CSOLEADO::1	CORTE SOLEADO	CDS	CALLE EL SOL	Residential	15,355.0	3" Mill & Overlay	11/6/2031	40.5	100	$ 138,195.0
COACH::CLAMORADA::1	CORTE LA MORADA	CDS	CALLE EL SOL	Residential	15,392.0	3" Mill & Overlay	11/6/2031	40.5	100	$ 138,528.0
COACH::CBELLA::1	CALLE BELLA	CALLE NINOS	CDS	Residential	15,444.0	3" Mill & Overlay	11/6/2031	36	100	$ 138,996.0
COACH::MICHELLEDR::1	MICHELLE DR	CALLE ALICIA	MICHELLE DR	Residential	15,444.0	3" Mill & Overlay	11/6/2031	39	100	$ 138,996.0
COACH::GRANITEPAS::1	GRANITE PASS TRL	CHAPARROSA ST	RED MOUNTAIN PL	Residential	15,444.0	3" Mill & Overlay	11/6/2031	42	100	$ 138,996.0
COACH::IRISAVE::1	IRIS AVE	HIBISCO ST	FREDERICK ST	Residential	6,956.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	25.5	100	$ 139,120.0
COACH::AADOBE::1	AVENIDA ADOBE	51ST AVE	CALLE CATHRON	Residential	6,960.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	0	100	$ 139,200.0
COACH::COXCOMBDR::1	COXCOMB DR	CHAPARROSA ST	RED MOUNTAIN PL	Residential	15,624.0	3" Mill & Overlay	11/6/2031	40.5	100	$ 140,616.0
COACH::50THAVEW::17	50TH AVE	CALHOUN ST	COLONIA DR	Arterial	15,630.0	3" Mill & Overlay	11/6/2031	40.5	100	$ 140,670.0
COACH::JALISCOAVE::6	JALISCO AVE	TAXCO WAY	FREDERICK ST	Residential	7,056.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	27	100	$ 141,120.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::SHADOWROCK::1	SHADOWROCK DR	CALHOUN ST	COPPERIDGE ST	Residential	7,067.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	28.5	100	$ 141,340.0
COACH::CALHOUNST::12	CALHOUN ST	CITY LIMITS	VIA PICON	Collector	15,816.6	3" Mill & Overlay	11/6/2031	39	100	$ 142,349.4
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.0	Slurry Seal	11/6/2032	85	100	$ 540.0
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.0	Slurry Seal	11/6/2032	85	100	$ 1,008.0
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.0	Slurry Seal	11/6/2032	85	100	$ 1,440.0
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2032	85	100	$ 2,068.3
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2032	85	100	$ 2,068.3
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.0	Slurry Seal	11/6/2032	85	100	$ 2,160.0
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	Residential	4,608.0	Slurry Seal	11/6/2032	85	100	$ 2,304.0
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.0	Slurry Seal	11/6/2032	85	100	$ 2,340.0
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.0	Slurry Seal	11/6/2032	85	100	$ 2,520.0
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.0	Slurry Seal	11/6/2032	85	100	$ 2,524.5
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.0	Slurry Seal	11/6/2032	85	100	$ 2,556.0
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.0	Slurry Seal	11/6/2032	85	100	$ 2,700.0
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.0	Slurry Seal	11/6/2032	85	100	$ 3,222.0
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.0	Slurry Seal	11/6/2032	85	100	$ 3,222.0
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.0	Slurry Seal	11/6/2032	85	100	$ 3,240.0
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.0	Slurry Seal	11/6/2032	85	100	$ 3,256.0
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.0	Slurry Seal	11/6/2032	85	100	$ 3,258.0
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	Residential	6,666.0	Slurry Seal	11/6/2032	85	100	$ 3,333.0
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.0	Slurry Seal	11/6/2032	85	100	$ 3,344.0
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.0	Slurry Seal	11/6/2032	85	100	$ 3,582.0
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.0	Slurry Seal	11/6/2032	85	100	$ 3,648.0
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	Residential	7,704.0	Slurry Seal	11/6/2032	85	100	$ 3,852.0
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.0	Slurry Seal	11/6/2032	85	100	$ 3,888.0
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2032	85	100	$ 4,320.0
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2032	85	100	$ 4,320.0
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.0	Slurry Seal	11/6/2032	85	100	$ 4,560.0
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.0	Slurry Seal	11/6/2032	85	100	$ 4,590.0
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2032	85	100	$ 4,680.0
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.0	Slurry Seal	11/6/2032	85	100	$ 4,860.0
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	$ 5,238.0
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	$ 5,238.0
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	$ 5,238.0
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	$ 5,238.0
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.0	Slurry Seal	11/6/2032	85	100	$ 5,328.0
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.0	Slurry Seal	11/6/2032	85	100	$ 5,400.0
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	Collector	6,400.0	Microsurfacing	11/6/2032	85	100	$ 6,400.0
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.0	Slurry Seal	11/6/2032	85	100	$ 6,720.0
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2032	85	100	$ 8,250.0
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2032	85	100	$ 8,442.0
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.0	Slurry Seal	11/6/2032	85	100	$ 8,455.0
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.0	Slurry Seal	11/6/2032	85	100	$ 9,000.0
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.0	Slurry Seal	11/6/2032	85	100	$ 9,036.0
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.0	Microsurfacing	11/6/2032	85	100	$ 10,400.0
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.0	Slurry Seal	11/6/2032	85	100	$ 11,898.0
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.0	Slurry Seal	11/6/2032	85	100	$ 12,540.0
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.0	Slurry Seal	11/6/2032	85	100	$ 12,580.0
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.0	Slurry Seal	11/6/2032	85	100	$ 14,094.0
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	Arterial	16,250.0	Microsurfacing	11/6/2032	85	100	$ 16,250.0
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.0	Microsurfacing	11/6/2032	85	100	$ 16,250.0
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.0	Microsurfacing	11/6/2032	85	100	$ 16,250.0
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.0	Slurry Seal	11/6/2032	85	100	$ 16,650.0
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.0	Microsurfacing	11/6/2032	85	100	$ 18,750.0
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	Residential	46,980.0	Slurry Seal	11/6/2032	85	100	$ 23,490.0
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	Residential	49,552.0	Slurry Seal	11/6/2032	85	100	$ 24,776.0
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	Residential	49,704.0	Slurry Seal	11/6/2032	85	100	$ 24,852.0
COACH::LASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	Residential	49,742.0	Slurry Seal	11/6/2032	85	100	$ 24,871.0
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	Residential	49,818.0	Slurry Seal	11/6/2032	85	100	$ 24,909.0
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	Residential	49,856.0	Slurry Seal	11/6/2032	85	100	$ 24,928.0
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.0	Slurry Seal	11/6/2032	85	100	$ 24,947.0
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	Residential	49,932.0	Slurry Seal	11/6/2032	85	100	$ 24,966.0
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	Arterial	36,300.0	Microsurfacing	11/6/2032	85	100	$ 36,300.0
COACH::BELLISSIMA::3	BELLISSIMA AVE	BELLA ROMA LN	CALLE EMPALME	Residential	15,890.0	3" Mill & Overlay	11/6/2032	36	100	$ 143,010.0
COACH::REDONDOSUR::1	REDONDO SUR	REDONDO PONIENTE	CALLE QUINTERRA	Residential	15,910.0	3" Mill & Overlay	11/6/2032	40.5	100	$ 143,190.0
COACH::PALMERASCR::4	PALMERAS CIR	CHUPAROSA DR	CARDELINA DR	Residential	7,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	3	100	$ 144,000.0
COACH::PALMERASCR::10	PALMERAS CIR	PALOMA DR	MARIPOSA DR	Residential	7,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	4.5	100	$ 144,000.0
COACH::PALMERASCR::9	PALMERAS CIR	MARIPOSA DR	CHUPAROSA DR	Residential	7,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	21	100	$ 144,000.0
COACH::PALMERASCR::8	PALMERAS CIR	CHUPAROSA DR	CARDELINA DR	Residential	7,200.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	22.5	100	$ 144,000.0
COACH::CALICIA::1	CALLE ALICIA	AVENIDA NICOLE	MICHELLE DR	Residential	16,050.0	3" Mill & Overlay	11/6/2032	40.5	100	$ 144,450.0
COACH::VIAMERIDA::1	VIA MERIDA	VAN BUREN ST	PASEO BARCELONA	Residential	7,272.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	8	100	$ 145,440.0
COACH::FIESTARD::3	FIESTA RD	VAN BUREN ST	SUMMER ST	Residential	7,380.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	27	100	$ 147,600.0
COACH::PALMERASCR::6	PALMERAS CIR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.0	3" Mill & Overlay	11/6/2032	39	100	$ 148,392.0
COACH::EAGLEAVE::2	EAGLE AVE	SAN GORGONIO ST	CHAPARROSA ST	Residential	16,530.0	3" Mill & Overlay	11/6/2032	43.5	100	$ 148,770.0
COACH::NSIENNACIR::3	N SIENNA CIR	SAPPHIRE LN	E SIENNA CIR	Residential	16,560.0	3" Mill & Overlay	11/6/2032	43.5	100	$ 149,040.0
COACH::AMARIA::1	AVENIDA MARIA	GENOA ST	CALLE DANIELLE	Residential	16,797.0	3" Mill & Overlay	11/6/2032	39	100	$ 151,173.0
COACH::53RDAVE::12	53RD AVE	CALLE BONITA	ADAM LN	Collector	16,920.0	3" Mill & Overlay	11/6/2032	42	100	$ 152,280.0
COACH::AADOBE::10	AVENIDA ADOBE	215' S/O CHRISTINA RD	CHRISTINA RD	Residential	7,704.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	19.5	100	$ 154,080.0
COACH::CLIMON::2	CALLE LIMON	52ND AVE	CAMINO CORTO	Residential	17,430.0	3" Mill & Overlay	11/6/2032	39	100	$ 156,870.0
COACH::AVERANO::2	AVENIDA VERANO	CALLE PUERTA DEL SOL	CALLE EL SOL	Residential	17,575.0	3" Mill & Overlay	11/6/2032	36	100	$ 158,175.0
COACH::52NDAVE::1	52ND AVE	CALHOUN ST	VAN BUREN ST	Arterial	158,220.0	Microsurfacing	11/6/2032	72	100	$ 158,220.0
COACH::JADEROCKRD::2	JADEROCK RD	HORNBLEND ST	CINNABAR LN	Residential	17,760.0	3" Mill & Overlay	11/6/2032	37.5	100	$ 159,840.0
COACH::BAGDADAVE::8	BAGDAD AVE	PARKING LOT ENTRANCE	TRIPOLI WAY	Collector	17,760.0	3" Mill & Overlay	11/6/2032	42	100	$ 159,840.0
COACH::50THAVEW::7	50TH AVE	AVENIDA DE ORO	AVENIDA DEL PARQUE	Arterial	17,853.0	3" Mill & Overlay	11/6/2032	36	100	$ 160,677.0
COACH::50THAVEE::12	50TH AVE	AVENIDA DEL PARQUE	AVENIDA DE ORO	Arterial	17,853.0	3" Mill & Overlay	11/6/2032	39	100	$ 160,677.0
COACH::SUNDOWNLN::1	SUNDOWN LN	CDS	SUNCREST ST	Residential	18,000.0	3" Mill & Overlay	11/6/2032	37.5	100	$ 162,000.0
COACH::PARKLN::1	PARK LN	CITY LIMITS	SH-86	Collector	18,030.0	3" Mill & Overlay	11/6/2032	37.5	100	$ 162,270.0
COACH::LOSCABOSAV::2	LOS CABOS AVE	CAMINO ROSARITO	CAMINO CORTEZ	Residential	18,036.0	3" Mill & Overlay	11/6/2032	45	100	$ 162,324.0
COACH::FREDERICK::18	FREDERICK ST	GUITRON ST	IRIS AVE	Collector	18,216.0	3" Mill & Overlay	11/6/2032	36	100	$ 163,944.0
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.0	Slurry Seal	11/6/2033	85	100	$ 1,278.0
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.0	Slurry Seal	11/6/2033	85	100	$ 3,204.0
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.0	Slurry Seal	11/6/2033	85	100	$ 3,888.0
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	$ 4,320.0
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	$ 4,320.0
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	$ 4,320.0
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	$ 4,320.0
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.0	Slurry Seal	11/6/2033	85	100	$ 4,458.5
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2033	85	100	$ 4,680.0
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	Residential	9,720.0	Slurry Seal	11/6/2033	85	100	$ 4,860.0
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	Residential	10,080.0	Slurry Seal	11/6/2033	85	100	$ 5,040.0
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.0	Slurry Seal	11/6/2033	85	100	$ 5,577.0
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2033	85	100	$ 8,442.0
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.0	Slurry Seal	11/6/2033	85	100	$ 9,996.0
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	Collector	10,400.0	Microsurfacing	11/6/2033	85	100	$ 10,400.0
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	Collector	10,400.0	Microsurfacing	11/6/2033	85	100	$ 10,400.0
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.0	Slurry Seal	11/6/2033	85	100	$ 14,436.0
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.0	Slurry Seal	11/6/2033	85	100	$ 17,075.5
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.0	Slurry Seal	11/6/2033	85	100	$ 17,537.0
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.0	Slurry Seal	11/6/2033	85	100	$ 17,613.0
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.0	Microsurfacing	11/6/2033	85	100	$ 18,750.0
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.0	Microsurfacing	11/6/2033	85	100	$ 18,900.0
COACH::52NDAVEW::20	52ND AVE	DOUMA ST	FREDERICK ST	Arterial	18,278.0	3" Mill & Overlay	11/6/2033	43.5	100	$ 164,502.0
COACH::CPIZANO::1	CALLE PIZANO	TYLER ST	COURTE STELLA	Residential	18,480.0	3" Mill & Overlay	11/6/2033	43.5	100	$ 166,320.0
COACH::CMENDOZA::2	CALLE MENDOZA	CORTE OLIVIA	CALLE PIZANO	Residential	18,480.0	3" Mill & Overlay	11/6/2033	43.5	100	$ 166,320.0
COACH::PRIMITIVO::1	PRIMITIVO DR	PRIMITIVO DR	MALVASIA WAY	Residential	8,544.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	16.5	100	$ 170,880.0
COACH::CBERNARDO::1	CALLE BERNARDO	CDS	CALLE LEANDRO	Residential	19,006.0	3" Mill & Overlay	11/6/2033	40.5	100	$ 171,054.0
COACH::JALISCOAVE::4	JALISCO AVE	JALISCO ACE PARKING LOOP	100' S/O TAXCO WAY	Residential	19,404.0	3" Mill & Overlay	11/6/2033	39	100	$ 174,636.0
COACH::CBOUGANVIL::1	CALLE BOUGANVILIA	TYLER ST	CALLE CLAVEL	Residential	19,476.0	3" Mill & Overlay	11/6/2033	39	100	$ 175,284.0
COACH::ORCHARDAVE::6	ORCHARD AVE	6TH ST	5TH ST	Collector	19,500.0	3" Mill & Overlay	11/6/2033	36	100	$ 175,500.0
COACH::PALMAVE::4	PALM AVE	4TH ST	3RD ST	Collector	19,500.0	3" Mill & Overlay	11/6/2033	36	100	$ 175,500.0
COACH::ORCHARDAVE::8	ORCHARD AVE	4TH ST	3RD ST	Collector	19,500.0	3" Mill & Overlay	11/6/2033	42	100	$ 175,500.0
COACH::DAMASCUSAV::1	DAMASCUS AVE	DOUMA ST	CALLE TORRES ORDUNO	Residential	19,532.0	3" Mill & Overlay	11/6/2033	37.5	100	$ 175,788.0
COACH::53RDAVE::14	53RD AVE	LEE LN	CALLE LA PAZ	Collector	19,620.0	3" Mill & Overlay	11/6/2033	42	100	$ 176,580.0
COACH::CDIEGO::1	CALLE DIEGO	VIA SANTIAGO	CALLE GREGORIO	Residential	19,788.0	3" Mill & Overlay	11/6/2033	43.5	100	$ 178,092.0
COACH::SUNDANCELN::1	SUNDANCE LN	CDS	SUNCREST ST	Residential	19,920.0	3" Mill & Overlay	11/6/2033	39	100	$ 179,280.0
COACH::MECCAHILLS::1	MECCA HILLS AVE	CHARLTON PEAK ST	CHAPARROSA ST	Residential	20,052.0	3" Mill & Overlay	11/6/2033	40.5	100	$ 180,468.0
COACH::CAPITOLAAV::4	CAPITOLA AVE	VENENTA BLVD	NEWPORT ST	Residential	9,072.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	18	100	$ 181,440.0
COACH::7THST::1	7TH ST	TRIPOLI WAY	DATE AVE	Collector	20,496.0	3" Mill & Overlay	11/6/2033	36	100	$ 184,464.0
COACH::EAGLEAVE::3	EAGLE AVE	CHAPARROSA ST	PINTO LN	Residential	20,558.0	3" Mill & Overlay	11/6/2033	39	100	$ 185,022.0
COACH::SBALBOAST::1	S BALBOA ST	WESTERFIELD WAY	CDS	Residential	20,628.0	3" Mill & Overlay	11/6/2033	43.5	100	$ 185,652.0
COACH::HIBISCOST::4	HIBISCO ST	AMAPOLA LN	ROSAL AVE	Residential	9,287.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	22.5	100	$ 185,740.0
COACH::CEMELIA::2	CALLE EMELIA	AVENIDA RAYLYNN	AVENIDA GRACE	Residential	9,288.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	22.5	100	$ 185,760.0
COACH::OCEANORD::1	OCEANO RD	CAPITOLA AVE	MALIBU AVE	Residential	9,288.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	27	100	$ 185,760.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::SKENMOREST::1	S KENMORE ST	WESTERFIELD WAY	CDS	Residential	20,664.0	3" Mill & Overlay	11/6/2033	42	100	$ 185,976.0
COACH::SCORONADO::1	S CORONADO ST	WESTERFIELD WAY	CDS	Residential	20,664.0	3" Mill & Overlay	11/6/2033	42	100	$ 185,976.0
COACH::50THAVEE::8	50TH AVE	CALLE QUINTERRA	MAZATLAN DR	Arterial	20,746.0	3" Mill & Overlay	11/6/2033	36	100	$ 186,714.0

APPENDIX E:
WORK PLAN FOR SCENARIO 5: REACH PCI OF 70

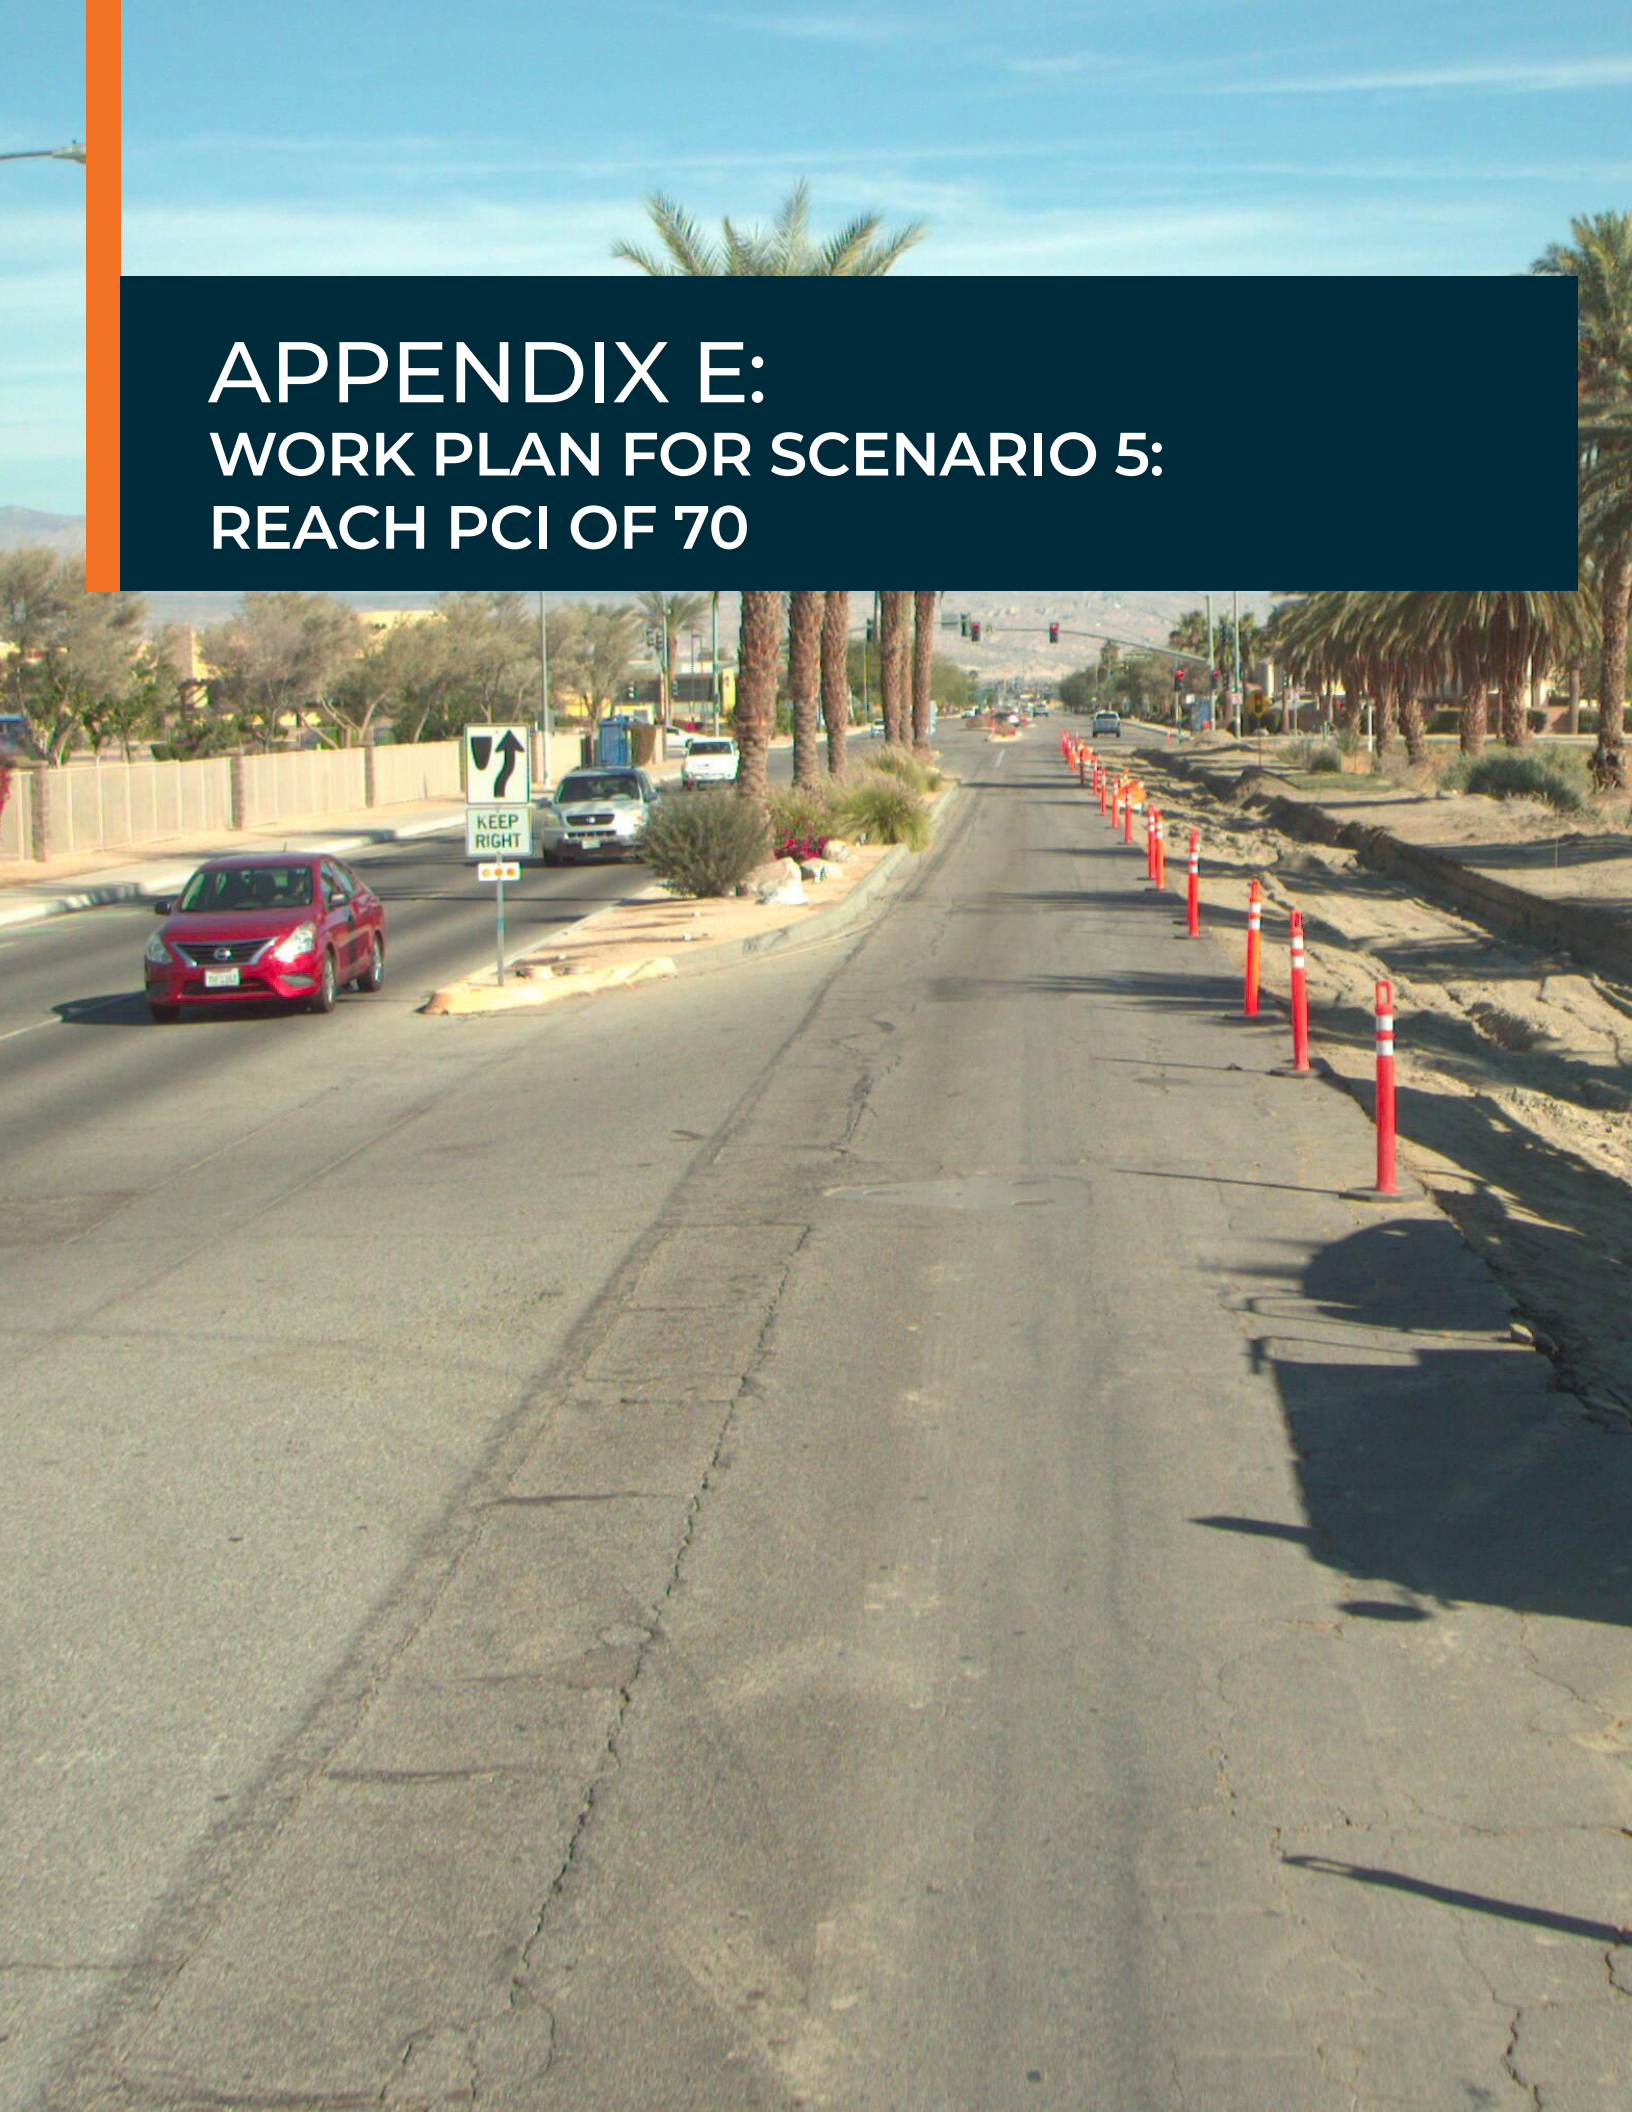

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.00	Slurry Seal	11/6/2024	74	100	$ 540.0
COACH::LAPLAYAST::3	LA PLAYA ST	50' S/O EL MAR AVE	EL MAR AVE	Residential	1,260.00	Slurry Seal	11/6/2024	78	100	$ 630.0
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.00	Slurry Seal	11/6/2024	80	100	$ 1,440.0
COACH::CDIEGO::4	CALLE DIEGO	150' E/O CALLE LEANDRO	CDS	Residential	3,128.00	Slurry Seal	11/6/2024	75	100	$ 1,564.0
COACH::52NDAVE::17	52ND AVE	TUSSELING CT	JENNIFER WAY	Arterial	1,716.00	Microsurfacing	11/6/2024	78	100	$ 1,716.0
COACH::WSIENNACIR::3	W SIENNA CIR	100' W/O SLATE DR	SLATE DR	Residential	3,600.00	Slurry Seal	11/6/2024	72	100	$ 1,800.0
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.67	Slurry Seal	11/6/2024	74	100	$ 2,068.3
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.67	Slurry Seal	11/6/2024	74	100	$ 2,068.3
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.00	Slurry Seal	11/6/2024	80	100	$ 2,160.0
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.00	Slurry Seal	11/6/2024	74	100	$ 2,340.0
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.00	Slurry Seal	11/6/2024	74	100	$ 2,520.0
COACH::CAVILA::1	CALLE AVILA	D/E	CALLE NOGAL	Residential	5,040.00	Slurry Seal	11/6/2024	84	100	$ 2,520.0
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.00	Slurry Seal	11/6/2024	80	100	$ 2,524.5
COACH::LUNADENICO::2	LUNA DE NICOLETA ST	CALLE COLIMA	140' N/O CALLE COLIMA	Residential	5,076.00	Slurry Seal	11/6/2024	78	100	$ 2,538.0
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.00	Slurry Seal	11/6/2024	74	100	$ 2,556.0
COACH::SLATEDR::4	SLATE DR	N SIENNA CIR	D/E	Residential	5,112.00	Slurry Seal	11/6/2024	75	100	$ 2,556.0
COACH::SH-86S::11	SH-86	CAIRO AVE	CAIRO AVE	Arterial	2,560.00	Microsurfacing	11/6/2024	84	100	$ 2,560.0
COACH::CROSA::3	CALLE ROSA	CALLE LINDA	140' W/O CALLE ESTRELLA	Residential	5,148.00	Slurry Seal	11/6/2024	75	100	$ 2,574.0
COACH::TEPEYACCT::1	TEPEYAC CT	VIA TEPEYAC	CDS	Residential	5,256.00	Slurry Seal	11/6/2024	72	100	$ 2,628.0
COACH::AALEENAH::6	AVENIDA ALEENAH	CALLE FLORENA	'150 E/O CALLE FLORENA	Residential	5,328.00	Slurry Seal	11/6/2024	72	100	$ 2,664.0
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.00	Slurry Seal	11/6/2024	74	100	$ 2,700.0
COACH::CGLORIOSA::1	CALLE GLORIOSA	AVENIDA NERIUM	D/E	Residential	5,508.00	Slurry Seal	11/6/2024	75	100	$ 2,754.0
COACH::DAMASCUSAV::2	DAMASCUS AVE	CALLE TORRES ORDUNO	LIBNAN ST	Residential	5,700.00	Slurry Seal	11/6/2024	72	100	$ 2,850.0
COACH::MICHELLEDR::4	MICHELLE DR	AVENIDA ALEENAH	AVENIDA NICOLE	Residential	5,940.00	Slurry Seal	11/6/2024	78	100	$ 2,970.0
COACH::RIGOCT::1	RIGO CT	CHRISTINA RD	CDS	Residential	5,952.00	Slurry Seal	11/6/2024	72	100	$ 2,976.0
COACH::MCCOYPEAK::2	MCCOY PEAK AVE	ARICA DR	CHAPARROSA ST	Residential	6,192.00	Slurry Seal	11/6/2024	72	100	$ 3,096.0
COACH::CROSARITO::1	CAMINO ROSARITO	D/E	CAMINO BAHIA AVE	Residential	6,440.00	Slurry Seal	11/6/2024	75	100	$ 3,220.0
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.00	Slurry Seal	11/6/2024	80	100	$ 3,222.0
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.00	Slurry Seal	11/6/2024	85	100	$ 3,222.0
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.00	Slurry Seal	11/6/2024	85	100	$ 3,240.0
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.00	Slurry Seal	11/6/2024	85	100	$ 3,256.0
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.00	Slurry Seal	11/6/2024	85	100	$ 3,258.0
COACH::SCARLETWAY::3	SCARLET WAY	E SIENNA CIR	FREDERICK ST	Residential	6,624.00	Slurry Seal	11/6/2024	75	100	$ 3,312.0
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.00	Slurry Seal	11/6/2024	85	100	$ 3,344.0
COACH::PLAYADELAM::4	PLAYA DEL AMOR ST	LOS MOCHIS AVE	PUEBLO BONITO AVE	Residential	6,768.00	Slurry Seal	11/6/2024	75	100	$ 3,384.0
COACH::WSIENNACIR::2	W SIENNA CIR	TOPAZ CT	100' W/O SLATE DR	Residential	6,804.00	Slurry Seal	11/6/2024	72	100	$ 3,402.0
COACH::LASLUNASAV::1	LAS LUNAS AVE	FREDERICK ST	SEDONA CT	Residential	7,164.00	Slurry Seal	11/6/2024	72	100	$ 3,582.0
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.00	Slurry Seal	11/6/2024	80	100	$ 3,582.0
COACH::PALMERASCR::2	PALMERAS CIR	PALOMA DR	MARIPOSA DR	Residential	7,200.00	Slurry Seal	11/6/2024	72	100	$ 3,600.0
COACH::SHADYLN::5	SHADY LN	D/E	VIA MISIONERO	Residential	7,224.00	Slurry Seal	11/6/2024	78	100	$ 3,612.0
COACH::CLINDA::1	CALLE LINDA	CDS	CALLE ROSA	Residential	7,260.00	Slurry Seal	11/6/2024	72	100	$ 3,630.0
COACH::SLATEDR::1	SLATE DR	54TH AVE	W SIENNA CIR	Residential	7,272.00	Slurry Seal	11/6/2024	81	100	$ 3,636.0
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.00	Slurry Seal	11/6/2024	85	100	$ 3,648.0
COACH::CAVILA::3	CALLE AVILA	CALLE PINO	53RD AVE	Residential	7,400.00	Slurry Seal	11/6/2024	81	100	$ 3,700.0
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.00	Slurry Seal	11/6/2024	80	100	$ 3,888.0
COACH::HUXLEYCT::1	HUXLEY CT	MICHELLE DR	CDS	Residential	8,064.00	Slurry Seal	11/6/2024	75	100	$ 4,032.0
COACH::MICHELLEDR::2	MICHELLE DR	MICHELLE DR	MICHELLE DR	Residential	8,100.00	Slurry Seal	11/6/2024	72	100	$ 4,050.0
COACH::JULIACT::1	JULIA CT	AVENIDA ALEENAH	CDS	Residential	8,280.00	Slurry Seal	11/6/2024	72	100	$ 4,140.0
COACH::VERACRUZ::1	VERA CRUZ	CDS	PAVON PALMA	Residential	8,320.00	Slurry Seal	11/6/2024	84	100	$ 4,160.0
COACH::VENICELN::1	VENICE LN	HUNTINGTON AVE	CDS	Residential	8,352.00	Slurry Seal	11/6/2024	78	100	$ 4,176.0
COACH::CCLAVEL::2	CALLE CLAVEL	CALLE VIOLETA	CALLE BOUGANVILIA	Residential	8,415.00	Slurry Seal	11/6/2024	78	100	$ 4,207.5
COACH::CCLAVEL::1	CALLE CLAVEL	CALLE GERANIO	CALLE VIOLETA	Residential	8,448.00	Slurry Seal	11/6/2024	72	100	$ 4,224.0
COACH::CGARDENIA::2	CALLE GARDENIA	CALLE VIOLETA	CALLE BOUGANVILIA	Residential	8,448.00	Slurry Seal	11/6/2024	72	100	$ 4,224.0
COACH::CGARDENIA::1	CALLE GARDENIA	CALLE GERANIO	CALLE VIOLETA	Residential	8,481.00	Slurry Seal	11/6/2024	75	100	$ 4,240.5
COACH::SANIGNACIO::1	SAN IGNACIO AVE	CHICHEN ITZA RD	CALHOUN ST	Residential	8,536.00	Slurry Seal	11/6/2024	84	100	$ 4,268.0
COACH::ACORTEZ::3	AVENIDA CORTEZ	VIA DURANGO	PASEO LAREDO	Residential	8,604.00	Slurry Seal	11/6/2024	75	100	$ 4,302.0
COACH::LOSMOCHIS::1	LOS MOCHIS AVE	JACKSON ST	PLAYA DEL AMOR ST	Residential	8,624.00	Slurry Seal	11/6/2024	78	100	$ 4,312.0
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.00	Slurry Seal	11/6/2024	85	100	$ 4,320.0
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.00	Slurry Seal	11/6/2024	85	100	$ 4,320.0
COACH::50THAVEW::6	50TH AVE	BALBOA ST	AVENIDA DE ORO	Arterial	4,356.00	Microsurfacing	11/6/2024	72	100	$ 4,356.0
COACH::PUERTECITO::1	PUERTECITOS AVE	JACKSON ST	PLAYA DEL AMOR ST	Residential	8,756.00	Slurry Seal	11/6/2024	81	100	$ 4,378.0
COACH::HUNTINGTON::2	HUNTINGTON AVE	MONARCH RD	HERMOSA BLVD	Residential	9,000.00	Slurry Seal	11/6/2024	72	100	$ 4,500.0
COACH::CHRISTINA::4	CHRISTINA RD	TOMAS LN	RIGO CT	Residential	9,108.00	Slurry Seal	11/6/2024	75	100	$ 4,554.0
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.00	Slurry Seal	11/6/2024	85	100	$ 4,560.0
COACH::CHRISTINA::3	CHRISTINA RD	ANDREA LN	TOMAS LN	Residential	9,144.00	Slurry Seal	11/6/2024	81	100	$ 4,572.0
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.00	Slurry Seal	11/6/2024	74	100	$ 4,590.0
COACH::CIELOVICTR::1	CIELO VICTORIA ST	MARIANA AVE	48TH AVE	Residential	9,200.00	Slurry Seal	11/6/2024	72	100	$ 4,600.0
COACH::HERMOSABL::1	HERMOSA BLVD	HUNTINGTON AVE	LA JOLLA AVE	Residential	9,216.00	Slurry Seal	11/6/2024	78	100	$ 4,608.0
COACH::SLATEDR::2	SLATE DR	W SIENNA CIR	SCARLET WAY	Residential	9,252.00	Slurry Seal	11/6/2024	72	100	$ 4,626.0
COACH::CROSA::1	CALLE ROSA	CALLE LOS HERMANOS	CALLE BONITA	Residential	9,360.00	Slurry Seal	11/6/2024	72	100	$ 4,680.0
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.00	Slurry Seal	11/6/2024	80	100	$ 4,680.0
COACH::FREDERICK::20	FREDERICK ST	140' S/O LAS LUNAS AVE	LAS LUNAS AVE	Residential	9,372.00	Slurry Seal	11/6/2024	84	100	$ 4,686.0
COACH::CFELIZ::1	CALLE FELIZ	CALLE LOS HERMANOS	CALLE BONITA	Residential	9,396.00	Slurry Seal	11/6/2024	72	100	$ 4,698.0
COACH::MONARCHRD::2	MONARCH RD	MANHATTAN AVE	HUNTINGTON AVE	Residential	9,396.00	Slurry Seal	11/6/2024	75	100	$ 4,698.0
COACH::MONARCHRD::1	MONARCH RD	CAPITOLA AVE	MANHATTAN AVE	Residential	9,396.00	Slurry Seal	11/6/2024	78	100	$ 4,698.0
COACH::LACOSTAAVE::1	LA COSTA AVE	ESTRELLA PEDRO ST	LA PLAYA ST	Residential	9,520.00	Slurry Seal	11/6/2024	75	100	$ 4,760.0
COACH::ANDREALN::1	ANDREA LN	JULIA DR	LINDA AVE	Residential	9,620.00	Slurry Seal	11/6/2024	84	100	$ 4,810.0
COACH::CHANNINGCT::1	CHANNING CT	AVENIDA MARIA	CDS	Residential	9,720.00	Slurry Seal	11/6/2024	72	100	$ 4,860.0
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.00	Slurry Seal	11/6/2024	74	100	$ 4,860.0
COACH::CCERVANTES::2	CALLE CERVANTES	CALLE LARRIVA	CALLE CHAVEZ	Residential	9,792.00	Slurry Seal	11/6/2024	72	100	$ 4,896.0
COACH::CANABELLA::1	CALLE ANABELLA	AVENIDA MARIA	AVENIDA CRYSTAL	Residential	9,900.00	Slurry Seal	11/6/2024	72	100	$ 4,950.0
COACH::KINGCT::1	KING CT	CDS	WASHINGTONIA AVE	Residential	10,016.00	Slurry Seal	11/6/2024	78	100	$ 5,008.0
COACH::CHICHENITZ::1	CHICHEN ITZA RD	PUERTO ESCONDIDO AVE	IXTAPA AVE	Residential	10,080.00	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CCOLIMA::4	CALLE COLIMA	CAMINO REAL	LA PLAYA ST	Residential	10,080.00	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::AGUABLANCA::2	AGUA BLANCA AVE	LUNA DE NICOLETA ST	CAMINO MAYA	Residential	10,080.00	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CCOLIMA::2	CALLE COLIMA	LUNA DE NICOLETA ST	CAMINO MAYA	Residential	10,080.00	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CFLORENA::3	CALLE FLORENA	AVENIDA GRACE	AVENIDA ALEENAH	Residential	10,080.00	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CCOLIMA::3	CALLE COLIMA	CAMINO MAYA	CAMINO REAL	Residential	10,080.00	Slurry Seal	11/6/2024	75	100	$ 5,040.0
COACH::AGUABLANCA::4	AGUA BLANCA AVE	CAMINO REAL	CHICHEN ITZA RD	Residential	10,080.00	Slurry Seal	11/6/2024	75	100	$ 5,040.0
COACH::PUEBLOBONI::1	PUEBLO BONITO AVE	PLAYA DEL AMOR ST	EL ACRO ST	Residential	10,080.00	Slurry Seal	11/6/2024	78	100	$ 5,040.0
COACH::PLAYADELAM::5	PLAYA DEL AMOR ST	PUEBLO BONITO AVE	EL GRECO AVE	Residential	10,080.00	Slurry Seal	11/6/2024	84	100	$ 5,040.0
COACH::CTECHA::4	CALLE TECHA	CALLE ROBERTO	CALLE VERDE	Residential	10,240.00	Slurry Seal	11/6/2024	72	100	$ 5,120.0
COACH::SH-86N::11	SH-86	BAGDAD AVE	BAGDAD AVE	Arterial	5,120.00	Microsurfacing	11/6/2024	81	100	$ 5,120.0
COACH::CPUERTADEL::1	CALLE PUERTA DEL SOL	50TH AVE	AVENIDA VERANO	Residential	10,272.00	Slurry Seal	11/6/2024	78	100	$ 5,136.0
COACH::CROSA::2	CALLE ROSA	CALLE BONITA	CALLE LINDA	Residential	10,332.00	Slurry Seal	11/6/2024	72	100	$ 5,166.0
COACH::COCASO::2	CALLE OCASO	CORTE ECLIPSE	CORTE ESTIVO	Residential	10,360.00	Slurry Seal	11/6/2024	72	100	$ 5,180.0
COACH::COCASO::1	CALLE OCASO	AVENIDA VERANO	CORTE ECLIPSE	Residential	10,360.00	Slurry Seal	11/6/2024	78	100	$ 5,180.0
COACH::VIATEPEYAC::2	VIA TEPEYAC	TEPEYAC CT	SHADY LN	Residential	10,368.00	Slurry Seal	11/6/2024	72	100	$ 5,184.0
COACH::SANASISDR::3	SAN ASIS DR	CALLE TOLOSA	SAN CAPISTRANO DR	Residential	10,400.00	Slurry Seal	11/6/2024	75	100	$ 5,200.0
COACH::CCOLIMA::1	CALLE COLIMA	AGUA CALIENTE ST	LUNA DE NICOLETA ST	Residential	10,440.00	Slurry Seal	11/6/2024	72	100	$ 5,220.0
COACH::AGUABLANCA::1	AGUA BLANCA AVE	AGUA CALIENTE ST	LUNA DE NICOLETA ST	Residential	10,440.00	Slurry Seal	11/6/2024	72	100	$ 5,220.0
COACH::PLAYADELAM::1	PLAYA DEL AMOR ST	CAMINO BAHIA AVE	PUERTECITOS AVE	Residential	10,440.00	Slurry Seal	11/6/2024	75	100	$ 5,220.0
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.00	Slurry Seal	11/6/2024	74	100	$ 5,238.0
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.00	Slurry Seal	11/6/2024	80	100	$ 5,238.0
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.00	Slurry Seal	11/6/2024	80	100	$ 5,238.0
COACH::ESIENNACIR::1	E SIENNA CIR	SCARLET WAY	INDIGO CT	Residential	10,476.00	Slurry Seal	11/6/2024	81	100	$ 5,238.0
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.00	Slurry Seal	11/6/2024	85	100	$ 5,238.0
COACH::ROYALCT::1	ROYAL CT	CDS	WASHINGTONIA AVE	Residential	10,540.00	Slurry Seal	11/6/2024	75	100	$ 5,270.0
COACH::52NDAVEW::18	52ND AVE	CALLE TORRES ORDUNO	DOUMA CT	Arterial	5,278.00	Microsurfacing	11/6/2024	72	100	$ 5,278.0
COACH::ELCASTILLO::1	EL CASTILLO RD	TODOS SANTOS AVE	CAMINO LAS BRISAS	Residential	10,640.00	Slurry Seal	11/6/2024	78	100	$ 5,320.0
COACH::ELARCOST::1	EL ARCO ST	LOS CABOS AVE	TODOS SANTOS AVE	Residential	10,640.00	Slurry Seal	11/6/2024	78	100	$ 5,320.0
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.00	Slurry Seal	11/6/2024	85	100	$ 5,328.0
COACH::QUEENCT::1	QUEEN CT	CDS	WASHINGTONIA AVE	Residential	10,778.00	Slurry Seal	11/6/2024	75	100	$ 5,389.0
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.00	Slurry Seal	11/6/2024	74	100	$ 5,400.0
COACH::SANASISDR::1	SAN ASIS DR	CDS	SOLEDAD PL	Residential	10,800.00	Slurry Seal	11/6/2024	75	100	$ 5,400.0
COACH::INDIGOCT::1	INDIGO CT	CDS	E SIENNA CIR	Residential	10,944.00	Slurry Seal	11/6/2024	78	100	$ 5,472.0
COACH::52NDAVE::22	52ND AVE	NELSON ST	DATE AVE	Arterial	5,500.00	Microsurfacing	11/6/2024	75	100	$ 5,500.0
COACH::PUEBLOBONI::3	PUEBLO BONITO AVE	EL CASTILLO RD	TAXCO AVE	Residential	11,016.00	Slurry Seal	11/6/2024	81	100	$ 5,508.0
COACH::CHICHENITZ::4	CHICHEN ITZA RD	SAN IGNACIO AVE	AGUA BLANCA AVE	Residential	11,196.00	Slurry Seal	11/6/2024	84	100	$ 5,598.0
COACH::CROSARITO::2	CAMINO ROSARITO	CAMINO BAHIA AVE	LOS CABOS AVE	Residential	11,200.00	Slurry Seal	11/6/2024	75	100	$ 5,600.0
COACH::TAXCOAVE::1	TAXCO AVE	PUEBLO BONITO AVE	EL GRECO AVE	Residential	11,200.00	Slurry Seal	11/6/2024	84	100	$ 5,600.0
COACH::LASLUNASAV::2	LAS LUNAS AVE	SEDONA CT	MESA CT	Residential	11,376.00	Slurry Seal	11/6/2024	75	100	$ 5,688.0
COACH::SUNCRESTST::3	SUNCREST ST	SUNDANCE LN	SUNDOWN LN	Residential	11,440.00	Slurry Seal	11/6/2024	75	100	$ 5,720.0
COACH::LASLUNASAV::4	LAS LUNAS AVE	RIO RANCHO CT	LAS CRUCES ST	Residential	11,556.00	Slurry Seal	11/6/2024	75	100	$ 5,778.0
COACH::LAJOLLAAVE::2	LA JOLLA AVE	HERMOSA BLVD	ZUMA DR	Residential	11,736.00	Slurry Seal	11/6/2024	72	100	$ 5,868.0
COACH::9THST::3	9TH ST	VINE AVE	SHADY LN	Collector	5,880.00	Microsurfacing	11/6/2024	84	100	$ 5,880.0
COACH::ACORTEZ::4	AVENIDA CORTEZ	PASEO LAREDO	CALLE LEON	Residential	11,952.00	Slurry Seal	11/6/2024	75	100	$ 5,976.0
COACH::LAPONDEROS::1	LA PONDEROSA DR	52ND AVE	NAOMI CT	Residential	12,204.00	Slurry Seal	11/6/2024	81	100	$ 6,102.0
COACH::CROJO::8	CALLE ROJO	CALLE CAMACHO	CESAR CHAVEZ ST	Residential	12,320.00	Slurry Seal	11/6/2024	81	100	$ 6,160.0
COACH::LAJOLLAAVE::1	LA JOLLA AVE	CDS	HERMOSA BLVD	Residential	12,780.00	Slurry Seal	11/6/2024	75	100	$ 6,390.0
COACH::PEDRODR::1	PEDRO DR	TOMAS LN	AVENIDA DEL PARQUE	Residential	12,816.00	Slurry Seal	11/6/2024	78	100	$ 6,408.0
COACH::CROJO::7	CALLE ROJO	CALLE AVILA	CALLE CAMACHO	Residential	12,960.00	Slurry Seal	11/6/2024	75	100	$ 6,480.0
COACH::CZAMORA::1	CALLE ZAMORA	CALLE EMPALME	CALLE TECHA	Residential	13,356.00	Slurry Seal	11/6/2024	72	100	$ 6,678.0
COACH::CCINDARELA::1	CORTE CINDARELLA	CDS	AVENIDA ADOBE	Residential	13,360.00	Slurry Seal	11/6/2024	84	100	$ 6,680.0
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.00	Slurry Seal	11/6/2024	80	100	$ 6,720.0
COACH::52NDAVE::23	52ND AVE	DATE AVE	LAS PALMAS ST	Arterial	6,952.00	Microsurfacing	11/6/2024	81	100	$ 6,952.0
COACH::ANDREALN::4	ANDREA LN	'45' N/O CHRISTINA RD	CDS	Residential	13,949.00	Slurry Seal	11/6/2024	84	100	$ 6,974.5
COACH::CAVILA::2	CALLE AVILA	CALLE NOGAL	CALLE PINO	Residential	13,960.00	Slurry Seal	11/6/2024	81	100	$ 6,980.0
COACH::SOLDELUNDA::1	SOL DE LUNDA ST	PLAZA DE ORO AVE	MARIANA AVE	Residential	14,000.00	Slurry Seal	11/6/2024	72	100	$ 7,000.0
COACH::CECLIPSE::1	CORTE ECLIPSE	CALLE OCASO	CDS	Residential	14,134.00	Slurry Seal	11/6/2024	72	100	$ 7,067.0
COACH::HUNTINGTON::1	HUNTINGTON AVE	VENICE LN	MONARCH RD	Residential	14,400.00	Slurry Seal	11/6/2024	81	100	$ 7,200.0
COACH::52NDAVEE::7	52ND AVE	CALLE TORRES ORDUNO	CALLE EMPALME	Arterial	1,456.00	1.5" Thin Overlay	11/6/2024	57	100	$ 7,280.0
COACH::AMETHYSTCT::1	AMETHYST CT	CDS	SCARLET WAY	Residential	14,760.00	Slurry Seal	11/6/2024	81	100	$ 7,380.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::PEDRODR::2	PEDRO DR	AVENIDA DEL PARQUE	AVENIDA ADOBE	Residential	14,796.00	Slurry Seal	11/6/2024	72	100	$ 7,398.0
COACH::52NDAVEW::17	52ND AVE	CALLE EMPALME	CALLE TORRES ORDUNO	Arterial	1,482.00	1.5" Thin Overlay	11/6/2024	60	100	$ 7,410.0
COACH::TODOSSANTO::3	TODOS SANTOS AVE	420' W/O CAMINO CORTEZ	CAMINO CORTEZ	Residential	15,048.00	Slurry Seal	11/6/2024	72	100	$ 7,524.0
COACH::SCARLETWAY::2	SCARLET WAY	SAPPHIRE LN	E SIENNA CIR	Residential	15,156.00	Slurry Seal	11/6/2024	72	100	$ 7,578.0
COACH::CLEON::1	CALLE LEON	CALLE DE VEGA	AVENIDA CORTEZ	Residential	15,280.00	Slurry Seal	11/6/2024	84	100	$ 7,640.0
COACH::CELALBA::1	CORTE EL ALBA	CDS	CALLE EL SOL	Residential	15,392.00	Slurry Seal	11/6/2024	78	100	$ 7,696.0
COACH::SOLEDADPL::1	SOLEDAD PL	SAN ASIS DR	SANTO LN	Residential	15,400.00	Slurry Seal	11/6/2024	72	100	$ 7,700.0
COACH::CPIZANO::2	CALLE PIZANO	COURTE STELLA	CALLE MENDOZA	Residential	15,444.00	Slurry Seal	11/6/2024	72	100	$ 7,722.0
COACH::SHADYLN::8	SHADY LN	GUADALUPANA CT	VIA TEPEYAC	Residential	15,456.00	Slurry Seal	11/6/2024	81	100	$ 7,728.0
COACH::SHADYLN::6	SHADY LN	VIA MISIONERO	DIEGO CT	Residential	15,456.00	Slurry Seal	11/6/2024	84	100	$ 7,728.0
COACH::GUADALUPAN::1	GUADALUPANA CT	CDS	SHADY LN	Residential	15,624.00	Slurry Seal	11/6/2024	72	100	$ 7,812.0
COACH::DIEGOCT::1	DIEGO CT	CDS	SHADY LN	Residential	15,624.00	Slurry Seal	11/6/2024	81	100	$ 7,812.0
COACH::SHADYLN::7	SHADY LN	DIEGO CT	GUADALUPANA CT	Residential	15,960.00	Slurry Seal	11/6/2024	75	100	$ 7,980.0
COACH::PLAZADEORO::1	PLAZA DE ORO AVE	SOL DE LINDA ST	LUNA DE NICOLETA ST	Residential	15,984.00	Slurry Seal	11/6/2024	72	100	$ 7,992.0
COACH::CREAL::2	CAMINO REAL	CAMINO PELICANO	CALLE COLIMA	Residential	16,056.00	Slurry Seal	11/6/2024	78	100	$ 8,028.0
COACH::RIORANCHO::1	RIO RANCHO CT	LAS LUNAS AVE	CDS	Residential	16,200.00	Slurry Seal	11/6/2024	75	100	$ 8,100.0
COACH::SEDONACT::1	SEDONA CT	LAS LUNAS AVE	CDS	Residential	16,200.00	Slurry Seal	11/6/2024	75	100	$ 8,100.0
COACH::MESACT::1	MESA CT	LAS LUNAS AVE	CDS	Residential	16,200.00	Slurry Seal	11/6/2024	78	100	$ 8,100.0
COACH::CBOUGANVIL::3	CALLE BOUGANVILIA	EL SOL ST	CALLE GARDENIA	Residential	16,272.00	Slurry Seal	11/6/2024	72	100	$ 8,136.0
COACH::TOMASLN::2	TOMAS LN	CHRISTINA RD	PEDRO DR	Residential	16,308.00	Slurry Seal	11/6/2024	78	100	$ 8,154.0
COACH::LAPLAYAST::4	LA PLAYA ST	EL MAR AVE	LA COSTA AVE	Residential	16,380.00	Slurry Seal	11/6/2024	78	100	$ 8,190.0
COACH::SANSOLANO::1	SAN SOLANO RD	SAN ASIS DR	SAGRADO DR	Residential	16,400.00	Slurry Seal	11/6/2024	72	100	$ 8,200.0
COACH::AMARIA::2	AVENIDA MARIA	CALLE DANIELLE	CALLE ANABELLA	Residential	16,401.00	Slurry Seal	11/6/2024	72	100	$ 8,200.5
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.00	Slurry Seal	11/6/2024	85	100	$ 8,250.0
COACH::CNOGAL::1	CALLE NOGAL	CALLE OLIVO	CALLE AVILA	Residential	16,740.00	Slurry Seal	11/6/2024	84	100	$ 8,370.0
COACH::CPINO::1	CALLE PINO	CALLE OLIVO	CALLE AVILA	Residential	16,740.00	Slurry Seal	11/6/2024	84	100	$ 8,370.0
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.00	Slurry Seal	11/6/2024	85	100	$ 8,442.0
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.00	Slurry Seal	11/6/2024	74	100	$ 8,455.0
COACH::ELCASTILLO::2	EL CASTILLO RD	CAMINO LAS BRISAS	PUEBLO BONITO AVE	Residential	17,024.00	Slurry Seal	11/6/2024	78	100	$ 8,512.0
COACH::SH-86N::7	SH-86	ALLEY	CAIRO AVE	Arterial	8,560.00	Microsurfacing	11/6/2024	78	100	$ 8,560.0
COACH::PEREZST::3	PEREZ ST	ORTIZ ST	HERNANDEZ ST	Residential	17,240.00	Slurry Seal	11/6/2024	81	100	$ 8,620.0
COACH::MAZATLANDR::8	MAZATLAN DR	MAZATLAN DR PARKING LOOP	MAZATLAN DR PARKING LOOP	Residential	17,280.00	Slurry Seal	11/6/2024	81	100	$ 8,640.0
COACH::ORTIZST::1	ORTIZ ST	PEREZ ST	HERNANDEZ ST	Residential	17,680.00	Slurry Seal	11/6/2024	84	100	$ 8,840.0
COACH::AIRPORTBL::5	AIRPORT BLVD	1395' W/O FILLMORE ST	1215' W/O FILLMORE ST	Collector	8,900.00	Microsurfacing	11/6/2024	81	100	$ 8,900.0
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.00	Slurry Seal	11/6/2024	85	100	$ 9,000.0
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.00	Slurry Seal	11/6/2024	80	100	$ 9,036.0
COACH::52NDAVEE::5	52ND AVE	DOUMA ST	DOUMA CT	Arterial	9,412.00	Microsurfacing	11/6/2024	72	100	$ 9,412.0
COACH::ADELPARQUE::3	AVENIDA DEL PARQUE	COURTE DEL PARQUE	AVENIDA DE ORO	Residential	18,880.00	Slurry Seal	11/6/2024	84	100	$ 9,440.0
COACH::SHADYLN::9	SHADY LN	VIA TEPEYAC	53RD AVE	Residential	19,488.00	Slurry Seal	11/6/2024	78	100	$ 9,744.0
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.00	1.5" Thin Overlay	11/6/2024	56	100	$ 10,080.0
COACH::AGUACALIEN::2	AGUA CALIENTE ST	CAMINO LAS BRISAS	CALLE COLIMA	Residential	20,202.00	Slurry Seal	11/6/2024	72	100	$ 10,101.0
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.00	Microsurfacing	11/6/2024	74	100	$ 10,400.0
COACH::VALLEYRD::6	VALLEY RD	LAS PALMAS ST	OASIS PALM AVE	Collector	10,400.00	Microsurfacing	11/6/2024	78	100	$ 10,400.0
COACH::CVIOLETA::1	CALLE VIOLETA	CALLE CLAVEL	CALLE GARDENIA	Residential	20,856.00	Slurry Seal	11/6/2024	75	100	$ 10,428.0
COACH::CGERANIO::1	CALLE GERANIO	CALLE CLAVEL	CALLE GARDENIA	Residential	20,889.00	Slurry Seal	11/6/2024	72	100	$ 10,444.5
COACH::52NDAVE::43	52ND AVE	5300' E/O FILLMORE ST	CITY LIMITS	Rural	13,515.00	Chip Seal	11/6/2024	75	100	$ 10,812.0
COACH::52NDAVE::24	52ND AVE	LAS PALMAS ST	OASIS PALM AVE	Arterial	11,396.00	Microsurfacing	11/6/2024	72	100	$ 11,396.0
COACH::52NDAVE::25	52ND AVE	OASIS PALM AVE	DOS PALMAS AVE	Arterial	11,440.00	Microsurfacing	11/6/2024	72	100	$ 11,440.0
COACH::52NDAVE::26	52ND AVE	DOS PALMAS AVE	CYPRESS ST	Arterial	11,440.00	Microsurfacing	11/6/2024	78	100	$ 11,440.0
COACH::52NDAVE::27	52ND AVE	CYPRESS ST	SHADY LN	Arterial	11,440.00	Microsurfacing	11/6/2024	78	100	$ 11,440.0
COACH::LAGUNALN::1	LAGUNA LN	CDS	LAGUNA LN	Residential	23,148.00	Slurry Seal	11/6/2024	72	100	$ 11,574.0
COACH::LASCRUCES::2	LAS CRUCES ST	LA LUNAS AVE	49TH AVE	Residential	23,292.00	Slurry Seal	11/6/2024	78	100	$ 11,646.0
COACH::CDIEGO::2	CALLE DIEGO	VIA SANTIAGO	CALLE LEANDRO	Residential	23,664.00	Slurry Seal	11/6/2024	81	100	$ 11,832.0
COACH::CEMPALME::2	CALLE EMPALME	53RD AVE	CALLE ZAMORA	Residential	23,796.00	Slurry Seal	11/6/2024	78	100	$ 11,898.0
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.00	Slurry Seal	11/6/2024	80	100	$ 11,898.0
COACH::CESARCHAVE::1	CESAR CHAVEZ ST	53RD AVE	CALLE ZAMORA	Residential	24,457.00	Slurry Seal	11/6/2024	72	100	$ 12,228.5
COACH::CBAHIAAVE::1	CAMINO BAHIA AVE	PLAYA DEL AMOR ST	CAMINO ROSARITO	Residential	24,480.00	Slurry Seal	11/6/2024	72	100	$ 12,240.0
COACH::FIESTARD::5	FIESTA RD	SIERRA ST	BRIANNE LN	Residential	24,876.00	Slurry Seal	11/6/2024	72	100	$ 12,438.0
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.00	Slurry Seal	11/6/2024	74	100	$ 12,540.0
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.00	Slurry Seal	11/6/2024	85	100	$ 12,580.0
COACH::CTECHA::6	CALLE TECHA	CALLE VERDE	CALLE ROJO	Residential	25,920.00	Slurry Seal	11/6/2024	72	100	$ 12,960.0
COACH::CVERDE::2	CALLE VERDE	CALLE TECHA	CALLE AVILA	Collector	12,960.00	Microsurfacing	11/6/2024	75	100	$ 12,960.0
COACH::CCAMACHO::4	CALLE CAMACHO	CALLE VERDE	CALLE ROJO	Residential	25,920.00	Slurry Seal	11/6/2024	75	100	$ 12,960.0
COACH::CEMPALME::3	CALLE EMPALME	CALLE VERDE	CALLE ROJO	Residential	25,920.00	Slurry Seal	11/6/2024	75	100	$ 12,960.0
COACH::CVERDE::1	CALLE VERDE	CALLE EMPALME	CALLE TECHA	Collector	12,960.00	Microsurfacing	11/6/2024	78	100	$ 12,960.0
COACH::CMAYA::1	CAMINO MAYA	AGUA BLANCA AVE	CALLE COLIMA	Residential	26,136.00	Slurry Seal	11/6/2024	72	100	$ 13,068.0
COACH::LUNADENICO::1	LUNA DE NICOLETA ST	AGUA BLANCA AVE	CALLE COLIMA	Residential	26,136.00	Slurry Seal	11/6/2024	75	100	$ 13,068.0
COACH::CCAMACHO::1	CALLE CAMACHO	D/E	53RD AVE	Residential	26,400.00	Slurry Seal	11/6/2024	81	100	$ 13,200.0
COACH::CAVILA::4	CALLE AVILA	53RD AVE	CALLE ZAMORA	Residential	26,440.00	Slurry Seal	11/6/2024	72	100	$ 13,220.0
COACH::CCAMACHO::3	CALLE CAMACHO	CALLE ZAMORA	CALLE VERDE	Residential	26,440.00	Slurry Seal	11/6/2024	78	100	$ 13,220.0
COACH::CTECHA::1	CALLE TECHA	53RD AVE	CALLE ZAMORA	Residential	26,440.00	Slurry Seal	11/6/2024	78	100	$ 13,220.0
COACH::CCAMACHO::2	CALLE CAMACHO	53RD AVE	CALLE ZAMORA	Residential	26,440.00	Slurry Seal	11/6/2024	81	100	$ 13,220.0
COACH::CORONADOST::1	CORONADO ST	D/E	50TH AVE	Residential	26,840.00	Slurry Seal	11/6/2024	75	100	$ 13,420.0
COACH::KENMOREST::1	KENMORE ST	D/E	50TH AVE	Residential	26,880.00	Slurry Seal	11/6/2024	75	100	$ 13,440.0
COACH::SLATEDR::3	SLATE DR	SCARLET WAY	N SIENNA CIR	Residential	27,432.00	Slurry Seal	11/6/2024	75	100	$ 13,716.0
COACH::CLASBRISAS::1	CAMINO LAS BRISAS	EL CASTILLO RD	AGLIA CALIENTE ST	Residential	27,576.00	Slurry Seal	11/6/2024	75	100	$ 13,788.0
COACH::52NDAVE::21	52ND AVE	MORGAN AVE	NELSON ST	Arterial	13,800.00	Microsurfacing	11/6/2024	75	100	$ 13,800.0
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.00	Slurry Seal	11/6/2024	85	100	$ 14,094.0
COACH::DILLONRD::10	DILLON RD	800' S/O VISTA DEL NORTE	650' S/O VISTA DEL NORTE	Arterial	14,208.00	Microsurfacing	11/6/2024	81	100	$ 14,208.0
COACH::AADOBE::11	AVENIDA ADOBE	CHRISTINA RD	45' N/O CHRISTINA RD	Residential	1,620.00	3" Mill & Overlay	11/6/2024	43.5	100	$ 14,580.0
COACH::AADOBE::9	AVENIDA ADOBE	LINDA AVE	215' S/O CHRISTINA RD	Residential	1,620.00	3" Mill & Overlay	11/6/2024	45	100	$ 14,580.0
COACH::PLAYADELAM::3	PLAYA DEL AMOR ST	PUERTECITOS AVE	LOS MOCHIS AVE	Residential	29,160.00	Slurry Seal	11/6/2024	72	100	$ 14,580.0
COACH::51STAVE::7	51ST AVE	AVENIDA ADOBE	MECCA LANE	Collector	14,756.00	Microsurfacing	11/6/2024	72	100	$ 14,756.0
COACH::GRAPEFRUIT::1	GRAPEFRUIT BLVD	CITY LIMITS	3310' S/O 54TH AVE	Arterial	14,905.00	Microsurfacing	11/6/2024	78	100	$ 14,905.0
COACH::PARKLN::2	PARK LN	SH-86	130' W/O SH-111	Arterial	3,000.00	1.5" Thin Overlay	11/6/2024	57	100	$ 15,000.0
COACH::52NDAVEW::6	52ND AVE	SUNSET DR	CALLE LIMON	Arterial	15,075.00	Microsurfacing	11/6/2024	72	100	$ 15,075.0
COACH::CSOLEDAD::1	CALLE SOLEDAD	VIA MISIONERO	VIA TEPEYAC	Residential	31,248.00	Slurry Seal	11/6/2024	75	100	$ 15,624.0
COACH::52NDAVEE::10	52ND AVE	CALLE TECHA	CALLE TECHA	Arterial	3,146.00	1.5" Thin Overlay	11/6/2024	57	100	$ 15,730.0
COACH::52NDAVEW::14	52ND AVE	CALLE TECHA	CALLE TECHA	Arterial	3,146.00	1.5" Thin Overlay	11/6/2024	63	100	$ 15,730.0
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	Arterial	16,250.00	Microsurfacing	11/6/2024	74	100	$ 16,250.0
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.00	Microsurfacing	11/6/2024	85	100	$ 16,250.0
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.00	Microsurfacing	11/6/2024	85	100	$ 16,250.0
COACH::53RDAVE::13	53RD AVE	ADAM LN	LEE LN	Collector	16,320.00	Microsurfacing	11/6/2024	72	100	$ 16,320.0
COACH::ELGRECOAVE::1	EL GRECO AVE	PLAYA DEL AMOR ST	TAXCO AVE	Residential	32,908.00	Slurry Seal	11/6/2024	75	100	$ 16,454.0
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.00	Slurry Seal	11/6/2024	85	100	$ 16,650.0
COACH::AVENUE49::1	AVENUE 49	CALHOUN ST	GARNET RIDGE ST	Collector	17,784.00	Microsurfacing	11/6/2024	78	100	$ 17,784.0
COACH::AALEENAH::4	AVENIDA ALEENAH	JULIA CT	'160 W/O CALLE FLORENA	Residential	3,564.00	1.5" Thin Overlay	11/6/2024	57	100	$ 17,820.0
COACH::AVENUE53::3	AVENUE 53	CALLE EMELIA	TYLER ST	Collector	18,012.00	Microsurfacing	11/6/2024	72	100	$ 18,012.0
COACH::52NDAVEW::15	52ND AVE	CALLE TECHA	CALLE EMPALME	Arterial	3,640.00	1.5" Thin Overlay	11/6/2024	57	100	$ 18,200.0
COACH::52NDAVEE::4	52ND AVE	FREDERICK ST	DOUMA ST	Arterial	18,278.00	Microsurfacing	11/6/2024	72	100	$ 18,278.0
COACH::NICKLECREEK::1	NICKLECREEK DR	COPPERIDGE ST	CINNABAR LN	Residential	36,593.00	Slurry Seal	11/6/2024	75	100	$ 18,296.5
COACH::JULIADR::1	JULIA DR	ANDREA LN	AVENIDA ADOBE	Residential	36,756.00	Slurry Seal	11/6/2024	75	100	$ 18,378.0
COACH::LINDAAVE::1	LINDA AVE	ANDREA LN	AVENIDA ADOBE	Residential	36,756.00	Slurry Seal	11/6/2024	78	100	$ 18,378.0
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.00	Microsurfacing	11/6/2024	85	100	$ 18,750.0
COACH::AIRPORTBL::9	AIRPORT BLVD	FILLMORE ST	CITY LIMITS	Collector	18,760.00	Microsurfacing	11/6/2024	81	100	$ 18,760.0
COACH::CFLORENA::2	CALLE FLORENA	AVENIDA ALEENAH	110' N/O AVENIDA ALEENAH	Residential	3,924.00	1.5" Thin Overlay	11/6/2024	63	100	$ 19,620.0
COACH::CSTELLA::1	CORTE STELLA	CALLE PIZANO	CDS	Residential	3,993.00	1.5" Thin Overlay	11/6/2024	63	100	$ 19,965.0
COACH::SANREYDR::2	SAN REY DR	COLONIA DR	SAN CAPISTRANO DR	Residential	4,000.00	1.5" Thin Overlay	11/6/2024	57	100	$ 20,000.0
COACH::52NDAVEW::9	52ND AVE	SH-86	CESAR CHAVEZ ST	Arterial	2,236.00	3" Mill & Overlay	11/6/2024	45	100	$ 20,124.0
COACH::PROSECCO::2	PROSECCO WAY	RODREJO WAY	PROSECCO WAY	Residential	4,064.00	1.5" Thin Overlay	11/6/2024	60	100	$ 20,320.0
COACH::SALTILLOCR::3	SALTILLO CIR	MAZATLAN DR	JALISCO AVE	Residential	4,108.00	1.5" Thin Overlay	11/6/2024	60	100	$ 20,540.0
COACH::53RDAVE::4	53RD AVE	CALLE TECHA	CALLE AVILA	Collector	21,090.00	Microsurfacing	11/6/2024	72	100	$ 21,090.0
COACH::53RDAVE::3	53RD AVE	CALLE EMPALME	CALLE TECHA	Collector	21,147.00	Microsurfacing	11/6/2024	84	100	$ 21,147.0
COACH::53RDAVE::8	53RD AVE	115' W/O CESAR CHAVEZ ST	CESAR CHAVEZ ST	Collector	4,255.00	1.5" Thin Overlay	11/6/2024	63	100	$ 21,275.0
COACH::51STAVE::9	51ST AVE	SUNCREST ST	SH-86	Collector	21,600.00	Microsurfacing	11/6/2024	72	100	$ 21,600.0
COACH::50THAVEE::16	50TH AVE	CORONADO ST	AVENIDA DE PLATINA	Arterial	4,389.00	1.5" Thin Overlay	11/6/2024	57	100	$ 21,945.0
COACH::50THAVEE::18	50TH AVE	KENMORE ST	SH-86	Arterial	22,209.00	Microsurfacing	11/6/2024	84	100	$ 22,209.0
COACH::DILLONRD::7	DILLON RD	VISTA DEL SUR	1070' S/O VISTA DEL NORTE	Arterial	22,272.00	Microsurfacing	11/6/2024	84	100	$ 22,272.0
COACH::FREDERICK::1	FREDERICK ST	54TH AVE	SCARLET WAY	Collector	22,752.00	Microsurfacing	11/6/2024	72	100	$ 22,752.0
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	Residential	4,608.00	1.5" Thin Overlay	11/6/2024	56	100	$ 23,040.0
COACH::GENOAST::10	GENOA ST	CALLE LIMON	VINETA LN	Residential	4,662.00	1.5" Thin Overlay	11/6/2024	63	100	$ 23,310.0
COACH::JALISCOAVE::1	JALISCO AVE	SALTILLO CIR	JALISCO AVE	Residential	4,676.00	1.5" Thin Overlay	11/6/2024	63	100	$ 23,380.0
COACH::50THAVEW::16	50TH AVE	HORNBLEND ST	CALHOUN ST	Arterial	23,392.00	Microsurfacing	11/6/2024	84	100	$ 23,392.0
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	Residential	46,980.00	Slurry Seal	11/6/2024	74	100	$ 23,490.0
COACH::SALTILLOCR::4	SALTILLO CIR	MAZATLAN DR	MAZATLAN DR	Residential	4,706.00	1.5" Thin Overlay	11/6/2024	57	100	$ 23,530.0
COACH::52NDAVEW::8	52ND AVE	GENOA ST	SHADY LN	Arterial	23,625.00	Microsurfacing	11/6/2024	81	100	$ 23,625.0
COACH::9THST::2	9TH ST	ORCHARD AVE	VINE AVE	Collector	23,744.00	Microsurfacing	11/6/2024	84	100	$ 23,744.0
COACH::CESARCHAVE::2	CESAR CHAVEZ ST	CALLE VERDE	CALLE ROJO	Collector	23,976.00	Microsurfacing	11/6/2024	72	100	$ 23,976.0
COACH::SH-86N::9	SH-86	CAIRO AVE	DAMASCUS AVE	Arterial	24,160.00	Microsurfacing	11/6/2024	72	100	$ 24,160.0
COACH::SH-86S::10	SH-86	DAMASCUS AVE	CAIRO AVE	Arterial	24,160.00	Microsurfacing	11/6/2024	84	100	$ 24,160.0
COACH::1STST::3	1ST ST	ORCHARD AVE	VINE AVE	Collector	24,225.00	Microsurfacing	11/6/2024	81	100	$ 24,225.0
COACH::PROSECCO::4	PROSECCO WAY	SOLARCE ST	MALVASIA WAY	Residential	4,864.00	1.5" Thin Overlay	11/6/2024	60	100	$ 24,320.0
COACH::GUITRONST::3	GUITRON ST	NIETO ST	AVENIDA DE ORO	Residential	4,930.00	1.5" Thin Overlay	11/6/2024	57	100	$ 24,650.0
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	Residential	49,552.00	Slurry Seal	11/6/2024	74	100	$ 24,776.0
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	Residential	49,704.00	Slurry Seal	11/6/2024	74	100	$ 24,852.0
COACH::LASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	Residential	49,742.00	Slurry Seal	11/6/2024	74	100	$ 24,871.0
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	Residential	49,818.00	Slurry Seal	11/6/2024	74	100	$ 24,909.0
COACH::51STAVE::6	51ST AVE	400' W/O AVENIDA ADOBE	AVENIDA ADOBE	Collector	24,924.00	Microsurfacing	11/6/2024	72	100	$ 24,924.0
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	Residential	49,856.00	Slurry Seal	11/6/2024	80	100	$ 24,928.0
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.00	Slurry Seal	11/6/2024	85	100	$ 24,947.0
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	Residential	49,932.00	Slurry Seal	11/6/2024	74	100	$ 24,966.0
COACH::LAPLAYAST::2	LA PLAYA ST	CALLE COLIMA	140' N/O CALLE COLIMA	Residential	5,040.00	1.5" Thin Overlay	11/6/2024	60	100	$ 25,200.0
COACH::FILLMOREST::4	FILLMORE ST	54TH AVE	CITY LIMIT	Rural	31,680.00	Chip Seal	11/6/2024	78	100	$ 25,344.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::50THAVE::6	50TH AVE	TYLER ST	50TH AVE	Rural	31,890.00	Chip Seal	11/6/2024	78	100	$ 25,512.0
COACH::SH-86S::8	SH-86	BAGDAD AVE	BAGDAD AVE	Arterial	5,120.00	1.5" Thin Overlay	11/6/2024	63	100	$ 25,600.0
COACH::ADEORO::1	AVENIDA DE ORO	50TH AVE	AVENIDA DEL PARQUE	Collector	25,715.00	Microsurfacing	11/6/2024	84	100	$ 25,715.0
COACH::CNINOS::4	CALLE NINOS	140' W/O CALLE BELLA	CALLE AMIGOS	Residential	5,148.00	1.5" Thin Overlay	11/6/2024	57	100	$ 25,740.0
COACH::CNINOS::3	CALLE NINOS	CALLE BELLA	140' W/O CALLE BELLA	Residential	5,148.00	1.5" Thin Overlay	11/6/2024	63	100	$ 25,740.0
COACH::1STST::4	1ST ST	VINE AVE	SH-111	Collector	25,878.00	Microsurfacing	11/6/2024	78	100	$ 25,878.0
COACH::PINTOLN::1	PINTO LN	EAGLE AVE	120' S/O MCCOY PEAK AVE	Residential	5,184.00	1.5" Thin Overlay	11/6/2024	57	100	$ 25,920.0
COACH::CCORTO::1	CAMINO CORTO	CALLE LIMON	CDS	Residential	5,250.00	1.5" Thin Overlay	11/6/2024	57	100	$ 26,250.0
COACH::52NDAVEW::13	52ND AVE	CALLE AVILA	CALLE TECHA	Arterial	5,278.00	1.5" Thin Overlay	11/6/2024	60	100	$ 26,390.0
COACH::52NDAVEE::11	52ND AVE	CALLE TECHA	CALLE AVILA	Arterial	5,278.00	1.5" Thin Overlay	11/6/2024	60	100	$ 26,390.0
COACH::52NDAVEW::5	52ND AVE	SH-111	SUNSET DR	Arterial	26,415.00	Microsurfacing	11/6/2024	75	100	$ 26,415.0
COACH::AALEENAH::2	AVENIDA ALEENAH	'150 E/O GENOA ST	ADRIANA CT	Residential	5,328.00	1.5" Thin Overlay	11/6/2024	57	100	$ 26,640.0
COACH::SH-86S::9	SH-86	BAGDAD AVE	DAMASCUS AVE	Arterial	26,720.00	Microsurfacing	11/6/2024	81	100	$ 26,720.0
COACH::SH-86N::10	SH-86	DAMASCUS AVE	BAGDAD AVE	Arterial	26,720.00	Microsurfacing	11/6/2024	81	100	$ 26,720.0
COACH::52NDAVEE::32	52ND AVE	SUNSET DR	SH-111	Arterial	27,270.00	Microsurfacing	11/6/2024	75	100	$ 27,270.0
COACH::WESTERFILD::4	WESTERFIELD WAY	140' E/O S CORONADO ST	S CORONADO ST	Residential	5,480.00	1.5" Thin Overlay	11/6/2024	60	100	$ 27,400.0
COACH::SH-86N::12	SH-86	BAGDAD AVE	6TH ST	Arterial	27,760.00	Microsurfacing	11/6/2024	84	100	$ 27,760.0
COACH::SH-86S::7	SH-86	6TH ST	BAGDAD AVE	Arterial	27,760.00	Microsurfacing	11/6/2024	84	100	$ 27,760.0
COACH::PRIMITIVO::2	PRIMITIVO DR	PRIMITIVO DR	PRIMITIVO DR	Residential	3,104.00	3" Mill & Overlay	11/6/2024	37.5	100	$ 27,936.0
COACH::48THAVEW::4	48TH AVE	CHAPARROSA ST	CALHOUN ST	Arterial	28,400.00	Microsurfacing	11/6/2024	75	100	$ 28,400.0
COACH::48THAVEE::3	48TH AVE	CALHOUN ST	CHAPARROSA ST	Arterial	28,400.00	Microsurfacing	11/6/2024	75	100	$ 28,400.0
COACH::AALEENAH::5	AVENIDA ALEENAH	'160 W/O CALLE FLORENA	CALLE FLORENA	Residential	5,760.00	1.5" Thin Overlay	11/6/2024	60	100	$ 28,800.0
COACH::JALISCOAVE::3	JALISCO AVE	JALISCO AVE	JALISCO ACE PARKING LOOP	Residential	5,768.00	1.5" Thin Overlay	11/6/2024	60	100	$ 28,840.0
COACH::CQUINTERRA::2	CALLE QUINTERRA	REDONDO SUR	CORTE SANTOS	Residential	5,883.00	1.5" Thin Overlay	11/6/2024	57	100	$ 29,415.0
COACH::CPERCEBE::1	CORTE PERCEBE	REDONDO SUR	CDS	Residential	5,904.00	1.5" Thin Overlay	11/6/2024	60	100	$ 29,520.0
COACH::MCCOYPEAK::3	MCCOY PEAK AVE	CHAPARROSA ST	SAN JACINTO LN	Residential	5,904.00	1.5" Thin Overlay	11/6/2024	60	100	$ 29,520.0
COACH::MAZATLANDR::1	MAZATLAN DR	SALTILLO CIR	MAZATLAN DR	Residential	5,952.00	1.5" Thin Overlay	11/6/2024	63	100	$ 29,760.0
COACH::ADEORO::2	AVENIDA DE ORO	AVENIDA DEL PARQUE	GUITRON ST	Collector	29,970.00	Microsurfacing	11/6/2024	84	100	$ 29,970.0
COACH::MAZATLANDR::2	MAZATLAN DR	MAZATLAN DR	SALTILLO CIR	Residential	6,048.00	1.5" Thin Overlay	11/6/2024	60	100	$ 30,240.0
COACH::CROJO::4	CALLE ROJO	85' W/O CALLE EMPALME	CALLE EMPALME	Residential	3,400.00	3" Mill & Overlay	11/6/2024	40.5	100	$ 30,600.0
COACH::MARYCT::1	MARY CT	CHRISTINA RD	CDS	Residential	6,176.00	1.5" Thin Overlay	11/6/2024	63	100	$ 30,880.0
COACH::CTECHA::2	CALLE TECHA	CALLE ZAMORA	CALLE LYA	Residential	6,200.00	1.5" Thin Overlay	11/6/2024	57	100	$ 31,000.0
COACH::SABALCT::1	SABAL CT	CDS	PHOENIX AVE	Residential	6,240.00	1.5" Thin Overlay	11/6/2024	57	100	$ 31,200.0
COACH::AHALAWAY::1	AVENIDA HALAWAY	FREDERICK ST	AVENIDA RAZON	Residential	6,264.00	1.5" Thin Overlay	11/6/2024	60	100	$ 31,320.0
COACH::CROJO::3	CALLE ROJO	85' W/O CALLE EMPALME	170' W/O CALLE EMPALME	Residential	3,520.00	3" Mill & Overlay	11/6/2024	37.5	100	$ 31,680.0
COACH::SANREYDR::1	SAN REY DR	CALLE TOLOSA	COLONIA DR	Residential	6,400.00	1.5" Thin Overlay	11/6/2024	60	100	$ 32,000.0
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	Collector	6,400.00	1.5" Thin Overlay	11/6/2024	62	100	$ 32,000.0
COACH::ZUMADR::1	ZUMA DR	LA JOLLA AVE	51ST AVE	Residential	6,408.00	1.5" Thin Overlay	11/6/2024	63	100	$ 32,040.0
COACH::CHIHUAHUA::1	CHIHUAHUA CT	CDS	MAZATLAN DR	Residential	6,608.00	1.5" Thin Overlay	11/6/2024	60	100	$ 33,040.0
COACH::POLKST::2	POLK ST	1330' S/O INDUSTRIAL WAY	610' S/O INDUSTRIAL WAY	Collector	33,166.00	Microsurfacing	11/6/2024	72	100	$ 33,166.0
COACH::AGUACALIEN::1	AGUA CALIENTE ST	AGUA BLANCA AVE	CAMINO LAS BRISAS	Residential	6,660.00	1.5" Thin Overlay	11/6/2024	60	100	$ 33,300.0
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	Residential	6,666.00	1.5" Thin Overlay	11/6/2024	56	100	$ 33,330.0
COACH::SUEZRD::1	SUEZ RD	CAIRO AVE	DAMASCUS AVE	Residential	6,680.00	1.5" Thin Overlay	11/6/2024	60	100	$ 33,400.0
COACH::CPERA::1	CALLE PERA	HILL DR	CDS	Residential	6,688.00	1.5" Thin Overlay	11/6/2024	63	100	$ 33,440.0
COACH::54THAVEE::6	54TH AVE	SHADY LN	TYLER ST	Arterial	33,972.00	Microsurfacing	11/6/2024	75	100	$ 33,972.0
COACH::FREDERICK::11	FREDERICK ST	BAJA WAY	520' N/O BAJA WAY	Collector	34,056.00	Microsurfacing	11/6/2024	81	100	$ 34,056.0
COACH::CGREGORIO::1	CALLE GREGORIO	FREDERICK ST	CALLE DIEGO	Residential	6,916.00	1.5" Thin Overlay	11/6/2024	57	100	$ 34,580.0
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	Arterial	36,300.00	Microsurfacing	11/6/2024	85	100	$ 36,300.0
COACH::MALVASIA::2	MALVASIA WAY	RODREJO WAY	MERCADO CIR	Residential	4,128.00	3" Mill & Overlay	11/6/2024	37.5	100	$ 37,152.0
COACH::BAJAWAY::1	BAJA WAY	CHIAPAS DR	FREDERICK ST	Residential	7,500.00	1.5" Thin Overlay	11/6/2024	57	100	$ 37,500.0
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	Residential	7,704.00	1.5" Thin Overlay	11/6/2024	62	100	$ 38,520.0
COACH::TABASCOCT::1	TABASCO CT	CHIAPAS DR	CDS	Residential	4,284.00	3" Mill & Overlay	11/6/2024	45	100	$ 38,556.0
COACH::50THAVEE::13	50TH AVE	AVENIDA DE ORO	BALBOA ST	Arterial	4,356.00	3" Mill & Overlay	11/6/2024	45	100	$ 39,204.0
COACH::50THAVEW::3	50TH AVE	AVENIDA DE PLATINA	CORONADO ST	Arterial	4,389.00	3" Mill & Overlay	11/6/2024	36	100	$ 39,501.0
COACH::ADELPARQUE::1	AVENIDA DEL PARQUE	PEDRO DR	50TH AVE	Residential	8,000.00	1.5" Thin Overlay	11/6/2024	60	100	$ 40,000.0
COACH::SOLARCEST::3	SOLARCE ST	SOLARCE ST	ALLENDE DR	Residential	4,454.00	3" Mill & Overlay	11/6/2024	45	100	$ 40,086.0
COACH::AFLORABUND::1	AVENIDA FLORABUNDA	CALLE CARMELLO	CALLE ABELIA	Residential	4,464.00	3" Mill & Overlay	11/6/2024	45	100	$ 40,176.0
COACH::AIRPORTBL::3	AIRPORT BLVD	2640' W/O FILLMORE ST	1830' W/O FILLMORE ST	Collector	40,450.00	Microsurfacing	11/6/2024	81	100	$ 40,450.0
COACH::CALHOUNST::11	CALHOUN ST	EL MAR AVE	48TH AVE	Collector	40,610.00	Microsurfacing	11/6/2024	75	100	$ 40,610.0
COACH::ARAZON::5	AVENIDA RAZON	VIA ZAHIDI	CDS	Residential	8,140.00	1.5" Thin Overlay	11/6/2024	60	100	$ 40,700.0
COACH::HILLDR::2	HILL DR	CALLE PERA	SUNSET DR	Residential	8,160.00	1.5" Thin Overlay	11/6/2024	57	100	$ 40,800.0
COACH::JALISCOAVE::2	JALISCO AVE	SALTILLO CIR	JALISCO AVE	Residential	4,592.00	3" Mill & Overlay	11/6/2024	37.5	100	$ 41,328.0
COACH::ANERIUM::2	AVENIDA NERIUM	CALLE GLORIOSA	CALLE TECOMARIA	Residential	8,280.00	1.5" Thin Overlay	11/6/2024	63	100	$ 41,400.0
COACH::ADRIANACT::1	ADRIANA CT	AVENIDA ALEENAH	CDS	Residential	8,424.00	1.5" Thin Overlay	11/6/2024	63	100	$ 42,120.0
COACH::CNINOS::2	CALLE NINOS	50' W/O CALLE BONITA	CALLE BELLA	Residential	8,460.00	1.5" Thin Overlay	11/6/2024	63	100	$ 42,300.0
COACH::ELMARAVE::1	EL MAR AVE	LA PLAYA ST	CALHOUN ST	Residential	8,536.00	1.5" Thin Overlay	11/6/2024	60	100	$ 42,680.0
COACH::51STAVE::5	51ST AVE	FREDERICK ST	690' E/O FREDRICK ST	Collector	42,718.00	Microsurfacing	11/6/2024	72	100	$ 42,718.0
COACH::BAGDADAVE::6	BAGDAD AVE	SUEZ RD	SH-86	Residential	8,560.00	1.5" Thin Overlay	11/6/2024	57	100	$ 42,800.0
COACH::FREDERICK::13	FREDERICK ST	JALISCO AVE	50TH AVE	Collector	42,966.00	Microsurfacing	11/6/2024	75	100	$ 42,966.0
COACH::MAZATLANDR::7	MAZATLAN DR	MAZATLAN DR PARKING LOOP	MAZATLAN DR PARKING LOOP	Residential	8,640.00	1.5" Thin Overlay	11/6/2024	57	100	$ 43,200.0
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	Residential	8,640.00	1.5" Thin Overlay	11/6/2024	62	100	$ 43,200.0
COACH::DILLONRD::12	DILLON RD	450' S/O VISTA DEL NORTE	VISTA DEL NORTE	Arterial	43,488.00	Microsurfacing	11/6/2024	78	100	$ 43,488.0
COACH::VALENCIALN::1	VALENCIA LN	CDS	CYPRESS ST	Residential	8,820.00	1.5" Thin Overlay	11/6/2024	56	100	$ 44,100.0
COACH::FREDERICK::12	FREDERICK ST	660' S/O CHRISTINA RD	JALISCO AVE	Collector	44,154.00	Microsurfacing	11/6/2024	78	100	$ 44,154.0
COACH::53RDAVE::17	53RD AVE	SHADY LN	SHADY LN	Collector	8,835.00	1.5" Thin Overlay	11/6/2024	60	100	$ 44,175.0
COACH::CHIAPASDR::5	CHIAPAS DR	315' E/O BAJA WAY	BAJA WAY	Residential	8,848.00	1.5" Thin Overlay	11/6/2024	57	100	$ 44,240.0
COACH::53RDAVE::7	53RD AVE	CALLE CAMACHO	130' E/O CALLE CAMACHO	Collector	4,995.00	3" Mill & Overlay	11/6/2024	37.5	100	$ 44,955.0
COACH::WASHINGTON::5	WASHINGTONIA AVE	RHAPIS CT	PHOENIX AVE	Residential	9,144.00	1.5" Thin Overlay	11/6/2024	60	100	$ 45,720.0
COACH::GENOAST::11	GENOA ST	VINETA LN	SYLMAR LN	Residential	9,250.00	1.5" Thin Overlay	11/6/2024	57	100	$ 46,250.0
COACH::ARAZON::2	AVENIDA RAZON	CORTE YAGER	CORTE GILLAN	Residential	9,250.00	1.5" Thin Overlay	11/6/2024	57	100	$ 46,250.0
COACH::NEWPORTST::3	NEWPORT ST	MALIBU AVE	CATALINA AVE	Residential	9,288.00	1.5" Thin Overlay	11/6/2024	57	100	$ 46,440.0
COACH::CHRISTINA::6	CHRISTINA RD	MARY CT	AVENIDA ADOBE	Residential	9,288.00	1.5" Thin Overlay	11/6/2024	60	100	$ 46,440.0
COACH::LAGUNALN::2	LAGUNA LN	LAGUNA LN	CAPITOLA AVE	Residential	9,324.00	1.5" Thin Overlay	11/6/2024	57	100	$ 46,620.0
COACH::AADOBE::8	AVENIDA ADOBE	JULIA DR	LINDA AVE	Residential	9,324.00	1.5" Thin Overlay	11/6/2024	57	100	$ 46,620.0
COACH::CATARINACT::1	CATARINA CT	AVENIDA NICOLE	CDS	Residential	9,360.00	1.5" Thin Overlay	11/6/2024	60	100	$ 46,800.0
COACH::CHARLTONPK::1	CHARLTON PEAK ST	SAN MATEO AVE	MECCA HILLS AVE	Residential	9,360.00	1.5" Thin Overlay	11/6/2024	63	100	$ 46,800.0
COACH::BRIANNELN::2	BRIANNE LN	CALENDULA AVE	MAGNOLIA ST	Residential	9,361.00	1.5" Thin Overlay	11/6/2024	60	100	$ 46,805.0
COACH::VENENTABLD::2	VENENTA BLVD	PISMO CT	HUNTINGTON AVE	Residential	9,396.00	1.5" Thin Overlay	11/6/2024	57	100	$ 46,980.0
COACH::BRIANNELN::3	BRIANNE LN	MAGNOLIA ST	FIESTA RD	Residential	9,435.00	1.5" Thin Overlay	11/6/2024	63	100	$ 47,175.0
COACH::HILLDR::4	HILL DR	240' W/O SH-111	SH-111	Residential	9,440.00	1.5" Thin Overlay	11/6/2024	57	100	$ 47,200.0
COACH::CALHOUNST::8	CALHOUN ST	AVENUE 49	SAN IGNACIO AVE	Collector	47,306.00	Microsurfacing	11/6/2024	72	100	$ 47,306.0
COACH::SIERRAST	SIERRA ST	FIESTA RD	TERA VISTA	Residential	9,472.00	1.5" Thin Overlay	11/6/2024	63	100	$ 47,360.0
COACH::ESIENNACIR::2	E SIENNA CIR	INDIGO CT	N SIENNA CIR	Residential	9,504.00	1.5" Thin Overlay	11/6/2024	60	100	$ 47,520.0
COACH::REYESST::1	REYES ST	GUITRON ST	ROMERO ST	Residential	9,520.00	1.5" Thin Overlay	11/6/2024	57	100	$ 47,600.0
COACH::SH-86S::14	SH-86	52ND AVE	CALLE ROJO	Arterial	47,680.00	Microsurfacing	11/6/2024	72	100	$ 47,680.0
COACH::BRIANNELN::5	BRIANNE LN	TERA VISTA	MEADOWS LN	Residential	9,546.00	1.5" Thin Overlay	11/6/2024	63	100	$ 47,730.0
COACH::CHAPARROSA::2	CHAPARROSA ST	MECCA HILLS AVE	GLENDORA RIDGE AVE	Residential	9,648.00	1.5" Thin Overlay	11/6/2024	57	100	$ 48,240.0
COACH::SUMMERST::1	SUMMER ST	CALENDULA AVE	MAGNOLIA ST	Residential	9,694.00	1.5" Thin Overlay	11/6/2024	63	100	$ 48,470.0
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	Residential	9,720.00	1.5" Thin Overlay	11/6/2024	62	100	$ 48,600.0
COACH::CALHOUNST::9	CALHOUN ST	SAN IGNACIO AVE	EAGLE AVE	Collector	48,794.00	Microsurfacing	11/6/2024	81	100	$ 48,794.0
COACH::VINEAVE::10	VINE AVE	ALLEY	1ST ST	Collector	9,776.00	1.5" Thin Overlay	11/6/2024	57	100	$ 48,880.0
COACH::WESTERFILD::3	WESTERFIELD WAY	S BALBOA ST	140' E/O S CORONADO ST	Residential	5,480.00	3" Mill & Overlay	11/6/2024	40.5	100	$ 49,320.0
COACH::WESTERFILD::2	WESTERFIELD WAY	140' W/O S BALBOA ST	S BALBOA ST	Residential	5,480.00	3" Mill & Overlay	11/6/2024	43.5	100	$ 49,320.0
COACH::WESTERFILD::5	WESTERFIELD WAY	S CORONADO ST	140' E/O S CORONADO ST	Residential	5,480.00	3" Mill & Overlay	11/6/2024	45	100	$ 49,320.0
COACH::FREDERICK::19	FREDERICK ST	IRIS AVE	150' N/O IRIS AVE	Collector	9,900.00	1.5" Thin Overlay	11/6/2024	57	100	$ 49,500.0
COACH::52NDAVEE::33	52ND AVE	SH-111	TYLER ST	Arterial	49,770.00	Microsurfacing	11/6/2024	81	100	$ 49,770.0
COACH::CNINOS::5	CALLE NINOS	CALLE AMIGOS	CALLE LA PAZ	Residential	9,972.00	1.5" Thin Overlay	11/6/2024	60	100	$ 49,860.0
COACH::51STAVE::4	51ST AVE	CHIAPAS DR	FREDERICK ST	Collector	49,968.00	Microsurfacing	11/6/2024	84	100	$ 49,968.0
COACH::REDONDOSUR::3	REDONDO SUR	CORTE PERCEBE	REDONDO ESTE	Residential	10,027.00	1.5" Thin Overlay	11/6/2024	63	100	$ 50,135.0
COACH::AFLORABUND::4	AVENIDA FLORABUNDA	CALLE ELDARICA	CALLE CANTARA	Residential	10,080.00	1.5" Thin Overlay	11/6/2024	57	100	$ 50,400.0
COACH::LAPONDEROS::3	LA PONDEROSA DR	HERNANDEZ ST	CDS	Residential	4,140.00	Slurry Seal	11/6/2025	84	100	2070
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.00	Slurry Seal	11/6/2025	85	100	3204
COACH::CHRISTINA::1	CHRISTINA RD	FREDERICK ST	ANDREA LN	Residential	6,480.00	Slurry Seal	11/6/2025	84	100	3240
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.00	Slurry Seal	11/6/2025	85	100	3888
COACH::HORNBLEND::1	HORNBLEND ST	50TH AVE	JADEROCK RD	Residential	8,436.00	Slurry Seal	11/6/2025	84	100	4218
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.00	Slurry Seal	11/6/2025	85	100	4320
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.00	Slurry Seal	11/6/2025	85	100	4320
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.00	Slurry Seal	11/6/2025	85	100	4320
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.00	Slurry Seal	11/6/2025	85	100	4458.5
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.00	Slurry Seal	11/6/2025	85	100	4680
COACH::CCARRASCO::2	CALLE CARRASCO	CALLE CHAVEZ	CALLE YSIANO	Residential	9,576.00	Slurry Seal	11/6/2025	84	100	4788
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.00	Slurry Seal	11/6/2025	85	100	5577
COACH::52NDAVEE::12	52ND AVE	CALLE AVILA	CALLE AVILA	Arterial	1,508.00	1.5" Thin Overlay	11/6/2025	63	100	7540
COACH::PASEOLARED::2	PASEO LAREDO	CALLE DE VEGA	AVENIDA CORTEZ	Residential	15,280.00	Slurry Seal	11/6/2025	84	100	7640
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.00	Slurry Seal	11/6/2025	85	100	8442
COACH::CEMPALME::1	CALLE EMPALME	BELLISSIMA AVE	53RD AVE	Residential	18,720.00	Slurry Seal	11/6/2025	84	100	9360
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.00	Slurry Seal	11/6/2025	85	100	9996
COACH::AIRPORTBL::7	AIRPORT BLVD	1085' W/O FILLMORE ST	860' W/O FILLMORE ST	Collector	11,300.00	Microsurfacing	11/6/2025	84	100	11300
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.00	1.5" Thin Overlay	11/6/2025	62	100	12780
COACH::VIASANTIAG::1	VIA SANTIAGO	CDS	CALLE DIEGO	Residential	2,556.00	1.5" Thin Overlay	11/6/2025	63	100	12780
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.00	Slurry Seal	11/6/2025	85	100	14436
COACH::54THAVEE::4	54TH AVE	SH-86	CALLE BALDERAS	Arterial	16,605.00	Microsurfacing	11/6/2025	84	100	16605
COACH::CVERDE::5	CALLE VERDE	CESAR CHAVEZ ST	SH-86	Collector	3,400.00	1.5" Thin Overlay	11/6/2025	63	100	17000
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.00	Slurry Seal	11/6/2025	85	100	17075.5
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.00	Slurry Seal	11/6/2025	85	100	17537
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.00	Slurry Seal	11/6/2025	85	100	17613
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.00	Microsurfacing	11/6/2025	85	100	18750
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.00	Microsurfacing	11/6/2025	85	100	18900
COACH::PARKLN::3	PARK LN	130' W/O SH-111	SH-111	Arterial	3,810.00	1.5" Thin Overlay	11/6/2025	63	100	19050
COACH::CZAMORA::5	CALLE ZAMORA	CESAR CHAVEZ ST	SH-86	Residential	3,852.00	1.5" Thin Overlay	11/6/2025	63	100	19260
COACH::54THAVEE::5	54TH AVE	CALLE BALDERAS	SHADY LN	Arterial	20,985.00	Microsurfacing	11/6/2025	84	100	20985
COACH::AIRPORTBL::4	AIRPORT BLVD	1830' W/O FILLMORE ST	1395' W/O FILLMORE ST	Collector	21,750.00	Microsurfacing	11/6/2025	84	100	21750
COACH::52NDAVEE::29	52ND AVE	SHADY LN	GENOA ST	Arterial	23,625.00	Microsurfacing	11/6/2025	84	100	23625

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::ARAZON::4	AVENIDA RAZON	AVENIDA HALAWAY	VIA ZAHIDI	Residential	4,810.00	1.5" Thin Overlay	11/6/2025	63	100	24050
COACH::SALTILLOCR::1	SALTILLO CIR	CHIAPAS DR	JALISCO AVE	Residential	4,992.00	1.5" Thin Overlay	11/6/2025	63	100	24960
COACH::LUNADENICO::3	LUNA DE NICOLETA ST	140' S/O PLAZA DE ORO AVE	PLAZA DE ORO AVE	Residential	5,040.00	1.5" Thin Overlay	11/6/2025	63	100	25200
COACH::BAGDADAVE::2	BAGDAD AVE	LIBNAN ST	MECCA LANE	Residential	5,200.00	1.5" Thin Overlay	11/6/2025	63	100	26000
COACH::52NDAVEE::6	52ND AVE	DOUMA CT	CALLE TORRES ORDUNO	Arterial	5,304.00	1.5" Thin Overlay	11/6/2025	63	100	26520
COACH::SH-86N::15	SH-86	ALLEY	WESTERFIELD WAY	Arterial	26,880.00	Microsurfacing	11/6/2025	84	100	26880
COACH::MARIANAAVE::1	MARIANA AVE	SOL DE LINDA ST	CIELO VICTORIA ST	Residential	5,587.00	1.5" Thin Overlay	11/6/2025	63	100	27935
COACH::BELLISSIMA::1	BELLISSIMA AVE	FREDERICK ST	MODENA TER	Residential	6,160.00	1.5" Thin Overlay	11/6/2025	63	100	30800
COACH::CHIAPASDR::7	CHIAPAS DR	220' S/O SALTILLO CT	SALTILLO CIR	Residential	6,188.00	1.5" Thin Overlay	11/6/2025	63	100	30940
COACH::AMARIA::3	AVENIDA MARIA	CALLE ANABELLA	CALLE ALICIA	Residential	6,270.00	1.5" Thin Overlay	11/6/2025	63	100	31350
COACH::LAJOLLAAVE::4	LA JOLLA AVE	NEWPORT ST	CDS	Residential	3,564.00	3" Mill & Overlay	11/6/2025	45	100	32076
COACH::LASFLORES::3	LAS FLORES AVE	CALLE MENDOZA	CDS	Residential	6,468.00	1.5" Thin Overlay	11/6/2025	63	100	32340
COACH::CLIMON::1	CALLE LIMON	GENOA ST	CAMINO CORTO	Residential	6,570.00	1.5" Thin Overlay	11/6/2025	63	100	32850
COACH::CMOLINO::1	CORTE MOLINO	CDS	REDONDO NORTE	Residential	6,600.00	1.5" Thin Overlay	11/6/2025	63	100	33000
COACH::KENTIACT::1	KENTIA CT	CDS	PHOENIX AVE	Residential	6,656.00	1.5" Thin Overlay	11/6/2025	63	100	33280
COACH::52NDAVEW::11	52ND AVE	CALLE CAMACHO	CALLE AVILA	Arterial	6,916.00	1.5" Thin Overlay	11/6/2025	63	100	34580
COACH::SALTILLOCR::5	SALTILLO CIR	CHIAPAS DR	MAZATLAN DR	Residential	7,254.00	1.5" Thin Overlay	11/6/2025	63	100	36270
COACH::CHIAPASDR::2	CHIAPAS DR	500' N/O 51ST AVE	TABASCO CT	Residential	7,392.00	1.5" Thin Overlay	11/6/2025	63	100	36960
COACH::GARNETRIDG::1	GARNET RIDGE ST	AVENUE 49	SAN MATEO AVE	Residential	7,560.00	1.5" Thin Overlay	11/6/2025	63	100	37800
COACH::50THAVEW::2	50TH AVE	KENMORE ST	AVENIDA DE PLATINA	Arterial	4,323.00	3" Mill & Overlay	11/6/2025	45	100	38907
COACH::50THAVEE::14	50TH AVE	BALBOA ST	AVENIDA DE PLATA	Arterial	4,356.00	3" Mill & Overlay	11/6/2025	45	100	39204
COACH::CLAMIRADAW::1	CORTE LA MIRADA	VAN BUREN ST	CALLE EL SOL	Residential	8,029.00	1.5" Thin Overlay	11/6/2025	63	100	40145
COACH::ACORTEZ::2	AVENIDA CORTEZ	VIA HERMOSA	VIA DURANGO	Residential	8,748.00	1.5" Thin Overlay	11/6/2025	63	100	43740
COACH::CSANTOS::1	CORTE SANTOS	CDS	CALLE QUINTERRA	Residential	8,748.00	1.5" Thin Overlay	11/6/2025	63	100	43740
COACH::AEUROPA::1	AVENIDA EUROPA	D\E	CALLE CARMELLO	Residential	4,932.00	3" Mill & Overlay	11/6/2025	45	100	44388
COACH::MCCOYPEAK::1	MCCOY PEAK AVE	SAN GORGONIO ST	ARICA DR	Residential	9,360.00	1.5" Thin Overlay	11/6/2025	63	100	46800
COACH::BIGBEARPL::1	BIG BEAR PL	CHARLTON PEAK ST	CHIRIACO SUMMIT ST	Residential	9,360.00	1.5" Thin Overlay	11/6/2025	63	100	46800
COACH::REDMOUNT::1	RED MOUNTAIN PL	GRANITE PASS TRL	COXCOMB DR	Residential	9,360.00	1.5" Thin Overlay	11/6/2025	63	100	46800
COACH::SIERRAST::2	SIERRA ST	TERA VISTA	MEADOWS LN	Residential	9,398.00	1.5" Thin Overlay	11/6/2025	63	100	46990
COACH::52NDAVEW::19	52ND AVE	DOUMA CT	DOUMA ST	Arterial	9,412.00	1.5" Thin Overlay	11/6/2025	63	100	47060
COACH::SUMMERST::3	SUMMER ST	MAGNOLIA ST	FIESTA RD	Residential	9,435.00	1.5" Thin Overlay	11/6/2025	63	100	47175
COACH::BRIANNELN::4	BRIANNE LN	FIESTA RD	TERA VISTA	Residential	9,472.00	1.5" Thin Overlay	11/6/2025	63	100	47360
COACH::REDONDONOR::1	REDONDO NORTE	REDONDO PONIENTE	CORTE MOLINO	Residential	9,540.00	1.5" Thin Overlay	11/6/2025	63	100	47700
COACH::NSIENNACIR::2	N SIENNA CIR	SLATE DR	SAPPHIRE LN	Residential	9,576.00	1.5" Thin Overlay	11/6/2025	63	100	47880
COACH::ANDREALN::2	ANDREA LN	LINDA AVE	CHRISTINA RD	Residential	9,583.00	1.5" Thin Overlay	11/6/2025	63	100	47915
COACH::WESTERFILD::7	WESTERFIELD WAY	S KENMORE ST	SUNCREST ST	Residential	5,400.00	3" Mill & Overlay	11/6/2025	45	100	48600
COACH::SANGORGONI::1	SAN GORGONIO ST	EAGLE AVE	MCCOY PEAK AVE	Residential	9,720.00	1.5" Thin Overlay	11/6/2025	63	100	48600
COACH::CHAPARROSA::6	CHAPARROSA ST	EAGLE AVE	MCCOY PEAK AVE	Residential	9,720.00	1.5" Thin Overlay	11/6/2025	63	100	48600
COACH::CZAMORA::3	CALLE ZAMORA	CALLE AVILA	CALLE CAMACHO	Residential	9,720.00	1.5" Thin Overlay	11/6/2025	63	100	48600
COACH::SOLARCEST::2	SOLARCE ST	PROSECCO WAY	SOLARCE ST	Residential	5,406.00	3" Mill & Overlay	11/6/2025	45	100	48654
COACH::PALOMARCT::1	PALOMAR CT	SAN JACINTO LN	CDS	Residential	9,972.00	1.5" Thin Overlay	11/6/2025	63	100	49860
COACH::CALENDULA::2	CALENDULA AVE	BRIANNE LN	JAZMIN ST	Residential	10,027.00	1.5" Thin Overlay	11/6/2025	63	100	50135
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	Residential	10,080.00	1.5" Thin Overlay	11/6/2025	56	100	50400
COACH::AFLORABUND::3	AVENIDA FLORABUNDA	CALLE TECOMARIA	CALLE ELDARICA	Residential	10,080.00	1.5" Thin Overlay	11/6/2025	57	100	50400
COACH::ANERIUM::4	AVENIDA NERIUM	CALLE ELDARICA	CALLE CANTARA	Residential	10,080.00	1.5" Thin Overlay	11/6/2025	60	100	50400
COACH::ANERIUM::3	AVENIDA NERIUM	CALLE TECOMARIA	CALLE ELDARICA	Residential	10,080.00	1.5" Thin Overlay	11/6/2025	60	100	50400
COACH::TODOSSANTO::1	TODOS SANTOS AVE	EL ARCO ST	EL CASTILLO RD	Residential	10,080.00	1.5" Thin Overlay	11/6/2025	63	100	50400
COACH::CAPITOLAAV::2	CAPITOLA AVE	MONARCH RD	LAGUNA LN	Residential	10,116.00	1.5" Thin Overlay	11/6/2025	60	100	50580
COACH::52NDAVEW::4	52ND AVE	TYLER ST	SH-111	Arterial	50,670.00	Microsurfacing	11/6/2025	72	100	50670
COACH::CFLORENA::1	CALLE FLORENA	AVENIDA RAYLYNN	AVENIDA GRACE	Residential	10,152.00	1.5" Thin Overlay	11/6/2025	57	100	50760
COACH::GENOAST::13	GENOA ST	NAPOLI LN	BAGDAD ST	Residential	10,175.00	1.5" Thin Overlay	11/6/2025	63	100	50875
COACH::CBERNARDO::3	CALLE BERNARDO	CALLE LEANDRO	CDS	Residential	10,234.00	1.5" Thin Overlay	11/6/2025	60	100	51170
COACH::SH-111::14	SH-111	50TH AVE	PARK LN	Arterial	51,250.00	Microsurfacing	11/6/2025	81	100	51250
COACH::GLENDORARG::1	GLENDORA RIDGE AVE	CHIRIACO SUMMIT ST	CHAPARROSA ST	Residential	10,296.00	1.5" Thin Overlay	11/6/2025	60	100	51480
COACH::CCARMELLO::1	CALLE CARMELLO	AVENIDA FLORABUNDA	AVENIDA EUROPA	Residential	10,296.00	1.5" Thin Overlay	11/6/2025	63	100	51480
COACH::ANICOLE::1	AVENIDA NICOLE	CALLE ALICIA	CATARINA CT	Residential	10,332.00	1.5" Thin Overlay	11/6/2025	63	100	51660
COACH::CHIAPASDR::4	CHIAPAS DR	500' E/O TABASCO CT	BAJA WAY	Residential	10,332.00	1.5" Thin Overlay	11/6/2025	63	100	51660
COACH::SANMATEOAV::2	SAN MATEO AVE	GARNET RIDGE ST	CHAPARROSA ST	Residential	10,332.00	1.5" Thin Overlay	11/6/2025	63	100	51660
COACH::COCASO::3	CALLE OCASO	CORTE ESTIVO	CORTE SOLIS	Residential	10,360.00	1.5" Thin Overlay	11/6/2025	57	100	51800
COACH::CELSOL::4	CALLE EL SOL	CORTE SOLEADO	AVENIDA LA LUNA	Residential	10,360.00	1.5" Thin Overlay	11/6/2025	57	100	51800
COACH::CELSOL::2	CALLE EL SOL	CORTE EL ALBA	CORTE LA MORADA	Residential	10,360.00	1.5" Thin Overlay	11/6/2025	63	100	51800
COACH::SH-86S::15	SH-86	CALLE ROJO	CALLE VERDE	Arterial	51,840.00	Microsurfacing	11/6/2025	75	100	51840
COACH::SH-86N::4	SH-86	CALLE VERDE	CALLE ROJO	Arterial	51,840.00	Microsurfacing	11/6/2025	81	100	51840
COACH::50THAVEW::10	50TH AVE	FREDERICK ST	MAZATLAN DR	Arterial	10,373.00	1.5" Thin Overlay	11/6/2025	60	100	51865
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	Collector	10,400.00	1.5" Thin Overlay	11/6/2025	62	100	52000
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	Collector	10,400.00	1.5" Thin Overlay	11/6/2025	62	100	52000
COACH::SANASISDR::4	SAN ASIS DR	SAN CAPISTRANO DR	SAN SOLANO RD	Residential	10,400.00	1.5" Thin Overlay	11/6/2025	63	100	52000
COACH::REDONDONOR::2	REDONDO NORTE	CORTE MOLINO	CALLE QUINTERRA	Residential	10,440.00	1.5" Thin Overlay	11/6/2025	57	100	52200
COACH::52NDAVE::41	52ND AVE	2200' W/O FILLMORE ST	FILLMORE ST	Rural	65,400.00	Chip Seal	11/6/2025	84	100	52320
COACH::CQUINTERRA::4	CALLE QUINTERRA	CORTE LORETO	REDONDO NORTE	Residential	5,846.00	3" Mill & Overlay	11/6/2025	43.5	100	52614
COACH::SH-86N::3	SH-86	CALLE ZAMORA	CALLE VERDE	Arterial	52,720.00	Microsurfacing	11/6/2025	78	100	52720
COACH::SH-86S::16	SH-86	CALLE VERDE	CALLE ZAMORA	Arterial	52,720.00	Microsurfacing	11/6/2025	78	100	52720
COACH::VANBURENST::1	VAN BUREN ST	AIRPORT BLVD	55TH AVE	Collector	52,880.00	Microsurfacing	11/6/2025	72	100	52880
COACH::SH-86N::2	SH-86	53RD AVE	CALLE ZAMORA	Arterial	52,880.00	Microsurfacing	11/6/2025	75	100	52880
COACH::SH-86S::17	SH-86	CALLE ZAMORA	53RD AVE	Arterial	52,880.00	Microsurfacing	11/6/2025	75	100	52880
COACH::SYLMARLN::1	SYLMAR LN	CDS	GENOA ST	Residential	10,590.00	1.5" Thin Overlay	11/6/2025	60	100	52950
COACH::VINETALN::1	VINETA LN	CDS	GENOA ST	Residential	10,590.00	1.5" Thin Overlay	11/6/2025	60	100	52950
COACH::NILELN::1	NILE LN	CDS	GENOA ST	Residential	10,590.00	1.5" Thin Overlay	11/6/2025	60	100	52950
COACH::SANTOLN::1	SANTO LN	SOLEDAD PL	CALLE TOLOSA	Residential	10,600.00	1.5" Thin Overlay	11/6/2025	63	100	53000
COACH::FREDERICK::9	FREDERICK ST	51ST AVE	AVENIDA HALAWAY	Collector	53,064.00	Microsurfacing	11/6/2025	78	100	53064
COACH::CJOYCE::1	CALLE JOYCE	AVENIDA RAYLYNN	AVENIDA GRACE	Residential	10,620.00	1.5" Thin Overlay	11/6/2025	63	100	53100
COACH::PROSECCO::1	PROSECCO WAY	RODREIO WAY	ALLENDE DR	Residential	5,920.00	3" Mill & Overlay	11/6/2025	45	100	53280
COACH::48THAVEW::6	48TH AVE	CIELO VICTORIA ST	JACKSON ST	Arterial	53,400.00	Microsurfacing	11/6/2025	75	100	53400
COACH::ASANDOMING::3	AVENIDA SAN DOMINGO	CAMINO EL FARO	CAMINO LORETO	Residential	10,693.00	1.5" Thin Overlay	11/6/2025	60	100	53465
COACH::VALLEYRD::5	VALLEY RD	NELSON ST	LAS PALMAS ST	Collector	10,720.00	1.5" Thin Overlay	11/6/2025	56	100	53600
COACH::HIBISCOST::1	HIBISCO ST	PHOENIX AVE	CALENDULA AVE	Residential	5,994.00	3" Mill & Overlay	11/6/2025	45	100	53946
COACH::TRIPOLIWAY::2	TRIPOLI WAY	52ND AVE	ARABY AVE	Residential	10,800.00	1.5" Thin Overlay	11/6/2025	60	100	54000
COACH::MARIANAAVE::2	MARIANA AVE	CIELO VICTORIA ST	LUNA DE NICOLETA ST	Residential	10,841.00	1.5" Thin Overlay	11/6/2025	57	100	54205
COACH::VERMOUTHDR::1	VERMOUTH DR	D/E	PRIMITIVO DR	Residential	6,080.00	3" Mill & Overlay	11/6/2025	45	100	54720
COACH::VALLEYRD::4	VALLEY RD	MORGAN AVE	NELSON ST	Collector	11,040.00	1.5" Thin Overlay	11/6/2025	62	100	55200
COACH::PINTOLN::3	PINTO LN	MCCOY PEAK AVE	RIMROCK LN	Residential	11,160.00	1.5" Thin Overlay	11/6/2025	60	100	55800
COACH::MAZATLANDR::3	MAZATLAN DR	MAZATLAN DR	MAZATLAN DR PARKING LOOP	Residential	6,208.00	3" Mill & Overlay	11/6/2025	42	100	55872
COACH::SANJACINTO::1	SAN JACINTO LN	MCCOY PEAK AVE	RIMROCK LN	Residential	11,196.00	1.5" Thin Overlay	11/6/2025	57	100	55980
COACH::CHAPARROSA::5	CHAPARROSA ST	COXCOMB DR	EAGLE AVE	Residential	11,196.00	1.5" Thin Overlay	11/6/2025	60	100	55980
COACH::MALVASIA::4	MALVASIA WAY	CHARDONNAY CIR	PROSECCO WAY	Residential	6,240.00	3" Mill & Overlay	11/6/2025	42	100	56160
COACH::CAIROAVE::4	CAIRO AVE	CALLE CAMACHO	SUEZ RD	Residential	6,240.00	3" Mill & Overlay	11/6/2025	45	100	56160
COACH::CROBERTO::1	CALLE ROBERTO	CALLE TECHA	CDS	Residential	11,232.00	1.5" Thin Overlay	11/6/2025	60	100	56160
COACH::PALMAVE::6	PALM AVE	ALLEY	2ND ST	Collector	11,280.00	1.5" Thin Overlay	11/6/2025	57	100	56400
COACH::LASLUNASAV::3	LAS LUNAS AVE	MESA CT	RIO RANCHO CT	Residential	11,376.00	1.5" Thin Overlay	11/6/2025	63	100	56880
COACH::SANJACINTO::2	SAN JACINTO LN	RIMROCK LN	PALOMAR CT	Residential	11,376.00	1.5" Thin Overlay	11/6/2025	63	100	56880
COACH::QUAILMOUNT::1	QUAIL MOUNTAIN TER	SAN GORGONIO ST	ARICA DR	Residential	11,520.00	1.5" Thin Overlay	11/6/2025	60	100	57600
COACH::CLAPAZ::2	CALLE LA PAZ	CALLE ROSA	53RD AVE	Residential	6,444.00	3" Mill & Overlay	11/6/2025	45	100	57996
COACH::51STAVE::8	51ST AVE	MECCA LANE	SUNCREST ST	Collector	58,140.00	Microsurfacing	11/6/2025	75	100	58140
COACH::REDONDOEST::2	REDONDO ESTE	AVENIDA VESTAGO	REDONDO NORTE	Residential	11,916.00	1.5" Thin Overlay	11/6/2025	60	100	59580
COACH::LIVISTONA::1	LIVISTONA CT	CDS	PHOENIX AVE	Residential	6,656.00	3" Mill & Overlay	11/6/2025	45	100	59904
COACH::CVERDE::4	CALLE VERDE	CALLE CAMACHO	CESAR CHAVEZ ST	Collector	12,080.00	1.5" Thin Overlay	11/6/2025	57	100	60400
COACH::REDONDOEST::1	REDONDO ESTE	REDONDO SUR	AVENIDA VESTAGO	Residential	12,168.00	1.5" Thin Overlay	11/6/2025	63	100	60840
COACH::PRIMAVERA::1	PRIMA VERA	MEADOWS LN	49TH AVE	Residential	6,768.00	3" Mill & Overlay	11/6/2025	43.5	100	60912
COACH::PHOENIXAVE::5	PHOENIX AVE	HIBISCO ST	FREDERICK ST	Residential	6,912.00	3" Mill & Overlay	11/6/2025	45	100	62208
COACH::MEADOWSLN::2	MEADOWS LN	PRIMA VERA	BRIANNE LN	Residential	12,469.00	1.5" Thin Overlay	11/6/2025	60	100	62345
COACH::BAGDADAVE::1	BAGDAD AVE	DATE AVE	DATE AVE	Collector	12,480.00	1.5" Thin Overlay	11/6/2025	63	100	62400
COACH::MERCADOCIR::1	MERCADO CIR	MALVASIA WAY	CDS	Residential	6,944.00	3" Mill & Overlay	11/6/2025	45	100	62496
COACH::ESTRELLAPE::1	ESTRELLA PEDRO ST	CAMINO BONITO AVE	LA COSTA AVE	Residential	12,600.00	1.5" Thin Overlay	11/6/2025	57	100	63000
COACH::DATEAVE::8	DATE AVE	BAGDAD AVE	8TH ST	Collector	7,020.00	3" Mill & Overlay	11/6/2025	42	100	63180
COACH::TRIPOLIWAY::11	TRIPOLI WAY	BAGDAD AVE	7TH ST	Collector	12,636.00	1.5" Thin Overlay	11/6/2025	57	100	63180
COACH::DOUMAST::2	DOUMA ST	DAMASCUS AVE	BAGDAD AVE	Residential	12,654.00	1.5" Thin Overlay	11/6/2025	63	100	63270
COACH::ALLENDEDR::4	ALLENDE DR	ALLENDE DR	VERMOUTH DR	Residential	3,168.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2025	12	100	63360
COACH::JALISCOAVE::6	JALISCO AVE	TAXCO WAY	FREDERICK ST	Residential	7,056.00	3" Mill & Overlay	11/6/2025	36	100	63504
COACH::SHADOWROCK::1	SHADOWROCK DR	CALHOUN ST	COPPERIDGE ST	Residential	7,067.00	3" Mill & Overlay	11/6/2025	37.5	100	63603
COACH::PALMERASCR::5	PALMERAS CIR	CARDELINA DR	PALMERAS CIR	Residential	7,200.00	3" Mill & Overlay	11/6/2025	43.5	100	64800
COACH::CVERDE::3	CALLE VERDE	CALLE AVILA	CALLE CAMACHO	Collector	12,960.00	1.5" Thin Overlay	11/6/2025	63	100	64800
COACH::SH-111::2	SH-111	TYLER ST	52ND AVE	Arterial	65,050.00	Microsurfacing	11/6/2025	78	100	65050
COACH::MEADOWSLN::1	MEADOWS LN	SIERRA ST	PRIMA VERA	Residential	13,024.00	1.5" Thin Overlay	11/6/2025	57	100	65120
COACH::VIAMERIDA::1	VIA MERIDA	VAN BUREN ST	PASEO BARCELONA	Residential	7,272.00	3" Mill & Overlay	11/6/2025	44	100	65448
COACH::FIESTARD::3	FIESTA RD	VAN BUREN ST	SUMMER ST	Residential	7,380.00	3" Mill & Overlay	11/6/2025	37.5	100	66420
COACH::RIMROCKLN::1	RIMROCK LN	SAN JACINTO LN	PINTO LN	Residential	13,320.00	1.5" Thin Overlay	11/6/2025	63	100	66600
COACH::50THAVE::1	50TH AVE	SH-86	PETER RABBIT LN	Arterial	67,160.00	Microsurfacing	11/6/2025	75	100	67160
COACH::SHADYLN::4	SHADY LN	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	13,440.00	1.5" Thin Overlay	11/6/2025	62	100	67200
COACH::CCAMACHO::6	CALLE CAMACHO	52ND AVE	CAIRO AVE	Residential	13,480.00	1.5" Thin Overlay	11/6/2025	57	100	67400
COACH::LASFLORES::2	LAS FLORES AVE	EL SOL ST	CALLE MENDOZA	Residential	13,497.00	1.5" Thin Overlay	11/6/2025	63	100	67485
COACH::VIAVALENCI::3	VIA VALENCIA	CALLE MARBELLA	PASEO CORDOVA	Residential	4,851.00	Slurry Seal	11/6/2026	85	100	2425.5
COACH::NAOMICT::2	NAOMI CT	PEREZ ST	CDS	Residential	6,240.00	Slurry Seal	11/6/2026	84	100	3120
COACH::COLIVO::1	CALLE OLIVO	CALLE NOGAL	CALLE PINO	Residential	10,440.00	Slurry Seal	11/6/2026	84	100	5220
COACH::CGRANADA::1	CALLE GRANADA	PASEO MADRID	PASEO CORDOVA	Residential	10,800.00	Slurry Seal	11/6/2026	85	100	5400
COACH::CNINOS::1	CALLE NINOS	CALLE BONITA	50' W/O CALLE BONITA	Residential	1,548.00	1.5" Thin Overlay	11/6/2026	63	100	7740
COACH::PASEOCORDO::1	PASEO CORDOVA	VIA VALENCIA	CALLE GRANADA	Residential	16,500.00	Slurry Seal	11/6/2026	85	100	8250
COACH::BAGDADAVE::7	BAGDAD AVE	SH-86	ALLEY	Collector	8,560.00	Microsurfacing	11/6/2026	84	100	8560
COACH::PASEOBARCE::1	PASEO BARCELONA	CALLE SEVILLE	VIA MERIDA	Residential	18,216.00	Slurry Seal	11/6/2026	85	100	9108
COACH::AIRPORTBL::2	AIRPORT BLVD	CITY LIMITS	2640' W/O FILLMORE ST	Collector	9,250.00	Microsurfacing	11/6/2026	84	100	9250
COACH::SH-86N::8	SH-86	CAIRO AVE	CAIRO AVE	Arterial	2,560.00	1.5" Thin Overlay	11/6/2026	63	100	12800
COACH::53RDAVE::9	53RD AVE	CESAR CHAVEZ ST	50' W/O CESAR CHAVEZ ST	Collector	3,145.00	1.5" Thin Overlay	11/6/2026	63	100	15725
COACH::SH-111S::7	SH-111	3RD ST	4TH ST	Arterial	16,250.00	Microsurfacing	11/6/2026	85	100	16250
COACH::CALICIA::2	CALLE ALICIA	MICHELLE DR	AVENIDA MARIA	Residential	3,270.00	1.5" Thin Overlay	11/6/2026	63	100	16350

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::SH-111S::11	SH-111	7TH ST	8TH ST	Arterial	18,750.00	Microsurfacing	11/6/2026	85	100	18750
COACH::DILLONRD::1	DILLON RD	CITY LIMITS	HARRISON ST	Arterial	20,064.00	Microsurfacing	11/6/2026	84	100	20064
COACH::TOPAZCT::1	TOPAZ CT	CDS	W SIENNA CIR	Residential	4,070.00	1.5" Thin Overlay	11/6/2026	63	100	20350
COACH::LAPONDEROS::2	LA PONDEROSA DR	NAOMI CT	HERNANDEZ ST	Residential	42,012.00	Slurry Seal	11/6/2026	84	100	21006
COACH::SALTILLOCR::2	SALTILLO CIR	JALISCO AVE	JALISCO AVE	Residential	4,290.00	1.5" Thin Overlay	11/6/2026	63	100	21450
COACH::PINTOLN::2	PINTO LN	120' S/O MCCOY PEAK AVE	MCCOY PEAK AVE	Residential	4,536.00	1.5" Thin Overlay	11/6/2026	63	100	22680
COACH::PIERCEST::1	PIERCE ST	55TH AVE	CITY LIMITS	Rural	31,896.00	Chip Seal	11/6/2026	84	100	25516.8
COACH::CROSA::4	CALLE ROSA	140' W/O CALLE ESTRELLA	CALLE ESTRELLA	Residential	5,148.00	1.5" Thin Overlay	11/6/2026	63	100	25740
COACH::DILLONRD::8	DILLON RD	1070' S/O VISTA DEL NORTE	800' S/O VISTA DEL NORTE	Arterial	25,824.00	Microsurfacing	11/6/2026	84	100	25824
COACH::JALISCOAVE::5	JALISCO AVE	100' S/O TAXCO WAY	TAXCO WAY	Residential	3,024.00	3" Mill & Overlay	11/6/2026	45	100	27216
COACH::CBOUGANVIL::2	CALLE BOUGANVILIA	CALLE CLAVEL	EL SOL ST	Residential	6,444.00	1.5" Thin Overlay	11/6/2026	63	100	32220
COACH::52NDAVEE::9	52ND AVE	CALLE EMPALME	CALLE TECHA	Arterial	3,640.00	3" Mill & Overlay	11/6/2026	45	100	32760
COACH::54THAVEW::5	54TH AVE	TYLER ST	SHADY LN	Arterial	33,972.00	Microsurfacing	11/6/2026	84	100	33972
COACH::52NDAVEE::13	52ND AVE	CALLE AVILA	CALLE CAMACHO	Arterial	6,916.00	1.5" Thin Overlay	11/6/2026	63	100	34580
COACH::PAVONPALMA::1	PAVON PALMA	50TH AVE	VERA CRUZ	Residential	7,200.00	1.5" Thin Overlay	11/6/2026	63	100	36000
COACH::TODOSSANTO::2	TODOS SANTOS AVE	EL CASTILLO RD	420' W/O CAMINO CORTEZ	Residential	7,272.00	1.5" Thin Overlay	11/6/2026	63	100	36360
COACH::SUNCRESTST::1	SUNCREST ST	51ST AVE	SUNSHINE AVE	Residential	7,520.00	1.5" Thin Overlay	11/6/2026	63	100	37600
COACH::GENOAST::6	GENOA ST	200' S/O AVENIDA MARIA	AVENIDA MARIA	Residential	7,548.00	1.5" Thin Overlay	11/6/2026	63	100	37740
COACH::51STAVE::1	51ST AVE	CITY LIMITS	VAN BUREN ST	Collector	39,360.00	Microsurfacing	11/6/2026	84	100	39360
COACH::CLAMIRADAE::1	CORTE LA MIRADA	CALLE EL SOL	VAN BUREN ST	Residential	8,066.00	1.5" Thin Overlay	11/6/2026	63	100	40330
COACH::CLORETO::1	CORTE LORETO	CALLE QUINTERRA	CDS	Residential	8,172.00	1.5" Thin Overlay	11/6/2026	63	100	40860
COACH::SH-86S::12	SH-86	CAIRO AVE	ALLEY	Arterial	8,560.00	1.5" Thin Overlay	11/6/2026	63	100	42800
COACH::CESTRELLA::1	CALLE ESTRELLA	CDS	CALLE ROSA	Residential	8,712.00	1.5" Thin Overlay	11/6/2026	63	100	43560
COACH::ELSOLST::1	EL SOL ST	CALLE BOUGANVILIA	LAS FLORES AVE	Residential	8,778.00	1.5" Thin Overlay	11/6/2026	63	100	43890
COACH::NSIENNACIR::1	N SIENNA CIR	W SIENNA CIR	SLATE DR	Residential	9,036.00	1.5" Thin Overlay	11/6/2026	63	100	45180
COACH::52NDAVE::18	52ND AVE	JENNIFER WAY	ALLEY	Arterial	5,060.00	3" Mill & Overlay	11/6/2026	45	100	45540
COACH::CDIEGO::3	CALLE DIEGO	CALLE LEANDRO	150' E/O CALLE LEANDRO	Residential	5,202.00	3" Mill & Overlay	11/6/2026	45	100	46818
COACH::ARAZON::1	AVENIDA RAZON	CALLE CATHRON	CORTE YAGER	Residential	9,435.00	1.5" Thin Overlay	11/6/2026	63	100	47175
COACH::AALEENAH::1	AVENIDA ALEENAH	GENOA ST	'150 E/O GENOA ST	Residential	5,364.00	3" Mill & Overlay	11/6/2026	45	100	48276
COACH::CDANIELLE::1	CALLE DANIELLE	AVENIDA MARIA	AVENIDA CRYSTAL	Residential	9,720.00	1.5" Thin Overlay	11/6/2026	63	100	48600
COACH::SCARLETWAY::1	SCARLET WAY	SLATE DR	SAPPHIRE LN	Residential	9,828.00	1.5" Thin Overlay	11/6/2026	63	100	49140
COACH::WESTERFILD::6	WESTERFIELD WAY	140' E/O S CORONADO ST	S KENMORE ST	Residential	5,480.00	3" Mill & Overlay	11/6/2026	45	100	49320
COACH::CTECHA::3	CALLE TECHA	CALLE LYA	CALLE ROBERTO	Residential	10,040.00	1.5" Thin Overlay	11/6/2026	63	100	50200
COACH::CPELICANO::1	CAMINO PELICANO	CAMINO REAL	LA PLAYA ST	Residential	10,080.00	1.5" Thin Overlay	11/6/2026	63	100	50400
COACH::CREAL::1	CAMINO REAL	AGUA BLANCA AVE	CAMINO PELICANO	Residential	10,080.00	1.5" Thin Overlay	11/6/2026	63	100	50400
COACH::CBONITOAVE::1	CAMINO BONITO AVE	ESTRELLA TOMAS ST	ESTRELLA PEDRO ST	Residential	10,080.00	1.5" Thin Overlay	11/6/2026	63	100	50400
COACH::PUEBLOBONI::2	PUEBLO BONITO AVE	EL ACRO ST	EL CASTILLO RD	Residential	10,080.00	1.5" Thin Overlay	11/6/2026	63	100	50400
COACH::AGUABLANCA::3	AGUA BLANCA AVE	CAMINO MAYA	CAMINO REAL	Residential	10,080.00	1.5" Thin Overlay	11/6/2026	63	100	50400
COACH::FIESTARD::4	FIESTA RD	SUMMER ST	SIERRA ST	Residential	10,332.00	1.5" Thin Overlay	11/6/2026	63	100	51660
COACH::ANICOLE::2	AVENIDA NICOLE	CATARINA CT	MICHELLE DR	Residential	10,332.00	1.5" Thin Overlay	11/6/2026	63	100	51660
COACH::MARIANAAVE::3	MARIANA AVE	LUNA DE NICOLETA ST	ESTRELLA TOMAS ST	Residential	10,360.00	1.5" Thin Overlay	11/6/2026	63	100	51800
COACH::CHARDONNAY::1	CHARDONNAY CIR	MALVASIA WAY	CDS	Residential	5,760.00	3" Mill & Overlay	11/6/2026	45	100	51840
COACH::SANASISDR::2	SAN ASIS DR	SOLEDAD PL	CALLE TOLOSA	Residential	10,600.00	1.5" Thin Overlay	11/6/2026	63	100	53000
COACH::CLYA::1	CALLE LYA	CALLE TECHA	CDS	Residential	10,860.00	1.5" Thin Overlay	11/6/2026	63	100	54300
COACH::CROSA::5	CALLE ROSA	CALLE ESTRELLA	CALLE LA PAZ	Residential	10,908.00	1.5" Thin Overlay	11/6/2026	63	100	54540
COACH::52NDAVE::19	52ND AVE	ALLEY	TRIPOLI WAY	Arterial	6,160.00	3" Mill & Overlay	11/6/2026	45	100	55440
COACH::COLIVIA::1	CORTE OLIVIA	CDS	CALLE MENDOZA	Residential	11,187.00	1.5" Thin Overlay	11/6/2026	63	100	55935
COACH::BAGDADAVE::5	BAGDAD AVE	CALLE CAMACHO	SUEZ RD	Residential	6,240.00	3" Mill & Overlay	11/6/2026	45	100	56160
COACH::PALMAVE::8	PALM AVE	ALLEY	1ST ST	Collector	11,280.00	1.5" Thin Overlay	11/6/2026	63	100	56400
COACH::48THAVEE::6	48TH AVE	CITY LIMITS	HARRISON ST	Arterial	57,480.00	Microsurfacing	11/6/2026	84	100	57480
COACH::TIJSSELING::1	TIJSSELING CT	52ND AVE	CDS	Residential	11,592.00	1.5" Thin Overlay	11/6/2026	63	100	57960
COACH::MAZATLANDR::9	MAZATLAN DR	MAZATLAN DR PARKING LOOP	50TH AVE	Residential	11,712.00	1.5" Thin Overlay	11/6/2026	63	100	58560
COACH::CSOLEDAD::2	CALLE SOLEDAD	VIA TEPEYAC	53RD AVE	Residential	11,844.00	1.5" Thin Overlay	11/6/2026	63	100	59220
COACH::SOLARCEST::1	SOLARCE ST	PROSECCO WAY	SOLARCE ST	Residential	6,596.00	3" Mill & Overlay	11/6/2026	45	100	59364
COACH::SUNCRESTST::2	SUNCREST ST	SUNSHINE AVE	SUNDANCE LN	Residential	12,080.00	1.5" Thin Overlay	11/6/2026	63	100	60400
COACH::MAHOGANYCT::1	MAHOGANY CT	CDS	SCARLET WAY	Residential	12,348.00	1.5" Thin Overlay	11/6/2026	63	100	61740
COACH::LUNADENICO::4	LUNA DE NICOLETA ST	PLAZA DE ORO AVE	MARIANA AVE	Residential	12,600.00	1.5" Thin Overlay	11/6/2026	63	100	63000
COACH::ESTRELLATO::1	ESTRELLA TOMAS ST	CAMINO BONITO AVE	MARIANA AVE	Residential	12,600.00	1.5" Thin Overlay	11/6/2026	63	100	63000
COACH::EAGLEAVE::1	EAGLE AVE	CALHOUN ST	SAN GORGONIO ST	Residential	7,144.00	3" Mill & Overlay	11/6/2026	45	100	64296
COACH::PALMERASCR::3	PALMERAS CIR	MARIPOSA DR	CHUPAROSA DR	Residential	7,200.00	3" Mill & Overlay	11/6/2026	45	100	64800
COACH::PALMERASCR::7	PALMERAS CIR	CARDELINA DR	PALMERAS CIR	Residential	7,200.00	3" Mill & Overlay	11/6/2026	45	100	64800
COACH::CROJO::5	CALLE ROJO	CALLE EMPALME	CALLE TECHA	Residential	12,960.00	1.5" Thin Overlay	11/6/2026	63	100	64800
COACH::CROJO::6	CALLE ROJO	CALLE TECHA	CALLE AVILA	Residential	12,960.00	1.5" Thin Overlay	11/6/2026	63	100	64800
COACH::CAPITOLAAV::1	CAPITOLA AVE	CDS	MONARCH RD	Residential	12,996.00	1.5" Thin Overlay	11/6/2026	63	100	64980
COACH::CZAMORA::2	CALLE ZAMORA	CALLE TECHA	CALLE AVILA	Residential	13,320.00	1.5" Thin Overlay	11/6/2026	63	100	66600
COACH::MOONLITDR::2	MOONLIT DR	VALLE POSADA	VAN BUREN ST	Residential	7,560.00	3" Mill & Overlay	11/6/2026	43.5	100	68040
COACH::52NDAVE::20	52ND AVE	TRIPOLI WAY	MORGAN AVE	Arterial	13,700.00	1.5" Thin Overlay	11/6/2026	63	100	68500
COACH::RHAPISCT::1	RHAPIS CT	CDS	WASHINGTONIA AVE	Residential	13,838.00	1.5" Thin Overlay	11/6/2026	60	100	69190
COACH::FIESTARD::2	FIESTA RD	VALLE POSADA	VAN BUREN ST	Residential	7,704.00	3" Mill & Overlay	11/6/2026	43.5	100	69336
COACH::CHIAPASDR::3	CHIAPAS DR	TABASCO CT	500' E/O TABASCO CT	Residential	13,972.00	1.5" Thin Overlay	11/6/2026	57	100	69860
COACH::CROJO::2	CALLE ROJO	170 W/O CALLE EMPALME	260' W/O CALLE EMPALME	Residential	3,520.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2026	28.5	100	70400
COACH::CQUINTERRA::1	CALLE QUINTERRA	50TH AVE	REDONDO SUR	Residential	7,844.00	3" Mill & Overlay	11/6/2026	42	100	70596
COACH::CESTIVO::1	CORTE ESTIVO	CALLE OCASO	CDS	Residential	14,134.00	1.5" Thin Overlay	11/6/2026	63	100	70670
COACH::MICHELLEDR::3	MICHELLE DR	AVENIDA NICOLE	MICHELLE DR	Residential	14,148.00	1.5" Thin Overlay	11/6/2026	57	100	70740
COACH::ACRYSTAL::1	AVENIDA CRYSTAL	CALLE DANIELLE	CALLE ANABELLA	Residential	14,160.00	1.5" Thin Overlay	11/6/2026	57	100	70800
COACH::CTOLOSA::1	CALLE TOLOSA	SAN ASIS DR	SANTO LN	Residential	14,245.00	1.5" Thin Overlay	11/6/2026	57	100	71225
COACH::CBERNO::1	CORTE BERNARDO	CDS	AVENIDA ADOBE	Residential	14,400.00	1.5" Thin Overlay	11/6/2026	57	100	72000
COACH::CGILLAN::1	CORTE GILLAN	AVENIDA RAZON	CDS	Residential	14,400.00	1.5" Thin Overlay	11/6/2026	63	100	72000
COACH::LOSCABOSAV::1	LOS CABOS AVE	EL ARCO ST	CAMINO ROSARITO	Residential	14,400.00	1.5" Thin Overlay	11/6/2026	63	100	72000
COACH::CYAGER::1	CORTE YAGER	AVENIDA RAZON	CDS	Residential	14,400.00	1.5" Thin Overlay	11/6/2026	63	100	72000
COACH::ALLENDEDR::1	ALLENDE DR	D/E	PROSECCO WAY	Residential	8,032.00	3" Mill & Overlay	11/6/2026	37.5	100	72288
COACH::CHIAPASDR::6	CHIAPAS DR	220' S/O SALTILLO CT	315' E/O BAJA WAY	Residential	8,064.00	3" Mill & Overlay	11/6/2026	43.5	100	72576
COACH::SOLARCEST::4	SOLARCE ST	ALLENDE DR	FREDERICK ST	Residential	8,092.00	3" Mill & Overlay	11/6/2026	42	100	72828
COACH::52NDAVEW::10	52ND AVE	CESAR CHAVEZ ST	CALLE CAMACHO	Arterial	8,138.00	3" Mill & Overlay	11/6/2026	43.5	100	73242
COACH::52NDAVEE::14	52ND AVE	CALLE CAMACHO	CESAR CHAVEZ ST	Arterial	8,138.00	3" Mill & Overlay	11/6/2026	45	100	73242
COACH::AADOBE::12	AVENIDA ADOBE	45' N/O CHRISTINA RD	PEDRO DR	Residential	14,688.00	1.5" Thin Overlay	11/6/2026	57	100	73440
COACH::52NDAVEE::31	52ND AVE	CALLE LIMON	SUNSET DR	Arterial	15,075.00	1.5" Thin Overlay	11/6/2026	63	100	75375
COACH::CMENDOZA::3	CALLE MENDOZA	LAS FLORES AVE	CALLE PIZANO	Residential	15,279.00	1.5" Thin Overlay	11/6/2026	57	100	76395
COACH::GLENDORARG::2	GLENDORA RIDGE AVE	CHAPARROSA ST	CDS	Residential	15,300.00	1.5" Thin Overlay	11/6/2026	60	100	76500
COACH::VIATEPEYAC::1	VIA TEPEYAC	CALLE SOLEDAD	TEPEYAC CT	Residential	15,336.00	1.5" Thin Overlay	11/6/2026	60	100	76680
COACH::CAMIGOS::1	CALLE AMIGOS	CALLE LA PAZ	CDS	Residential	15,444.00	1.5" Thin Overlay	11/6/2026	63	100	77220
COACH::OCEANORD::3	OCEANO RD	CATALINA AVE	CDS	Residential	8,604.00	3" Mill & Overlay	11/6/2026	42	100	77436
COACH::48THAVEE::4	48TH AVE	CHAPARROSA ST	VAN BUREN ST	Arterial	77,600.00	Microsurfacing	11/6/2026	72	100	77600
COACH::CLEANDRO::3	CALLE LEANDRO	CALLE BERNARDO	CALLE GREGORIO	Residential	15,560.00	1.5" Thin Overlay	11/6/2026	63	100	77800
COACH::LAPLAYAST::1	LA PLAYA ST	CAMINO PELICANO	CALLE COLIMA	Residential	16,056.00	1.5" Thin Overlay	11/6/2026	60	100	80280
COACH::CHICHENITZ::2	CHICHEN ITZA RD	IXTAPA AVE	SAN IGNACIO AVE	Residential	8,964.00	3" Mill & Overlay	11/6/2026	45	100	80676
COACH::53RDAVE::15	53RD AVE	CALLE LA PAZ	CALLE SOLEDAD	Collector	16,320.00	1.5" Thin Overlay	11/6/2026	60	100	81600
COACH::ALLEY::2	ALLEY	52ND AVE	ALLEY	Alley	16,350.00	1.5" Thin Overlay	11/6/2026	58	100	81750
COACH::SH-86S::2	SH-86	PARK LN	50TH AVE	Arterial	81,920.00	Microsurfacing	11/6/2026	72	100	81920
COACH::WASHINGTON::4	WASHINGTONIA AVE	QUEEN CT	RHAPIS CT	Residential	9,144.00	3" Mill & Overlay	11/6/2026	42	100	82296
COACH::WASHINGTON::2	WASHINGTONIA AVE	ROYAL CT	KING CT	Residential	9,144.00	3" Mill & Overlay	11/6/2026	43.5	100	82296
COACH::WASHINGTON::3	WASHINGTONIA AVE	KING CT	QUEEN CT	Residential	9,144.00	3" Mill & Overlay	11/6/2026	43.5	100	82296
COACH::EAGLEAVE::2	EAGLE AVE	SAN GORGONIO ST	CHAPARROSA ST	Residential	16,530.00	1.5" Thin Overlay	11/6/2026	60	100	82650
COACH::NSIENNACIR::3	N SIENNA CIR	SAPPHIRE LN	E SIENNA CIR	Residential	16,560.00	1.5" Thin Overlay	11/6/2026	60	100	82800
COACH::CHRISTINA::5	CHRISTINA RD	RIGO CT	MARY CT	Residential	9,216.00	3" Mill & Overlay	11/6/2026	45	100	82944
COACH::54THAVEW::7	54TH AVE	CALLE BALDERAS	SH-86	Arterial	16,605.00	1.5" Thin Overlay	11/6/2026	63	100	83025
COACH::GENOAST::12	GENOA ST	SYLMAR LN	NAPOLI LN	Residential	9,250.00	3" Mill & Overlay	11/6/2026	42	100	83250
COACH::OCEANORD::1	OCEANO RD	CAPITOLA AVE	MALIBU AVE	Residential	9,288.00	3" Mill & Overlay	11/6/2026	37.5	100	83592
COACH::OCEANORD::2	OCEANO RD	MALIBU AVE	CATALINA AVE	Residential	9,288.00	3" Mill & Overlay	11/6/2026	42	100	83592
COACH::NEWPORTST::2	NEWPORT ST	CAPITOLA AVE	MALIBU AVE	Residential	9,288.00	3" Mill & Overlay	11/6/2026	42	100	83592
COACH::NEWPORTST::1	NEWPORT ST	MIRAMAR CT	CAPITOLA AVE	Residential	9,324.00	3" Mill & Overlay	11/6/2026	43.5	100	83916
COACH::CALENDULA::4	CALENDULA AVE	TULIPAN ST	ORQUIDEA LN	Residential	9,361.00	3" Mill & Overlay	11/6/2026	40.5	100	84249
COACH::53RDAVE::12	53RD AVE	CALLE BONITA	ADAM LN	Collector	16,920.00	1.5" Thin Overlay	11/6/2026	57	100	84600
COACH::NEWPORTST::4	NEWPORT ST	CATALINA AVE	LA JOLLA AVE	Residential	9,432.00	3" Mill & Overlay	11/6/2026	37.5	100	84888
COACH::ROMUALDACT::1	ROMUALDA CT	PEREZ ST	CDS	Residential	6,120.00	Slurry Seal	11/6/2027	84	100	3060
COACH::CRUIZ::3	CALLE RUIZ	AVENIDA ZOCALO	AVENIDA REFORMA	Residential	6,444.00	Slurry Seal	11/6/2027	85	100	3222
COACH::MODENATER::1	MODENA TER	BELLISSIMA AVE	SIENO LN	Residential	7,680.00	Slurry Seal	11/6/2027	84	100	3840
COACH::CRUIZ::4	CALLE RUIZ	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	8,640.00	Slurry Seal	11/6/2027	85	100	4320
COACH::ASANDOMING::1	AVENIDA SAN DOMINGO	CAMINO FRONTERA	CAMINO CORAS	Residential	9,879.00	Slurry Seal	11/6/2027	84	100	4939.5
COACH::SHADYLN::3	SHADY LN	AVENIDA TACUBA	AVENIDA REFORMA	Residential	20,048.00	Slurry Seal	11/6/2027	85	100	10024
COACH::CCEBRINO::1	CALLE CEBRINO	CALLE CHAVEZ	CDS	Residential	24,696.00	Slurry Seal	11/6/2027	84	100	12348
COACH::52NDAVEW::12	52ND AVE	CALLE AVILA	CALLE AVILA	Arterial	1,508.00	3" Mill & Overlay	11/6/2027	45	100	13572
COACH::52NDAVEE::15	52ND AVE	CESAR CHAVEZ ST	SH-86	Arterial	2,236.00	3" Mill & Overlay	11/6/2027	45	100	20124
COACH::HERNANDEZ::3	HERNANDEZ ST	52ND AVE	ORTIZ ST	Residential	43,040.00	Slurry Seal	11/6/2027	84	100	21520
COACH::TYLERST::19	TYLER ST	3485' S/O VISTA DEL SUR	2125' S/O VISTA DEL SUR	Rural	40,740.00	Chip Seal	11/6/2027	84	100	32592
COACH::50THAVEE::17	50TH AVE	AVENIDA DE PLATINA	KENMORE ST	Arterial	4,323.00	3" Mill & Overlay	11/6/2027	45	100	38907
COACH::50THAVEE::15	50TH AVE	AVENIDA DE PLATA	CORONADO ST	Arterial	4,356.00	3" Mill & Overlay	11/6/2027	45	100	39204
COACH::GENOAST::9	GENOA ST	NILE LN	CALLE LIMON	Residential	4,588.00	3" Mill & Overlay	11/6/2027	45	100	41292
COACH::ARAZON::3	AVENIDA RAZON	CORTE GILLAN	AVENIDA HALAWAY	Residential	4,625.00	3" Mill & Overlay	11/6/2027	45	100	41625
COACH::52NDAVEE::8	52ND AVE	CALLE EMPALME	CALLE EMPALME	Arterial	4,784.00	3" Mill & Overlay	11/6/2027	45	100	43056
COACH::52NDAVEW::16	52ND AVE	CALLE EMPALME	CALLE EMPALME	Arterial	4,784.00	3" Mill & Overlay	11/6/2027	45	100	43056
COACH::AADOBE::6	AVENIDA ADOBE	CORTE ALTURIAN	WESTERFIELD WAY	Residential	5,120.00	3" Mill & Overlay	11/6/2027	45	100	46080
COACH::AGRACE::2	AVENIDA GRACE	CALLE FLORENA	150' E/O CALLE FLORENA	Residential	5,400.00	3" Mill & Overlay	11/6/2027	45	100	48600
COACH::AMARONECIR::1	AMARONE CIR	MALVASIA WAY	CDS	Residential	5,760.00	3" Mill & Overlay	11/6/2027	45	100	51840
COACH::MAZATLANDR::5	MAZATLAN DR	CHIHUAHUA CT	TAXCO WAY	Residential	6,240.00	3" Mill & Overlay	11/6/2027	45	100	56160
COACH::PROSECCO::3	PROSECCO WAY	SOLARCE ST	SOLARCE ST	Residential	6,400.00	3" Mill & Overlay	11/6/2027	45	100	57600
COACH::CBONITA::3	CALLE BONITA	CALLE ROSA	53RD AVE	Residential	6,444.00	3" Mill & Overlay	11/6/2027	45	100	57996
COACH::SUEZRD::2	SUEZ RD	DAMASCUS AVE	BAGDAD AVE	Residential	6,680.00	3" Mill & Overlay	11/6/2027	45	100	60120
COACH::MAZATLANDR::4	MAZATLAN DR	MAZATLAN DR PARKING LOOP	CHIHUAHUA CT	Residential	6,912.00	3" Mill & Overlay	11/6/2027	45	100	62208
COACH::CARDINALDR::1	CARDINAL DR	TYLER ST	PALMERAS CIR	Residential	6,960.00	3" Mill & Overlay	11/6/2027	45	100	62640
COACH::CEMELIA::1	CALLE EMELIA	AVENUE 53	AVENIDA RAYLYNN	Residential	7,092.00	3" Mill & Overlay	11/6/2027	45	100	63828
COACH::WASHINGTON::1	WASHINGTONIA AVE	50TH AVE	ROYAL CT	Residential	8,100.00	3" Mill & Overlay	11/6/2027	45	100	72900
COACH::CLEANDRO::1	CALLE LEANDRO	53RD AVE	CALLE DIEGO	Residential	8,440.00	3" Mill & Overlay	11/6/2027	45	100	75960

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::CAIROAVE::6	CAIRO AVE	SUEZ RD	SH-86	Residential	8,560.00	3" Mill & Overlay	11/6/2027	45	100	77040
COACH::54THAVEW::4	54TH AVE	SH-111	TYLER ST	Arterial	80,525.00	Microsurfacing	11/6/2027	84	100	80525
COACH::CZAMORA::4	CALLE ZAMORA	CALLE CAMACHO	CESAR CHAVEZ ST	Residential	9,216.00	3" Mill & Overlay	11/6/2027	45	100	82944
COACH::AVESTAGO::1	AVENIDA VESTAGO	REDONDO ESTE	FREDERICK ST	Residential	9,246.00	3" Mill & Overlay	11/6/2027	45	100	83214
COACH::CHAPARROSA::4	CHAPARROSA ST	GRANITE PASS TRL	COXCOMB DR	Residential	9,360.00	3" Mill & Overlay	11/6/2027	45	100	84240
COACH::ALLENDEDR::2	ALLENDE DR	PROSECCO WAY	SOLARCE ST	Residential	9,376.00	3" Mill & Overlay	11/6/2027	45	100	84384
COACH::VENENTABLD::1	VENENTA BLVD	CAPITOLA AVE	PISMO CT	Residential	9,396.00	3" Mill & Overlay	11/6/2027	45	100	84564
COACH::CHAPARROSA::3	CHAPARROSA ST	GLENDORA RIDGE AVE	GRANITE PASS TRL	Residential	9,432.00	3" Mill & Overlay	11/6/2027	45	100	84888
COACH::CROIO::9	CALLE ROJO	CESAR CHAVEZ ST	SH-86	Residential	4,280.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	27	100	85600
COACH::NIETOST::1	NIETO ST	GUITRON ST	ROMERO ST	Residential	9,520.00	3" Mill & Overlay	11/6/2027	42	100	85680
COACH::AADOBE::2	AVENIDA ADOBE	CALLE CATHRON	CORTE CINDARELLA	Residential	9,560.00	3" Mill & Overlay	11/6/2027	45	100	86040
COACH::FREDERICK::17	FREDERICK ST	PHOENIX AVE	GUITRON ST	Collector	9,636.00	3" Mill & Overlay	11/6/2027	45	100	86724
COACH::50THAVEW::5	50TH AVE	AVENIDA DE PLATA	BALBOA ST	Arterial	4,356.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	27	100	87120
COACH::50THAVEW::4	50TH AVE	CORONADO ST	AVENIDA DE PLATA	Arterial	4,356.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	30	100	87120
COACH::SANMATEOAV::1	SAN MATEO AVE	CHARLTON PEAK ST	GARNET RIDGE ST	Residential	9,684.00	3" Mill & Overlay	11/6/2027	45	100	87156
COACH::PHOENIXAVE::2	PHOENIX AVE	LIVISTONA CT	KENTIA CT	Residential	9,720.00	3" Mill & Overlay	11/6/2027	37.5	100	87480
COACH::PHOENIXAVE::3	PHOENIX AVE	KENTIA CT	SABAL CT	Residential	9,720.00	3" Mill & Overlay	11/6/2027	39	100	87480
COACH::CHAPARROSA::1	CHAPARROSA ST	SAN MATEO AVE	MECCA HILLS AVE	Residential	9,720.00	3" Mill & Overlay	11/6/2027	45	100	87480
COACH::VINEAVE::7	VINE AVE	3RD ST	ALLEY	Collector	9,776.00	3" Mill & Overlay	11/6/2027	39	100	87984
COACH::VINEAVE::8	VINE AVE	ALLEY	2ND ST	Collector	9,776.00	3" Mill & Overlay	11/6/2027	42	100	87984
COACH::SUMMERST::2	SUMMER ST	FIESTA RD	CDS	Residential	17,686.00	1.5" Thin Overlay	11/6/2027	60	100	88430
COACH::AVERANO::1	AVENIDA VERANO	CALLE OCASO	CALLE PUERTA DEL SOL	Residential	17,908.00	1.5" Thin Overlay	11/6/2027	60	100	89540
COACH::MAZATLANDR::6	MAZATLAN DR	MAZATLAN DR PARKING LOOP	TAXCO WAY	Residential	9,952.00	3" Mill & Overlay	11/6/2027	43.5	100	89568
COACH::LOSCABOSAV::2	LOS CABOS AVE	CAMINO ROSARITO	CAMINO CORTEZ	Residential	18,036.00	1.5" Thin Overlay	11/6/2027	60	100	90180
COACH::GRAPEFRUIT::2	GRAPEFRUIT BLVD	3310' S/O 54TH AVE	1660' S/O 54TH AVE	Arterial	90,530.00	Microsurfacing	11/6/2027	75	100	90530
COACH::IXTAPAAVE::2	IXTAPA AVE	COZUMEL ST	CHICHEN ITZA RD	Residential	10,080.00	3" Mill & Overlay	11/6/2027	40.5	100	90720
COACH::COZUMELST::1	COZUMEL ST	IXTAPA AVE	TODOS SANTOS AVE	Residential	10,080.00	3" Mill & Overlay	11/6/2027	40.5	100	90720
COACH::CCORTEZ::2	CAMINO CORTEZ	LOS CABOS AVE	TODOS SANTOS AVE	Residential	10,080.00	3" Mill & Overlay	11/6/2027	42	100	90720
COACH::CCORTEZ::1	CAMINO CORTEZ	PUERTO ESCONDIDO AVE	LOS CABOS AVE	Residential	10,080.00	3" Mill & Overlay	11/6/2027	43.5	100	90720
COACH::HILLDR::1	HILL DR	GENOA ST	CALLE PERA	Residential	10,120.00	3" Mill & Overlay	11/6/2027	45	100	91080
COACH::GRAPEFRUIT::3	GRAPEFRUIT BLVD	1660' S/O 54TH AVE	54TH AVE	Arterial	91,135.00	Microsurfacing	11/6/2027	72	100	91135
COACH::52NDAVEW::20	52ND AVE	DOUMA ST	FREDERICK ST	Arterial	18,278.00	1.5" Thin Overlay	11/6/2027	60	100	91390
COACH::CINNABARLN::4	CINNABAR LN	LAPIS DR	SERPENTINE WAY	Residential	10,175.00	3" Mill & Overlay	11/6/2027	42	100	91575
COACH::COPPERIDGE::4	COPPERIDGE ST	LAPIS DR	ASHLER CT	Residential	10,175.00	3" Mill & Overlay	11/6/2027	43.5	100	91575
COACH::AADOBE::4	AVENIDA ADOBE	CORTE BERNARDO	VIA ZAHIDI	Residential	10,240.00	3" Mill & Overlay	11/6/2027	43.5	100	92160
COACH::CPIZANO::1	CALLE PIZANO	TYLER ST	COURTE STELLA	Residential	18,480.00	1.5" Thin Overlay	11/6/2027	60	100	92400
COACH::CMENDOZA::2	CALLE MENDOZA	CORTE OLIVIA	CALLE PIZANO	Residential	18,480.00	1.5" Thin Overlay	11/6/2027	60	100	92400
COACH::CTECOMARIA::2	CALLE TECOMARIA	AVENIDA EUROPA	AVENIDA CEDRUS	Residential	10,296.00	3" Mill & Overlay	11/6/2027	36	100	92664
COACH::NARCISOLN::1	NARCISO LN	CALENDULA AVE	CDS	Residential	10,296.00	3" Mill & Overlay	11/6/2027	37.5	100	92664
COACH::CCARMELLO::3	CALLE CARMELLO	AVENIDA CEDRUS	AVENIDA NERIUM	Residential	10,296.00	3" Mill & Overlay	11/6/2027	39	100	92664
COACH::CCARMELLO::2	CALLE CARMELLO	AVENIDA EUROPA	AVENIDA CEDRUS	Residential	10,296.00	3" Mill & Overlay	11/6/2027	45	100	92664
COACH::CTECOMARIA::1	CALLE TECOMARIA	AVENIDA FLORABUNDA	AVENIDA EUROPA	Residential	10,296.00	3" Mill & Overlay	11/6/2027	45	100	92664
COACH::GENOAST::8	GENOA ST	52ND AVE	NILE LN	Residential	10,323.00	3" Mill & Overlay	11/6/2027	42	100	92907
COACH::LAJOLLAAVE::3	LA JOLLA AVE	ZUMA DR	NEWPORT ST	Residential	10,332.00	3" Mill & Overlay	11/6/2027	42	100	92988
COACH::CTECOMARIA::3	CALLE TECOMARIA	AVENIDA CEDRUS	AVENIDA NERIUM	Residential	10,332.00	3" Mill & Overlay	11/6/2027	45	100	92988
COACH::TAXCOWAY::1	TAXCO WAY	MAZATLAN DR	JALISCO AVE	Residential	10,332.00	3" Mill & Overlay	11/6/2027	45	100	92988
COACH::CINNABARLN::1	CINNABAR LN	JADEROCK RD	NICKLECREEK DR	Residential	10,360.00	3" Mill & Overlay	11/6/2027	39	100	93240
COACH::CELSOL::1	CALLE EL SOL	AVENIDA VERANO	CORTE EL ALBA	Residential	10,360.00	3" Mill & Overlay	11/6/2027	42	100	93240
COACH::CINNABARLN::2	CINNABAR LN	NICKLECREEK DR	SHADOWROCK DR	Residential	10,360.00	3" Mill & Overlay	11/6/2027	42	100	93240
COACH::CINNABARLN::3	CINNABAR LN	SHADOWROCK DR	LAPIS DR	Residential	10,360.00	3" Mill & Overlay	11/6/2027	43.5	100	93240
COACH::COCASO::4	CALLE OCASO	CORTE SOLIS	AVENIDA LA LUNA	Residential	10,360.00	3" Mill & Overlay	11/6/2027	43.5	100	93240
COACH::50THAVEE::9	50TH AVE	MAZATLAN DR	FREDERICK ST	Arterial	10,373.00	3" Mill & Overlay	11/6/2027	43.5	100	93357
COACH::VALLEYRD::2	VALLEY RD	JENNIFER WAY	TRIPOLI WAY	Collector	10,400.00	3" Mill & Overlay	11/6/2027	38	100	93600
COACH::SANREYDR::3	SAN REY DR	SAN CAPISTRANO DR	SAN SOLANO RD	Residential	10,400.00	3" Mill & Overlay	11/6/2027	42	100	93600
COACH::MIRAMARCT::1	MIRAMAR CT	CDS	NEWPORT ST	Residential	10,404.00	3" Mill & Overlay	11/6/2027	39	100	93636
COACH::CAIROAVE::2	CAIRO AVE	CALLE TECHA	CALLE AVILA	Residential	10,440.00	3" Mill & Overlay	11/6/2027	37.5	100	93960
COACH::CEMELIA::3	CALLE EMELIA	AVENIDA GRACE	AVENIDA ALEENAH	Residential	10,476.00	3" Mill & Overlay	11/6/2027	40.5	100	94284
COACH::CAIROAVE::1	CAIRO AVE	CALLE EMPALME	CALLE TECHA	Residential	10,560.00	3" Mill & Overlay	11/6/2027	40.5	100	95040
COACH::VIACONCHIL::1	VIA CONCHILLA	AVENIDA DE PLATA	AVENIDA DE PLATINA	Residential	10,600.00	3" Mill & Overlay	11/6/2027	42	100	95400
COACH::SUNCRESTST::4	SUNCREST ST	SUNDOWN LN	SUNRISE AVE	Residential	10,800.00	3" Mill & Overlay	11/6/2027	45	100	97200
COACH::ORCHARDAVE::8	ORCHARD AVE	4TH ST	3RD ST	Collector	19,500.00	1.5" Thin Overlay	11/6/2027	57	100	97500
COACH::53RDAVE::14	53RD AVE	LEE LN	CALLE LA PAZ	Collector	19,620.00	1.5" Thin Overlay	11/6/2027	57	100	98100
COACH::CDIEGO::1	CALLE DIEGO	VIA SANTIAGO	CALLE GREGORIO	Residential	19,788.00	1.5" Thin Overlay	11/6/2027	60	100	98940
COACH::53RDAVE::6	53RD AVE	130' W/O CALLE CAMACHO	CALLE CAMACHO	Collector	4,995.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	25.5	100	99900
COACH::53RDAVE::5	53RD AVE	CALLE AVILA	130' E/O CALLE AVILA	Collector	4,995.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2027	27	100	99900
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.00	Slurry Seal	11/6/2028	85	100	540
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.00	Slurry Seal	11/6/2028	85	100	1008
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.00	Slurry Seal	11/6/2028	85	100	1440
COACH::VIAPICON::1	VIA PICON	CALHOUN ST	CALLE FRONTERA	Residential	3,989.80	Slurry Seal	11/6/2028	84	100	1994.9
COACH::VIAPICON::2	VIA PICON	CALHOUN ST	CALLE FRONTERA	Residential	4,022.80	Slurry Seal	11/6/2028	84	100	2011.4
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.67	Slurry Seal	11/6/2028	85	100	2068.34
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.67	Slurry Seal	11/6/2028	85	100	2068.34
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.00	Slurry Seal	11/6/2028	85	100	2160
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	Residential	4,608.00	Slurry Seal	11/6/2028	85	100	2304
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.00	Slurry Seal	11/6/2028	85	100	2340
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.00	Slurry Seal	11/6/2028	85	100	2520
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.00	Slurry Seal	11/6/2028	85	100	2524.5
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.00	Slurry Seal	11/6/2028	85	100	2556
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.00	Slurry Seal	11/6/2028	85	100	2700
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.00	Slurry Seal	11/6/2028	85	100	3222
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.00	Slurry Seal	11/6/2028	85	100	3222
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.00	Slurry Seal	11/6/2028	85	100	3240
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.00	Slurry Seal	11/6/2028	85	100	3256
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.00	Slurry Seal	11/6/2028	85	100	3258
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	Residential	6,666.00	Slurry Seal	11/6/2028	85	100	3333
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.00	Slurry Seal	11/6/2028	85	100	3344
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.00	Slurry Seal	11/6/2028	85	100	3582
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.00	Slurry Seal	11/6/2028	85	100	3648
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	Residential	7,704.00	Slurry Seal	11/6/2028	85	100	3852
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.00	Slurry Seal	11/6/2028	85	100	3888
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.00	Slurry Seal	11/6/2028	85	100	4320
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	Residential	8,640.00	Slurry Seal	11/6/2028	85	100	4320
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.00	Slurry Seal	11/6/2028	85	100	4320
COACH::VALENCIALN::1	VALENCIA LN	CDS	CYPRESS ST	Residential	8,820.00	Slurry Seal	11/6/2028	85	100	4410
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.00	Slurry Seal	11/6/2028	85	100	4560
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.00	Slurry Seal	11/6/2028	85	100	4590
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.00	Slurry Seal	11/6/2028	85	100	4680
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	Residential	9,720.00	Slurry Seal	11/6/2028	85	100	4860
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.00	Slurry Seal	11/6/2028	85	100	4860
COACH::CCERVANTES::3	CALLE CERVANTES	CALLE CHAVEZ	CALLE YSIANO	Residential	10,224.00	Slurry Seal	11/6/2028	84	100	5112
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.00	Slurry Seal	11/6/2028	85	100	5238
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.00	Slurry Seal	11/6/2028	85	100	5238
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.00	Slurry Seal	11/6/2028	85	100	5238
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.00	Slurry Seal	11/6/2028	85	100	5238
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.00	Slurry Seal	11/6/2028	85	100	5328
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.00	Slurry Seal	11/6/2028	85	100	5400
COACH::PEREZST::1	PEREZ ST	NAOMI CT	ROMUALDA CT	Residential	11,200.00	Slurry Seal	11/6/2028	84	100	5600
COACH::52NDAVE::28	52ND AVE	SHADY LN	SHADY LN	Arterial	6,248.00	Microsurfacing	11/6/2028	84	100	6248
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	Collector	6,400.00	Microsurfacing	11/6/2028	85	100	6400
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.00	Slurry Seal	11/6/2028	85	100	6720
COACH::HERNANDEZ::1	HERNANDEZ ST	LA PONDEROSA DR	PEREZ ST	Residential	15,920.00	Slurry Seal	11/6/2028	84	100	7960
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.00	Slurry Seal	11/6/2028	85	100	8250
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.00	Slurry Seal	11/6/2028	85	100	8442
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.00	Slurry Seal	11/6/2028	85	100	8455
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.00	Slurry Seal	11/6/2028	85	100	9000
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.00	Slurry Seal	11/6/2028	85	100	9036
COACH::HERNANDEZ::2	HERNANDEZ ST	PEREZ ST	ORTIZ ST	Residential	19,320.00	Slurry Seal	11/6/2028	84	100	9660
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.00	Microsurfacing	11/6/2028	85	100	10400
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.00	Slurry Seal	11/6/2028	85	100	11898
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.00	Slurry Seal	11/6/2028	85	100	12540
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.00	Slurry Seal	11/6/2028	85	100	12580
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.00	Slurry Seal	11/6/2028	85	100	14094
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.00	Microsurfacing	11/6/2028	85	100	16250
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	Arterial	16,250.00	Microsurfacing	11/6/2028	85	100	16250
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.00	Microsurfacing	11/6/2028	85	100	16250
COACH::CALHOUNST::3	CALHOUN ST	CITY LIMITS	VIA PICON	Collector	16,260.00	Microsurfacing	11/6/2028	84	100	16260
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.00	Slurry Seal	11/6/2028	85	100	16650
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.00	Microsurfacing	11/6/2028	85	100	18750
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	Residential	46,980.00	Slurry Seal	11/6/2028	85	100	23490
COACH::CALHOUNST::4	CALHOUN ST	VIA PICON	50TH AVE	Collector	23,820.00	Microsurfacing	11/6/2028	84	100	23820
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	Residential	49,552.00	Slurry Seal	11/6/2028	85	100	24776
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	Residential	49,704.00	Slurry Seal	11/6/2028	85	100	24852
COACH::LASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	Residential	49,742.00	Slurry Seal	11/6/2028	85	100	24871
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	Residential	49,818.00	Slurry Seal	11/6/2028	85	100	24909
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	Residential	49,856.00	Slurry Seal	11/6/2028	85	100	24928
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.00	Slurry Seal	11/6/2028	85	100	24947
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	Residential	49,932.00	Slurry Seal	11/6/2028	85	100	24966
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	Arterial	36,300.00	Microsurfacing	11/6/2028	85	100	36300
COACH::TYLERST::20	TYLER ST	2125' S/O VISTA DEL SUR	VISTA DEL SUR	Rural	63,780.00	Chip Seal	11/6/2028	84	100	51024
COACH::48THAVEW::1	48TH AVE	HARRISON ST	CITY LIMITS	Arterial	57,240.00	Microsurfacing	11/6/2028	84	100	57240
COACH::TYLERST::1	TYLER ST	CITY LIMITS	54TH AVE	Collector	66,700.00	Microsurfacing	11/6/2028	84	100	66700
COACH::44THAVEE::1	44TH AVE	HARRISON ST	DILLON RD	Arterial	72,150.00	Microsurfacing	11/6/2028	84	100	72150
COACH::VISTADELNO::1	VISTA DEL NORTE	HARRISON ST	CITY LIMITS	Collector	79,500.00	Microsurfacing	11/6/2028	84	100	79500

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::54THAVEE::7	54TH AVE	TYLER ST	SH-111	Arterial	80,800.00	Microsurfacing	11/6/2028	84	100	80800
COACH::ARAYLYNN::1	AVENIDA RAYLYNN	GENOA ST	CALLE JOYCE	Residential	10,080.00	3" Mill & Overlay	11/6/2028	45	100	90720
COACH::AADOBE::5	AVENIDA ADOBE	VIA ZAHIDI	CORTE ALTURIAN	Residential	10,320.00	3" Mill & Overlay	11/6/2028	45	100	92880
COACH::CELSOL::3	CALLE EL SOL	CORTE LA MORADA	CORTE SOLEADO	Residential	10,360.00	3" Mill & Overlay	11/6/2028	45	100	93240
COACH::COPPERIDGE::1	COPPERIDGE ST	JADEROCK RD	NICKLECREEK DR	Residential	10,360.00	3" Mill & Overlay	11/6/2028	45	100	93240
COACH::1STST::1	1ST ST	SH-86	PALM AVE	Collector	10,431.00	3" Mill & Overlay	11/6/2028	45	100	93879
COACH::NAPOLILN::1	NAPOLI LN	CDS	GENOA ST	Residential	10,590.00	3" Mill & Overlay	11/6/2028	45	100	95310
COACH::REDONDOSUR::2	REDONDO SUR	CALLE QUINTERRA	CORTE PERCEBE	Residential	10,656.00	3" Mill & Overlay	11/6/2028	45	100	95904
COACH::CBONITA::1	CALLE BONITA	CALLE NINOS	CALLE FELIZ	Residential	11,232.00	3" Mill & Overlay	11/6/2028	39	100	101088
COACH::PALMAVE::7	PALM AVE	2ND ST	ALLEY	Collector	11,280.00	3" Mill & Overlay	11/6/2028	39	100	101520
COACH::ORCHARDAVE::11	ORCHARD AVE	2ND ST	ALLEY	Collector	11,280.00	3" Mill & Overlay	11/6/2028	39	100	101520
COACH::CLEANDRO::2	CALLE LEANDRO	CALLE DIEGO	CALLE BERNARDO	Residential	11,280.00	3" Mill & Overlay	11/6/2028	43.5	100	101520
COACH::ORCHARDAVE::12	ORCHARD AVE	ALLEY	1ST ST	Collector	11,280.00	3" Mill & Overlay	11/6/2028	43.5	100	101520
COACH::PALMAVE::5	PALM AVE	3RD ST	ALLEY	Collector	11,280.00	3" Mill & Overlay	11/6/2028	45	100	101520
COACH::CTORRESORD::2	CALLE TORRES ORDUNO	DOUMA CT	DAMASCUS AVE	Residential	11,424.00	3" Mill & Overlay	11/6/2028	40.5	100	102816
COACH::SBALBOAST::1	S BALBOA ST	WESTERFIELD WAY	CDS	Residential	20,628.00	1.5" Thin Overlay	11/6/2028	57	100	103140
COACH::ARAYLYNN::3	AVENIDA RAYLYNN	CALLE FLORENA	150' E/O CALLE FLORENA	Residential	5,184.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	18	100	103680
COACH::PISMOCT::1	PISMO CT	CDS	VENENTA BLVD	Residential	11,520.00	3" Mill & Overlay	11/6/2028	42	100	103680
COACH::SUNCREST::5	SUNCREST ST	SUNRISE AVE	WESTERFIELD WAY	Residential	11,520.00	3" Mill & Overlay	11/6/2028	43.5	100	103680
COACH::50THAVEW::11	50TH AVE	MAZATLAN DR	CALLE QUINTERRA	Arterial	20,746.00	1.5" Thin Overlay	11/6/2028	57	100	103730
COACH::2NDST::5	2ND ST	ALLEY	SH-111	Collector	11,536.00	3" Mill & Overlay	11/6/2028	45	100	103824
COACH::WESTERFILD::1	WESTERFIELD WAY	AVENIDA ADOBE	140' W/O S BALBOA ST	Residential	5,200.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	28.5	100	104000
COACH::AADOBE::3	AVENIDA ADOBE	CORTE CINDARELLA	CORTE BERNARDO	Residential	11,560.00	3" Mill & Overlay	11/6/2028	40.5	100	104040
COACH::3RDST::5	3RD ST	ALLEY	SH-111	Collector	11,592.00	3" Mill & Overlay	11/6/2028	40.5	100	104328
COACH::CALHOUNST::7	CALHOUN ST	LAS PLUMAS CT	AVENUE 49	Collector	104,470.00	Microsurfacing	11/6/2028	75	100	104470
COACH::TRIPOLIWAY::12	TRIPOLI WAY	7TH ST	6TH ST	Collector	11,700.00	3" Mill & Overlay	11/6/2028	45	100	105300
COACH::DATEAVE::10	DATE AVE	7TH ST	6TH ST	Collector	11,700.00	3" Mill & Overlay	11/6/2028	45	100	105300
COACH::GENOAST::3	GENOA ST	AVENIDA ALEENAH	150' N/O AVENIDA ALEENAH	Residential	5,291.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	16.5	100	105820
COACH::ANERIUM::1	AVENIDA NERIUM	CALLE CARMELLO	CALLE GLORIOSA	Residential	11,880.00	3" Mill & Overlay	11/6/2028	39	100	106920
COACH::AADOBE::7	AVENIDA ADOBE	WESTERFIELD WAY	JULIA DR	Residential	5,364.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	28.5	100	107280
COACH::GENOAST::5	GENOA ST	AVENIDA VERONICA	150' N/O AVENIDA VERONICA	Residential	5,476.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	22.5	100	109520
COACH::GENOAST::1	GENOA ST	AVENUE 53	AVENIDA RAYLYNN	Residential	12,358.00	3" Mill & Overlay	11/6/2028	40.5	100	111222
COACH::50THAVEW::9	50TH AVE	PAVON PALMA	FREDERICK ST	Arterial	12,375.00	3" Mill & Overlay	11/6/2028	39	100	111375
COACH::54THAVEE::2	54TH AVE	SLATE DR	FREDERICK ST	Arterial	12,420.00	3" Mill & Overlay	11/6/2028	42	100	111780
COACH::54THAVEW::9	54TH AVE	FREDERICK ST	SLATE DR	Arterial	12,420.00	3" Mill & Overlay	11/6/2028	43.5	100	111780
COACH::BAGDADAVE::10	BAGDAD AVE	TRIPOLI WAY	DATE AVE	Collector	12,440.00	3" Mill & Overlay	11/6/2028	45	100	111960
COACH::CAIROAVE::3	CAIRO AVE	CALLE AVILA	CALLE CAMPOYO	Residential	12,520.00	3" Mill & Overlay	11/6/2028	37.5	100	112680
COACH::HILLDR::3	HILL DR	SUNSET DR	240' W/O SH-111	Residential	5,640.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	12	100	112800
COACH::AMAPOLALN::1	AMAPOLA LN	CDS	HIBISCO ST	Residential	12,728.00	3" Mill & Overlay	11/6/2028	40.5	100	114552
COACH::HUNTINGTON::3	HUNTINGTON AVE	HERMOSA BLVD	VENENTA BLVD	Residential	12,996.00	3" Mill & Overlay	11/6/2028	40.5	100	116964
COACH::SERPENTINE::1	SERPENTINE WAY	CDS	CINNABAR LN	Residential	13,024.00	3" Mill & Overlay	11/6/2028	40.5	100	117216
COACH::SAPPHIRELN::1	SAPPHIRE LN	SCARLET WAY	N SIENNA CIR	Residential	23,472.00	1.5" Thin Overlay	11/6/2028	57	100	117360
COACH::CRESCENTW::1	CRESCENT WAY	MOONLIT DR	FIESTA RD	Residential	13,104.00	3" Mill & Overlay	11/6/2028	45	100	117936
COACH::VIAMISIONE::1	VIA MISIONERO	CALLE SOLEDAD	SHADY LN	Residential	23,724.00	1.5" Thin Overlay	11/6/2028	57	100	118620
COACH::55THAVE::1	55TH AVE	CITY LIMITS	VAN BUREN ST	Collector	13,210.00	3" Mill & Overlay	11/6/2028	37.5	100	118890
COACH::6THST::5	6TH ST	ORCHARD AVE	VINE AVE	Collector	23,800.00	1.5" Thin Overlay	11/6/2028	57	100	119000
COACH::PALMERASCR::12	PALMERAS CIR	CARDINAL DR	PALMERAS CIR	Residential	5,976.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	10.5	100	119520
COACH::CAPITOLAAV::5	CAPITOLA AVE	NEWPORT ST	OCEANO RD	Residential	13,428.00	3" Mill & Overlay	11/6/2028	37.5	100	120852
COACH::CATALINAAV::1	CATALINA AVE	NEWPORT ST	OCEANO RD	Residential	13,428.00	3" Mill & Overlay	11/6/2028	39	100	120852
COACH::DATEAVE::9	DATE AVE	8TH ST	7TH ST	Collector	13,536.00	3" Mill & Overlay	11/6/2028	43.5	100	121824
COACH::52NDAVEW::7	52ND AVE	CALLE LIMON	GENOA ST	Arterial	24,615.00	1.5" Thin Overlay	11/6/2028	57	100	123075
COACH::GUITRONST::1	GUITRON ST	FREDERICK ST	REYES ST	Residential	6,154.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	25.5	100	123080
COACH::2NDST::4	2ND ST	VINE AVE	ALLEY	Collector	13,720.00	3" Mill & Overlay	11/6/2028	40.5	100	123480
COACH::3RDST::4	3RD ST	VINE AVE	ALLEY	Collector	13,720.00	3" Mill & Overlay	11/6/2028	42	100	123480
COACH::MALVASIA::1	MALVASIA WAY	PRIMITIVO DR	RODREJO WAY	Residential	6,176.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2028	24	100	123520
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.00	Slurry Seal	11/6/2029	85	100	1278
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.00	Slurry Seal	11/6/2029	85	100	3204
COACH::VIAMERIDA::1	VIA MERIDA	VAN BUREN ST	PASEO BARCELONA	Residential	7,272.00	Slurry Seal	11/6/2029	85	100	3636
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.00	Slurry Seal	11/6/2029	85	100	3888
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.00	Slurry Seal	11/6/2029	85	100	4320
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.00	Slurry Seal	11/6/2029	85	100	4320
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.00	Slurry Seal	11/6/2029	85	100	4320
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.00	Slurry Seal	11/6/2029	85	100	4458.5
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.00	Slurry Seal	11/6/2029	85	100	4680
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	Residential	10,080.00	Slurry Seal	11/6/2029	85	100	5040
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.00	Slurry Seal	11/6/2029	85	100	5577
COACH::SHADYLN::4	SHADY LN	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	13,440.00	Slurry Seal	11/6/2029	85	100	6720
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.00	Slurry Seal	11/6/2029	85	100	8442
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.00	Slurry Seal	11/6/2029	85	100	9996
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	Collector	10,400.00	Microsurfacing	11/6/2029	85	100	10400
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	Collector	10,400.00	Microsurfacing	11/6/2029	85	100	10400
COACH::VALLEYRD::5	VALLEY RD	NELSON ST	LAS PALMAS ST	Collector	10,720.00	Microsurfacing	11/6/2029	85	100	10720
COACH::VALLEYRD::4	VALLEY RD	MORGAN AVE	NELSON ST	Collector	11,040.00	Microsurfacing	11/6/2029	85	100	11040
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.00	Slurry Seal	11/6/2029	85	100	14436
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.00	Slurry Seal	11/6/2029	85	100	17075.5
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.00	Slurry Seal	11/6/2029	85	100	17537
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.00	Slurry Seal	11/6/2029	85	100	17613
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.00	Microsurfacing	11/6/2029	85	100	18750
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.00	Microsurfacing	11/6/2029	85	100	18900
COACH::CLEANDRO::4	CALLE LEANDRO	CALLE GREGORIO	CDS	Residential	13,560.00	3" Mill & Overlay	11/6/2029	45	100	122040
COACH::MCCOYPEAK::4	MCCOY PEAK AVE	SAN JACINTO LN	PINTO LN	Residential	13,680.00	3" Mill & Overlay	11/6/2029	45	100	123120
COACH::50THAVEE::11	50TH AVE	PAVON PALMA	AVENIDA DEL PARQUE	Arterial	13,728.00	3" Mill & Overlay	11/6/2029	42	100	123552
COACH::CABELIA::1	CALLE ABELIA	49TH AVE	AVENIDA FLORABUNDA	Residential	13,920.00	3" Mill & Overlay	11/6/2029	43.5	100	125280
COACH::ORCHARDAVE::2	ORCHARD AVE	ORCHARD AVE	9TH ST	Collector	14,040.00	3" Mill & Overlay	11/6/2029	45	100	126360
COACH::AALEENAH::3	AVENIDA ALEENAH	ADRIANA CT	JULIA CT	Residential	14,112.00	3" Mill & Overlay	11/6/2029	43.5	100	127008
COACH::CSOLIS::1	CORTE SOLIS	CALLE OCASO	CDS	Residential	14,134.00	3" Mill & Overlay	11/6/2029	43.5	100	127206
COACH::PARKINGLOT::1	PARKING LOT	200' S/O BAGDAD AVE	BAGDAD AVE	Residential	6,368.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	21	100	127360
COACH::CHIAPASDR::1	CHIAPAS DR	51ST AVE	500' N/O 51ST AVE	Residential	14,168.00	3" Mill & Overlay	11/6/2029	42	100	127512
COACH::CFLORENA::4	CALLE FLORENA	110' N/O AVENIDA ALEENAH	AVENIDA VERONICA	Residential	14,184.00	3" Mill & Overlay	11/6/2029	37.5	100	127656
COACH::VALLEPOSAD::1	VALLE POSADA	MOONLIT DR	FIESTA RD	Residential	14,508.00	3" Mill & Overlay	11/6/2029	39	100	130572
COACH::JAZMINST::2	JAZMIN ST	MARGARITA AVE	49TH AVE	Residential	6,549.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	16.5	100	130980
COACH::PHOENIXCT::1	PHOENIX CT	CDS	WASHINGTONIA AVE	Residential	14,616.00	3" Mill & Overlay	11/6/2029	45	100	131544
COACH::DOUMACT::2	DOUMA CT	DOUMA CT	CALLE TORRES ORDUNO	Residential	6,660.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	19.5	100	133200
COACH::53RDAVE::20	53RD AVE	CALLE LEANDRO	CALLE EMPALME	Collector	15,109.50	3" Mill & Overlay	11/6/2029	42	100	135985.5
COACH::52NDAVE::40	52ND AVE	2700' W/O FILLMORE ST	2200' W/O FILLMORE ST	Rural	15,150.00	3" Mill & Overlay	11/6/2029	42	100	136350
COACH::MECCAHILLS::2	MECCA HILLS AVE	CHAPARROSA ST	CDS	Residential	15,300.00	3" Mill & Overlay	11/6/2029	43.5	100	137700
COACH::SANMATEOAV::3	SAN MATEO AVE	CHAPARROSA ST	CDS	Residential	15,300.00	3" Mill & Overlay	11/6/2029	43.5	100	137700
COACH::52NDAVE::16	52ND AVE	SH-86	TIJSSELING CT	Arterial	15,312.00	3" Mill & Overlay	11/6/2029	45	100	137808
COACH::CSOLEADO::1	CORTE SOLEADO	CDS	CALLE EL SOL	Residential	15,355.00	3" Mill & Overlay	11/6/2029	43.5	100	138195
COACH::CLAMORADA::1	CORTE LA MORADA	CDS	CALLE EL SOL	Residential	15,392.00	3" Mill & Overlay	11/6/2029	43.5	100	138528
COACH::CBELLA::1	CALLE BELLA	CALLE NINOS	CDS	Residential	15,444.00	3" Mill & Overlay	11/6/2029	39	100	138996
COACH::MICHELLEDR::1	MICHELLE DR	CALLE ALICIA	MICHELLE DR	Residential	15,444.00	3" Mill & Overlay	11/6/2029	42	100	138996
COACH::GRANITEPAS::1	GRANITE PASS TRL	CHAPARROSA ST	RED MOUNTAIN PL	Residential	15,444.00	3" Mill & Overlay	11/6/2029	45	100	138996
COACH::IRISAVE::1	IRIS AVE	HIBISCO ST	FREDERICK ST	Residential	6,956.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	28.5	100	139120
COACH::AADOBE::1	AVENIDA ADOBE	51ST AVE	CALLE CATHRON	Residential	6,960.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	3	100	139200
COACH::COXCOMBDR::1	COXCOMB DR	CHAPARROSA ST	RED MOUNTAIN PL	Residential	15,624.00	3" Mill & Overlay	11/6/2029	43.5	100	140616
COACH::50THAVEW::17	50TH AVE	CALHOUN ST	COLONIA DR	Arterial	15,630.00	3" Mill & Overlay	11/6/2029	43.5	100	140670
COACH::CALHOUNST::12	CALHOUN ST	CITY LIMITS	VIA PICON	Collector	15,816.60	3" Mill & Overlay	11/6/2029	42	100	142349.4
COACH::BELLISSIMA::3	BELLISSIMA AVE	BELLA ROMA LN	CALLE EMPALME	Residential	15,890.00	3" Mill & Overlay	11/6/2029	40.5	100	143010
COACH::REDONDOSUR::1	REDONDO SUR	REDONDO PONIENTE	CALLE QUINTERRA	Residential	15,910.00	3" Mill & Overlay	11/6/2029	45	100	143190
COACH::PALMERASCR::4	PALMERAS CIR	CHUPAROSA DR	CARDELINA DR	Residential	7,200.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	7.5	100	144000
COACH::PALMERASCR::10	PALMERAS CIR	PALOMA DR	MARIPOSA DR	Residential	7,200.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	9	100	144000
COACH::PALMERASCR::9	PALMERAS CIR	MARIPOSA DR	CHUPAROSA DR	Residential	7,200.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	25.5	100	144000
COACH::PALMERASCR::8	PALMERAS CIR	CHUPAROSA DR	CARDELINA DR	Residential	7,200.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	27	100	144000
COACH::CALICIA::1	CALLE ALICIA	AVENIDA NICOLE	MICHELLE DR	Residential	16,050.00	3" Mill & Overlay	11/6/2029	45	100	144450
COACH::CARDELINAD::1	CARDELINA DR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.00	3" Mill & Overlay	11/6/2029	37.5	100	148392
COACH::PALOMADR::1	PALOMA DR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.00	3" Mill & Overlay	11/6/2029	37.5	100	148392
COACH::PALMERASCR::6	PALMERAS CIR	PALMERAS CIR	PALMERAS CIR	Residential	16,488.00	3" Mill & Overlay	11/6/2029	43.5	100	148392
COACH::AMARIA::1	AVENIDA MARIA	GENOA ST	CALLE DANIELLE	Residential	16,797.00	3" Mill & Overlay	11/6/2029	43.5	100	151173
COACH::VINEAVE::6	VINE AVE	4TH AVE	3RD ST	Collector	16,900.00	3" Mill & Overlay	11/6/2029	37.5	100	152100
COACH::AADOBE::10	AVENIDA ADOBE	215' S/O CHRISTINA RD	CHRISTINA RD	Residential	7,704.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2029	24	100	154080
COACH::CLIMON::2	CALLE LIMON	52ND AVE	CAMINO CORTO	Residential	17,430.00	3" Mill & Overlay	11/6/2029	43.5	100	156870
COACH::AVERANO::2	AVENIDA VERANO	CALLE PUERTA DEL SOL	CALLE EL SOL	Residential	17,575.00	3" Mill & Overlay	11/6/2029	40.5	100	158175
COACH::52NDAVE::1	52ND AVE	CALHOUN ST	VAN BUREN ST	Arterial	158,220.00	Microsurfacing	11/6/2029	81	100	158220
COACH::JADEROCKRD::2	JADEROCK RD	HORNBLEND ST	CINNABAR LN	Residential	17,760.00	3" Mill & Overlay	11/6/2029	42	100	159840
COACH::50THAVEW::7	50TH AVE	AVENIDA DE ORO	AVENIDA DEL PARQUE	Arterial	17,853.00	3" Mill & Overlay	11/6/2029	40.5	100	160677
COACH::50THAVEE::12	50TH AVE	AVENIDA DEL PARQUE	AVENIDA DE ORO	Arterial	17,853.00	3" Mill & Overlay	11/6/2029	43.5	100	160677
COACH::VIAVALENCI::3	VIA VALENCIA	CALLE MARBELLA	PASEO CORDOVA	Residential	4,851.00	Slurry Seal	11/6/2030	85	100	2425.5
COACH::CGRANADA::1	CALLE GRANADA	PASEO MADRID	PASEO CORDOVA	Residential	10,800.00	Slurry Seal	11/6/2030	85	100	5400
COACH::PASEOCORDO::1	PASEO CORDOVA	VIA VALENCIA	CALLE GRANADA	Residential	16,500.00	Slurry Seal	11/6/2030	85	100	8250
COACH::PASEOBARCE::1	PASEO BARCELONA	CALLE SEVILLE	VIA MERIDA	Residential	18,216.00	Slurry Seal	11/6/2030	85	100	9108
COACH::SH-111S::7	SH-111	3RD ST	4TH ST	Arterial	16,250.00	Microsurfacing	11/6/2030	85	100	16250
COACH::SH-111S::11	SH-111	7TH ST	8TH ST	Arterial	18,750.00	Microsurfacing	11/6/2030	85	100	18750
COACH::BAGDADAVE::8	BAGDAD AVE	PARKING LOT ENTRANCE	TRIPOLI WAY	Collector	17,760.00	3" Mill & Overlay	11/6/2030	45	100	159840
COACH::SUNDOWNLN::1	SUNDOWN LN	CDS	SUNCREST ST	Residential	18,000.00	3" Mill & Overlay	11/6/2030	40.5	100	162000
COACH::PARKLN::1	PARK LN	CITY LIMITS	SH-86	Collector	18,030.00	3" Mill & Overlay	11/6/2030	40.5	100	162270
COACH::FREDERICK::18	FREDERICK ST	GUITRON ST	IRIS AVE	Collector	18,216.00	3" Mill & Overlay	11/6/2030	39	100	163944
COACH::DILLONRD::11	DILLON RD	650' S/O VISTA DEL NORTE	450' S/O VISTA DEL NORTE	Arterial	18,624.00	3" Mill & Overlay	11/6/2030	37.5	100	167616
COACH::PRIMITIVO::1	PRIMITIVO DR	PRIMITIVO DR	MALVASIA WAY	Residential	8,544.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	21	100	170880
COACH::CBERNARDO::1	CALLE BERNARDO	CDS	CALLE LEANDRO	Residential	19,006.00	3" Mill & Overlay	11/6/2030	45	100	171054
COACH::RODREJOWAY::1	RODREJO WAY	MALVASIA WAY	PROSECCO WAY	Residential	19,040.00	3" Mill & Overlay	11/6/2030	39	100	171360
COACH::ORQUIDEALN::1	ORQUIDEA LN	CALENDULA AVE	CDS	Residential	19,260.00	3" Mill & Overlay	11/6/2030	39	100	173340
COACH::IXTAPAAVE::1	IXTAPA AVE	CDS	COZUMEL ST	Residential	19,260.00	3" Mill & Overlay	11/6/2030	39	100	173340

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::JALISCOAVE::4	JALISCO AVE	JALISCO ACE PARKING LOOP	100' S/O TAXCO WAY	Residential	19,404.00	3" Mill & Overlay	11/6/2030	43.5	100	174636
COACH::CBOUGANVIL::1	CALLE BOUGANVILIA	TYLER ST	CALLE CLAVEL	Residential	19,476.00	3" Mill & Overlay	11/6/2030	43.5	100	175284
COACH::ORCHARDAVE::5	ORCHARD AVE	7TH ST	6TH ST	Collector	19,500.00	3" Mill & Overlay	11/6/2030	37.5	100	175500
COACH::PALMAVE::3	PALM AVE	5TH ST	4TH ST	Collector	19,500.00	3" Mill & Overlay	11/6/2030	37.5	100	175500
COACH::ORCHARDAVE::7	ORCHARD AVE	5TH ST	4TH ST	Collector	19,500.00	3" Mill & Overlay	11/6/2030	39	100	175500
COACH::PALMAVE::4	PALM AVE	4TH ST	3RD ST	Collector	19,500.00	3" Mill & Overlay	11/6/2030	40.5	100	175500
COACH::ORCHARDAVE::6	ORCHARD AVE	6TH ST	5TH ST	Collector	19,500.00	3" Mill & Overlay	11/6/2030	40.5	100	175500
COACH::DAMASCUSAV::1	DAMASCUS AVE	DOUMA ST	CALLE TORRES ORDUNO	Residential	19,532.00	3" Mill & Overlay	11/6/2030	42	100	175788
COACH::CALHOUNST::6	CALHOUN ST	SHADOWROCK DR	LAS PLUMAS CT	Collector	19,654.00	3" Mill & Overlay	11/6/2030	39	100	176886
COACH::SUNDANCELN::1	SUNDANCE LN	CDS	SUNCREST ST	Residential	19,920.00	3" Mill & Overlay	11/6/2030	43.5	100	179280
COACH::MECCAHILLS::1	MECCA HILLS AVE	CHARLTON PEAK ST	CHAPARROSA ST	Residential	20,052.00	3" Mill & Overlay	11/6/2030	45	100	180468
COACH::CAPITOLAAV::4	CAPITOLA AVE	VENENTA BLVD	NEWPORT ST	Residential	9,072.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	22.5	100	181440
COACH::AEUROPA::2	AVENIDA EUROPA	CALLE CARMELLO	CALLE TECOMARIA	Residential	20,160.00	3" Mill & Overlay	11/6/2030	39	100	181440
COACH::ACEDRUS::1	AVENIDA CEDRUS	CALLE CARMELLO	CALLE TECOMARIA	Residential	20,160.00	3" Mill & Overlay	11/6/2030	39	100	181440
COACH::7THST::1	7TH ST	TRIPOLI WAY	DATE AVE	Collector	20,496.00	3" Mill & Overlay	11/6/2030	40.5	100	184464
COACH::EAGLEAVE::3	EAGLE AVE	CHAPARROSA ST	PINTO LN	Residential	20,558.00	3" Mill & Overlay	11/6/2030	43.5	100	185022
COACH::HIBISCOST::4	HIBISCO ST	AMAPOLA LN	ROSAL AVE	Residential	9,287.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	27	100	185740
COACH::CEMELIA::2	CALLE EMELIA	AVENIDA RAYLYNN	AVENIDA GRACE	Residential	9,288.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	27	100	185760
COACH::50THAVE::8	50TH AVE	CALLE QUINTERRA	MAZATLAN DR	Arterial	20,746.00	3" Mill & Overlay	11/6/2030	40.5	100	186714
COACH::HIBISCOST::5	HIBISCO ST	ROSAL AVE	MARGARITA AVE	Residential	9,398.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	13.5	100	187960
COACH::CAIROAVE::5	CAIRO AVE	SH-86	ALLEY	Residential	9,416.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	8	100	188320
COACH::CALENDULA::5	CALENDULA AVE	ORQUIDEA LN	NARCISO LN	Residential	9,435.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	18	100	188700
COACH::54THAVEW::6	54TH AVE	SHADY LN	CALLE BALDERAS	Arterial	20,985.00	3" Mill & Overlay	11/6/2030	37.5	100	188865
COACH::HIBISCOST::2	HIBISCO ST	CALENDULA AVE	IRIS AVE	Residential	9,472.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	15	100	189440
COACH::BAGDADAVE::16	BAGDAD AVE	GENOA ST	SH-111	Collector	21,120.00	3" Mill & Overlay	11/6/2030	40.5	100	190080
COACH::VALENCIALN::2	VALENCIA LN	CYPRESS ST	SHADY LN	Residential	9,540.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	12	100	190800
COACH::CALENDULA::3	CALENDULA AVE	JAZMIN ST	TULIPAN ST	Residential	9,583.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2030	6	100	191660
COACH::GENOAST::7	GENOA ST	AVENIDA MARIA	52ND AVE	Residential	21,312.00	3" Mill & Overlay	11/6/2030	45	100	191808
COACH::CRUIZ::3	CALLE RUIZ	AVENIDA ZOCALO	AVENIDA REFORMA	Residential	6,444.00	Slurry Seal	11/6/2031	85	100	3222
COACH::CRUIZ::4	CALLE RUIZ	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	8,640.00	Slurry Seal	11/6/2031	85	100	4320
COACH::AIRPORTBL::6	AIRPORT BLVD	1215' W/O FILLMORE ST	1085' W/O FILLMORE ST	Collector	6,500.00	Microsurfacing	11/6/2031	84	100	6500
COACH::SHADYLN::3	SHADY LN	AVENIDA TACUBA	AVENIDA REFORMA	Residential	20,048.00	Slurry Seal	11/6/2031	85	100	10024
COACH::VALLEYRD::2	VALLEY RD	JENNIFER WAY	TRIPOLI WAY	Collector	10,400.00	Microsurfacing	11/6/2031	85	100	10400
COACH::SKENMOREST::1	S KENMORE ST	WESTERFIELD WAY	CDS	Residential	20,664.00	3" Mill & Overlay	11/6/2031	45	100	185976
COACH::SCORONADO::1	S CORONADO ST	WESTERFIELD WAY	CDS	Residential	20,664.00	3" Mill & Overlay	11/6/2031	45	100	185976
COACH::BAGDADAVE::15	BAGDAD AVE	SHADY LN	GENOA ST	Collector	20,920.00	3" Mill & Overlay	11/6/2031	45	100	188280
COACH::CMENDOZA::1	CALLE MENDOZA	TYLER ST	CORTE OLIVIA	Residential	20,955.00	3" Mill & Overlay	11/6/2031	45	100	188595
COACH::MANHATTAN::1	MANHATTAN AVE	VAN BUREN ST	MONARCH RD	Residential	21,132.00	3" Mill & Overlay	11/6/2031	45	100	190188
COACH::BAGDADAVE::3	BAGDAD AVE	MECCA LANE	CALLE AVILA	Residential	21,480.00	3" Mill & Overlay	11/6/2031	40.5	100	193320
COACH::3RDST::1	3RD ST	D/E	PALM AVE	Collector	21,672.00	3" Mill & Overlay	11/6/2031	36	100	195048
COACH::2NDST::1	2ND ST	D/E	PALM AVE	Collector	21,672.00	3" Mill & Overlay	11/6/2031	37.5	100	195048
COACH::PALMERASCR::11	PALMERAS CIR	PALMERAS CIR	PALOMA DR	Residential	9,756.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	24	100	195120
COACH::CALENDULA::6	CALENDULA AVE	NARCISO LN	HIBISCO ST	Residential	9,768.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	21	100	195360
COACH::VINEAVE::9	VINE AVE	2ND ST	ALLEY	Collector	9,776.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	16.5	100	195520
COACH::50THAVEW::13	50TH AVE	VAN BUREN ST	CALLE PUERTA DEL SOL	Arterial	21,728.00	3" Mill & Overlay	11/6/2031	43.5	100	195552
COACH::HIBISCOST::3	HIBISCO ST	IRIS AVE	AMAPOLA LN	Residential	9,842.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	12	100	196840
COACH::SANGORGONI::2	SAN GORGONIO ST	MCCOY PEAK AVE	QUAIL MOUNTAIN TER	Residential	21,960.00	3" Mill & Overlay	11/6/2031	42	100	197640
COACH::54THAVEW::1	54TH AVE	POLK ST	CITY LIMITS	Arterial	22,140.00	3" Mill & Overlay	11/6/2031	36	100	199260
COACH::ARICADR::1	ARICA DR	MCCOY PEAK AVE	QUAIL MOUNTAIN TER	Residential	22,176.00	3" Mill & Overlay	11/6/2031	45	100	199584
COACH::50THAVEW::1	50TH AVE	SH-86	KENMORE ST	Arterial	22,209.00	3" Mill & Overlay	11/6/2031	43.5	100	199881
COACH::CHIRIACOSU::1	CHIRIACO SUMMIT ST	GLENDORA RIDGE AVE	BIG BEAR PL	Residential	22,248.00	3" Mill & Overlay	11/6/2031	45	100	200232
COACH::8THST::1	8TH ST	DATE AVE	PENDLETON WAY	Collector	22,400.00	3" Mill & Overlay	11/6/2031	43.5	100	201600
COACH::ORCHARDAVE::3	ORCHARD AVE	9TH ST	8TH ST	Collector	22,500.00	3" Mill & Overlay	11/6/2031	36	100	202500
COACH::ORCHARDAVE::4	ORCHARD AVE	8TH ST	7TH ST	Collector	22,500.00	3" Mill & Overlay	11/6/2031	40.5	100	202500
COACH::CLOSHERMAN::1	CALLE LOS HERMANOS	CALLE FELIZ	CALLE ROSA	Residential	22,536.00	3" Mill & Overlay	11/6/2031	45	100	202824
COACH::CBONITA::2	CALLE BONITA	CALLE FELIZ	CALLE ROSA	Residential	22,752.00	3" Mill & Overlay	11/6/2031	42	100	204768
COACH::CTOLOSA::2	CALLE TOLOSA	SANTO LN	SAN REY DR	Residential	22,792.00	3" Mill & Overlay	11/6/2031	42	100	205128
COACH::ENTERPRISE::1	ENTERPRISE WAY	D/E	54TH AVE	Collector	22,905.00	3" Mill & Overlay	11/6/2031	43.5	100	206145
COACH::COPPERIDGE::3	COPPERIDGE ST	SHADOWROCK DR	LAPIS DR	Residential	10,360.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	19.5	100	207200
COACH::COPPERIDGE::2	COPPERIDGE ST	NICKLECREEK DR	SHADOWROCK DR	Residential	10,360.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2031	21	100	207200
COACH::CALHOUNST::13	CALHOUN ST	VIA PICON	50TH AVE	Collector	23,250.30	3" Mill & Overlay	11/6/2031	39	100	209252.7
COACH::CTORRESORD::1	CALLE TORRES ORDUNO	52ND AVE	DOUMA CT	Residential	23,290.00	3" Mill & Overlay	11/6/2031	37.5	100	209610
COACH::TYLERST::16	TYLER ST	50TH AVE	50TH AVE	Rural	23,580.00	3" Mill & Overlay	11/6/2031	37.5	100	212220
COACH::SANSOLANO::2	SAN SOLANO RD	SAGRADO DR	SAN REY DR	Residential	23,640.00	3" Mill & Overlay	11/6/2031	45	100	212760
COACH::LASFLORES::1	LAS FLORES AVE	TYLER ST	EL SOL ST	Residential	23,727.00	3" Mill & Overlay	11/6/2031	45	100	213543
COACH::8THST::2	8TH ST	ORCHARD AVE	VINE AVE	Collector	23,744.00	3" Mill & Overlay	11/6/2031	36	100	213696
COACH::7THST::3	7TH ST	PALM AVE	ORCHARD AVE	Collector	23,744.00	3" Mill & Overlay	11/6/2031	37.5	100	213696
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.00	Slurry Seal	11/6/2032	85	100	540
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.00	Slurry Seal	11/6/2032	85	100	1008
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.00	Slurry Seal	11/6/2032	85	100	1440
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.67	Slurry Seal	11/6/2032	85	100	2068.34
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.67	Slurry Seal	11/6/2032	85	100	2068.34
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.00	Slurry Seal	11/6/2032	85	100	2160
COACH::TRIPOLIWAY::8	TRIPOLI WAY	DAMASCUS AVE	DAMASCUS AVE	Residential	4,608.00	Slurry Seal	11/6/2032	85	100	2304
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.00	Slurry Seal	11/6/2032	85	100	2340
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.00	Slurry Seal	11/6/2032	85	100	2520
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.00	Slurry Seal	11/6/2032	85	100	2524.5
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.00	Slurry Seal	11/6/2032	85	100	2556
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.00	Slurry Seal	11/6/2032	85	100	2700
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.00	Slurry Seal	11/6/2032	85	100	3222
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.00	Slurry Seal	11/6/2032	85	100	3222
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.00	Slurry Seal	11/6/2032	85	100	3240
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.00	Slurry Seal	11/6/2032	85	100	3256
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.00	Slurry Seal	11/6/2032	85	100	3258
COACH::VIAVALENCI::1	VIA VALENCIA	VAN BUREN ST	PASEO MADRID	Residential	6,666.00	Slurry Seal	11/6/2032	85	100	3333
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.00	Slurry Seal	11/6/2032	85	100	3344
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.00	Slurry Seal	11/6/2032	85	100	3582
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.00	Slurry Seal	11/6/2032	85	100	3648
COACH::DATEAVE::3	DATE AVE	ARABY AVE	CAIRO AVE	Residential	7,704.00	Slurry Seal	11/6/2032	85	100	3852
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.00	Slurry Seal	11/6/2032	85	100	3888
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.00	Slurry Seal	11/6/2032	85	100	4320
COACH::TRIPOLIWAY::3	TRIPOLI WAY	ARABY AVE	ALLEY	Residential	8,640.00	Slurry Seal	11/6/2032	85	100	4320
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.00	Slurry Seal	11/6/2032	85	100	4320
COACH::VALENCIALN::1	VALENCIA LN	CDS	CYPRESS ST	Residential	8,820.00	Slurry Seal	11/6/2032	85	100	4410
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.00	Slurry Seal	11/6/2032	85	100	4560
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.00	Slurry Seal	11/6/2032	85	100	4590
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.00	Slurry Seal	11/6/2032	85	100	4680
COACH::DATEAVE::7	DATE AVE	DAMASCUS AVE	BAGDAD AVE	Residential	9,720.00	Slurry Seal	11/6/2032	85	100	4860
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.00	Slurry Seal	11/6/2032	85	100	4860
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.00	Slurry Seal	11/6/2032	85	100	5238
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.00	Slurry Seal	11/6/2032	85	100	5238
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.00	Slurry Seal	11/6/2032	85	100	5238
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.00	Slurry Seal	11/6/2032	85	100	5238
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.00	Slurry Seal	11/6/2032	85	100	5328
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.00	Slurry Seal	11/6/2032	85	100	5400
COACH::VALLEYRD::10	VALLEY RD	SHADY LN	SHADY LN	Collector	6,400.00	Microsurfacing	11/6/2032	85	100	6400
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.00	Slurry Seal	11/6/2032	85	100	6720
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.00	Slurry Seal	11/6/2032	85	100	8250
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.00	Slurry Seal	11/6/2032	85	100	8442
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.00	Slurry Seal	11/6/2032	85	100	8455
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.00	Slurry Seal	11/6/2032	85	100	9000
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.00	Slurry Seal	11/6/2032	85	100	9036
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.00	Microsurfacing	11/6/2032	85	100	10400
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.00	Slurry Seal	11/6/2032	85	100	11898
COACH::ARABYAVE::1	ARABY AVE	TRIPOLI WAY	DATE AVE	Residential	25,080.00	Slurry Seal	11/6/2032	85	100	12540
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.00	Slurry Seal	11/6/2032	85	100	12580
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.00	Slurry Seal	11/6/2032	85	100	14094
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.00	Microsurfacing	11/6/2032	85	100	16250
COACH::SH-111S::10	SH-111	6TH ST	7TH ST	Arterial	16,250.00	Microsurfacing	11/6/2032	85	100	16250
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.00	Microsurfacing	11/6/2032	85	100	16250
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.00	Slurry Seal	11/6/2032	85	100	16650
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.00	Microsurfacing	11/6/2032	85	100	18750
COACH::TRIPOLIWAY::1	TRIPOLI WAY	VALLEY RD	52ND AVE	Residential	46,980.00	Slurry Seal	11/6/2032	85	100	23490
COACH::JENNIFER::1	JENNIFER WAY	VALLEY RD	52ND AVE	Residential	49,552.00	Slurry Seal	11/6/2032	85	100	24776
COACH::NELSONST::1	NELSON ST	VALLEY RD	52ND AVE	Residential	49,704.00	Slurry Seal	11/6/2032	85	100	24852
COACH::LASPALMAS::1	LAS PALMAS ST	VALLEY RD	52ND AVE	Residential	49,742.00	Slurry Seal	11/6/2032	85	100	24871
COACH::OASISPALM::2	OASIS PALM AVE	VALLEY RD	52ND AVE	Residential	49,818.00	Slurry Seal	11/6/2032	85	100	24909
COACH::DOSPALMAS::1	DOS PALMAS AVE	VALLEY RD	52ND AVE	Residential	49,856.00	Slurry Seal	11/6/2032	85	100	24928
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.00	Slurry Seal	11/6/2032	85	100	24947
COACH::SHADYLN::14	SHADY LN	VALLEY RD	52ND AVE	Residential	49,932.00	Slurry Seal	11/6/2032	85	100	24966
COACH::SH-111S::4	SH-111	1ST ST	50TH AVE	Arterial	36,300.00	Microsurfacing	11/6/2032	85	100	36300
COACH::6THST::4	6TH ST	PALM AVE	ORCHARD AVE	Collector	23,800.00	3" Mill & Overlay	11/6/2032	37.5	100	214200
COACH::5THST::2	5TH ST	PALM AVE	ORCHARD AVE	Collector	23,800.00	3" Mill & Overlay	11/6/2032	37.5	100	214200
COACH::VALLEYRD::3	VALLEY RD	TRIPOLI WAY	MORGAN AVE	Collector	10,720.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	8	100	214400
COACH::AGRACE::1	AVENIDA GRACE	CALLE JOYCE	CALLE FLORENA	Residential	23,976.00	3" Mill & Overlay	11/6/2032	42	100	215784
COACH::TYLERST::9	TYLER ST	CALLE BOUGANVILA	LAS FLORES AVE	Collector	10,800.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	6	100	216000
COACH::SHADYLN::10	SHADY LN	53RD AVE	STACIE LN	Residential	10,808.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	0	100	216160
COACH::AIRPORTBL::8	AIRPORT BLVD	860' W/O FILLMORE ST	FILLMORE ST	Collector	24,024.00	3" Mill & Overlay	11/6/2032	43.5	100	216216
COACH::BELLISSIMA::2	BELLISSIMA AVE	MODENA TER	BELLA ROMA LN	Residential	24,080.00	3" Mill & Overlay	11/6/2032	37.5	100	216720
COACH::ADAMLN::1	ADAM LN	53RD AVE	CDS	Residential	24,120.00	3" Mill & Overlay	11/6/2032	36	100	217080
COACH::LEELN::1	LEE LN	53RD AVE	CDS	Residential	24,160.00	3" Mill & Overlay	11/6/2032	37.5	100	217440
COACH::ARAYLYNN::2	AVENIDA RAYLYNN	CALLE JOYCE	CALLE FLORENA	Residential	24,228.00	3" Mill & Overlay	11/6/2032	36	100	218052
COACH::CTECHA::7	CALLE TECHA	CALLE ROJO	52ND AVE	Residential	24,280.00	3" Mill & Overlay	11/6/2032	36	100	218520

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::CEMPALME::4	CALLE EMPALME	CALLE ROJO	52ND AVE	Residential	24,280.00	3" Mill & Overlay	11/6/2032	39	100	218520
COACH::CCAMACHO::5	CALLE CAMACHO	CALLE ROJO	52ND AVE	Residential	24,280.00	3" Mill & Overlay	11/6/2032	40.5	100	218520
COACH::1STST::2	1ST ST	PALM AVE	ORCHARD AVE	Collector	24,282.00	3" Mill & Overlay	11/6/2032	42	100	218538
COACH::TYLERST::11	TYLER ST	LAS FLORES AVE	CALLE PIZANO	Collector	10,960.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	18	100	219200
COACH::52NDAVEE::30	52ND AVE	GENOA ST	CALLE LIMON	Arterial	24,615.00	3" Mill & Overlay	11/6/2032	43.5	100	221535
COACH::ALLENDEDR::5	ALLENDE DR	ALLENDE DR	VERMOUTH DR	Residential	11,104.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	16.5	100	222080
COACH::CYPRESSST::1	CYPRESS ST	VALENCIA LN	VALLEY RD	Residential	11,172.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	12	100	223440
COACH::ORCHARDAVE::10	ORCHARD AVE	ALLEY	2ND ST	Collector	11,280.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	16.5	100	225600
COACH::ORCHARDAVE::9	ORCHARD AVE	3RD ST	ALLEY	Collector	11,280.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	16.5	100	225600
COACH::CGREGORIO::2	CALLE GREGORIO	CALLE DIEGO	CALLE LEANDRO	Residential	25,308.00	3" Mill & Overlay	11/6/2032	37.5	100	227772
COACH::MITCHELLDR::1	MITCHELL DR	FREDERICK ST	SH-111	Collector	25,346.00	3" Mill & Overlay	11/6/2032	42	100	228114
COACH::6THST::6	6TH ST	VINE AVE	SH-111	Collector	25,368.00	3" Mill & Overlay	11/6/2032	43.5	100	228312
COACH::7THST::5	7TH ST	VINE AVE	SH-111	Collector	25,424.00	3" Mill & Overlay	11/6/2032	36	100	228816
COACH::TERAVISTA::1	TERA VISTA	SIERRA ST	BRIANNE LN	Residential	25,567.00	3" Mill & Overlay	11/6/2032	45	100	230103
COACH::PRIMITIVO::4	PRIMITIVO DR	VERMOUTH DR	52ND AVE	Residential	11,616.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	16.5	100	232320
COACH::BELLAROMA::1	BELLA ROMA LN	D/E	BELLISSIMA AVE	Residential	25,888.00	3" Mill & Overlay	11/6/2032	39	100	232992
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.00	Slurry Seal	11/6/2033	85	100	1278
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.00	Slurry Seal	11/6/2033	85	100	3204
COACH::VIAMERIDA::1	VIA MERIDA	VAN BUREN ST	PASEO BARCELONA	Residential	7,272.00	Slurry Seal	11/6/2033	85	100	3636
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.00	Slurry Seal	11/6/2033	85	100	3888
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.00	Slurry Seal	11/6/2033	85	100	4320
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.00	Slurry Seal	11/6/2033	85	100	4320
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.00	Slurry Seal	11/6/2033	85	100	4320
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.00	Slurry Seal	11/6/2033	85	100	4458.5
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.00	Slurry Seal	11/6/2033	85	100	4680
COACH::DATEAVE::1	DATE AVE	52ND AVE	ARABY AVE	Residential	10,080.00	Slurry Seal	11/6/2033	85	100	5040
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.00	Slurry Seal	11/6/2033	85	100	5577
COACH::SHADYLN::4	SHADY LN	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	13,440.00	Slurry Seal	11/6/2033	85	100	6720
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.00	Slurry Seal	11/6/2033	85	100	8442
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.00	Slurry Seal	11/6/2033	85	100	9996
COACH::VALLEYRD::9	VALLEY RD	CYPRESS ST	SHADY LN	Collector	10,400.00	Microsurfacing	11/6/2033	85	100	10400
COACH::VALLEYRD::7	VALLEY RD	OASIS PALM AVE	DOS PALMAS AVE	Collector	10,400.00	Microsurfacing	11/6/2033	85	100	10400
COACH::VALLEYRD::5	VALLEY RD	NELSON ST	LAS PALMAS ST	Collector	10,720.00	Microsurfacing	11/6/2033	85	100	10720
COACH::VALLEYRD::4	VALLEY RD	MORGAN AVE	NELSON ST	Collector	11,040.00	Microsurfacing	11/6/2033	85	100	11040
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.00	Slurry Seal	11/6/2033	85	100	14436
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.00	Slurry Seal	11/6/2033	85	100	17075.5
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.00	Slurry Seal	11/6/2033	85	100	17537
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.00	Slurry Seal	11/6/2033	85	100	17613
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.00	Microsurfacing	11/6/2033	85	100	18750
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.00	Microsurfacing	11/6/2033	85	100	18900
COACH::CAVILA::5	CALLE AVILA	CALLE VERDE	CALLE ROJO	Residential	25,920.00	3" Mill & Overlay	11/6/2033	43.5	100	233280
COACH::CALTURIAN::1	CORTE ALTURIAN	CDS	AVENIDA ADOBE	Residential	26,160.00	3" Mill & Overlay	11/6/2033	37.5	100	235440
COACH::CALHOUNST::10	CALHOUN ST	EAGLE AVE	EL MAR AVE	Collector	26,350.00	3" Mill & Overlay	11/6/2033	39	100	237150
COACH::CAPITOLAAV::3	CAPITOLA AVE	LAGUNA LN	VENENTA BLVD	Residential	11,880.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	15	100	237600
COACH::55THAVE::2	55TH AVE	FILLMORE ST	1330' E/O FILLMORE ST	Rural	26,540.00	3" Mill & Overlay	11/6/2033	39	100	238860
COACH::BAGDADAVE::1	BAGDAD AVE	DOUMA ST	LIBNAN ST	Residential	26,560.00	3" Mill & Overlay	11/6/2033	39	100	239040
COACH::CAVILA::8	CALLE AVILA	CAIRO AVE	BAGDAD AVE	Residential	26,640.00	3" Mill & Overlay	11/6/2033	43.5	100	239760
COACH::CCAMACHO::7	CALLE CAMACHO	CAIRO AVE	BAGDAD AVE	Residential	26,680.00	3" Mill & Overlay	11/6/2033	43.5	100	240120
COACH::REDONDOPON::1	REDONDO PONIENTE	REDONDO SUR	REDONDO NORTE	Residential	26,800.00	3" Mill & Overlay	11/6/2033	43.5	100	241200
COACH::BALBOAST::1	BALBOA ST	D/E	50TH AVE	Residential	26,840.00	3" Mill & Overlay	11/6/2033	43.5	100	241560
COACH::SH-86S::4	SH-86	WESTERFIELD WAY	ALLEY	Arterial	26,880.00	3" Mill & Overlay	11/6/2033	43.5	100	241920
COACH::SUNRISEAVE::1	SUNRISE AVE	SUNBURST ST	SUNCREST ST	Residential	27,440.00	3" Mill & Overlay	11/6/2033	37.5	100	246960
COACH::50THAVEE::10	50TH AVE	FREDERICK ST	PAVON PALMA	Arterial	12,375.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	3	100	247500
COACH::ELARCOST::2	EL ARCO ST	TODOS SANTOS AVE	PUEBLO BONITO AVE	Residential	27,664.00	3" Mill & Overlay	11/6/2033	43.5	100	248976
COACH::ASHLERCT::1	ASHLER CT	COPPERIDGE ST	CDS	Residential	12,469.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	27	100	249380
COACH::BAGDADAVE::4	BAGDAD AVE	CALLE AVILA	CALLE CAMACHO	Residential	12,520.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	10.5	100	250400
COACH::MALVASIA::3	MALVASIA WAY	MERCADO CIR	CHARDONNAY CIR	Residential	12,704.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	27	100	254080
COACH::POLKST::3	POLK ST	610' S/O INDUSTRIAL WAY	INDUSTRIAL WAY	Collector	28,290.00	3" Mill & Overlay	11/6/2033	42	100	254610
COACH::TODOSSANTO::4	TODOS SANTOS AVE	CAMINO CORTEZ	COZUMEL ST	Residential	29,340.00	3" Mill & Overlay	11/6/2033	42	100	264060
COACH::CHAPARROSA::7	CHAPARROSA ST	MCCOY PEAK AVE	48TH AVE	Residential	29,700.00	3" Mill & Overlay	11/6/2033	40.5	100	267300
COACH::MALIBUAVE::1	MALIBU AVE	NEWPORT ST	OCEANO RD	Residential	13,428.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	27	100	268560
COACH::PENDLETON::1	PENDLETON WAY	7TH ST	9TH ST	Collector	30,080.00	3" Mill & Overlay	11/6/2033	42	100	270720
COACH::CQUINTERRA::3	CALLE QUINTERRA	CORTE SANTOS	CORTE LORETO	Residential	13,690.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	18	100	273800
COACH::50THAVEW::8	50TH AVE	AVENIDA DEL PARQUE	PAVON PALMA	Arterial	13,728.00	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	24	100	274560
COACH::52NDAVE::38	52ND AVE	POLK ST	1030' E/O POLK ST	Rural	30,900.00	3" Mill & Overlay	11/6/2033	36	100	278100
COACH::CCANTARA::1	CALLE CANTARA	AVENIDA FLORABUNDA	AVENIDA NERIUM	Residential	30,924.00	3" Mill & Overlay	11/6/2033	39	100	278316

APPENDIX F:
WORK PLAN FOR SCENARIO 6: CURRENT BUDGET

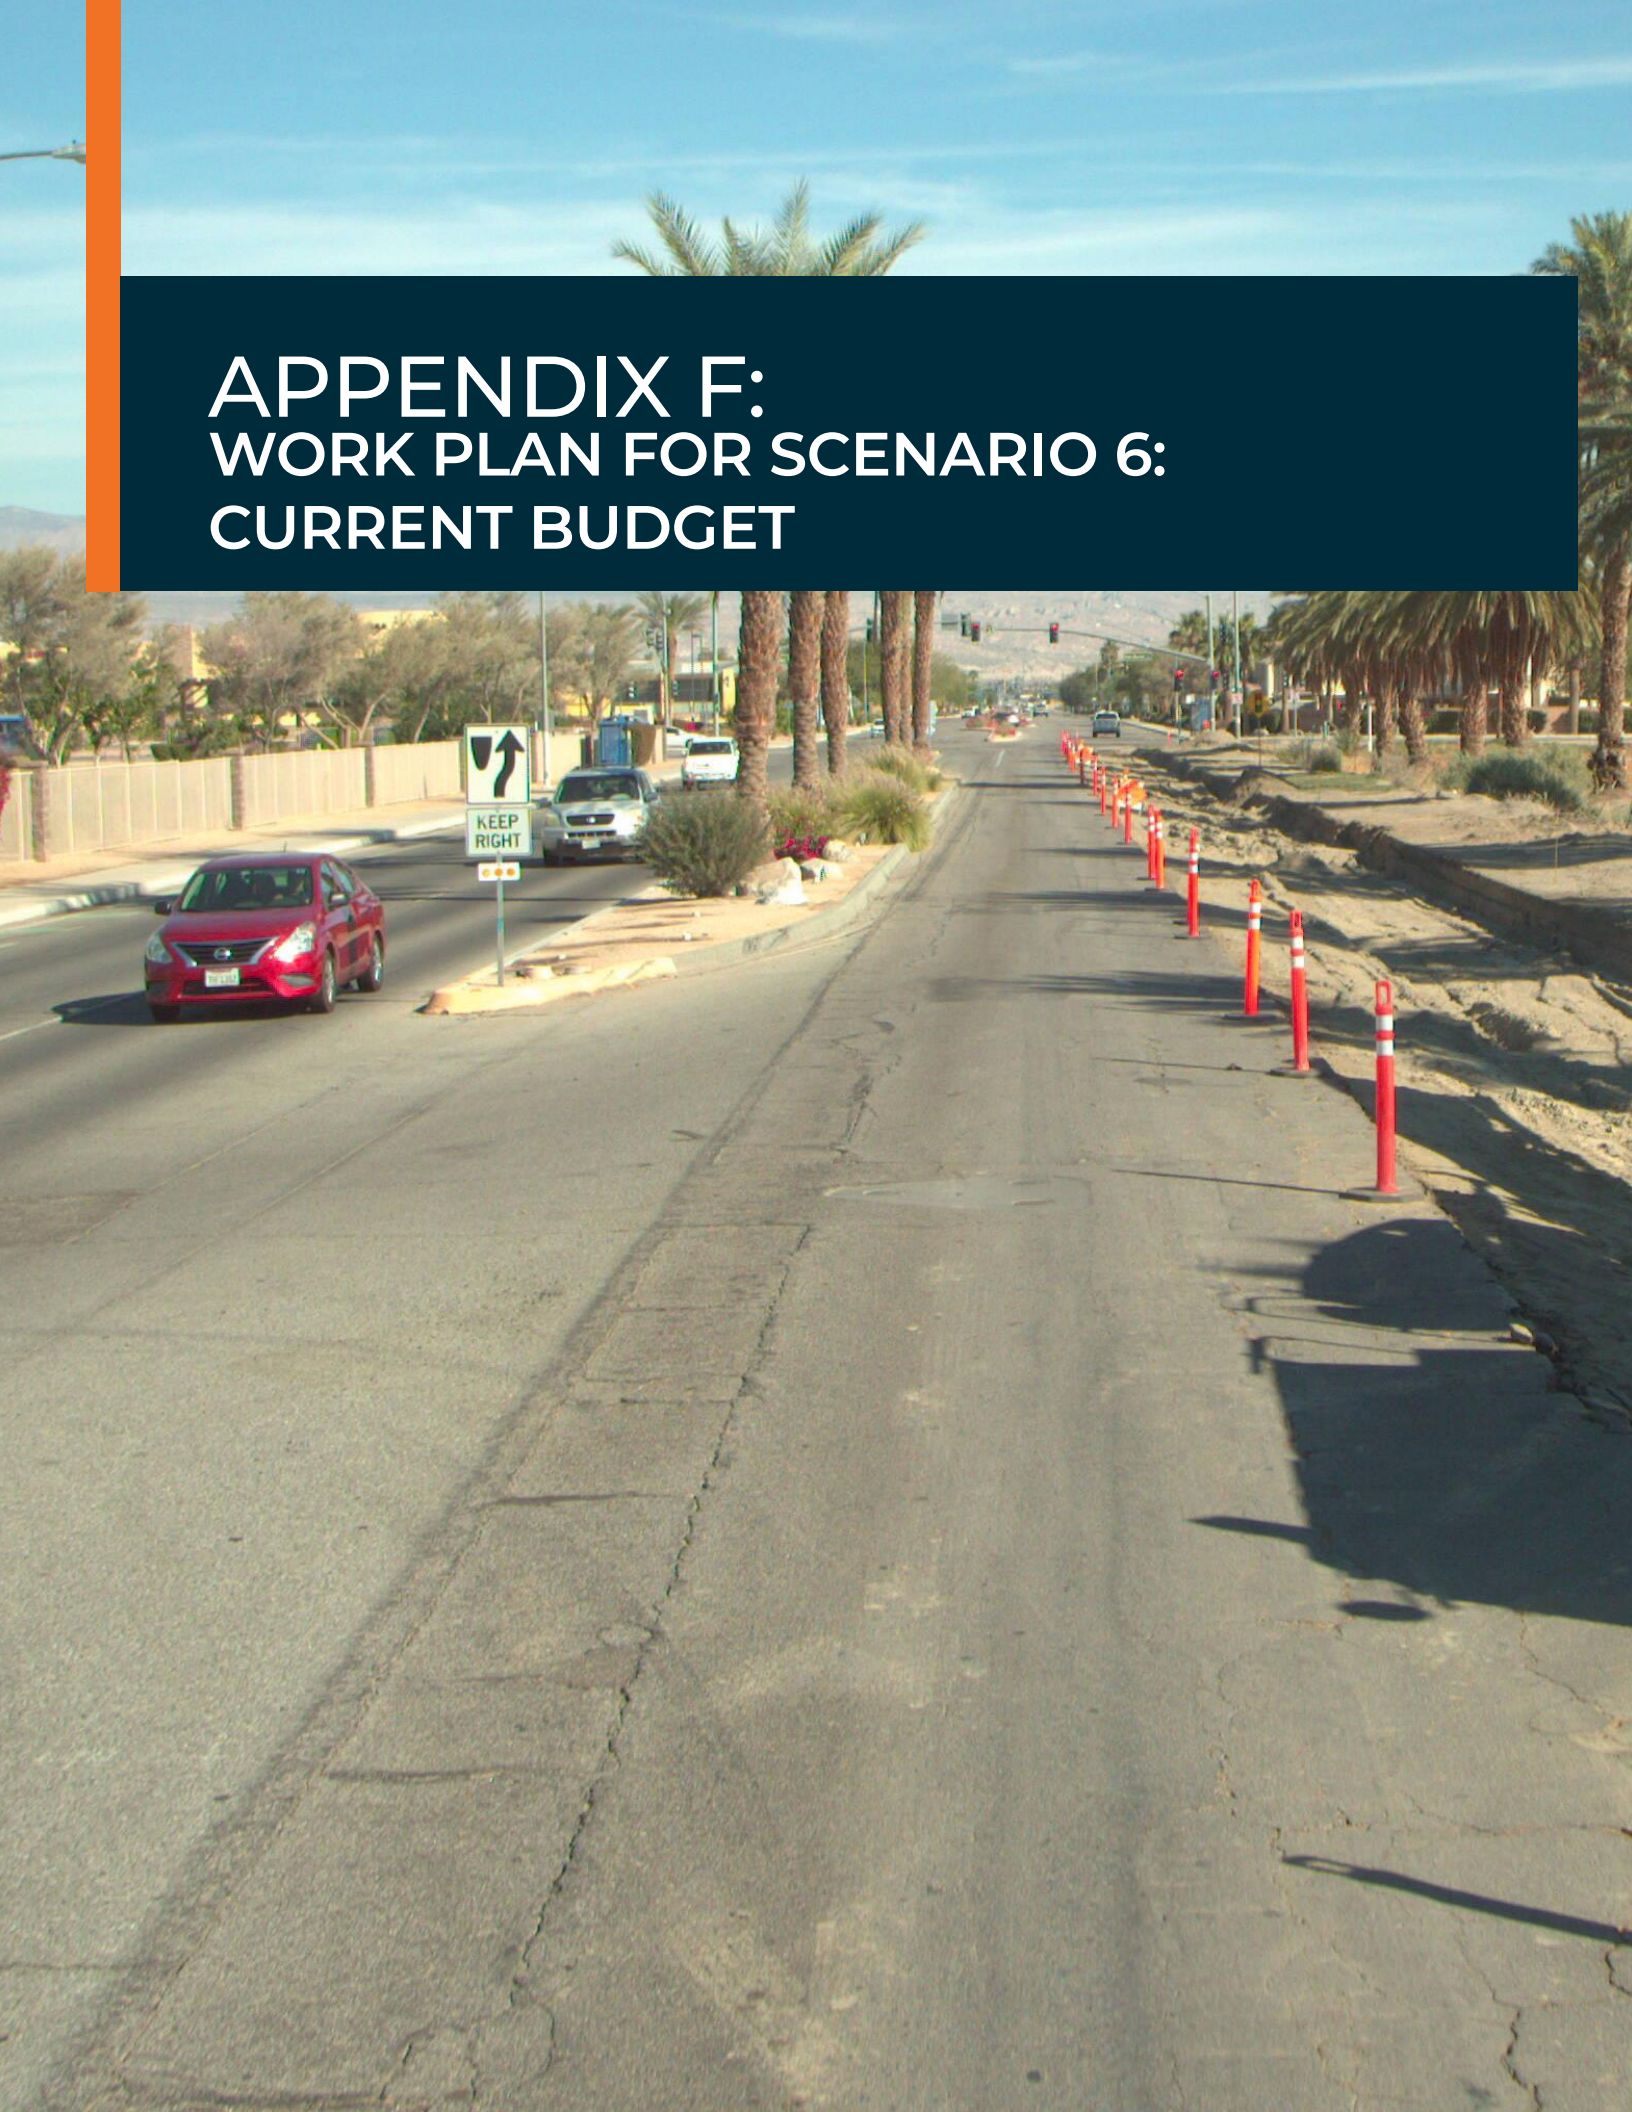

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.0	Slurry Seal	11/6/2024	74	100	$ 540.0
COACH::LAPLAYAST::3	LA PLAYA ST	50' S/O EL MAR AVE	EL MAR AVE	Residential	1,260.0	Slurry Seal	11/6/2024	78	100	$ 630.0
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.0	Slurry Seal	11/6/2024	80	100	$ 1,440.0
COACH::CDIEGO::4	CALLE DIEGO	150' E/O CALLE LEANDRO	CDS	Residential	3,128.0	Slurry Seal	11/6/2024	75	100	$ 1,564.0
COACH::52NDAVE::17	52ND AVE	TIJSSELING CT	JENNIFER WAY	Arterial	1,716.0	Microsurfacing	11/6/2024	78	100	$ 1,716.0
COACH::WSIENNACIR::3	W SIENNA CIR	100' W/O SLATE DR	SLATE DR	Residential	3,600.0	Slurry Seal	11/6/2024	72	100	$ 1,800.0
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2024	74	100	$ 2,068.3
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2024	74	100	$ 2,068.3
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.0	Slurry Seal	11/6/2024	80	100	$ 2,160.0
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.0	Slurry Seal	11/6/2024	74	100	$ 2,340.0
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.0	Slurry Seal	11/6/2024	74	100	$ 2,520.0
COACH::CAVILA::1	CALLE AVILA	D/E	CALLE NOGAL	Residential	5,040.0	Slurry Seal	11/6/2024	84	100	$ 2,520.0
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.0	Slurry Seal	11/6/2024	80	100	$ 2,524.5
COACH::LUNADENICO::2	LUNA DE NICOLETA ST	CALLE COLIMA	140' N/O CALLE COLIMA	Residential	5,076.0	Slurry Seal	11/6/2024	78	100	$ 2,538.0
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.0	Slurry Seal	11/6/2024	74	100	$ 2,556.0
COACH::SLATEDR::4	SLATE DR	N SIENNA CIR	D/E	Residential	5,112.0	Slurry Seal	11/6/2024	75	100	$ 2,556.0
COACH::SH-86S::11	SH-86	CAIRO AVE	CAIRO AVE	Arterial	2,560.0	Microsurfacing	11/6/2024	84	100	$ 2,560.0
COACH::CROSA::3	CALLE ROSA	CALLE LINDA	140' W/O CALLE ESTRELLA	Residential	5,148.0	Slurry Seal	11/6/2024	75	100	$ 2,574.0
COACH::TEPEYACCT::1	TEPEYAC CT	VIA TEPEYAC	CDS	Residential	5,256.0	Slurry Seal	11/6/2024	72	100	$ 2,628.0
COACH::AALEENAH::6	AVENIDA ALEENAH	CALLE FLORENA	'150 E/O CALLE FLORENA	Residential	5,328.0	Slurry Seal	11/6/2024	72	100	$ 2,664.0
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.0	Slurry Seal	11/6/2024	74	100	$ 2,700.0
COACH::CGLORIOSA::1	CALLE GLORIOSA	AVENIDA NERIUM	D/E	Residential	5,508.0	Slurry Seal	11/6/2024	75	100	$ 2,754.0
COACH::DAMASCUSAV::2	DAMASCUS AVE	CALLE TORRES ORDUNO	LIBNAN ST	Residential	5,700.0	Slurry Seal	11/6/2024	72	100	$ 2,850.0
COACH::MICHELLEDR::4	MICHELLE DR	AVENIDA ALEENAH	AVENIDA NICOLE	Residential	5,940.0	Slurry Seal	11/6/2024	78	100	$ 2,970.0
COACH::RIGOCT::1	RIGO CT	CHRISTINA RD	CDS	Residential	5,952.0	Slurry Seal	11/6/2024	72	100	$ 2,976.0
COACH::MCCOYPEAK::2	MCCOY PEAK AVE	ARICA DR	CHAPARROSA ST	Residential	6,192.0	Slurry Seal	11/6/2024	72	100	$ 3,096.0
COACH::CROSARITO::1	CAMINO ROSARITO	D/E	CAMINO BAHIA AVE	Residential	6,440.0	Slurry Seal	11/6/2024	75	100	$ 3,220.0
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.0	Slurry Seal	11/6/2024	80	100	$ 3,222.0
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.0	Slurry Seal	11/6/2024	85	100	$ 3,222.0
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.0	Slurry Seal	11/6/2024	85	100	$ 3,240.0
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.0	Slurry Seal	11/6/2024	85	100	$ 3,256.0
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.0	Slurry Seal	11/6/2024	85	100	$ 3,258.0
COACH::SCARLETWAY::3	SCARLET WAY	E SIENNA CIR	FREDERICK ST	Residential	6,624.0	Slurry Seal	11/6/2024	75	100	$ 3,312.0
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.0	Slurry Seal	11/6/2024	85	100	$ 3,344.0
COACH::PLAYADELAM::4	PLAYA DEL AMOR ST	LOS MOCHIS AVE	PUEBLO BONITO AVE	Residential	6,768.0	Slurry Seal	11/6/2024	75	100	$ 3,384.0
COACH::WSIENNACIR::2	W SIENNA CIR	TOPAZ CT	100' W/O SLATE DR	Residential	6,804.0	Slurry Seal	11/6/2024	72	100	$ 3,402.0
COACH::LASLUNASAV::1	LAS LUNAS AVE	FREDERICK ST	SEDONA CT	Residential	7,164.0	Slurry Seal	11/6/2024	72	100	$ 3,582.0
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.0	Slurry Seal	11/6/2024	80	100	$ 3,582.0
COACH::PALMERASCR::2	PALMERAS CIR	PALOMA DR	MARIPOSA DR	Residential	7,200.0	Slurry Seal	11/6/2024	72	100	$ 3,600.0
COACH::SHADYLN::5	SHADY LN	D/E	VIA MISIONERO	Residential	7,224.0	Slurry Seal	11/6/2024	78	100	$ 3,612.0
COACH::CLINDA::1	CALLE LINDA	CDS	CALLE ROSA	Residential	7,260.0	Slurry Seal	11/6/2024	72	100	$ 3,630.0
COACH::SLATEDR::1	SLATE DR	54TH AVE	W SIENNA CIR	Residential	7,272.0	Slurry Seal	11/6/2024	81	100	$ 3,636.0
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.0	Slurry Seal	11/6/2024	85	100	$ 3,648.0
COACH::CAVILA::3	CALLE AVILA	CALLE PINO	53RD AVE	Residential	7,400.0	Slurry Seal	11/6/2024	81	100	$ 3,700.0
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.0	Slurry Seal	11/6/2024	80	100	$ 3,888.0
COACH::HUXLEYCT::1	HUXLEY CT	MICHELLE DR	CDS	Residential	8,064.0	Slurry Seal	11/6/2024	75	100	$ 4,032.0
COACH::MICHELLEDR::2	MICHELLE DR	MICHELLE DR	MICHELLE DR	Residential	8,100.0	Slurry Seal	11/6/2024	72	100	$ 4,050.0
COACH::JULIACT::1	JULIA CT	AVENIDA ALEENAH	CDS	Residential	8,280.0	Slurry Seal	11/6/2024	72	100	$ 4,140.0
COACH::VERACRUZ::1	VERA CRUZ	CDS	PAVON PALMA	Residential	8,320.0	Slurry Seal	11/6/2024	84	100	$ 4,160.0
COACH::VENICELN::1	VENICE LN	HUNTINGTON AVE	CDS	Residential	8,352.0	Slurry Seal	11/6/2024	78	100	$ 4,176.0
COACH::CCLAVEL::2	CALLE CLAVEL	CALLE VIOLETA	CALLE BOUGANVILIA	Residential	8,415.0	Slurry Seal	11/6/2024	78	100	$ 4,207.5
COACH::CGARDENIA::2	CALLE GARDENIA	CALLE VIOLETA	CALLE BOUGANVILIA	Residential	8,448.0	Slurry Seal	11/6/2024	72	100	$ 4,224.0
COACH::CCLAVEL::1	CALLE CLAVEL	CALLE GERANIO	CALLE VIOLETA	Residential	8,448.0	Slurry Seal	11/6/2024	72	100	$ 4,224.0
COACH::CGARDENIA::1	CALLE GARDENIA	CALLE GERANIO	CALLE VIOLETA	Residential	8,481.0	Slurry Seal	11/6/2024	75	100	$ 4,240.5
COACH::SANIGNACIO::1	SAN IGNACIO AVE	CHICHEN ITZA RD	CALHOUN ST	Residential	8,536.0	Slurry Seal	11/6/2024	84	100	$ 4,268.0
COACH::ACORTEZ::3	AVENIDA CORTEZ	VIA DURANGO	PASEO LAREDO	Residential	8,604.0	Slurry Seal	11/6/2024	75	100	$ 4,302.0
COACH::LOSMOCHIS::1	LOS MOCHIS AVE	JACKSON ST	PLAYA DEL AMOR ST	Residential	8,624.0	Slurry Seal	11/6/2024	78	100	$ 4,312.0
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2024	85	100	$ 4,320.0
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2024	85	100	$ 4,320.0
COACH::50THAVEW::6	50TH AVE	BALBOA ST	AVENIDA DE ORO	Arterial	4,356.0	Microsurfacing	11/6/2024	72	100	$ 4,356.0
COACH::PUERTECITO::1	PUERTECITOS AVE	JACKSON ST	PLAYA DEL AMOR ST	Residential	8,756.0	Slurry Seal	11/6/2024	81	100	$ 4,378.0
COACH::HUNTINGTON::2	HUNTINGTON AVE	MONARCH RD	HERMOSA BLVD	Residential	9,000.0	Slurry Seal	11/6/2024	72	100	$ 4,500.0
COACH::CHRISTINA::4	CHRISTINA RD	TOMAS LN	RIGO CT	Residential	9,108.0	Slurry Seal	11/6/2024	75	100	$ 4,554.0
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.0	Slurry Seal	11/6/2024	85	100	$ 4,560.0
COACH::CHRISTINA::3	CHRISTINA RD	ANDREA LN	TOMAS LN	Residential	9,144.0	Slurry Seal	11/6/2024	81	100	$ 4,572.0
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.0	Slurry Seal	11/6/2024	74	100	$ 4,590.0
COACH::CIELOVICTR::1	CIELO VICTORIA ST	MARIANA AVE	48TH AVE	Residential	9,200.0	Slurry Seal	11/6/2024	72	100	$ 4,600.0
COACH::HERMOSABL::1	HERMOSA BLVD	HUNTINGTON AVE	LA JOLLA AVE	Residential	9,216.0	Slurry Seal	11/6/2024	78	100	$ 4,608.0
COACH::SLATEDR::2	SLATE DR	W SIENNA CIR	SCARLET WAY	Residential	9,252.0	Slurry Seal	11/6/2024	72	100	$ 4,626.0
COACH::CROSA::1	CALLE ROSA	CALLE LOS HERMANOS	CALLE BONITA	Residential	9,360.0	Slurry Seal	11/6/2024	72	100	$ 4,680.0
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2024	80	100	$ 4,680.0
COACH::FREDERICK::20	FREDERICK ST	140' S/O LAS LUNAS AVE	LAS LUNAS AVE	Residential	9,372.0	Slurry Seal	11/6/2024	84	100	$ 4,686.0
COACH::CFELIZ::1	CALLE FELIZ	CALLE LOS HERMANOS	CALLE BONITA	Residential	9,396.0	Slurry Seal	11/6/2024	72	100	$ 4,698.0
COACH::MONARCHRD::2	MONARCH RD	MANHATTAN AVE	HUNTINGTON AVE	Residential	9,396.0	Slurry Seal	11/6/2024	75	100	$ 4,698.0
COACH::MONARCHRD::1	MONARCH RD	CAPITOLA AVE	MANHATTAN AVE	Residential	9,396.0	Slurry Seal	11/6/2024	78	100	$ 4,698.0
COACH::LACOSTAAVE::1	LA COSTA AVE	ESTRELLA PEDRO ST	LA PLAYA ST	Residential	9,520.0	Slurry Seal	11/6/2024	75	100	$ 4,760.0
COACH::ANDREALN::1	ANDREA LN	JULIA DR	LINDA AVE	Residential	9,620.0	Slurry Seal	11/6/2024	84	100	$ 4,810.0
COACH::CHANNINGCT::1	CHANNING CT	AVENIDA MARIA	CDS	Residential	9,720.0	Slurry Seal	11/6/2024	72	100	$ 4,860.0
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.0	Slurry Seal	11/6/2024	74	100	$ 4,860.0
COACH::CCERVANTES::2	CALLE CERVANTES	CALLE LARRIVA	CALLE CHAVEZ	Residential	9,792.0	Slurry Seal	11/6/2024	72	100	$ 4,896.0
COACH::CANABELLA::1	CALLE ANABELLA	AVENIDA MARIA	AVENIDA CRYSTAL	Residential	9,900.0	Slurry Seal	11/6/2024	72	100	$ 4,950.0
COACH::KINGCT::1	KING CT	CDS	WASHINGTONIA AVE	Residential	10,016.0	Slurry Seal	11/6/2024	78	100	$ 5,008.0
COACH::CHICHENITZ::1	CHICHEN ITZA RD	PUERTO ESCONDIDO AVE	IXTAPA AVE	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CCOLIMA::2	CALLE COLIMA	LUNA DE NICOLETA ST	CAMINO MAYA	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CFLORENA::3	CALLE FLORENA	AVENIDA GRACE	AVENIDA ALEENAH	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::CCOLIMA::4	CALLE COLIMA	CAMINO REAL	LA PLAYA ST	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::AGUABLANCA::2	AGUA BLANCA AVE	LUNA DE NICOLETA ST	CAMINO MAYA	Residential	10,080.0	Slurry Seal	11/6/2024	72	100	$ 5,040.0
COACH::AGUABLANCA::4	AGUA BLANCA AVE	CAMINO REAL	CHICHEN ITZA RD	Residential	10,080.0	Slurry Seal	11/6/2024	75	100	$ 5,040.0
COACH::CCOLIMA::3	CALLE COLIMA	CAMINO MAYA	CAMINO REAL	Residential	10,080.0	Slurry Seal	11/6/2024	75	100	$ 5,040.0
COACH::PUEBLOBONI::1	PUEBLO BONITO AVE	PLAYA DEL AMOR ST	EL ACRO ST	Residential	10,080.0	Slurry Seal	11/6/2024	78	100	$ 5,040.0
COACH::PLAYADELAM::5	PLAYA DEL AMOR ST	PUEBLO BONITO AVE	EL GRECO AVE	Residential	10,080.0	Slurry Seal	11/6/2024	84	100	$ 5,040.0
COACH::CTECHA::4	CALLE TECHA	CALLE ROBERTO	CALLE VERDE	Residential	10,240.0	Slurry Seal	11/6/2024	72	100	$ 5,120.0
COACH::SH-86N::11	SH-86	BAGDAD AVE	BAGDAD AVE	Arterial	5,120.0	Microsurfacing	11/6/2024	81	100	$ 5,120.0
COACH::CPUERTADEL::1	CALLE PUERTA DEL SOL	50TH AVE	AVENIDA VERANO	Residential	10,272.0	Slurry Seal	11/6/2024	78	100	$ 5,136.0
COACH::CROSA::2	CALLE ROSA	CALLE BONITA	CALLE LINDA	Residential	10,332.0	Slurry Seal	11/6/2024	72	100	$ 5,166.0
COACH::COCASO::2	CALLE OCASO	CORTE ECLIPSE	CORTE ESTIVO	Residential	10,360.0	Slurry Seal	11/6/2024	72	100	$ 5,180.0
COACH::COCASO::1	CALLE OCASO	AVENIDA VERANO	CORTE ECLIPSE	Residential	10,360.0	Slurry Seal	11/6/2024	78	100	$ 5,180.0
COACH::VIATEPEYAC::2	VIA TEPEYAC	TEPEYAC CT	SHADY LN	Residential	10,368.0	Slurry Seal	11/6/2024	72	100	$ 5,184.0
COACH::SANASISDR::3	SAN ASIS DR	CALLE TOLOSA	SAN CAPISTRANO DR	Residential	10,400.0	Slurry Seal	11/6/2024	75	100	$ 5,200.0
COACH::AGUABLANCA::1	AGUA BLANCA AVE	AGUA CALIENTE ST	LUNA DE NICOLETA ST	Residential	10,440.0	Slurry Seal	11/6/2024	72	100	$ 5,220.0
COACH::CCOLIMA::1	CALLE COLIMA	AGUA CALIENTE ST	LUNA DE NICOLETA ST	Residential	10,440.0	Slurry Seal	11/6/2024	72	100	$ 5,220.0
COACH::PLAYADELAM::1	PLAYA DEL AMOR ST	CAMINO BAHIA AVE	PUERTECITOS AVE	Residential	10,440.0	Slurry Seal	11/6/2024	75	100	$ 5,220.0
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2024	74	100	$ 5,238.0
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2024	80	100	$ 5,238.0
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2024	80	100	$ 5,238.0
COACH::ESIENNACIR::1	E SIENNA CIR	SCARLET WAY	INDIGO CT	Residential	10,476.0	Slurry Seal	11/6/2024	81	100	$ 5,238.0
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2024	85	100	$ 5,238.0
COACH::ROYALCT::1	ROYAL CT	CDS	WASHINGTONIA AVE	Residential	10,540.0	Slurry Seal	11/6/2024	75	100	$ 5,270.0
COACH::52NDAVEW::18	52ND AVE	CALLE TORRES ORDUNO	DOUMA CT	Arterial	5,278.0	Microsurfacing	11/6/2024	72	100	$ 5,278.0
COACH::ELCASTILLO::1	EL CASTILLO RD	TODOS SANTOS AVE	CAMINO LAS BRISAS	Residential	10,640.0	Slurry Seal	11/6/2024	78	100	$ 5,320.0
COACH::ELARCOST::1	EL ARCO ST	LOS CABOS AVE	TODOS SANTOS AVE	Residential	10,640.0	Slurry Seal	11/6/2024	78	100	$ 5,320.0
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.0	Slurry Seal	11/6/2024	85	100	$ 5,328.0
COACH::QUEENCT::1	QUEEN CT	CDS	WASHINGTONIA AVE	Residential	10,778.0	Slurry Seal	11/6/2024	75	100	$ 5,389.0
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.0	Slurry Seal	11/6/2024	74	100	$ 5,400.0
COACH::SANASISDR::1	SAN ASIS DR	CDS	SOLEDAD PL	Residential	10,800.0	Slurry Seal	11/6/2024	75	100	$ 5,400.0
COACH::INDIGOCT::1	INDIGO CT	CDS	E SIENNA CIR	Residential	10,944.0	Slurry Seal	11/6/2024	78	100	$ 5,472.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::52NDAVE::22	52ND AVE	NELSON ST	DATE AVE	Arterial	5,500.0	Microsurfacing	11/6/2024	75	100	$ 5,500.0
COACH::PUEBLOBONI::3	PUEBLO BONITO AVE	EL CASTILLO RD	TAXCO AVE	Residential	11,016.0	Slurry Seal	11/6/2024	81	100	$ 5,508.0
COACH::CHICHENITZ::4	CHICHEN ITZA RD	SAN IGNACIO AVE	AGUA BLANCA AVE	Residential	11,196.0	Slurry Seal	11/6/2024	84	100	$ 5,598.0
COACH::CROSARITO::2	CAMINO ROSARITO	CAMINO BAHIA AVE	LOS CABOS AVE	Residential	11,200.0	Slurry Seal	11/6/2024	75	100	$ 5,600.0
COACH::TAXCOAVE::1	TAXCO AVE	PUEBLO BONITO AVE	EL GRECO AVE	Residential	11,200.0	Slurry Seal	11/6/2024	84	100	$ 5,600.0
COACH::LASLUNASAV::2	LAS LUNAS AVE	SEDONA CT	MESA CT	Residential	11,376.0	Slurry Seal	11/6/2024	75	100	$ 5,688.0
COACH::SUNCRESTST::3	SUNCREST ST	SUNDANCE LN	SUNDOWN LN	Residential	11,440.0	Slurry Seal	11/6/2024	75	100	$ 5,720.0
COACH::LASLUNASAV::4	LAS LUNAS AVE	RIO RANCHO CT	LAS CRUCES ST	Residential	11,556.0	Slurry Seal	11/6/2024	75	100	$ 5,778.0
COACH::LAJOLLAAVE::2	LA JOLLA AVE	HERMOSA BLVD	ZUMA DR	Residential	11,736.0	Slurry Seal	11/6/2024	72	100	$ 5,868.0
COACH::9THST::3	9TH ST	VINE AVE	SHADY LN	Collector	5,880.0	Microsurfacing	11/6/2024	84	100	$ 5,880.0
COACH::ACORTEZ::4	AVENIDA CORTEZ	PASEO LAREDO	CALLE LEON	Residential	11,952.0	Slurry Seal	11/6/2024	75	100	$ 5,976.0
COACH::LAPONDEROS::1	LA PONDEROSA DR	52ND AVE	NAOMI CT	Residential	12,204.0	Slurry Seal	11/6/2024	81	100	$ 6,102.0
COACH::CROJO::8	CALLE ROJO	CALLE CAMACHO	CESAR CHAVEZ ST	Residential	12,320.0	Slurry Seal	11/6/2024	81	100	$ 6,160.0
COACH::LAJOLLAAVE::1	LA JOLLA AVE	CDS	HERMOSA BLVD	Residential	12,780.0	Slurry Seal	11/6/2024	75	100	$ 6,390.0
COACH::PEDRODR::1	PEDRO DR	TOMAS LN	AVENIDA DEL PARQUE	Residential	12,816.0	Slurry Seal	11/6/2024	78	100	$ 6,408.0
COACH::CROJO::7	CALLE ROJO	CALLE AVILA	CALLE CAMACHO	Residential	12,960.0	Slurry Seal	11/6/2024	75	100	$ 6,480.0
COACH::CZAMORA::1	CALLE ZAMORA	CALLE EMPALME	CALLE TECHA	Residential	13,356.0	Slurry Seal	11/6/2024	72	100	$ 6,678.0
COACH::CCINDARELA::1	CORTE CINDARELLA	CDS	AVENIDA ADOBE	Residential	13,360.0	Slurry Seal	11/6/2024	84	100	$ 6,680.0
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.0	Slurry Seal	11/6/2024	80	100	$ 6,720.0
COACH::52NDAVE::23	52ND AVE	DATE AVE	LAS PALMAS ST	Arterial	6,952.0	Microsurfacing	11/6/2024	81	100	$ 6,952.0
COACH::ANDREALN::4	ANDREA LN	'45' N/O CHRISTINA RD	CDS	Residential	13,949.0	Slurry Seal	11/6/2024	84	100	$ 6,974.5
COACH::CAVILA::2	CALLE AVILA	CALLE NOGAL	CALLE PINO	Residential	13,960.0	Slurry Seal	11/6/2024	81	100	$ 6,980.0
COACH::SOLDELINDA::1	SOL DE LINDA ST	PLAZA DE ORO AVE	MARIANA AVE	Residential	14,000.0	Slurry Seal	11/6/2024	72	100	$ 7,000.0
COACH::CECLIPSE::1	CORTE ECLIPSE	CALLE OCASO	CDS	Residential	14,134.0	Slurry Seal	11/6/2024	72	100	$ 7,067.0
COACH::HUNTINGTON::1	HUNTINGTON AVE	VENICE LN	MONARCH RD	Residential	14,400.0	Slurry Seal	11/6/2024	81	100	$ 7,200.0
COACH::52NDAVEE::7	52ND AVE	CALLE TORRES ORDUNO	CALLE EMPALME	Arterial	1,456.0	1.5" Thin Overlay	11/6/2024	57	100	$ 7,280.0
COACH::AMETHYSTCT::1	AMETHYST CT	CDS	SCARLET WAY	Residential	14,760.0	Slurry Seal	11/6/2024	81	100	$ 7,380.0
COACH::PEDRODR::2	PEDRO DR	AVENIDA DEL PARQUE	AVENIDA ADOBE	Residential	14,796.0	Slurry Seal	11/6/2024	72	100	$ 7,398.0
COACH::52NDAVEW::17	52ND AVE	CALLE EMPALME	CALLE TORRES ORDUNO	Arterial	1,482.0	1.5" Thin Overlay	11/6/2024	60	100	$ 7,410.0
COACH::TODOSSANTO::3	TODOS SANTOS AVE	420' W/O CAMINO CORTEZ	CAMINO CORTEZ	Residential	15,048.0	Slurry Seal	11/6/2024	72	100	$ 7,524.0
COACH::SCARLETWAY::2	SCARLET WAY	SAPPHIRE LN	E SIENNA CIR	Residential	15,156.0	Slurry Seal	11/6/2024	72	100	$ 7,578.0
COACH::CLEON::1	CALLE LEON	CALLE DE VEGA	AVENIDA CORTEZ	Residential	15,280.0	Slurry Seal	11/6/2024	84	100	$ 7,640.0
COACH::CELALBA::1	CORTE EL ALBA	CDS	CALLE EL SOL	Residential	15,392.0	Slurry Seal	11/6/2024	78	100	$ 7,696.0
COACH::SOLEDADPL::1	SOLEDAD PL	SAN ASIS DR	SANTO LN	Residential	15,400.0	Slurry Seal	11/6/2024	72	100	$ 7,700.0
COACH::CPIZANO::2	CALLE PIZANO	COURTE STELLA	CALLE MENDOZA	Residential	15,444.0	Slurry Seal	11/6/2024	72	100	$ 7,722.0
COACH::SHADYLN::8	SHADY LN	GUADALUPANA CT	VIA TEPEYAC	Residential	15,456.0	Slurry Seal	11/6/2024	81	100	$ 7,728.0
COACH::SHADYLN::6	SHADY LN	VIA MISIONERO	DIEGO CT	Residential	15,456.0	Slurry Seal	11/6/2024	84	100	$ 7,728.0
COACH::GUADALUPAN::1	GUADALUPANA CT	CDS	SHADY LN	Residential	15,624.0	Slurry Seal	11/6/2024	72	100	$ 7,812.0
COACH::DIEGOCT::1	DIEGO CT	CDS	SHADY LN	Residential	15,624.0	Slurry Seal	11/6/2024	81	100	$ 7,812.0
COACH::SHADYLN::7	SHADY LN	DIEGO CT	GUADALUPANA CT	Residential	15,960.0	Slurry Seal	11/6/2024	75	100	$ 7,980.0
COACH::PLAZADEORO::1	PLAZA DE ORO AVE	SOL DE LINDA ST	LUNA DE NICOLETA ST	Residential	15,984.0	Slurry Seal	11/6/2024	72	100	$ 7,992.0
COACH::CREAL::2	CAMINO REAL	CAMINO PELICANO	CALLE COLIMA	Residential	16,056.0	Slurry Seal	11/6/2024	78	100	$ 8,028.0
COACH::RIORANCHO::1	RIO RANCHO CT	LAS LUNAS AVE	CDS	Residential	16,200.0	Slurry Seal	11/6/2024	75	100	$ 8,100.0
COACH::SEDONACT::1	SEDONA CT	LAS LUNAS AVE	CDS	Residential	16,200.0	Slurry Seal	11/6/2024	75	100	$ 8,100.0
COACH::MESACT::1	MESA CT	LAS LUNAS AVE	CDS	Residential	16,200.0	Slurry Seal	11/6/2024	78	100	$ 8,100.0
COACH::CBOUGANVIL::3	CALLE BOUGANVILIA	EL SOL ST	CALLE GARDENIA	Residential	16,272.0	Slurry Seal	11/6/2024	72	100	$ 8,136.0
COACH::TOMASLN::2	TOMAS LN	CHRISTINA RD	PEDRO DR	Residential	16,308.0	Slurry Seal	11/6/2024	78	100	$ 8,154.0
COACH::LAPLAYAST::4	LA PLAYA ST	EL MAR AVE	LA COSTA AVE	Residential	16,380.0	Slurry Seal	11/6/2024	78	100	$ 8,190.0
COACH::SANSOLANO::1	SAN SOLANO RD	SAN ASIS DR	SAGRADO DR	Residential	16,400.0	Slurry Seal	11/6/2024	72	100	$ 8,200.0
COACH::AMARIA::2	AVENIDA MARIA	CALLE DANIELLE	CALLE ANABELLA	Residential	16,401.0	Slurry Seal	11/6/2024	72	100	$ 8,200.5
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2024	85	100	$ 8,250.0
COACH::CPINO::1	CALLE PINO	CALLE OLIVO	CALLE AVILA	Residential	16,740.0	Slurry Seal	11/6/2024	84	100	$ 8,370.0
COACH::CNOGAL::1	CALLE NOGAL	CALLE OLIVO	CALLE AVILA	Residential	16,740.0	Slurry Seal	11/6/2024	84	100	$ 8,370.0
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2024	85	100	$ 8,442.0
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.0	Slurry Seal	11/6/2024	74	100	$ 8,455.0
COACH::ELCASTILLO::2	EL CASTILLO RD	CAMINO LAS BRISAS	PUEBLO BONITO AVE	Residential	17,024.0	Slurry Seal	11/6/2024	78	100	$ 8,512.0
COACH::SH-86N::7	SH-86	ALLEY	CAIRO AVE	Arterial	8,560.0	Microsurfacing	11/6/2024	78	100	$ 8,560.0
COACH::PEREZST::3	PEREZ ST	ORTIZ ST	HERNANDEZ ST	Residential	17,240.0	Slurry Seal	11/6/2024	81	100	$ 8,620.0
COACH::MAZATLANDR::8	MAZATLAN DR	MAZATLAN DR PARKING LOOP	MAZATLAN DR PARKING LOOP	Residential	17,280.0	Slurry Seal	11/6/2024	81	100	$ 8,640.0
COACH::ORTIZST::1	ORTIZ ST	PEREZ ST	HERNANDEZ ST	Residential	17,680.0	Slurry Seal	11/6/2024	84	100	$ 8,840.0
COACH::AIRPORTBL::5	AIRPORT BLVD	1395' W/O FILLMORE ST	1215' W/O FILLMORE ST	Collector	8,900.0	Microsurfacing	11/6/2024	81	100	$ 8,900.0
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.0	Slurry Seal	11/6/2024	85	100	$ 9,000.0
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.0	Slurry Seal	11/6/2024	80	100	$ 9,036.0
COACH::52NDAVEE::5	52ND AVE	DOUMA ST	DOUMA CT	Arterial	9,412.0	Microsurfacing	11/6/2024	72	100	$ 9,412.0
COACH::ADELPARQUE::3	AVENIDA DEL PARQUE	COURTE DEL PARQUE	AVENIDA DE ORO	Residential	18,880.0	Slurry Seal	11/6/2024	84	100	$ 9,440.0
COACH::SHADYLN::9	SHADY LN	VIA TEPEYAC	53RD AVE	Residential	19,488.0	Slurry Seal	11/6/2024	78	100	$ 9,744.0
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.0	1.5" Thin Overlay	11/6/2024	56	100	$ 10,080.0
COACH::AGUACALIEN::2	AGUA CALIENTE ST	CAMINO LAS BRISAS	CALLE COLIMA	Residential	20,202.0	Slurry Seal	11/6/2024	72	100	$ 10,101.0
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.0	Microsurfacing	11/6/2024	74	100	$ 10,400.0
COACH::LAPONDEROS::3	LA PONDEROSA DR	HERNANDEZ ST	CDS	Residential	4,140.0	Slurry Seal	11/6/2025	84	100	$ 2,070.0
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.0	Slurry Seal	11/6/2025	85	100	$ 3,204.0
COACH::CHRISTINA::1	CHRISTINA RD	FREDERICK ST	ANDREA LN	Residential	6,480.0	Slurry Seal	11/6/2025	84	100	$ 3,240.0
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.0	Slurry Seal	11/6/2025	85	100	$ 3,888.0
COACH::HORNBLEND::1	HORNBLEND ST	50TH AVE	JADEROCK RD	Residential	8,436.0	Slurry Seal	11/6/2025	84	100	$ 4,218.0
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2025	85	100	$ 4,320.0
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2025	85	100	$ 4,320.0
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.0	Slurry Seal	11/6/2025	85	100	$ 4,320.0
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.0	Slurry Seal	11/6/2025	85	100	$ 4,458.5
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2025	85	100	$ 4,680.0
COACH::CCARRASCO::2	CALLE CARRASCO	CALLE CHAVEZ	CALLE YSIANO	Residential	9,576.0	Slurry Seal	11/6/2025	84	100	$ 4,788.0
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.0	Slurry Seal	11/6/2025	85	100	$ 5,577.0
COACH::52NDAVEE::12	52ND AVE	CALLE AVILA	CALLE AVILA	Arterial	1,508.0	1.5" Thin Overlay	11/6/2025	63	100	$ 7,540.0
COACH::PASEOLARED::2	PASEO LAREDO	CALLE DE VEGA	AVENIDA CORTEZ	Residential	15,280.0	Slurry Seal	11/6/2025	84	100	$ 7,640.0
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2025	85	100	$ 8,442.0
COACH::CEMPALME::1	CALLE EMPALME	BELLISSIMA AVE	53RD AVE	Residential	18,720.0	Slurry Seal	11/6/2025	84	100	$ 9,360.0
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.0	Slurry Seal	11/6/2025	85	100	$ 9,996.0
COACH::VALLEYRD::6	VALLEY RD	LAS PALMAS ST	OASIS PALM AVE	Collector	10,400.0	Microsurfacing	11/6/2025	75	100	$ 10,400.0
COACH::CVIOLETA::1	CALLE VIOLETA	CALLE CLAVEL	CALLE GARDENIA	Residential	20,856.0	Slurry Seal	11/6/2025	72	100	$ 10,428.0
COACH::52NDAVE::43	52ND AVE	5300' E/O FILLMORE ST	CITY LIMITS	Rural	13,515.0	Chip Seal	11/6/2025	72	100	$ 10,812.0
COACH::AIRPORTBL::7	AIRPORT BLVD	1085' W/O FILLMORE ST	860' W/O FILLMORE ST	Collector	11,300.0	Microsurfacing	11/6/2025	84	100	$ 11,300.0
COACH::52NDAVE::27	52ND AVE	CYPRESS ST	SHADY LN	Arterial	11,440.0	Microsurfacing	11/6/2025	75	100	$ 11,440.0
COACH::52NDAVE::26	52ND AVE	DOS PALMAS AVE	CYPRESS ST	Arterial	11,440.0	Microsurfacing	11/6/2025	75	100	$ 11,440.0
COACH::LASCRUCES::2	LAS CRUCES ST	LA LUNAS AVE	49TH AVE	Residential	23,292.0	Slurry Seal	11/6/2025	75	100	$ 11,646.0
COACH::CDIEGO::2	CALLE DIEGO	VIA SANTIAGO	CALLE LEANDRO	Residential	23,664.0	Slurry Seal	11/6/2025	78	100	$ 11,832.0
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.0	Slurry Seal	11/6/2025	74	100	$ 11,898.0
COACH::CEMPALME::2	CALLE EMPALME	53RD AVE	CALLE ZAMORA	Residential	23,796.0	Slurry Seal	11/6/2025	75	100	$ 11,898.0
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.0	Slurry Seal	11/6/2025	80	100	$ 12,580.0
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.0	1.5" Thin Overlay	11/6/2025	62	100	$ 12,780.0
COACH::VIASANTIAG::1	VIA SANTIAGO	CDS	CALLE DIEGO	Residential	2,556.0	1.5" Thin Overlay	11/6/2025	63	100	$ 12,780.0
COACH::CVERDE::2	CALLE VERDE	CALLE TECHA	CALLE AVILA	Collector	12,960.0	Microsurfacing	11/6/2025	72	100	$ 12,960.0
COACH::CEMPALME::3	CALLE EMPALME	CALLE VERDE	CALLE ROJO	Residential	25,920.0	Slurry Seal	11/6/2025	72	100	$ 12,960.0
COACH::CCAMACHO::4	CALLE CAMACHO	CALLE VERDE	CALLE ROJO	Residential	25,920.0	Slurry Seal	11/6/2025	72	100	$ 12,960.0
COACH::CVERDE::1	CALLE VERDE	CALLE EMPALME	CALLE TECHA	Collector	12,960.0	Microsurfacing	11/6/2025	75	100	$ 12,960.0
COACH::LUNADENICO::1	LUNA DE NICOLETA ST	AGUA BLANCA AVE	CALLE COLIMA	Residential	26,136.0	Slurry Seal	11/6/2025	72	100	$ 13,068.0
COACH::CCAMACHO::1	CALLE CAMACHO	D/E	53RD AVE	Residential	26,400.0	Slurry Seal	11/6/2025	78	100	$ 13,200.0
COACH::CCAMACHO::3	CALLE CAMACHO	CALLE ZAMORA	CALLE VERDE	Residential	26,440.0	Slurry Seal	11/6/2025	75	100	$ 13,220.0
COACH::CTECHA::1	CALLE TECHA	53RD AVE	CALLE ZAMORA	Residential	26,440.0	Slurry Seal	11/6/2025	75	100	$ 13,220.0
COACH::CCAMACHO::2	CALLE CAMACHO	53RD AVE	CALLE ZAMORA	Residential	26,440.0	Slurry Seal	11/6/2025	78	100	$ 13,220.0
COACH::CORONADOST::1	CORONADO ST	D/E	50TH AVE	Residential	26,840.0	Slurry Seal	11/6/2025	72	100	$ 13,420.0
COACH::KENMOREST::1	KENMORE ST	D/E	50TH AVE	Residential	26,880.0	Slurry Seal	11/6/2025	72	100	$ 13,440.0
COACH::SLATEDR::3	SLATE DR	SCARLET WAY	N SIENNA CIR	Residential	27,432.0	Slurry Seal	11/6/2025	72	100	$ 13,716.0
COACH::CLASBRISAS::1	CAMINO LAS BRISAS	EL CASTILLO RD	AGLIA CALIENTE ST	Residential	27,576.0	Slurry Seal	11/6/2025	72	100	$ 13,788.0
COACH::52NDAVE::21	52ND AVE	MORGAN AVE	NELSON ST	Arterial	13,800.0	Microsurfacing	11/6/2025	72	100	$ 13,800.0
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.0	Slurry Seal	11/6/2025	80	100	$ 14,094.0
COACH::DILLONRD::10	DILLON RD	800' S/O VISTA DEL NORTE	650' S/O VISTA DEL NORTE	Arterial	14,208.0	Microsurfacing	11/6/2025	78	100	$ 14,208.0
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.0	Slurry Seal	11/6/2025	85	100	$ 14,436.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::AADOBE::11	AVENIDA ADOBE	CHRISTINA RD	45' N/O CHRISTINA RD	Residential	1,620.0	3" Mill & Overlay	11/6/2025	42	100	$ 14,580.0
COACH::AADOBE::9	AVENIDA ADOBE	LINDA AVE	215' S/O CHRISTINA RD	Residential	1,620.0	3" Mill & Overlay	11/6/2025	43.5	100	$ 14,580.0
COACH::GRAPEFRUIT::1	GRAPEFRUIT BLVD	CITY LIMITS	3310' S/O 54TH AVE	Arterial	14,905.0	Microsurfacing	11/6/2025	75	100	$ 14,905.0
COACH::CSOLEDAD::1	CALLE SOLEDAD	VIA MISIONERO	VIA TEPEYAC	Residential	31,248.0	Slurry Seal	11/6/2025	72	100	$ 15,624.0
COACH::52NDAVEW::14	52ND AVE	CALLE TECHA	CALLE TECHA	Arterial	3,146.0	1.5" Thin Overlay	11/6/2025	60	100	$ 15,730.0
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.0	Microsurfacing	11/6/2025	80	100	$ 16,250.0
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.0	Microsurfacing	11/6/2025	80	100	$ 16,250.0
COACH::ELGRECOAVE::1	EL GRECO AVE	PLAYA DEL AMOR ST	TAXCO AVE	Residential	32,908.0	Slurry Seal	11/6/2025	72	100	$ 16,454.0
COACH::54THAVEE::4	54TH AVE	SH-86	CALLE BALDERAS	Arterial	16,605.0	Microsurfacing	11/6/2025	84	100	$ 16,605.0
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.0	Slurry Seal	11/6/2025	80	100	$ 16,650.0
COACH::CVERDE::5	CALLE VERDE	CESAR CHAVEZ ST	SH-86	Collector	3,400.0	1.5" Thin Overlay	11/6/2025	63	100	$ 17,000.0
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.0	Slurry Seal	11/6/2025	85	100	$ 17,075.5
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.0	Slurry Seal	11/6/2025	85	100	$ 17,537.0
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.0	Slurry Seal	11/6/2025	85	100	$ 17,613.0
COACH::AVENUE49::1	AVENUE 49	CALHOUN ST	GARNET RIDGE ST	Collector	17,784.0	Microsurfacing	11/6/2025	75	100	$ 17,784.0
COACH::NICKLECREK::1	NICKLECREEK DR	COPPERIDGE ST	CINNABAR LN	Residential	36,593.0	Slurry Seal	11/6/2025	72	100	$ 18,296.5
COACH::JULIADR::1	JULIA DR	ANDREA LN	AVENIDA ADOBE	Residential	36,756.0	Slurry Seal	11/6/2025	72	100	$ 18,378.0
COACH::LINDAAVE::1	LINDA AVE	ANDREA LN	AVENIDA ADOBE	Residential	36,756.0	Slurry Seal	11/6/2025	75	100	$ 18,378.0
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.0	Microsurfacing	11/6/2025	80	100	$ 18,750.0
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.0	Microsurfacing	11/6/2025	85	100	$ 18,750.0
COACH::AIRPORTBL::9	AIRPORT BLVD	FILLMORE ST	CITY LIMITS	Collector	18,760.0	Microsurfacing	11/6/2025	78	100	$ 18,760.0
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.0	Microsurfacing	11/6/2025	85	100	$ 18,900.0
COACH::PARKLN::3	PARK LN	130' W/O SH-111	SH-111	Arterial	3,810.0	1.5" Thin Overlay	11/6/2025	63	100	$ 19,050.0
COACH::CZAMORA::5	CALLE ZAMORA	CESAR CHAVEZ ST	SH-86	Residential	3,852.0	1.5" Thin Overlay	11/6/2025	63	100	$ 19,260.0
COACH::CFLORENA::2	CALLE FLORENA	AVENIDA ALEENAH	110' N/O AVENIDA ALEENAH	Residential	3,924.0	1.5" Thin Overlay	11/6/2025	60	100	$ 19,620.0
COACH::CSTELLA::1	CORTE STELLA	CALLE PIZANO	CDS	Residential	3,993.0	1.5" Thin Overlay	11/6/2025	60	100	$ 19,965.0
COACH::52NDAVEW::9	52ND AVE	SH-86	CESAR CHAVEZ ST	Arterial	2,236.0	3" Mill & Overlay	11/6/2025	43.5	100	$ 20,124.0
COACH::PROSECCO::2	PROSECCO WAY	RODREJO WAY	PROSECCO WAY	Residential	4,064.0	1.5" Thin Overlay	11/6/2025	57	100	$ 20,320.0
COACH::SALTILLOCR::3	SALTILLO CIR	MAZATLAN DR	JALISCO AVE	Residential	4,108.0	1.5" Thin Overlay	11/6/2025	57	100	$ 20,540.0
COACH::VIAVALENCI::3	VIA VALENCIA	CALLE MARBELLA	PASEO CORDOVA	Residential	4,851.0	Slurry Seal	11/6/2026	85	100	$ 2,425.5
COACH::NAOMICT::2	NAOMI CT	PEREZ ST	CDS	Residential	6,240.0	Slurry Seal	11/6/2026	84	100	$ 3,120.0
COACH::COLIVO::1	CALLE OLIVO	CALLE NOGAL	CALLE PINO	Residential	10,440.0	Slurry Seal	11/6/2026	84	100	$ 5,220.0
COACH::CGRANADA::1	CALLE GRANADA	PASEO MADRID	PASEO CORDOVA	Residential	10,800.0	Slurry Seal	11/6/2026	85	100	$ 5,400.0
COACH::CNINOS::1	CALLE NINOS	CALLE BONITA	50' W/O CALLE BONITA	Residential	1,548.0	1.5" Thin Overlay	11/6/2026	63	100	$ 7,740.0
COACH::PASEOCORDO::1	PASEO CORDOVA	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2026	85	100	$ 8,250.0
COACH::BAGDADAVE::7	BAGDAD AVE	SH-86	ALLEY	Collector	8,560.0	Microsurfacing	11/6/2026	84	100	$ 8,560.0
COACH::PASEOBARCE::1	PASEO BARCELONA	CALLE SEVILLE	VIA MERIDA	Residential	18,216.0	Slurry Seal	11/6/2026	85	100	$ 9,108.0
COACH::AIRPORTBL::2	AIRPORT BLVD	CITY LIMITS	2640' W/O FILLMORE ST	Collector	9,250.0	Microsurfacing	11/6/2026	84	100	$ 9,250.0
COACH::SH-86N::8	SH-86	CAIRO AVE	CAIRO AVE	Arterial	2,560.0	1.5" Thin Overlay	11/6/2026	63	100	$ 12,800.0
COACH::53RDAVE::9	53RD AVE	CESAR CHAVEZ ST	50' W/O CESAR CHAVEZ ST	Collector	3,145.0	1.5" Thin Overlay	11/6/2026	63	100	$ 15,725.0
COACH::SH-111S::7	SH-111	3RD ST	4TH ST	Arterial	16,250.0	Microsurfacing	11/6/2026	85	100	$ 16,250.0
COACH::CALICIA::2	CALLE ALICIA	MICHELLE DR	AVENIDA MARIA	Residential	3,270.0	1.5" Thin Overlay	11/6/2026	63	100	$ 16,350.0
COACH::SH-111S::11	SH-111	7TH ST	8TH ST	Arterial	18,750.0	Microsurfacing	11/6/2026	85	100	$ 18,750.0
COACH::DILLONRD::1	DILLON RD	CITY LIMITS	HARRISON ST	Arterial	20,064.0	Microsurfacing	11/6/2026	84	100	$ 20,064.0
COACH::TOPAZCT::1	TOPAZ CT	CDS	W SIENNA CIR	Residential	4,070.0	1.5" Thin Overlay	11/6/2026	63	100	$ 20,350.0
COACH::54THAVEE::5	54TH AVE	CALLE BALDERAS	SHADY LN	Arterial	20,985.0	Microsurfacing	11/6/2026	81	100	$ 20,985.0
COACH::LAPONDEROS::2	LA PONDEROSA DR	NAOMI CT	HERNANDEZ ST	Residential	42,012.0	Slurry Seal	11/6/2026	84	100	$ 21,006.0
COACH::53RDAVE::3	53RD AVE	CALLE EMPALME	CALLE TECHA	Collector	21,147.0	Microsurfacing	11/6/2026	78	100	$ 21,147.0
COACH::53RDAVE::8	53RD AVE	115' W/O CESAR CHAVEZ ST	CESAR CHAVEZ ST	Collector	4,255.0	1.5" Thin Overlay	11/6/2026	57	100	$ 21,275.0
COACH::SALTILLOCR::2	SALTILLO CIR	JALISCO AVE	JALISCO AVE	Residential	4,290.0	1.5" Thin Overlay	11/6/2026	63	100	$ 21,450.0
COACH::AIRPORTBL::4	AIRPORT BLVD	1830' W/O FILLMORE ST	1395' W/O FILLMORE ST	Collector	21,750.0	Microsurfacing	11/6/2026	81	100	$ 21,750.0
COACH::50THAVEE::18	50TH AVE	KENMORE ST	SH-86	Arterial	22,209.0	Microsurfacing	11/6/2026	78	100	$ 22,209.0
COACH::DILLONRD::7	DILLON RD	VISTA DEL SUR	1070' S/O VISTA DEL NORTE	Arterial	22,272.0	Microsurfacing	11/6/2026	78	100	$ 22,272.0
COACH::PINTOLN::2	PINTO LN	120' S/O MCCOY PEAK AVE	MCCOY PEAK AVE	Residential	4,536.0	1.5" Thin Overlay	11/6/2026	63	100	$ 22,680.0
COACH::GENOAST::10	GENOA ST	CALLE LIMON	VINETA LN	Residential	4,662.0	1.5" Thin Overlay	11/6/2026	57	100	$ 23,310.0
COACH::JALISCOAVE::1	JALISCO AVE	SALTILLO CIR	JALISCO AVE	Residential	4,676.0	1.5" Thin Overlay	11/6/2026	57	100	$ 23,380.0
COACH::50THAVEW::16	50TH AVE	HORNBLEND ST	CALHOUN ST	Arterial	23,392.0	Microsurfacing	11/6/2026	78	100	$ 23,392.0
COACH::52NDAVEW::8	52ND AVE	GENOA ST	SHADY LN	Arterial	23,625.0	Microsurfacing	11/6/2026	75	100	$ 23,625.0
COACH::52NDAVEE::29	52ND AVE	SHADY LN	GENOA ST	Arterial	23,625.0	Microsurfacing	11/6/2026	81	100	$ 23,625.0
COACH::9THST::2	9TH ST	ORCHARD AVE	VINE AVE	Collector	23,744.0	Microsurfacing	11/6/2026	78	100	$ 23,744.0
COACH::ARAZON::4	AVENIDA RAZON	AVENIDA HALAWAY	VIA ZAHIDI	Residential	4,810.0	1.5" Thin Overlay	11/6/2026	60	100	$ 24,050.0
COACH::SH-86S::10	SH-86	DAMASCUS AVE	CAIRO AVE	Arterial	24,160.0	Microsurfacing	11/6/2026	78	100	$ 24,160.0
COACH::1STST::3	1ST ST	ORCHARD AVE	VINE AVE	Collector	24,225.0	Microsurfacing	11/6/2026	75	100	$ 24,225.0
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.0	Slurry Seal	11/6/2026	74	100	$ 24,947.0
COACH::SALTILLOCR::1	SALTILLO CIR	CHIAPAS DR	JALISCO AVE	Residential	4,992.0	1.5" Thin Overlay	11/6/2026	60	100	$ 24,960.0
COACH::LUNADENICO::3	LUNA DE NICOLETA ST	140' S/O PLAZA DE ORO AVE	PLAZA DE ORO AVE	Residential	5,040.0	1.5" Thin Overlay	11/6/2026	60	100	$ 25,200.0
COACH::FILLMOREST::4	FILLMORE ST	54TH AVE	CITY LIMIT	Rural	31,680.0	Chip Seal	11/6/2026	72	100	$ 25,344.0
COACH::50THAVE::6	50TH AVE	TYLER ST	50TH AVE	Rural	31,890.0	Chip Seal	11/6/2026	72	100	$ 25,512.0
COACH::PIERCEST::1	PIERCE ST	55TH AVE	CITY LIMITS	Rural	31,896.0	Chip Seal	11/6/2026	84	100	$ 25,516.8
COACH::SH-86S::8	SH-86	BAGDAD AVE	BAGDAD AVE	Arterial	5,120.0	1.5" Thin Overlay	11/6/2026	57	100	$ 25,600.0
COACH::ADEORO::1	AVENIDA DE ORO	50TH AVE	AVENIDA DEL PARQUE	Collector	25,715.0	Microsurfacing	11/6/2026	78	100	$ 25,715.0
COACH::CNINOS::3	CALLE NINOS	CALLE BELLA	140' W/O CALLE BELLA	Residential	5,148.0	1.5" Thin Overlay	11/6/2026	57	100	$ 25,740.0
COACH::CROSA::4	CALLE ROSA	140' W/O CALLE ESTRELLA	CALLE ESTRELLA	Residential	5,148.0	1.5" Thin Overlay	11/6/2026	63	100	$ 25,740.0
COACH::DILLONRD::8	DILLON RD	1070' S/O VISTA DEL NORTE	800' S/O VISTA DEL NORTE	Arterial	25,824.0	Microsurfacing	11/6/2026	84	100	$ 25,824.0
COACH::1STST::4	1ST ST	VINE AVE	SH-111	Collector	25,878.0	Microsurfacing	11/6/2026	72	100	$ 25,878.0
COACH::BAGDADAVE::2	BAGDAD AVE	LIBNAN ST	MECCA LANE	Residential	5,200.0	1.5" Thin Overlay	11/6/2026	60	100	$ 26,000.0
COACH::52NDAVEE::6	52ND AVE	DOUMA CT	CALLE TORRES ORDUNO	Arterial	5,304.0	1.5" Thin Overlay	11/6/2026	60	100	$ 26,520.0
COACH::SH-86S::9	SH-86	BAGDAD AVE	DAMASCUS AVE	Arterial	26,720.0	Microsurfacing	11/6/2026	75	100	$ 26,720.0
COACH::SH-86N::10	SH-86	DAMASCUS AVE	BAGDAD AVE	Arterial	26,720.0	Microsurfacing	11/6/2026	75	100	$ 26,720.0
COACH::ROMUALDACT::1	ROMUALDA CT	PEREZ ST	CDS	Residential	6,120.0	Slurry Seal	11/6/2027	84	100	$ 3,060.0
COACH::CRUIZ::3	CALLE RUIZ	AVENIDA ZOCALO	AVENIDA REFORMA	Residential	6,444.0	Slurry Seal	11/6/2027	85	100	$ 3,222.0
COACH::MODENATER::1	MODENA TER	BELLISSIMA AVE	SIENO LN	Residential	7,680.0	Slurry Seal	11/6/2027	84	100	$ 3,840.0
COACH::CRUIZ::4	CALLE RUIZ	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	8,640.0	Slurry Seal	11/6/2027	85	100	$ 4,320.0
COACH::ASANDOMING::1	AVENIDA SAN DOMINGO	CAMINO FRONTERA	CAMINO CORAS	Residential	9,879.0	Slurry Seal	11/6/2027	84	100	$ 4,939.5
COACH::SHADYLN::3	SHADY LN	AVENIDA TACUBA	AVENIDA REFORMA	Residential	20,048.0	Slurry Seal	11/6/2027	85	100	$ 10,024.0
COACH::CCEBRINO::1	CALLE CEBRINO	CALLE CHAVEZ	CDS	Residential	24,696.0	Slurry Seal	11/6/2027	84	100	$ 12,348.0
COACH::52NDAVEW::12	52ND AVE	CALLE AVILA	CALLE AVILA	Arterial	1,508.0	3" Mill & Overlay	11/6/2027	45	100	$ 13,572.0
COACH::52NDAVEE::15	52ND AVE	CESAR CHAVEZ ST	SH-86	Arterial	2,236.0	3" Mill & Overlay	11/6/2027	45	100	$ 20,124.0
COACH::HERNANDEZ::3	HERNANDEZ ST	52ND AVE	ORTIZ ST	Residential	43,040.0	Slurry Seal	11/6/2027	84	100	$ 21,520.0
COACH::SH-86N::15	SH-86	ALLEY	WESTERFIELD WAY	Arterial	26,880.0	Microsurfacing	11/6/2027	78	100	$ 26,880.0
COACH::JALISCOAVE::5	JALISCO AVE	100' S/O TAXCO WAY	TAXCO WAY	Residential	3,024.0	3" Mill & Overlay	11/6/2027	43.5	100	$ 27,216.0
COACH::SH-86N::12	SH-86	BAGDAD AVE	6TH ST	Arterial	27,760.0	Microsurfacing	11/6/2027	75	100	$ 27,760.0
COACH::SH-86S::7	SH-86	6TH ST	BAGDAD AVE	Arterial	27,760.0	Microsurfacing	11/6/2027	75	100	$ 27,760.0
COACH::MARIANAAVE::1	MARIANA AVE	SOL DE LINDA ST	CIELO VICTORIA ST	Residential	5,587.0	1.5" Thin Overlay	11/6/2027	57	100	$ 27,935.0
COACH::ADEORO::2	AVENIDA DE ORO	AVENIDA DEL PARQUE	GUITRON ST	Collector	29,970.0	Microsurfacing	11/6/2027	75	100	$ 29,970.0
COACH::CROJO::4	CALLE ROJO	85' W/O CALLE EMPALME	CALLE EMPALME	Residential	3,400.0	3" Mill & Overlay	11/6/2027	36	100	$ 30,600.0
COACH::BELLISSIMA::1	BELLISSIMA AVE	FREDERICK ST	MODENA TER	Residential	6,160.0	1.5" Thin Overlay	11/6/2027	57	100	$ 30,800.0
COACH::CHIAPASDR::7	CHIAPAS DR	220' S/O SALTILLO CT	SALTILLO CIR	Residential	6,188.0	1.5" Thin Overlay	11/6/2027	57	100	$ 30,940.0
COACH::AMARIA::3	AVENIDA MARIA	CALLE ANABELLA	CALLE ALICIA	Residential	6,270.0	1.5" Thin Overlay	11/6/2027	57	100	$ 31,350.0
COACH::LAJOLLAAVE::4	LA JOLLA AVE	NEWPORT ST	CDS	Residential	3,564.0	3" Mill & Overlay	11/6/2027	42	100	$ 32,076.0
COACH::CBOUGANVIL::2	CALLE BOUGANVILIA	CALLE CLAVEL	EL SOL ST	Residential	6,444.0	1.5" Thin Overlay	11/6/2027	60	100	$ 32,220.0
COACH::LASFLORES::3	LAS FLORES AVE	CALLE MENDOZA	CDS	Residential	6,468.0	1.5" Thin Overlay	11/6/2027	57	100	$ 32,340.0
COACH::TYLERST::19	TYLER ST	3485' S/O VISTA DEL SUR	2125' S/O VISTA DEL SUR	Rural	40,740.0	Chip Seal	11/6/2027	84	100	$ 32,592.0
COACH::52NDAVEE::9	52ND AVE	CALLE EMPALME	CALLE TECHA	Arterial	3,640.0	3" Mill & Overlay	11/6/2027	43.5	100	$ 32,760.0
COACH::CLIMON::1	CALLE LIMON	GENOA ST	CAMINO CORTO	Residential	6,570.0	1.5" Thin Overlay	11/6/2027	57	100	$ 32,850.0
COACH::CMOLINO::1	CORTE MOLINO	CDS	REDONDO NORTE	Residential	6,600.0	1.5" Thin Overlay	11/6/2027	57	100	$ 33,000.0
COACH::KENTIACT::1	KENTIA CT	CDS	PHOENIX AVE	Residential	6,656.0	1.5" Thin Overlay	11/6/2027	57	100	$ 33,280.0
COACH::54THAVEW::5	54TH AVE	TYLER ST	SHADY LN	Arterial	33,972.0	Microsurfacing	11/6/2027	81	100	$ 33,972.0
COACH::FREDERICK::11	FREDERICK ST	BAJA WAY	520' N/O BAJA WAY	Collector	34,056.0	Microsurfacing	11/6/2027	72	100	$ 34,056.0
COACH::52NDAVEW::11	52ND AVE	CALLE CAMACHO	CALLE AVILA	Arterial	6,916.0	1.5" Thin Overlay	11/6/2027	57	100	$ 34,580.0
COACH::52NDAVEE::13	52ND AVE	CALLE AVILA	CALLE CAMACHO	Arterial	6,916.0	1.5" Thin Overlay	11/6/2027	60	100	$ 34,580.0
COACH::PAVONPALMA::1	PAVON PALMA	50TH AVE	VERA CRUZ	Residential	7,200.0	1.5" Thin Overlay	11/6/2027	60	100	$ 36,000.0
COACH::SALTILLOCR::5	SALTILLO CIR	CHIAPAS DR	MAZATLAN DR	Residential	7,254.0	1.5" Thin Overlay	11/6/2027	57	100	$ 36,270.0
COACH::TODOSSANTO::2	TODOS SANTOS AVE	EL CASTILLO RD	420' W/O CAMINO CORTEZ	Residential	7,272.0	1.5" Thin Overlay	11/6/2027	60	100	$ 36,360.0
COACH::CHIAPASDR::2	CHIAPAS DR	500' N/O 51ST AVE	TABASCO CT	Residential	7,392.0	1.5" Thin Overlay	11/6/2027	57	100	$ 36,960.0
COACH::SUNCRESTST::1	SUNCREST ST	51ST AVE	SUNSHINE AVE	Residential	7,520.0	1.5" Thin Overlay	11/6/2027	60	100	$ 37,600.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.0	Slurry Seal	11/6/2028	85	100	$ 540.0
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.0	Slurry Seal	11/6/2028	85	100	$ 1,008.0
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.0	Slurry Seal	11/6/2028	85	100	$ 1,440.0
COACH::VIAPICON::1	VIA PICON	CALHOUN ST	CALLE FRONTERA	Residential	3,989.8	Slurry Seal	11/6/2028	84	100	$ 1,994.9
COACH::VIAPICON::2	VIA PICON	CALHOUN ST	CALLE FRONTERA	Residential	4,022.8	Slurry Seal	11/6/2028	84	100	$ 2,011.4
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2028	85	100	$ 2,068.3
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2028	85	100	$ 2,068.3
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.0	Slurry Seal	11/6/2028	85	100	$ 2,160.0
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.0	Slurry Seal	11/6/2028	85	100	$ 2,340.0
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.0	Slurry Seal	11/6/2028	85	100	$ 2,520.0
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.0	Slurry Seal	11/6/2028	85	100	$ 2,524.5
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.0	Slurry Seal	11/6/2028	85	100	$ 2,556.0
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.0	Slurry Seal	11/6/2028	85	100	$ 2,700.0
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.0	Slurry Seal	11/6/2028	85	100	$ 3,222.0
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.0	Slurry Seal	11/6/2028	85	100	$ 3,222.0
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.0	Slurry Seal	11/6/2028	85	100	$ 3,240.0
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.0	Slurry Seal	11/6/2028	85	100	$ 3,256.0
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.0	Slurry Seal	11/6/2028	85	100	$ 3,258.0
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.0	Slurry Seal	11/6/2028	85	100	$ 3,344.0
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.0	Slurry Seal	11/6/2028	85	100	$ 3,582.0
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.0	Slurry Seal	11/6/2028	85	100	$ 3,648.0
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.0	Slurry Seal	11/6/2028	85	100	$ 3,888.0
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2028	85	100	$ 4,320.0
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2028	85	100	$ 4,320.0
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.0	Slurry Seal	11/6/2028	85	100	$ 4,560.0
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.0	Slurry Seal	11/6/2028	85	100	$ 4,590.0
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2028	85	100	$ 4,680.0
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.0	Slurry Seal	11/6/2028	85	100	$ 4,860.0
COACH::CCERVANTES::3	CALLE CERVANTES	CALLE CHAVEZ	CALLE YSIANO	Residential	10,224.0	Slurry Seal	11/6/2028	84	100	$ 5,112.0
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	$ 5,238.0
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	$ 5,238.0
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	$ 5,238.0
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2028	85	100	$ 5,238.0
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.0	Slurry Seal	11/6/2028	85	100	$ 5,328.0
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.0	Slurry Seal	11/6/2028	85	100	$ 5,400.0
COACH::PEREZST::1	PEREZ ST	NAOMI CT	ROMUALDA CT	Residential	11,200.0	Slurry Seal	11/6/2028	84	100	$ 5,600.0
COACH::52NDAVE::28	52ND AVE	SHADY LN	SHADY LN	Arterial	6,248.0	Microsurfacing	11/6/2028	84	100	$ 6,248.0
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.0	Slurry Seal	11/6/2028	85	100	$ 6,720.0
COACH::HERNANDEZ::1	HERNANDEZ ST	LA PONDEROSA DR	PEREZ ST	Residential	15,920.0	Slurry Seal	11/6/2028	84	100	$ 7,960.0
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2028	85	100	$ 8,250.0
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2028	85	100	$ 8,442.0
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.0	Slurry Seal	11/6/2028	85	100	$ 8,455.0
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.0	Slurry Seal	11/6/2028	85	100	$ 9,000.0
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.0	Slurry Seal	11/6/2028	85	100	$ 9,036.0
COACH::HERNANDEZ::2	HERNANDEZ ST	PEREZ ST	ORTIZ ST	Residential	19,320.0	Slurry Seal	11/6/2028	84	100	$ 9,660.0
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.0	Microsurfacing	11/6/2028	85	100	$ 10,400.0
COACH::CALHOUNST::3	CALHOUN ST	CITY LIMITS	VIA PICON	Collector	16,260.0	Microsurfacing	11/6/2028	84	100	$ 16,260.0
COACH::CALHOUNST::4	CALHOUN ST	VIA PICON	50TH AVE	Collector	23,820.0	Microsurfacing	11/6/2028	84	100	$ 23,820.0
COACH::PARKLN::2	PARK LN	SH-86	130' W/O SH-111	Arterial	3,000.0	3" Mill & Overlay	11/6/2028	45	100	$ 27,000.0
COACH::52NDAVEE::10	52ND AVE	CALLE TECHA	CALLE TECHA	Arterial	3,146.0	3" Mill & Overlay	11/6/2028	45	100	$ 28,314.0
COACH::AALEENAH::4	AVENIDA ALEENAH	JULIA CT	'160 W/O CALLE FLORENA	Residential	3,564.0	3" Mill & Overlay	11/6/2028	45	100	$ 32,076.0
COACH::52NDAVEW::15	52ND AVE	CALLE TECHA	CALLE EMPALME	Arterial	3,640.0	3" Mill & Overlay	11/6/2028	45	100	$ 32,760.0
COACH::SANREYDR::2	SAN REY DR	COLONIA DR	SAN CAPISTRANO DR	Residential	4,000.0	3" Mill & Overlay	11/6/2028	45	100	$ 36,000.0
COACH::GENOAST::6	GENOA ST	200' S/O AVENIDA MARIA	AVENIDA MARIA	Residential	7,548.0	1.5" Thin Overlay	11/6/2028	57	100	$ 37,740.0
COACH::TABASCOCT::1	TABASCO CT	CHIAPAS DR	CDS	Residential	4,284.0	3" Mill & Overlay	11/6/2028	39	100	$ 38,556.0
COACH::50THAVEW::2	50TH AVE	KENMORE ST	AVENIDA DE PLATINA	Arterial	4,323.0	3" Mill & Overlay	11/6/2028	40.5	100	$ 38,907.0
COACH::50THAVEE::17	50TH AVE	AVENIDA DE PLATINA	KENMORE ST	Arterial	4,323.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 38,907.0
COACH::50THAVEE::13	50TH AVE	AVENIDA DE ORO	BALBOA ST	Arterial	4,356.0	3" Mill & Overlay	11/6/2028	39	100	$ 39,204.0
COACH::50THAVEE::14	50TH AVE	BALBOA ST	AVENIDA DE PLATA	Arterial	4,356.0	3" Mill & Overlay	11/6/2028	40.5	100	$ 39,204.0
COACH::50THAVEE::15	50TH AVE	AVENIDA DE PLATA	CORONADO ST	Arterial	4,356.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 39,204.0
COACH::51STAVE::1	51ST AVE	CITY LIMITS	VAN BUREN ST	Collector	39,360.0	Microsurfacing	11/6/2028	78	100	$ 39,360.0
COACH::50THAVEE::16	50TH AVE	CORONADO ST	AVENIDA DE PLATINA	Arterial	4,389.0	3" Mill & Overlay	11/6/2028	45	100	$ 39,501.0
COACH::SOLARCEST::3	SOLARCE ST	SOLARCE ST	ALLENDE DR	Residential	4,454.0	3" Mill & Overlay	11/6/2028	39	100	$ 40,086.0
COACH::AFLORABUND::1	AVENIDA FLORABUNDA	CALLE CARMELLO	CALLE ABELIA	Residential	4,464.0	3" Mill & Overlay	11/6/2028	39	100	$ 40,176.0
COACH::CLAMIRADAE::1	CORTE LA MIRADA	CALLE EL SOL	VAN BUREN ST	Residential	8,066.0	1.5" Thin Overlay	11/6/2028	57	100	$ 40,330.0
COACH::CLORETO::1	CORTE LORETO	CALLE QUINTERRA	CDS	Residential	8,172.0	1.5" Thin Overlay	11/6/2028	57	100	$ 40,860.0
COACH::GENOAST::9	GENOA ST	NILE LN	CALLE LIMON	Residential	4,588.0	3" Mill & Overlay	11/6/2028	43.5	100	$ 41,292.0
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.0	Slurry Seal	11/6/2029	85	100	$ 1,278.0
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.0	Slurry Seal	11/6/2029	85	100	$ 3,204.0
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.0	Slurry Seal	11/6/2029	85	100	$ 3,888.0
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	$ 4,320.0
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	$ 4,320.0
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2029	85	100	$ 4,320.0
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.0	Slurry Seal	11/6/2029	85	100	$ 4,458.5
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2029	85	100	$ 4,680.0
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.0	Slurry Seal	11/6/2029	85	100	$ 5,577.0
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2029	85	100	$ 8,442.0
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.0	Slurry Seal	11/6/2029	85	100	$ 9,996.0
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.0	Slurry Seal	11/6/2029	85	100	$ 11,898.0
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.0	Slurry Seal	11/6/2029	85	100	$ 12,580.0
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.0	Slurry Seal	11/6/2029	85	100	$ 14,094.0
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.0	Slurry Seal	11/6/2029	85	100	$ 14,436.0
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.0	Microsurfacing	11/6/2029	85	100	$ 16,250.0
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.0	Microsurfacing	11/6/2029	85	100	$ 16,250.0
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.0	Slurry Seal	11/6/2029	85	100	$ 16,650.0
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.0	Slurry Seal	11/6/2029	85	100	$ 17,075.5
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.0	Slurry Seal	11/6/2029	85	100	$ 17,537.0
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.0	Slurry Seal	11/6/2029	85	100	$ 17,613.0
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.0	Microsurfacing	11/6/2029	85	100	$ 18,750.0
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.0	Microsurfacing	11/6/2029	85	100	$ 18,750.0
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.0	Microsurfacing	11/6/2029	85	100	$ 18,900.0
COACH::ARAZON::3	AVENIDA RAZON	CORTE GILLAN	AVENIDA HALAWAY	Residential	4,625.0	3" Mill & Overlay	11/6/2029	42	100	$ 41,625.0
COACH::SALTILLOCR::4	SALTILLO CIR	MAZATLAN DR	MAZATLAN DR	Residential	4,706.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 42,354.0
COACH::52NDAVEE::8	52ND AVE	CALLE EMPALME	CALLE EMPALME	Arterial	4,784.0	3" Mill & Overlay	11/6/2029	42	100	$ 43,056.0
COACH::52NDAVEW::16	52ND AVE	CALLE EMPALME	CALLE EMPALME	Arterial	4,784.0	3" Mill & Overlay	11/6/2029	42	100	$ 43,056.0
COACH::PROSECCO::4	PROSECCO WAY	SOLARCE ST	MALVASIA WAY	Residential	4,864.0	3" Mill & Overlay	11/6/2029	45	100	$ 43,776.0
COACH::GUITRONST::3	GUITRON ST	NIETO ST	AVENIDA DE ORO	Residential	4,930.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 44,370.0
COACH::AEUROPA::1	AVENIDA EUROPA	D\E	CALLE CARMELLO	Residential	4,932.0	3" Mill & Overlay	11/6/2029	39	100	$ 44,388.0
COACH::LAPLAYAST::2	LA PLAYA ST	CALLE COLIMA	140' N/O CALLE COLIMA	Residential	5,040.0	3" Mill & Overlay	11/6/2029	45	100	$ 45,360.0
COACH::52NDAVE::18	52ND AVE	JENNIFER WAY	ALLEY	Arterial	5,060.0	3" Mill & Overlay	11/6/2029	40.5	100	$ 45,540.0
COACH::AADOBE::6	AVENIDA ADOBE	CORTE ALTURIAN	WESTERFIELD WAY	Residential	5,120.0	3" Mill & Overlay	11/6/2029	42	100	$ 46,080.0
COACH::CNINOS::4	CALLE NINOS	140' W/O CALLE BELLA	CALLE AMIGOS	Residential	5,148.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 46,332.0
COACH::PINTOLN::1	PINTO LN	EAGLE AVE	120' S/O MCCOY PEAK AVE	Residential	5,184.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 46,656.0
COACH::CDIEGO::3	CALLE DIEGO	CALLE LEANDRO	150' E/O CALLE LEANDRO	Residential	5,202.0	3" Mill & Overlay	11/6/2029	40.5	100	$ 46,818.0
COACH::CCORTO::1	CAMINO CORTO	CALLE LIMON	CDS	Residential	5,250.0	3" Mill & Overlay	11/6/2029	43.5	100	$ 47,250.0
COACH::52NDAVEW::13	52ND AVE	CALLE AVILA	CALLE TECHA	Arterial	5,278.0	3" Mill & Overlay	11/6/2029	45	100	$ 47,502.0
COACH::52NDAVEE::11	52ND AVE	CALLE TECHA	CALLE AVILA	Arterial	5,278.0	3" Mill & Overlay	11/6/2029	45	100	$ 47,502.0
COACH::VIAVALENCI::3	VIA VALENCIA	CALLE MARBELLA	PASEO CORDOVA	Residential	4,851.0	Slurry Seal	11/6/2030	85	100	$ 2,425.5
COACH::CGRANADA::1	CALLE GRANADA	PASEO MADRID	PASEO CORDOVA	Residential	10,800.0	Slurry Seal	11/6/2030	85	100	$ 5,400.0
COACH::PASEOCORDO::1	PASEO CORDOVA	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2030	85	100	$ 8,250.0
COACH::PASEOBARCE::1	PASEO BARCELONA	CALLE SEVILLE	VIA MERIDA	Residential	18,216.0	Slurry Seal	11/6/2030	85	100	$ 9,108.0
COACH::SH-111S::7	SH-111	3RD ST	4TH ST	Arterial	16,250.0	Microsurfacing	11/6/2030	85	100	$ 16,250.0
COACH::SH-111S::11	SH-111	7TH ST	8TH ST	Arterial	18,750.0	Microsurfacing	11/6/2030	85	100	$ 18,750.0
COACH::CYPRESSST::2	CYPRESS ST	VALLEY RD	52ND AVE	Residential	49,894.0	Slurry Seal	11/6/2030	85	100	$ 24,947.0
COACH::AALEENAH::2	AVENIDA ALEENAH	'150 E/O GENOA ST	ADRIANA CT	Residential	5,328.0	3" Mill & Overlay	11/6/2030	42	100	$ 47,952.0
COACH::AALEENAH::1	AVENIDA ALEENAH	GENOA ST	'150 E/O GENOA ST	Residential	5,364.0	3" Mill & Overlay	11/6/2030	39	100	$ 48,276.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::WESTERFILD::7	WESTERFIELD WAY	S KENMORE ST	SUNCREST ST	Residential	5,400.0	3" Mill & Overlay	11/6/2030	37.5	100	$ 48,600.0
COACH::AGRACE::2	AVENIDA GRACE	CALLE FLORENA	150' E/O CALLE FLORENA	Residential	5,400.0	3" Mill & Overlay	11/6/2030	40.5	100	$ 48,600.0
COACH::SOLARCEST::2	SOLARCE ST	PROSECCO WAY	SOLARCE ST	Residential	5,406.0	3" Mill & Overlay	11/6/2030	37.5	100	$ 48,654.0
COACH::WESTERFILD::5	WESTERFIELD WAY	S CORONADO ST	140' E/O S CORONADO ST	Residential	5,480.0	3" Mill & Overlay	11/6/2030	36	100	$ 49,320.0
COACH::WESTERFILD::6	WESTERFIELD WAY	140' E/O S CORONADO ST	S KENMORE ST	Residential	5,480.0	3" Mill & Overlay	11/6/2030	39	100	$ 49,320.0
COACH::WESTERFILD::4	WESTERFIELD WAY	140' E/O S CORONADO ST	S CORONADO ST	Residential	5,480.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 49,320.0
COACH::TYLERST::20	TYLER ST	2125' S/O VISTA DEL SUR	VISTA DEL SUR	Rural	63,780.0	Chip Seal	11/6/2030	78	100	$ 51,024.0
COACH::CHARDONNAY::1	CHARDONNAY CIR	MALVASIA WAY	CDS	Residential	5,760.0	3" Mill & Overlay	11/6/2030	39	100	$ 51,840.0
COACH::AMARONECIR::1	AMARONE CIR	MALVASIA WAY	CDS	Residential	5,760.0	3" Mill & Overlay	11/6/2030	40.5	100	$ 51,840.0
COACH::AALEENAH::5	AVENIDA ALEENAH	'160 W/O CALLE FLORENA	CALLE FLORENA	Residential	5,760.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 51,840.0
COACH::JALISCOAVE::3	JALISCO AVE	JALISCO AVE	JALISCO ACE PARKING LOOP	Residential	5,768.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 51,912.0
COACH::CQUINTERRA::4	CALLE QUINTERRA	CORTE LORETO	REDONDO NORTE	Residential	5,846.0	3" Mill & Overlay	11/6/2030	36	100	$ 52,614.0
COACH::CQUINTERRA::2	CALLE QUINTERRA	REDONDO SUR	CORTE SANTOS	Residential	5,883.0	3" Mill & Overlay	11/6/2030	42	100	$ 52,947.0
COACH::CPERCEBE::1	CORTE PERCEBE	REDONDO SUR	CDS	Residential	5,904.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 53,136.0
COACH::MCCOYPEAK::3	MCCOY PEAK AVE	CHAPARROSA ST	SAN JACINTO LN	Residential	5,904.0	3" Mill & Overlay	11/6/2030	43.5	100	$ 53,136.0
COACH::PROSECCO::1	PROSECCO WAY	RODREJO WAY	ALLENDE DR	Residential	5,920.0	3" Mill & Overlay	11/6/2030	37.5	100	$ 53,280.0
COACH::CRUIZ::3	CALLE RUIZ	AVENIDA ZOCALO	AVENIDA REFORMA	Residential	6,444.0	Slurry Seal	11/6/2031	85	100	$ 3,222.0
COACH::CRUIZ::4	CALLE RUIZ	AVENIDA REFORMA	AVENIDA DEL PRADO	Residential	8,640.0	Slurry Seal	11/6/2031	85	100	$ 4,320.0
COACH::AIRPORTBL::6	AIRPORT BLVD	1215' W/O FILLMORE ST	1085' W/O FILLMORE ST	Collector	6,500.0	Microsurfacing	11/6/2031	84	100	$ 6,500.0
COACH::SHADYLN::3	SHADY LN	AVENIDA TACUBA	AVENIDA REFORMA	Residential	20,048.0	Slurry Seal	11/6/2031	85	100	$ 10,024.0
COACH::MAZATLANDR::1	MAZATLAN DR	SALTILLO CIR	MAZATLAN DR	Residential	5,952.0	3" Mill & Overlay	11/6/2031	43.5	100	$ 53,568.0
COACH::HIBISCOST::1	HIBISCO ST	PHOENIX AVE	CALENDULA AVE	Residential	5,994.0	3" Mill & Overlay	11/6/2031	36	100	$ 53,946.0
COACH::MAZATLANDR::2	MAZATLAN DR	MAZATLAN DR	SALTILLO CIR	Residential	6,048.0	3" Mill & Overlay	11/6/2031	42	100	$ 54,432.0
COACH::VERMOUTHDR::1	VERMOUTH DR	D/E	PRIMITIVO DR	Residential	6,080.0	3" Mill & Overlay	11/6/2031	36	100	$ 54,720.0
COACH::52NDAVE::19	52ND AVE	ALLEY	TRIPOLI WAY	Arterial	6,160.0	3" Mill & Overlay	11/6/2031	37.5	100	$ 55,440.0
COACH::MARYCT::1	MARY CT	CHRISTINA RD	CDS	Residential	6,176.0	3" Mill & Overlay	11/6/2031	43.5	100	$ 55,584.0
COACH::CTECHA::2	CALLE TECHA	CALLE ZAMORA	CALLE LYA	Residential	6,200.0	3" Mill & Overlay	11/6/2031	40.5	100	$ 55,800.0
COACH::CAIROAVE::4	CAIRO AVE	CALLE CAMACHO	SUEZ RD	Residential	6,240.0	3" Mill & Overlay	11/6/2031	36	100	$ 56,160.0
COACH::BAGDADAVE::5	BAGDAD AVE	CALLE CAMACHO	SUEZ RD	Residential	6,240.0	3" Mill & Overlay	11/6/2031	37.5	100	$ 56,160.0
COACH::MAZATLANDR::5	MAZATLAN DR	CHIHUAHUA CT	TAXCO WAY	Residential	6,240.0	3" Mill & Overlay	11/6/2031	39	100	$ 56,160.0
COACH::SABALCT::1	SABAL CT	CDS	PHOENIX AVE	Residential	6,240.0	3" Mill & Overlay	11/6/2031	40.5	100	$ 56,160.0
COACH::AHALAWAY::1	AVENIDA HALAWAY	FREDERICK ST	AVENIDA RAZON	Residential	6,264.0	3" Mill & Overlay	11/6/2031	42	100	$ 56,376.0
COACH::48THAVEW::1	48TH AVE	HARRISON ST	CITY LIMITS	Arterial	57,240.0	Microsurfacing	11/6/2031	75	100	$ 57,240.0
COACH::PROSECCO::3	PROSECCO WAY	SOLARCE ST	SOLARCE ST	Residential	6,400.0	3" Mill & Overlay	11/6/2031	39	100	$ 57,600.0
COACH::SANREYDR::1	SAN REY DR	CALLE TOLOSA	COLONIA DR	Residential	6,400.0	3" Mill & Overlay	11/6/2031	42	100	$ 57,600.0
COACH::ZUMADR::1	ZUMA DR	LA JOLLA AVE	51ST AVE	Residential	6,408.0	3" Mill & Overlay	11/6/2031	43.5	100	$ 57,672.0
COACH::CLAPAZ::2	CALLE LA PAZ	CALLE ROSA	53RD AVE	Residential	6,444.0	3" Mill & Overlay	11/6/2031	36	100	$ 57,996.0
COACH::TRIPOLIWAY::4	TRIPOLI WAY	ALLEY	CAIRO AVE	Residential	1,080.0	Slurry Seal	11/6/2032	85	100	$ 540.0
COACH::DATEAVE::2	DATE AVE	ARABY AVE	ARABY AVE	Residential	2,016.0	Slurry Seal	11/6/2032	85	100	$ 1,008.0
COACH::CRUIZ::5	CALLE RUIZ	AVENIDA DEL PRADO	AVENIDA EL FAROL	Residential	2,880.0	Slurry Seal	11/6/2032	85	100	$ 1,440.0
COACH::LASPLUMAS::1	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2032	85	100	$ 2,068.3
COACH::LASPLUMAS::2	LAS PLUMAS CT	PLUMA AMARILLA PL	CALHOUN ST	Residential	4,136.7	Slurry Seal	11/6/2032	85	100	$ 2,068.3
COACH::TRIPOLIWAY::5	TRIPOLI WAY	CAIRO AVE	CAIRO AVE	Residential	4,320.0	Slurry Seal	11/6/2032	85	100	$ 2,160.0
COACH::DATEAVE::4	DATE AVE	CAIRO AVE	CAIRO AVE	Residential	4,680.0	Slurry Seal	11/6/2032	85	100	$ 2,340.0
COACH::DATEAVE::5	DATE AVE	CAIRO AVE	MEDINA AVE	Residential	5,040.0	Slurry Seal	11/6/2032	85	100	$ 2,520.0
COACH::VIAVALENCI::2	VIA VALENCIA	PASEO MADRID	CALLE MARBELLA	Residential	5,049.0	Slurry Seal	11/6/2032	85	100	$ 2,524.5
COACH::TRIPOLIWAY::7	TRIPOLI WAY	MEDINA AVE	DAMASCUS AVE	Residential	5,112.0	Slurry Seal	11/6/2032	85	100	$ 2,556.0
COACH::TRIPOLIWAY::6	TRIPOLI WAY	CAIRO AVE	MEDINA AVE	Residential	5,400.0	Slurry Seal	11/6/2032	85	100	$ 2,700.0
COACH::PLUMAAMARI::1	PLUMA AMARILLA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,444.0	Slurry Seal	11/6/2032	85	100	$ 3,222.0
COACH::CRUIZ::2	CALLE RUIZ	AVENIDA TACUBA	AVENIDA ZOCALO	Residential	6,444.0	Slurry Seal	11/6/2032	85	100	$ 3,222.0
COACH::PLUMAAMARI::2	PLUMA AMARILLA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,480.0	Slurry Seal	11/6/2032	85	100	$ 3,240.0
COACH::CSEGOVIA::2	CALLE SEGOVIA	CALLE MARBELLA	PASEO CADIZ	Residential	6,512.0	Slurry Seal	11/6/2032	85	100	$ 3,256.0
COACH::PLUMABLANC::1	PLUMA BLANCA PL	PLUMA DORADA CT	LAS PLUMAS CT	Residential	6,516.0	Slurry Seal	11/6/2032	85	100	$ 3,258.0
COACH::CSEGOVIA::1	CALLE SEGOVIA	PASEO BARCELONA	CALLE MARBELLA	Residential	6,688.0	Slurry Seal	11/6/2032	85	100	$ 3,344.0
COACH::TRIPOLIWAY::10	TRIPOLI WAY	ALLEY	BAGDAD AVE	Residential	7,164.0	Slurry Seal	11/6/2032	85	100	$ 3,582.0
COACH::DAMASCUSAV::3	DAMASCUS AVE	SH-86	ALLEY	Residential	7,296.0	Slurry Seal	11/6/2032	85	100	$ 3,648.0
COACH::PLUMAVERDE::2	PLUMA VERDE PL	LAS PLUMAS CT	CDS	Residential	7,776.0	Slurry Seal	11/6/2032	85	100	$ 3,888.0
COACH::AELFAROL::2	AVENIDA EL FAROL	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2032	85	100	$ 4,320.0
COACH::AELFAROL::1	AVENIDA EL FAROL	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2032	85	100	$ 4,320.0
COACH::ADELROBLE::2	AVENIDA DEL ROBLE	AVENIDA DEL ROBLE	AVENIDA YUCATECO	Residential	9,120.0	Slurry Seal	11/6/2032	85	100	$ 4,560.0
COACH::PLUMANEGRA::1	PLUMA NEGRA CT	PLUMA VERDE PL	PLUMA BLANCA PL	Residential	9,180.0	Slurry Seal	11/6/2032	85	100	$ 4,590.0
COACH::PLUMAAZUL::2	PLUMA AZUL CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2032	85	100	$ 4,680.0
COACH::DATEAVE::6	DATE AVE	MEDINA AVE	DAMASCUS AVE	Residential	9,720.0	Slurry Seal	11/6/2032	85	100	$ 4,860.0
COACH::PLUMADORAD::1	PLUMA DORADA CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	$ 5,238.0
COACH::PLUMADORAD::3	PLUMA DORADA CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	$ 5,238.0
COACH::PLUMAAZUL::1	PLUMA AZUL CT	PLUMA BLANCA PL	PLUMA ROJA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	$ 5,238.0
COACH::PLUMAAZUL::3	PLUMA AZUL CT	PLUMA GRIS PL	PLUMA AMARILLA PL	Residential	10,476.0	Slurry Seal	11/6/2032	85	100	$ 5,238.0
COACH::PASEOBARCE::2	PASEO BARCELONA	VIA MERIDA	CALLE SEGOVIA	Residential	10,656.0	Slurry Seal	11/6/2032	85	100	$ 5,328.0
COACH::CSEVILLE::1	CALLE SEVILLE	PASEO BARCELONA	PASEO CADIZ	Residential	10,800.0	Slurry Seal	11/6/2032	85	100	$ 5,400.0
COACH::SHADYLN::2	SHADY LN	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	13,440.0	Slurry Seal	11/6/2032	85	100	$ 6,720.0
COACH::PASEOMADRI::1	PASEO MADRID	VIA VALENCIA	CALLE GRANADA	Residential	16,500.0	Slurry Seal	11/6/2032	85	100	$ 8,250.0
COACH::PLUMAGRIS::1	PLUMA GRIS PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2032	85	100	$ 8,442.0
COACH::DAMASCUSAV::4	DAMASCUS AVE	ALLEY	TRIPOLI WAY	Residential	16,910.0	Slurry Seal	11/6/2032	85	100	$ 8,455.0
COACH::CSANBORN::2	CALLE SANBORN	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,000.0	Slurry Seal	11/6/2032	85	100	$ 9,000.0
COACH::CBALDERAS::2	CALLE BALDERAS	AVENIDA ZOCALO	AVENIDA EL FAROL	Residential	18,072.0	Slurry Seal	11/6/2032	85	100	$ 9,036.0
COACH::VALLEYRD::8	VALLEY RD	DOS PALMAS AVE	CYPRESS ST	Collector	10,400.0	Microsurfacing	11/6/2032	85	100	$ 10,400.0
COACH::CBONITA::3	CALLE BONITA	CALLE ROSA	53RD AVE	Residential	6,444.0	3" Mill & Overlay	11/6/2032	37.5	100	$ 57,996.0
COACH::SOLARCEST::1	SOLARCE ST	PROSECCO WAY	SOLARCE ST	Residential	6,596.0	3" Mill & Overlay	11/6/2032	36	100	$ 59,364.0
COACH::CHIHUAHUA::1	CHIHUAHUA CT	CDS	MAZATLAN DR	Residential	6,608.0	3" Mill & Overlay	11/6/2032	40.5	100	$ 59,472.0
COACH::AGUACALIEN::1	AGUA CALIENTE ST	AGUA BLANCA AVE	CAMINO LAS BRISAS	Residential	6,660.0	3" Mill & Overlay	11/6/2032	40.5	100	$ 59,940.0
COACH::SUEZRD::2	SUEZ RD	DAMASCUS AVE	BAGDAD AVE	Residential	6,680.0	3" Mill & Overlay	11/6/2032	37.5	100	$ 60,120.0
COACH::SUEZRD::1	SUEZ RD	CAIRO AVE	DAMASCUS AVE	Residential	6,680.0	3" Mill & Overlay	11/6/2032	40.5	100	$ 60,120.0
COACH::CPERA::1	CALLE PERA	HILL DR	CDS	Residential	6,688.0	3" Mill & Overlay	11/6/2032	42	100	$ 60,192.0
COACH::PRIMITIVO::2	PRIMITIVO DR	PRIMITIVO DR	PRIMITIVO DR	Residential	3,104.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	25.5	100	$ 62,080.0
COACH::MAZATLANDR::4	MAZATLAN DR	MAZATLAN DR PARKING LOOP	CHIHUAHUA CT	Residential	6,912.0	3" Mill & Overlay	11/6/2032	37.5	100	$ 62,208.0
COACH::CGREGORIO::1	CALLE GREGORIO	FREDERICK ST	CALLE DIEGO	Residential	6,916.0	3" Mill & Overlay	11/6/2032	39	100	$ 62,244.0
COACH::CARDINALDR::1	CARDINAL DR	TYLER ST	PALMERAS CIR	Residential	6,960.0	3" Mill & Overlay	11/6/2032	37.5	100	$ 62,640.0
COACH::ALLENDEDR::4	ALLENDE DR	ALLENDE DR	VERMOUTH DR	Residential	3,168.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2032	1.5	100	$ 63,360.0
COACH::CEMELIA::1	CALLE EMELIA	AVENUE 53	AVENIDA RAYLYNN	Residential	7,092.0	3" Mill & Overlay	11/6/2032	37.5	100	$ 63,828.0
COACH::TRIPOLIWAY::9	TRIPOLI WAY	DAMASCUS AVE	70' N/O DAMASCUS AVE	Residential	2,556.0	Slurry Seal	11/6/2033	85	100	$ 1,278.0
COACH::PLUMABLANC::2	PLUMA BLANCA PL	LAS PLUMAS CT	PLUMA AZUL CT	Residential	6,408.0	Slurry Seal	11/6/2033	85	100	$ 3,204.0
COACH::PLUMAVERDE::1	PLUMA VERDE PL	CDS	LAS PLUMAS CT	Residential	7,776.0	Slurry Seal	11/6/2033	85	100	$ 3,888.0
COACH::AZOCALO::1	AVENIDA ZOCALO	CALLE BALDERAS	CALLE SANBORN	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	$ 4,320.0
COACH::AZOCALO::2	AVENIDA ZOCALO	CALLE SANBORN	CALLE RUIZ	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	$ 4,320.0
COACH::CRUIZ::1	CALLE RUIZ	AVENIDA YUCATECO	AVENIDA TACUBA	Residential	8,640.0	Slurry Seal	11/6/2033	85	100	$ 4,320.0
COACH::AYUCATECO::2	AVENIDA YUCATECO	AVENIDA DEL ROBLE	SHADY LN	Residential	8,917.0	Slurry Seal	11/6/2033	85	100	$ 4,458.5
COACH::PLUMADORAD::2	PLUMA DORADA CT	PLUMA ROJA PL	PLUMA GRIS PL	Residential	9,360.0	Slurry Seal	11/6/2033	85	100	$ 4,680.0
COACH::CMARBELLA::1	CALLE MARBELLA	CALLE SEGOVIA	VIA VALENCIA	Residential	11,154.0	Slurry Seal	11/6/2033	85	100	$ 5,577.0
COACH::PLUMAROJA::1	PLUMA ROJA PL	PLUMA DORADA CT	PLUMA AZUL CT	Residential	16,884.0	Slurry Seal	11/6/2033	85	100	$ 8,442.0
COACH::SHADYLN::1	SHADY LN	54TH AVE	AVENIDA YUCATECO	Residential	19,992.0	Slurry Seal	11/6/2033	85	100	$ 9,996.0
COACH::CSANBORN::1	CALLE SANBORN	AVENIDA DEL ROBLE	AVENIDA ZOCALO	Residential	23,796.0	Slurry Seal	11/6/2033	85	100	$ 11,898.0
COACH::AYUCATECO::1	AVENIDA YUCATECO	CALLE RUIZ	AVENIDA DEL ROBLE	Residential	25,160.0	Slurry Seal	11/6/2033	85	100	$ 12,580.0
COACH::CBALDERAS::1	CALLE BALDERAS	54TH AVE	AVENIDA ZOCALO	Residential	28,188.0	Slurry Seal	11/6/2033	85	100	$ 14,094.0
COACH::PASEOCADIZ::1	PASEO CADIZ	CALLE SEVILLE	CALLE SEGOVIA	Residential	28,872.0	Slurry Seal	11/6/2033	85	100	$ 14,436.0
COACH::SH-111S::8	SH-111	4TH ST	5TH ST	Arterial	16,250.0	Microsurfacing	11/6/2033	85	100	$ 16,250.0
COACH::SH-111S::9	SH-111	5TH ST	6TH ST	Arterial	16,250.0	Microsurfacing	11/6/2033	85	100	$ 16,250.0
COACH::AREFORMA::1	AVENIDA REFORMA	CALLE RUIZ	SHADY LN	Residential	33,300.0	Slurry Seal	11/6/2033	85	100	$ 16,650.0
COACH::ATACUBA::1	AVENIDA TACUBA	CALLE RUIZ	SHADY LN	Residential	34,151.0	Slurry Seal	11/6/2033	85	100	$ 17,075.5
COACH::ADELROBLE::1	AVENIDA DEL ROBLE	CALLE SANBORN	AVENIDA DEL ROBLE	Residential	35,074.0	Slurry Seal	11/6/2033	85	100	$ 17,537.0
COACH::ADELPRADO::1	AVENIDA DEL PRADO	CALLE RUIZ	SHADY LN	Residential	35,226.0	Slurry Seal	11/6/2033	85	100	$ 17,613.0
COACH::SH-111S::6	SH-111	2ND ST	3RD ST	Arterial	18,750.0	Microsurfacing	11/6/2033	85	100	$ 18,750.0
COACH::SH-111S::5	SH-111	1ST ST	2ND ST	Arterial	18,750.0	Microsurfacing	11/6/2033	85	100	$ 18,750.0
COACH::SH-111S::12	SH-111	8TH ST	9TH ST	Arterial	18,900.0	Microsurfacing	11/6/2033	85	100	$ 18,900.0
COACH::BAJAWAY::1	BAJA WAY	CHIAPAS DR	FREDERICK ST	Residential	7,500.0	3" Mill & Overlay	11/6/2033	37.5	100	$ 67,500.0
COACH::GARNETRIDG::1	GARNET RIDGE ST	AVENUE 49	SAN MATEO AVE	Residential	7,560.0	3" Mill & Overlay	11/6/2033	42	100	$ 68,040.0
COACH::CROJO::2	CALLE ROJO	170 W/O CALLE EMPALME	260' W/O CALLE EMPALME	Residential	3,520.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	18	100	$ 70,400.0

Asset Id	Name	Start Location	End Location	Functional Classification	Area	Treatment Name	Maintenance Date	PCI Before Treatment	PCI After Treatment	Treatment Cost
COACH::CROJO::3	CALLE ROJO	85' W/O CALLE EMPALME	170' W/O CALLE EMPALME	Residential	3,520.0	Reconstruction - 6" Asphalt + 8" Base	11/6/2033	24	100	$ 70,400.0
COACH::ADELPARQUE::1	AVENIDA DEL PARQUE	PEDRO DR	50TH AVE	Residential	8,000.0	3" Mill & Overlay	11/6/2033	39	100	$ 72,000.0
COACH::CLAMIRADAW::1	CORTE LA MIRADA	VAN BUREN ST	CALLE EL SOL	Residential	8,029.0	3" Mill & Overlay	11/6/2033	42	100	$ 72,261.0
COACH::WASHINGTON::1	WASHINGTONIA AVE	50TH AVE	ROYAL CT	Residential	8,100.0	3" Mill & Overlay	11/6/2033	36	100	$ 72,900.0
COACH::ARAZON::5	AVENIDA RAZON	VIA ZAHIDI	CDS	Residential	8,140.0	3" Mill & Overlay	11/6/2033	39	100	$ 73,260.0
COACH::HILLDR::2	HILL DR	CALLE PERA	SUNSET DR	Residential	8,160.0	3" Mill & Overlay	11/6/2033	37.5	100	$ 73,440.0
COACH::ANERIUM::2	AVENIDA NERIUM	CALLE GLORIOSA	CALLE TECOMARIA	Residential	8,280.0	3" Mill & Overlay	11/6/2033	40.5	100	$ 74,520.0

The City of Coachella
53990 Enterprise Way
Coachella, CA 92236