SCOPE OF WORK:

1. PROVIDE NEW VINYL COVE BASE UNDER NEW MILLWORK.
2. PROVIDE SHUT-OFF VALVES TO ALL EQUIPMENT SUPPLY LINES.
3. ANY ELECTRICAL OUTLETS SHALL BE GFI PROTECTED. PROVIDE EITHER INDIVIDUAL GFI DEVICES, UNLESS SPECIFICALLY NOTED ON THE DRAWINGS OR SCHEDULES.
4. CONTRACTOR SHALL INCLUDE ALL MISCELLANEOUS ITEMS REQUIRED TO COMPLETE WORK.
5. CLEAN ALL EXISTING EQUIPMENT BEFORE RECONNECTING.
6. RE-CONNECT ALL EXISTING PLUMBING & ELECTRICAL EQUIPMENT AFTER FINISHES & MILLWORK ARE REPLACED.

EXISTING FINISH MATERIAL SCHEDULE:

CAPPUCCINO BLEND

CODE	MATERIAL	MANUFACTURER	PRODUCT #	DESCRIPTION / REMARKS
PT-01	PAINT	SHERWIN WILLIAMS	6372	"INVITING IVORY": SATIN FINISH
PT-02	PAINT	SHERWIN WILLIAMS	6884	"OBSTINATE ORANGE": SATIN FINISH (INTERIOR)
PT-03	PAINT	SHERWIN WILLIAMS	6140	"MODERATE WHITE": SATIN FINISH
PT-04	PAINT	SHERWIN WILLIAMS	6099	"SAND DOLLAR": SATIN FINISH
PT-05	PAINT	SHERWIN WILLIAMS	7536	"BITTERSWEET STEM": SATIN
PT-06	PAINT	SHERWIN WILLIAMS	7724	"CANOE": SATIN
PT-07	PAINT	SHERWIN WILLIAMS	6117	"SMOKEY TOPAZ": SATIN
PT-08	PAINT	SHERWIN WILLIAMS	6096	"JUTE BROWN": SATIN
PT-09	PAINT	SHERWIN WILLIAMS	6097	"STURDY BROWN": SATIN
PT-10	PAINT	SHERWIN WILLIAMS	6090	"JAVA": SATIN
PT-11	PAINT	SHERWIN WILLIAMS	6069	"FRENCH ROAST": SATIN
PT-12	PAINT	SHERWIN WILLIAMS	6006	"BLACK BEAN": SATIN
PT-14	PAINT	SHERWIN WILLIAMS	6348	"REYNARD": SATIN
PT-15	PAINT	SHERWIN WILLIAMS	6642	"RHUMBA ORANGE": SATIN
PT-17	PAINT	SHERWIN WILLIAMS	6067	"MOCHA": SATIN
SSX-03	SOLID SURFACE MATERIAL	CAESARSTONE	#6350 "CHOCOLATE TRUFFLE"	FRONT LINE MILLWORK TOPS, CONDIMENT STATION
PL-08	PLASTIC LAMINATE	FORMICA	6306 "WEDGE STRAND"	FRONT LINE MILLWORK PANEL LAMINATE
PL-09	PLASTIC LAMINATE	FORMICA	859-58 "DESERT TAN"	FRONT LINE MILLWORK - HEADER/SHROUD FINISH, CONDIMENT STATION ACCENT BAND

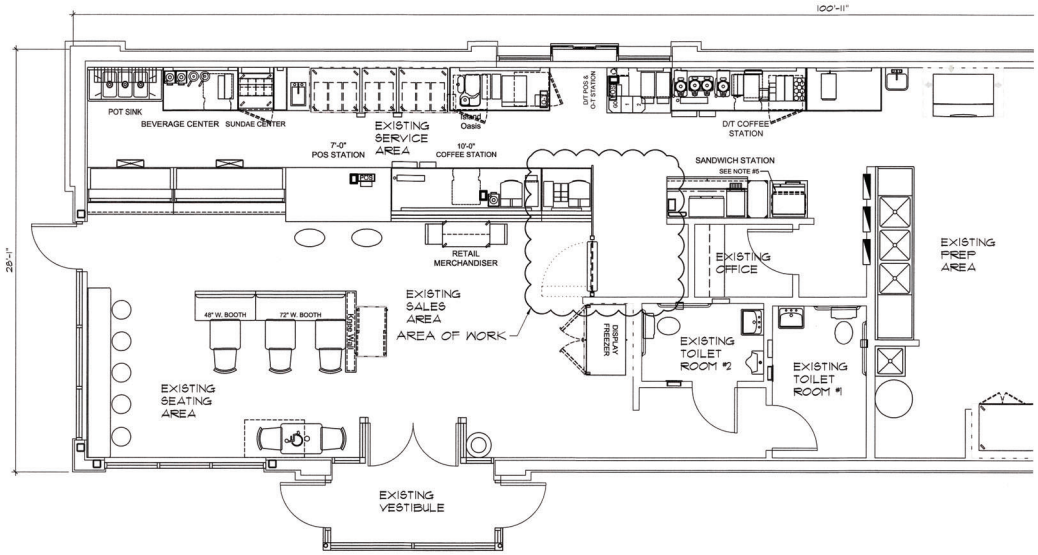

1 EXISTING FLOOR PLAN
1/4" = 1'-0"

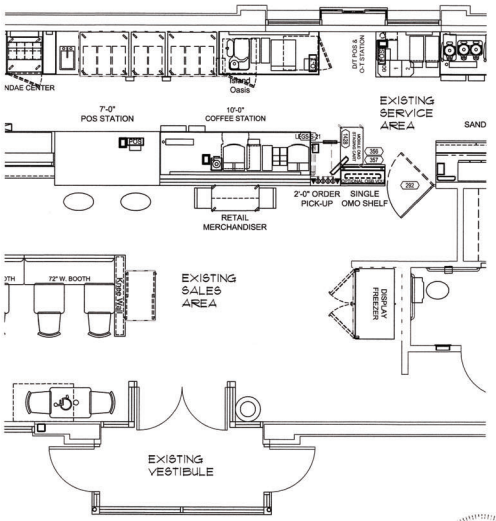

2 FLOOR PLAN
1/4" = 1'-0"

REVISIONS

JOB/PROJECT

DATE: 2-26

THIS DRAWING	
FOR COORDINATION	2-26-25
FOR BIDDING	3-20-25
FOR PERMIT	4-21-25

2359 165RD ST.
HOMEWOOD, IL 60430
FC#3148

DUNKIN' B&R BASKIN-ROBBINS

PETER G. PARASKIS
ARCHITECT, LTD.

EXISTING FLOOR PLAN, FLOOR PLAN & NOTES

A.1