

GENERAL NOTES:

- ALL NOTES APPLY TO ALL DRAWINGS AND ALL TRADES.
- REFER TO ENGINEERING PLANS FOR LAYOUT AND LOCATION OF UTILITIES AND ROADS
- ALL SURVEY AND SITE INFORMATION WERE COMPILED FROM A VARIETY OF SOURCES AT VARIOUS TIMES. SITE INFORMATION MUST BE FIELD VERIFIED BEFORE CONSTRUCTION BEGINS. REPORT ANY DISCREPANCIES TO THE OWNER OR OWNER'S REPRESENTATIVE.
- IT IS THE RESPONSIBILITY OF ALL CONTRACTORS AND TRADES TO COORDINATE THE INSTALLATION OF THEIR WORK WITH THE INSTALLATION OF WORK BY ALL OTHER CONTRACTORS AND TRADES.
- THE REQUIREMENTS OF THE SPECIFICATIONS, DRAWINGS, GENERAL REQUIREMENTS, AND ALL ITEMS OF THE CONTRACT DOCUMENTS ARE EQUALLY BINDING FOR ALL CONTRACTORS AND TRADES.
- CONTRACTOR SHALL PROVIDE TO MAINTAIN FULL (COLOR) SETS OF THE CONTRACT DOCUMENTS FOR HIS EMPLOYEES USE ON THE PROJECT TO ASSURE THAT ALL WORK IS PROPERLY COORDINATED AND FOR REVIEWS BY COUNTY AND / OR MUNICIPALITY OFFICIALS FOR INSPECTIONS.
- ALL CONTRACTORS AND ALL TRADES ARE RESPONSIBLE FOR OBTAINING THE CORRECT PERMITS AND INSPECTIONS PRIOR TO CONSTRUCTION AS REQUIRED BY LOCAL PLANNING, ZONING, BUILDING CODE AND OTHER TOWN AUTHORITIES.
- W.J.K. LTD., THE OWNER AND / OR THE OWNER'S REPRESENTATIVE SHALL BE NOTIFIED OF ANY SITE CONDITIONS WHICH MAY NECESSITATE MODIFICATION TO THE PLAN. THE OWNER OR OWNER'S REPRESENTATIVE SHALL MAKE INFIELD MODIFICATIONS, IF NECESSARY.
- CONTRACTOR SHALL PROVIDE AND FURNISH ALL MATERIALS, EQUIPMENT AND LABOR NECESSARY FOR ALL CONSTRUCTION, PROTECTION, MAINTENANCE AND RELATED ITEMS TO COMPLETE WORK INDICATED ON THE DRAWINGS.
- BEFORE COMMENCING ANY WORK CONTRACTOR SHALL ASCERTAIN THE LOCATION OF ALL UTILITIES, SUB-SURFACE DRAINAGE, AND UNDERGROUND CONSTRUCTION SO THAT PROPER PRECAUTIONS MAY BE TAKEN NOT TO DISTURB ANY SUB-SURFACE IMPROVEMENTS. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS IN BRINGING EQUIPMENT ON TO AND OFF OF THE SITE, PROTECTING WALKS, PAVING, STEPS AND OTHER EXISTING CONSTRUCTION ON THE SITE. CONTACTS SHALL BE MADE BY CONTRACTOR WITH PROPER AUTHORITIES BEFORE AND DURING THIS WORK SO AS TO COMPLY WITH ALL REGULATIONS AND ORDINANCES.
- CONTRACTOR SHALL FIELD LOCATE ALL UTILITIES AND CONFIRM / DETERMINE UTILITY ELEVATIONS PRIOR TO CONSTRUCTION. CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGE AND MAKE REPAIRS, AT THEIR OWN EXPENSE, THAT MAY OCCUR TO EXISTING UTILITIES IN ACCORDANCE WITH NATIONAL, STATE AND LOCAL CODES.
- CONTRACTOR SHALL VERIFY ALL EXISTING TREE CONDITIONS AND ELEVATIONS PRIOR TO CONSTRUCTION. CONTRACTOR SHALL NOTIFY THE OWNER OR OWNER'S REPRESENTATIVE OF ANY DISCREPANCIES PRIOR TO THEIR REMOVAL.
- CONTRACTOR SHALL PROTECT AND INSTALL TREE PROTECTION FENCE AROUND THE DRIP LINE OF ALL TREES, NATURAL AREAS AND EXISTING VEGETATION TO REMAIN. TREE PROTECTION LOCATION SHALL BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO CONSTRUCTION.
- ALL CONSTRUCTION FOR ALL TRADES SHALL CONFORM TO OR EXCEED THE PRODUCT MANUFACTURER'S RECOMMENDATIONS, REGULATIONS OF BEAUFORT COUNTY AND THE AMERICANS WITH DISABILITIES ACT, AND / OR OTHER APPLICABLE NATIONAL, STATE, AND LOCAL CODES AND ANY OTHER GOVERNING AUTHORITIES.
- CONTRACTOR ACCESS FOR CONSTRUCTION AS DIRECTED BY THE OWNER OR OWNER'S REPRESENTATIVE.
- CONTRACTOR SHALL PROTECT THE GENERAL PUBLIC FROM CONSTRUCTION AREAS DURING CONSTRUCTION.
- THE OWNER MAY REQUIRE FLAG MEN TO BE AVAILABLE DURING THE CONSTRUCTION PROCESS.
- ANY DEVIATIONS FROM THESE PLANS MUST BE SPECIFICALLY APPROVED BY W.J.K. LTD., AND THE OWNER OR OWNER'S REPRESENTATIVE.

DEMOLITION NOTES:

- THE CONTRACTOR, BEFORE BEGINNING ANY DEMOLITION ACTIVITY, SHALL CONTACT THE LOCAL UTILITIES FOR INSTRUCTION ON SPECIAL PROCEDURES THAT MAY BE REQUIRED BY THE UTILITIES CONCERNING DEMOLITION.
- ALL DEMOLISHED MATERIAL SHALL BE HAULED AWAY AND DISPOSED OF PROPERLY IN A LANDFILL AS APPLICABLE PER BEAUFORT COUNTY CODE(S).
- THE CONTRACTOR SHALL FOLLOW ALL REQUIREMENTS OF LOCAL, STATE AND FEDERAL REGULATORY AGENCIES WHICH MAY HAVE JURISDICTION OVER SUCH ACTIVITIES.
- THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL DATA PROVIDED IN THESE DRAWINGS. THE CONTRACTOR SHALL PERFORM HIS OWN ESTIMATE OF MATERIAL FOR DEMOLITION AND REPORT ANY DISCREPANCIES TO THE OWNER OR THE OWNER'S REPRESENTATIVE PRIOR TO BEGINNING WORK.
- ALL UTILITIES SHOWN ON THE DRAWINGS ARE APPROXIMATE AND FOR ESTIMATING PURPOSES ONLY. THE EXACT LOCATIONS SHALL BE FIELD VERIFIED BY THE CONTRACTOR PRIOR TO BEGINNING DEMOLITION WORK. ALL UTILITIES SHALL BE LOCATED AND PROTECTED TO PREVENT DAMAGE. ANY DAMAGE WHICH MAY OCCUR DURING THE CONSTRUCTION PROCESS IS TO BE PROMPTLY REPORTED TO THE APPROPRIATE UTILITY AUTHORITY AND REPAIRS SHALL BE MADE IN ACCORDANCE WITH THEIR REQUIREMENTS. THE SAFE DEMOLITION AND REMOVAL OF UTILITIES, STRUCTURES AND EQUIPMENT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO NOTIFY, AT THE DIRECTION OF THE OWNER OR OWNER'S REPRESENTATIVE, THE UTILITIES HAVING JURISDICTION OVER ANY UTILITY EASEMENTS OF ANY KIND FOR APPROVAL OF WORK WITHIN THE EASEMENT.
- REMOVAL OF ANY AND ALL MATERIALS INDICATED INCLUDES ALL MATERIALS ASSOCIATED WITH THAT ITEM INCLUDING SUBSURFACE MATERIAL, IF APPLICABLE, NOT NEEDED OR IN NEED OF REPAIR OR REPLACEMENT.
- THE CONTRACTOR SHALL TAKE CARE WHEN WORKING AROUND EXISTING TREES SCHEDULED TO REMAIN. PROPER TREE PROTECTION IN ACCORDANCE WITH LOCAL CODES SHALL BE MADE PRIOR TO CONSTRUCTION BEGINNING AND THROUGHOUT THE CONSTRUCTION PROCESS.
- SOME TREES AND SHRUBS SCHEDULED FOR RELOCATION AND REUSE ON THE PROPERTY MAY NOT BE SALVAGEABLE DUE TO UNDERGROUND UTILITIES.
- BARRIERS AND / OR FLAG MEN MAY BE REQUIRED FOR SAFETY, VERIFY REQUIREMENTS WITH THE OWNER FOR SUCH NEEDS PRIOR TO BEGINNING THE WORK.
- THE OWNER SHALL BE NOTIFIED AS TO THE TIMING OF THE WORK SO THAT PROPER SECURITY NOTIFICATION IS MADE.

GENERAL DISTURBANCE NOTES:

- CONTRACTOR SHALL IMPLEMENT ALL SILT FENCE OR OTHER SEDIMENT CONTROL MEASURES AROUND ALL DISTURBED AREAS PRIOR TO ANY CONSTRUCTION ACTIVITIES.
- TEMPORARY CONSTRUCTION ENTRANCE SHALL BE INSTALLED AFTER SILT FENCE AND PRIOR TO ALL OTHER CONSTRUCTION ACTIVITIES.
- ALL SEDIMENT AND EROSION CONTROL DEVICES SHALL BE INSPECTED BY THE CONTRACTOR AT LEAST ONCE EVERY FOURTEEN (14) CALENDAR DAYS AND WITHIN 24 HOURS OF THE END OF A STORM EVENT OF 0.5 INCHES OR GREATER. IF SITE INSPECTIONS IDENTIFY B.M.P.S. THAT ARE DAMAGED OR ARE NOT OPERATING EFFECTIVELY, MAINTENANCE MUST BE PERFORMED AS SOON AS PRACTICAL AND BEFORE THE NEXT STORM EVENT IF PRACTICAL.
- CONTRACTOR TO PROVIDE SILT FENCE AND / OR OTHER CONTROL DEVICES, AS MAY BE REQUIRED, TO CONTROL SOIL EROSION DURING UTILITY CONSTRUCTION. ALL DISTURBED AREAS SHALL BE CLEANED, GRADED AND STABILIZED WITH GRASSING IMMEDIATELY AFTER THE UTILITY INSTALLATION. FILL, COVER AND TEMPORARY SEEDING AT THE END OF EACH DAY ARE RECOMMENDED. IF WATER IS ENCOUNTERED WHILE TRENCHING, THE WATER SHOULD BE FILTERED TO REMOVE ANY SEDIMENTS BEFORE BEING PUMPED BACK INTO ANY WATERS OF THE STATE.
- ALL EROSION CONTROL DEVICES SHALL BE PROPERLY MAINTAINED BY THE CONTRACTOR DURING ALL PHASES OF CONSTRUCTION UNTIL THE COMPLETION OF ALL CONSTRUCTION ACTIVITIES AND ALL DISTURBED AREAS HAVE BEEN STABILIZED. ADDITIONAL CONTROL DEVICES MAY BE REQUIRED DURING CONSTRUCTION IN ORDER TO CONTROL EROSION AND / OR OFFSITE SEDIMENTATION. ALL TEMPORARY CONTROL DEVICES SHALL BE REMOVED ONCE CONSTRUCTION IS COMPLETE AND THE SITE IS STABILIZED.
- THE CONTRACTOR MUST TAKE NECESSARY ACTION TO MINIMIZE THE TRACKING OF MUD ONTO PAVED SURFACES FROM CONSTRUCTION AREAS AND THE GENERATION OF DUST. THE CONTRACTOR SHALL REMOVE MUD / SOIL DAILY FROM PAVED SURFACES, AS REQUIRED.
- RESIDENTIAL SUBDIVISIONS REQUIRE EROSION CONTROL FEATURES FOR INFRASTRUCTURE AS WELL AS FOR INDIVIDUAL LOT CONSTRUCTION. INDIVIDUAL PROPERTY OWNERS SHALL FOLLOW THESE PLANS DURING CONSTRUCTION OR OBTAIN APPROVAL OF AN INDIVIDUAL PLAN IN ACCORDANCE WITH S.C. REG. 72-300 ET SEQ. AND SCR100000.
- TEMPORARY DIVERSION BEAMS AND / OR DITCHES WILL BE PROVIDED AS NEEDED DURING CONSTRUCTION TO PROTECT WORK AREAS FROM UPSLOPE RUNOFF AND / OR TO DIVERT SEDIMENT-LADEN WATER TO APPROPRIATE TRAPS OR STABLE OULETS.
- ALL WATERS OF THE STATE (W.O.S.), INCLUDING WETLANDS, ARE TO BE FLAGGED OR OTHERWISE CLEARLY MARKED IN THE FIELD. A DOUBLE ROW OF SILT FENCE IS TO BE INSTALLED IN ALL AREAS WHERE A 50-FOOT BUFFER CAN'T BE MAINTAINED BETWEEN THE DISTURBED AREA AND ALL W.O.S. A 10-FOOT BUFFER SHOULD BE MAINTAINED BETWEEN THE LAST ROW OF SILT FENCE AND ALL W.O.S.
- LITTER, CONSTRUCTION DEBRIS, OILS, FUELS AND BUILDING PRODUCTS WITH SIGNIFICANT POTENTIAL FOR IMPACT (SUCH AS STOCKPILES OF FRESHLY TREATED LUMBER) AND CONSTRUCTION CHEMICALS THAT COULD BE EXPOSED TO STORMWATER MUST BE PREVENTED FROM BECOMING A POLLUTANT SOURCE IN STORMWATER DISCHARGES.
- STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS PRACTICAL IN PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED, BUT IN NO CASE MORE THAN FOURTEEN (14) DAYS AFTER WORK HAS CEASED EXCEPT AS STATED BELOW:
 - WHERE STABILIZATION BY THE 14TH DAY IS PRECLUDED BY SNOW COVER OR FROZEN GROUND CONDITIONS, STABILIZATION MEASURES MUST BE INITIATED AS SOON AS PRACTICAL.
 - WHERE CONSTRUCTION ACTIVITY ON A PORTION OF THE SITE IS TEMPORARILY CEASED AND EARTH-DISTURBING ACTIVITIES WILL BE RESUMED WITHIN 14 DAYS, TEMPORARY STABILIZATION MEASURES DO NOT HAVE TO BE INITIATED ON THAT PORTION OF THE SITE.

LAYOUT NOTES:

- ALL CONSTRUCTION STAKING SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.
- CONTRACTOR TO USE DIGITAL FILES PROVIDED BY WITMER-JONES-KEEFER, LTD. TO LAYOUT AND STAKE ALL SITE IMPROVEMENTS AND ELEMENTS. FINAL LAYOUT AND STAKING TO BE FIELD VERIFIED AND APPROVED BY LANDSCAPE ARCHITECT AND OWNER OR OWNER'S REPRESENTATIVE PRIOR TO CONSTRUCTION.
- CONTRACTOR SHALL FIELD LOCATE, STAKE AND USE COLOR CODED SPRAY PAINT FOR ALL ABOVE AND BELOW GROUND UTILITIES. CONTRACTOR TO CONFIRM / DETERMINE UTILITY ELEVATIONS PRIOR TO CONSTRUCTION. ANY EXISTING UTILITY CONFLICTS WITH SITE IMPROVEMENTS TO BE REPORTED TO OWNER, OWNER'S REPRESENTATIVE AND LANDSCAPE ARCHITECT PRIOR TO CONSTRUCTION. CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGE TO EXISTING UTILITIES AS STATED IN THE GENERAL NOTES.
- ALL SITE IMPROVEMENTS REPRESENTED IN THIS SET OF PLANS SHALL BE STAKED AND REVIEWED WITH THE OWNER OR OWNER'S REPRESENTATIVE PRIOR TO CONSTRUCTION. ANY DISCREPANCIES TO BE REPORTED TO THE OWNER, OWNER'S REPRESENTATIVE OR LANDSCAPE ARCHITECT.
- ALL DIMENSIONS ARE TO EDGE OF PAVING AND CENTERLINE OF WALLS AND COLUMNS UNLESS OTHERWISE INDICATED.
- ALL ANGLES ARE 90 UNLESS OTHERWISE INDICATED.
- CONTRACTOR SHALL PROVIDE LIGHTING, IRRIGATION AND ANY OTHER CONDUIT NEEDED TO ALL LANDSCAPE AREAS.
- ANY AND ALL FIELD ADJUSTMENTS SHALL RECEIVE APPROVAL FROM THE OWNER, OWNER'S REPRESENTATIVE OR LANDSCAPE ARCHITECT PRIOR TO CONSTRUCTION.

CONSTRUCTION NOTES:

- ALL CONTRACTORS AND ALL TRADES ARE RESPONSIBLE FOR OBTAINING THE CORRECT PERMITS AND INSPECTIONS PRIOR TO CONSTRUCTION AS REQUIRED BY LOCAL PLANNING, ZONING, BUILDING CODE AND OTHER TOWN AUTHORITIES.
- CONTRACTOR SHALL PROVIDE SAMPLES OF ALL MATERIALS AND OBTAIN APPROVAL FROM OWNER, OWNER'S REPRESENTATIVE OR LANDSCAPE ARCHITECT PRIOR TO CONSTRUCTION.
- ON SITE TOPOGRAPHY MAY REQUIRE ADJUSTMENTS OF FINAL SPOT ELEVATIONS ON SITE FOR PROPOSED VERTICAL CONSTRUCTION ELEMENTS. THE CONTRACTOR SHALL NOTIFY THE OWNER OR OWNER'S REPRESENTATIVE PROMPTLY UPON THE DISCOVERY OF ANY SUCH REQUIRED ADJUSTMENTS.
- THE CONTRACTOR SHALL PROVIDE FILL AS IS REQUIRED TO OBTAIN PROPER RELATIONSHIP OF FOOTING TO FINISH GRADE REQUIREMENTS - FEATHER FILL TO ADJACENT EXISTING GRADE TO ASSURE A COORDINATED AND DESIRED EFFECT.
- THE CONTRACTOR IS RESPONSIBLE FOR ALL DAMAGE TO EXISTING CONDITIONS SCHEDULED TO REMAIN DURING CONSTRUCTION.
- THE CONTRACTOR IS RESPONSIBLE FOR LOCATING ALL EXISTING UTILITIES AND FOR ANY DAMAGE THAT MAY OCCUR TO EXISTING UTILITIES DURING CONSTRUCTION.
- IN-FIELD MODIFICATIONS MAY BE NECESSARY TO PRODUCE DESIRED EFFECT. MODIFICATIONS TO BE APPROVED BY LANDSCAPE ARCHITECT AND OWNER OR OWNER'S REPRESENTATIVE.
- ALL WELDS TO BE CONTINUOUS.
- FOR ALL WOOD MEMBERS, ALL CUTS SHALL BE EVEN AND JOINTS FLUSH. SAND FOUR SIDES AND FILL IMPERFECTIONS, COUNTERSINKS AND NAIL HOLES TO ASSURE EVEN FINISH.
- CONTRACTOR SHALL VERIFY ALL WOOD MEMBERS FOR APPROPRIATE SIZE, SPACING, ATTACHMENTS AND STRUCTURAL STABILITY PRIOR TO CONSTRUCTION. CONTRACTOR TO REPORT ANY DISCREPANCIES TO OWNER, OWNER'S REPRESENTATIVE OR LANDSCAPE ARCHITECT.
- ALL NOTCHES SHALL BE SHOP CUT TO ASSURE TIGHT JOINTS. EACH MEMBER SHALL BE DRIVEN HOME TO ASSURE TIGHT FIT. PILOT HOLES SHALL BE DRILLED FOR EACH CARRIAGE BOLT. PLUG, SEAL AND PRIME.
- FINISH ALL SIDES AND CAULK ALL JOINTS WITH APPROPRIATE EXTERIOR CAULK PRIOR TO FINISHING.
- ALL CONNECTORS, UNLESS OTHERWISE SPECIFIED, SHALL BE STAINLESS STEEL. BOLTS, THREADED RODS, WASHERS, NUTS AND ALL BUILDING HARDWARE SHALL BE STAINLESS STEEL AND SUITABLE FOR PRESSURE TREATED WOOD. ALL THROUGH BOLTS TO BE SMOOTH SHAFT WITH STAINLESS STEEL NUTS, BOLTS AND WASHERS. ALL NAILS AND FINISH NAILS SHALL BE ANNULAR STAINLESS STEEL.
- ALL DECKING SHALL BE SECURED WITH STAINLESS STEEL SCREWS SIZED FOR DECK APPLICATION. MINIMUM 3" APART.

SOIL AMENDMENT NOTES:

- TOPSOIL SHALL CONSIST OF THE NATURAL LOAM, SANDY LOAM, SILT LOAM, OR CLAY LOAM HUMUS BEARING SOILS, ADAPTED TO THE SUSTENANCE OF PLANT LIFE, WITH THE FOLLOWING TEXTURE:
 - ORGANIC MATERIAL - TWO (2) TO TWENTY (20) PERCENT BY MASS
 - SAND CONTENT - TWENTY (20) TO SIXTY (60) PERCENT BY MASS
 - CLAY-SILT CONTENT - THIRTY FIVE (35) TO SEVENTY (70) PERCENT BY MASS.
 - TOPSOIL PH SHALL BE BETWEEN FIVE (5) AND SEVEN (7).
- TOPSOIL SHALL BE OF UNIFORM QUALITY AND FREE FROM FOREIGN MATERIAL SUCH HARD CLODS, SLUGS, STIFF CLAY, HARD PAW, STONES LARGER THAN ONE (1) INCH DIAMETER, LIME CEMENT, ASHES, SLAG, CONCRETE, TAR RESIDUES, TAILED PAPER, BOARDS, CHIPS, STICKS, OR OTHER UNDESIRABLE MATERIALS. IT SHALL ALSO BE REASONABLY FREE FROM WEEDS AND OBJECTIONABLE PLANT MATERIAL.
- AFTER ALL DEMOLITION, CLEARING AND DISPOSAL IS COMPLETED, THE CONTRACTOR SHALL STRIP FROM THE TOP OF THE EXISTING GROUND ALL TOPSOIL IN ALL AREAS TO BE GRADED.
- PRIOR TO STOCKPILING OF TOPSOIL, TOPSOIL SHALL BE SCREENED WITH A ONE HALF (1/2) INCH SIZE SIEVE. STOCKPILE TOPSOIL IN DESIGNATED OR APPROVED LOCATIONS WITH PROPER DRAINAGE AND WHERE IT WILL NOT INTERFERE WITH THE WORK. AFTER TOPSOIL HAS BEEN STOCKPILED, CONTRACTOR SHALL QUANTIFY THE AMOUNTS AT NO ADDITIONAL COST TO THE OWNER. QUANTITIES SHALL BE GIVEN TO THE ARCHITECT, OWNER AND SITE DESIGN PROFESSIONAL.
- IF AMOUNT OF SCREENED TOPSOIL STOCKPILED FROM STRIPPING OPERATIONS IS INSUFFICIENT TO PROVIDE THE NECESSARY AMOUNTS (4" MINIMUM DEPTH), IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO OBTAIN (FROM OFF-SITE SOURCE) THE NECESSARY AMOUNT OF SCREENED TOPSOIL TO COMPLETE THE PROJECT.
- SCREENED TOPSOIL SHALL BE DISTRIBUTED WITH A MINIMUM DEPTH OF FOUR (4) INCHES TO ALL GRADED AREAS (NOT INCLUDING BUILDING, PAVED, SYNTHETIC TURF, PVIOUS PAVEMENT, ETC.) AND / OR AS DIRECTED BY THE OWNER OR OWNER'S REPRESENTATIVE. GROUND SHALL BE SCARIFIED BEFORE PLACING TOPSOIL. AREAS WHERE SCREENED TOPSOIL IS DISTRIBUTED SHALL BE STABILIZED WITH TEMPORARY AND/OR PERMANENT VEGETATION (SEASON DEPENDENT) OR TEMPORARY MULCH WITHIN FOURTEEN (14) CALENDAR DAYS OF DISTRIBUTION.

PLANTING NOTES:

- CONTRACTOR IS RESPONSIBLE FOR INSPECTION OF EXISTING CONDITIONS, INCLUDING UTILITIES, AND PROMPTLY REPORTING ANY DISCREPANCIES OR CONFLICTS WITH PLANTING AREAS. REPORT INFORMATION TO OWNER, OWNER'S REPRESENTATIVE AND LANDSCAPE ARCHITECT.
- CONTRACTOR SHALL FIELD LOCATE ALL UTILITIES. CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGE AND MAKE REPAIRS THAT MAY OCCUR TO EXISTING UTILITIES IN ACCORDANCE WITH NATIONAL, STATE AND LOCAL CODES.
- LANDSCAPE PLANTING AND / OR MULCHED AREAS TO BE FINE GRADED, HAND RAKED SMOOTH AND FREE OF DEBRIS.
- CONTRACTOR TO PERFORM SOIL TESTS AS NECESSARY TO ASSURE PLANT HEALTH AND GROWTH.
- MULCH ALL PLANTING BEDS TO A MIN. 3" DEPTH WITH MULCH SPECIFIED IN PLANT SCHEDULE.
- CONTRACTOR VERIFIES THAT ALL PLANT MATERIAL IS DETERMINED AVAILABLE AS SPECIFIED WHEN BID / PROPOSAL IS SUBMITTED.
- PLANT SCHEDULE WAS PREPARED FOR ESTIMATING PURPOSES ONLY. CONTRACTOR SHALL MAKE OWN QUANTITY TAKEOFFS USING DRAWINGS TO DETERMINE QUANTITIES TO HIS SATISFACTION, REPORTING PROMPTLY ANY DISCREPANCIES WHICH MAY AFFECT BIDDING.
- GALLON SIZES ARE FOR PRICING PURPOSES ONLY. PLANT MUST MEET HEIGHTS AND WIDTHS SPECIFIED IN PLANT SCHEDULE.
- ROOT TYPE MAY BE FREELY SUBSTITUTED IN CASE OF BALLED AND BURLAPPED OR CONTAINER GROWN, OTHER SPECIFICATIONS REMAINING UNCHANGED, EXCEPT IN THE CASE OF CONTAINER GROWN SPECIMEN TREES AS INDICATED IN THE TREE PLANTING SCHEDULE.
- ANY SIGNIFICANT ROOTS ENCOUNTERED 2" DIA. AND LARGER SHALL BE DUG OUT BY HAND AND CLEANLY CUT BACK IN THE FOOTING / FOUNDATION AREA TO PROMOTE ROOT RE-GROWTH AND HELP PREVENT ROOT DIEBACK.
- ALL PLANT MATERIAL (EXCEPT SEASONAL COLOR) SHALL BE GUARANTEED AND REPLACED AS NECESSARY BY THE CONTRACTOR FOR ONE YEAR.
- ALL SEASONAL COLOR SHALL BE GUARANTEED AND REPLACED AS NECESSARY BY THE CONTRACTOR FOR THREE MONTH TIME FRAMES.

TURF AND GRASSING NOTES:

- GRASS SEED: PROVIDE FRESH, CLEAN, NEW-CROP SEED COMPLYING WITH TOLERANCE FOR PURITY AND GERMINATION ESTABLISHED BY OFFICIAL SEED ANALYSIS OF NORTH AMERICA. PROVIDE SEED MIXTURE COMPOSED OF GRASS SPECIES, PROPORTIONS AND MINIMUM PERCENTAGES OF PURITY, GERMINATION, AND MAXIMUM PERCENTAGE OF WEED SEED, AS SPECIFIED SEED MANUFACTURER.
- SOD SHALL BE STRONGLY ROOTED AND FREE OF PERNICIOUS WEEDS. ALL NETTING SHALL BE REMOVED FROM SOD BEFORE IT IS LAID.
- ALL AREAS IN WHICH EARTHWORK SHALL BE SUSPENDED FOR MORE THAN TWO (2) WEEKS SHALL BE GRASSED WITH TEMPORARY GRASS.
- AFTER TOPSOIL HAS BEEN INSTALLED, AND BEFORE ANY SOD IS LAID, CORRECT ALL SOFT SPOTS AND IRREGULARITIES IN GRADE. THE SOD SHALL BE LAID BY BUTTING THE ENDS AND SIDES UP EVENLY AND STAGGERING THE ROLLS OF SOD. CONTRACTOR SHALL NOT OVERLAP SOD. AS SOON AS THE SOD IS LAID OR AS IT IS BEING LAID ROLL OVER WITH A LIGHT ROLLER, MAKING CERTAIN THAT ALL OF THE SOD IS IN CONTACT WITH THE SOIL. THE COMPLETED SODDED AREAS SHALL BE TRUE TO FINISH GRADE, EVEN AND FIRM AT ALL POINTS.
- SEED SHALL BE AT A RATE OF 10 POUNDS PER ACRE.
- THIRTY DAYS AFTER LAST SEEDING/SODDING OPERATION, APPLY 1 POUND OF TYPE A NITROGEN FERTILIZER PER ACRE OF LAWN AREAS AND IMMEDIATELY WATER.
- UPON COMPLETION OF PLANTINGS ALL EXCESS SOIL, STONES AND DEBRIS WHICH HAS NOT PREVIOUSLY BEEN CLEANED UP SHALL BE REMOVED FROM THE SITE AND DISPOSED OF AS DIRECTED BY THE OWNER'S REPRESENTATIVE.
- ALL LAWN AREAS THAT DO NOT SHOW SATISFACTORY GROWTH WITHIN (18) DAYS AFTER PLANTING SHALL BE RE-PLANTED AND RE-FERTILIZED AS SPECIFIED UNTIL A SATISFACTORY LAWN IS ESTABLISHED. THE LAWN SHALL BE CONSIDERED ESTABLISHED WHEN ITS REASONABLY FREE FROM WEED, GREEN IN APPEARANCE AND THE SPECIFIED GRASS IS VIGOROUS AND GROWING WELL ON EACH SQ. FT. OF LAWN AREA.
- LAWN SHALL BE PROTECTED AND MAINTAINED BY WATERING, MOWING, AND REPLANTING, OVERSEEING, AS NECESSARY FOR AS LONG AS IS NECESSARY TO ESTABLISH A UNIFORM STAND. SCATTERED BARE SPOTS, NONE OF WHICH IS LARGER THAN ONE SQ. FT., WILL BE ALLOWED UP TO MAXIMUM OF THREE PERCENT OF ANY LAWN AREA. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO REPAIR ANY EROSIONAL DAMAGE TO THE LAWN AREA. FULL COVERAGE IS REQUIRED IN SIXTY DAYS.
- MAINTENANCE OF GRASSED AREAS SHALL CONSIST OF MOWING, WATERING AND FERTILIZING. ALL GRASSED AREAS SHALL BE MAINTAINED AT A HEIGHT NOT TO EXCEED 6" ABOVE FINISHED GRADE.
- IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO MAINTAIN ALL GRASSED AREAS UNTIL ACCEPTANCE BY OWNER AT END OF PROJECT. LAWN MAINTENANCE SHALL OCCUR AT A MINIMUM OF ONCE PER SEVEN CALENDAR DAYS.
- FINAL SEEDING AND SOD AREAS / SQUARE FOOTAGES TO BE PAINTED IN FIELD AND APPROVED AND ADJUSTED IN FIELD BY OWNER'S REPRESENTATIVE PRIOR TO INSTALLATION.
- SEEDING SHALL TAKE PLACE IMMEDIATELY AFTER FINE GRADING. MAINTAIN SEEDED LAWN UNTIL COMPLETION AND ACCEPTANCE OF ENTIRE PROJECT.
- SEEDING BED SHALL HAVE TOPSOIL LOOSEN TO A DEPTH OF 4". REMOVE STONE OVER 1" IN ANY DIMENSION, ROOTS, RUBBISH, AND EXTRANEOUS MATTER.

IRRIGATION NOTES:

- CONTRACTOR TO SUPPLY AUTOMATIC IRRIGATION SYSTEM, COMPLETE AND INSTALLED. SYSTEM TO INCLUDE ALL VALVES, PIPES, HEADS, FITTINGS, BACK FLOW CONTROLLER, AND IRRIGATION METER AND TO PROVIDE 100% COVERAGE FOR ALL NEW PLANTINGS. DRIP IRRIGATION TO BE USED FOR ALL PLANTINGS, EXCEPT LAWNS.
- FINAL SEEDING AND SOD AREAS / SQUARE FOOTAGES TO BE PAINTED IN FIELD AND APPROVED AND ADJUSTED IN FIELD BY OWNER'S REPRESENTATIVE PRIOR TO INSTALLATION.
- SEEDING SHALL TAKE PLACE IMMEDIATELY AFTER FINE GRADING. MAINTAIN SEEDED LAWN UNTIL COMPLETION AND ACCEPTANCE OF ENTIRE PROJECT.
- SEEDING BED SHALL HAVE TOPSOIL LOOSEN TO A DEPTH OF 4". REMOVE STONE OVER 1" IN ANY DIMENSION, ROOTS, RUBBISH, AND EXTRANEOUS MATTER.

SHEET INDEX

- CS - COVER SHEET
L10 - SITE PLAN - EXISTING CONDITIONS
L100 - SITE PLAN - PROPOSED CONDITIONS
L500 - PLANTING PLAN + EXHIBITS

ISSUED:
MAY 28, 2025

PROJECT TEAM

LANDSCAPE ARCHITECT

WITMER JONES KEEFER
BLUFFTON, SC
(843) 757.7411

ARCHITECTURE

ALL ARCHITECTURAL
INFORMATION WAS TAKEN FROM
DIGITAL FILES PROVIDED BY:

PEARCE SCOTT ARCHITECTS
BLUFFTON, SC.
(843) 837.5700

SURVEYING

ALL TOPOGRAPHY, EXISTING TREES, SITE
BOUNDARY, SITE SURVEY DATA, ETC. WERE TAKEN
FROM DIGITAL FILES PROVIDED BY:

T SQUARE SURVEYING
BLUFFTON, SC.
(843) 757.2650

SITE DEVELOPMENT PLANS
FOR
89 BRIDGE STREET
NEIGHBORHOOD CONSERVATION - HD
BLUFFTON, SOUTH CAROLINA

DATE:	MAY 28, 2025
PROJECT NO.:	XXXXXX
DRAWN BY:	JM/EB
CHECKED BY:	DK



REVISIONS:

DRAWING TITLE
COVER SHEET AND
PROJECT NOTES

DRAWING NUMBER

CS




©2023 WJK LTD.
DESIGN - CONCEPTS, DRAWING, SHEETS,
LOGOS, SPECIFICATIONS, DETAILS,
WRITTEN MATERIAL SHALL NOT BE USED
OR REPRODUCED IN WHOLE OR IN PART
IN ANY FORM WITHOUT PRIOR WRITTEN
CONSENT OF WJK LTD.
THIS SHEET TO SCALE AT: 24"x36"

****CAUTION****

3 DAYS BEFORE DIGGING
CALL TOLL FREE
1-888-721-7877

A ONE-CALL SYSTEM FOR COMMUNITY AND JOB SAFETY

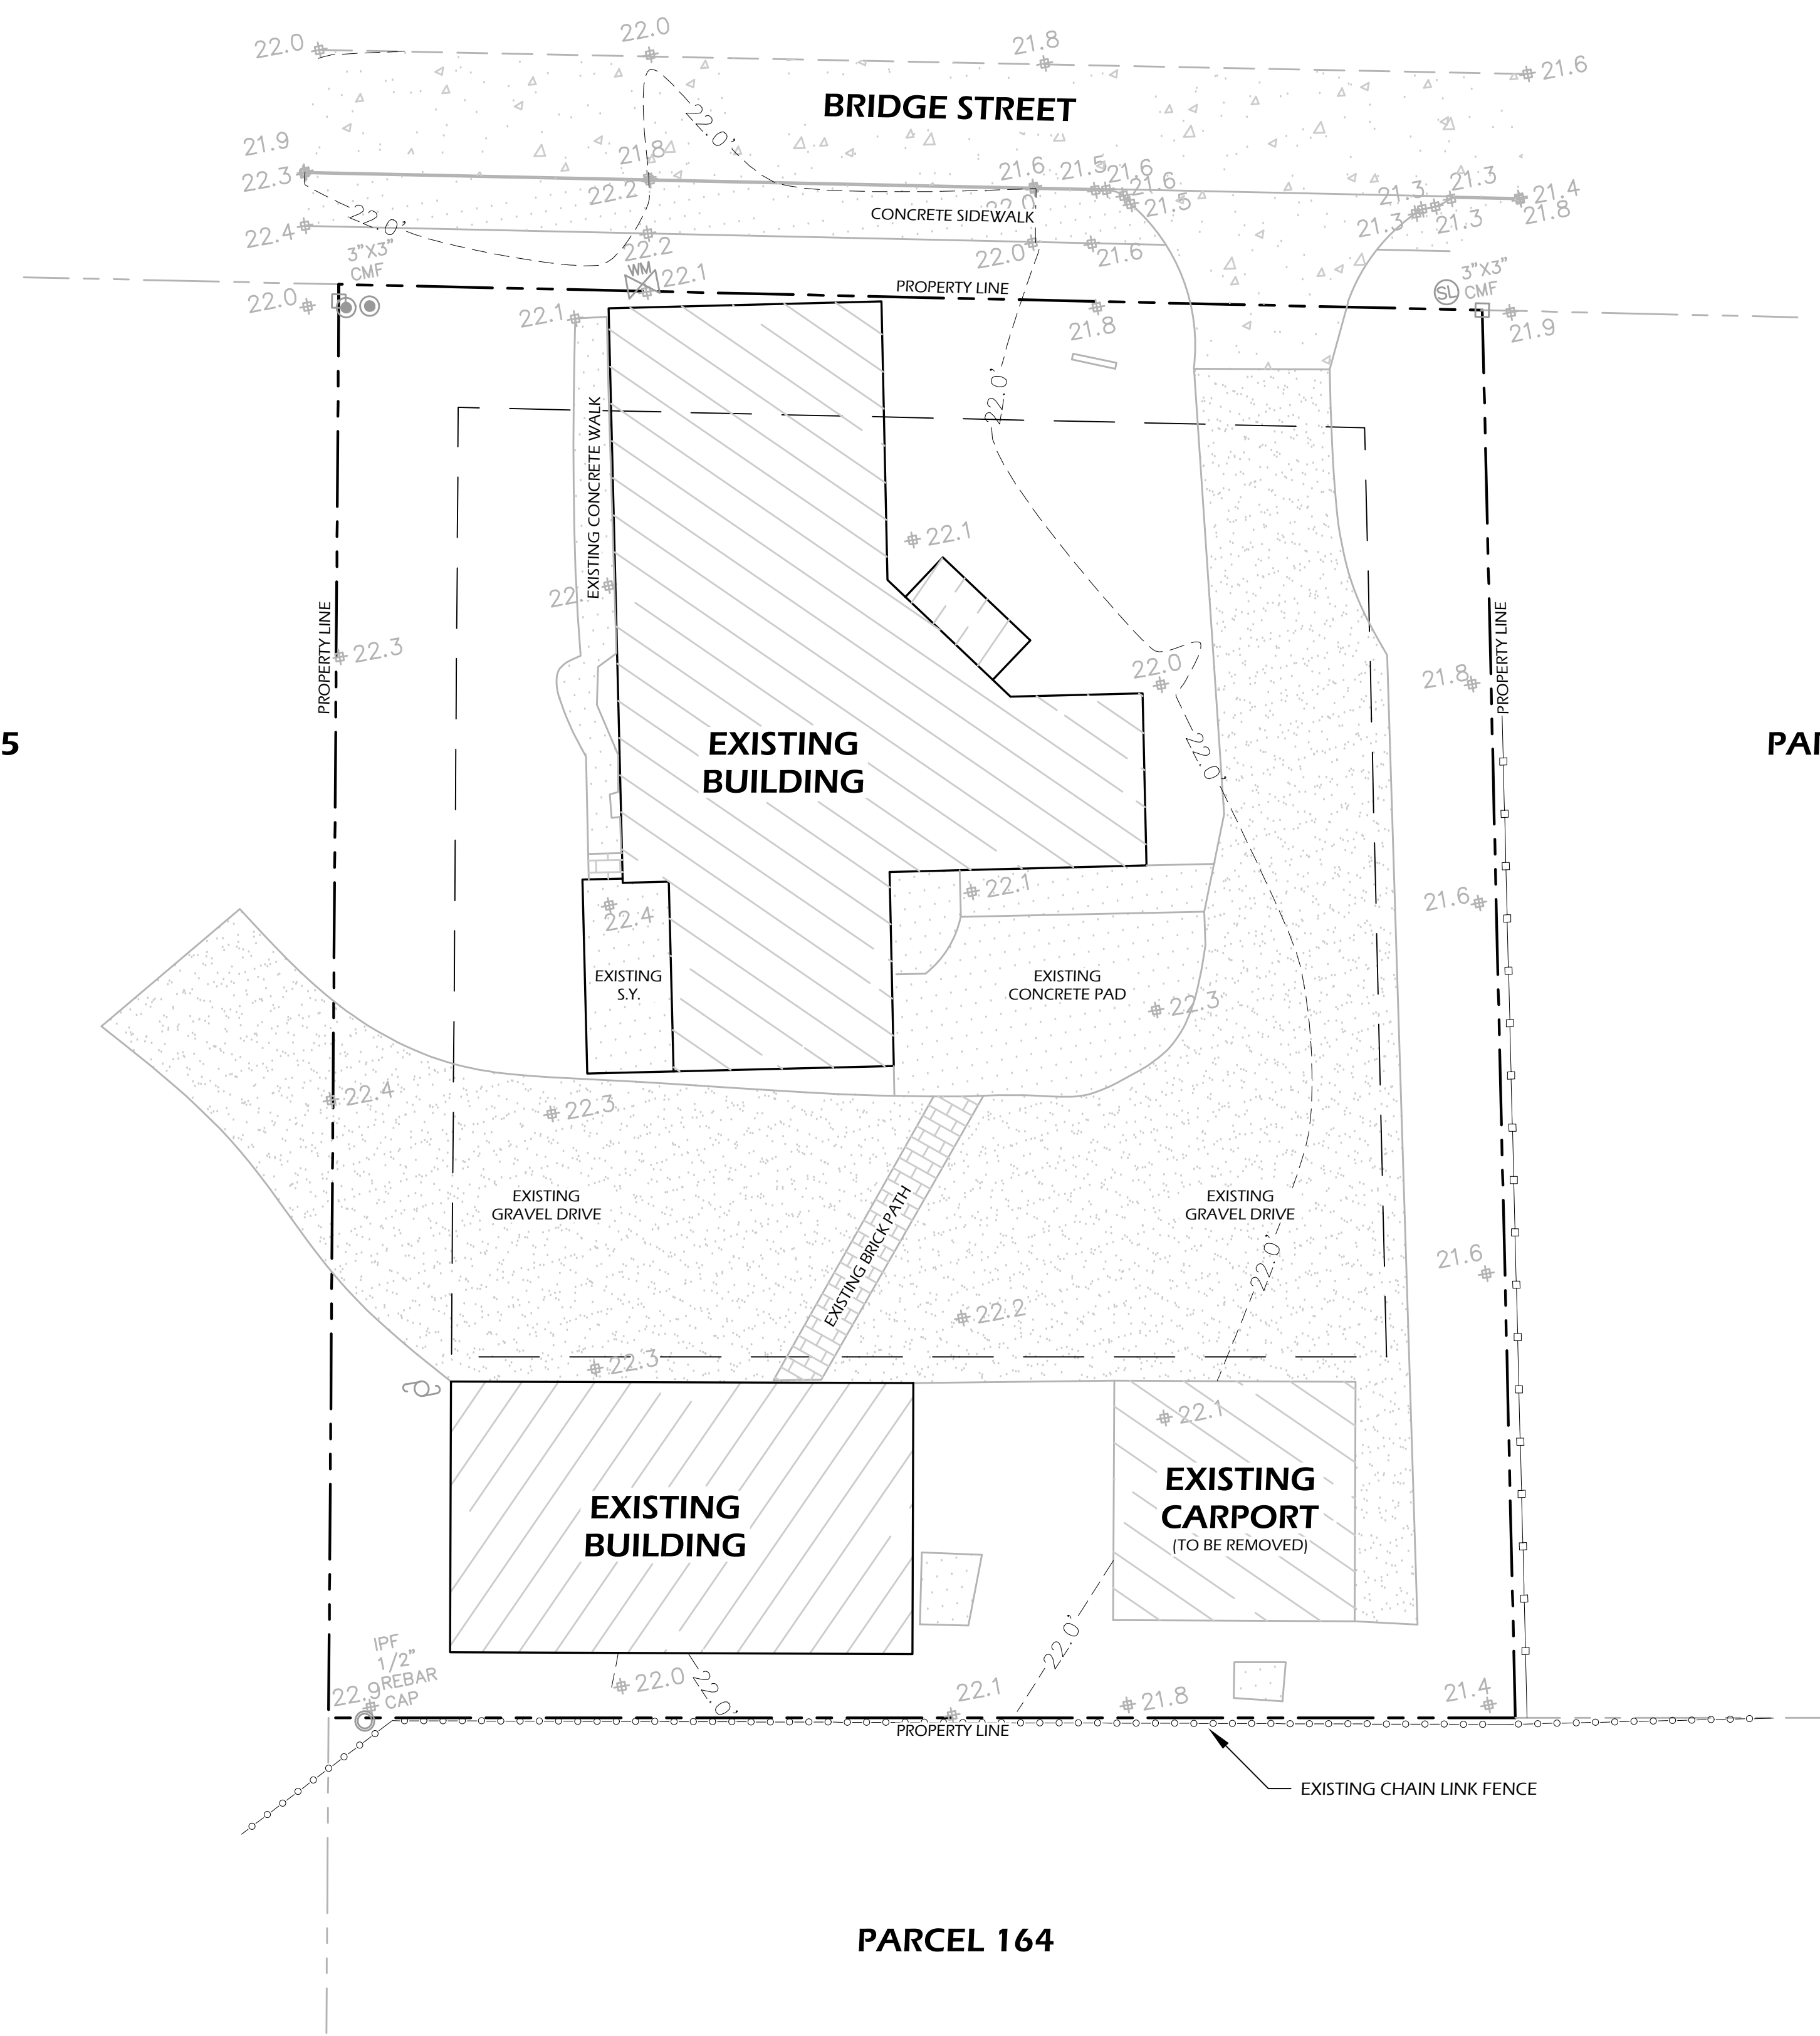

EXISTING SITE COVERAGE TABLE	
	ACTUAL COVERAGE (SF)
TOTAL IMPERVIOUS	7,025 S.F.
TOTAL SITE AREA	11,431 S.F.
% SITE COVERAGE	61.46%



Wimmer Jones Keefer
landscape architecture
land planning
www.wjkltd.com

©2023 WJK LTD.
DESIGN, CONCEPTS, DRAWING, SHEETS, LOGOS, SPECIFICATIONS, DETAILS, WRITTEN MATERIAL SHALL NOT BE USED OR REPRODUCED IN WHOLE OR IN PART IN ANY FORM WITHOUT PRIOR WRITTEN CONSENT OF WJK LTD.
THIS SHEET TO SCALE AT: 24"x36"

SITE DEVELOPMENT PLANS
FOR

89 BRIDGE STREET

NEIGHBORHOOD CONSERVATION - HD

BLUFFTON, SOUTH CAROLINA


DATE:	MAY 28, 2025
PROJECT NO.:	XXXXXX
DRAWN BY:	JM/EB
CHECKED BY:	DK




REVISIONS:

DRAWING TITLE
SITE PLAN -
EXISTING CONDITIONS

DRAWING NUMBER
L10

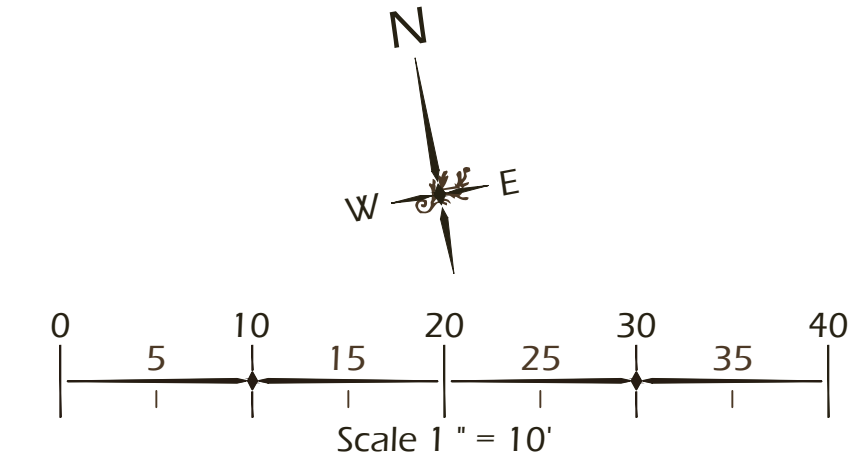

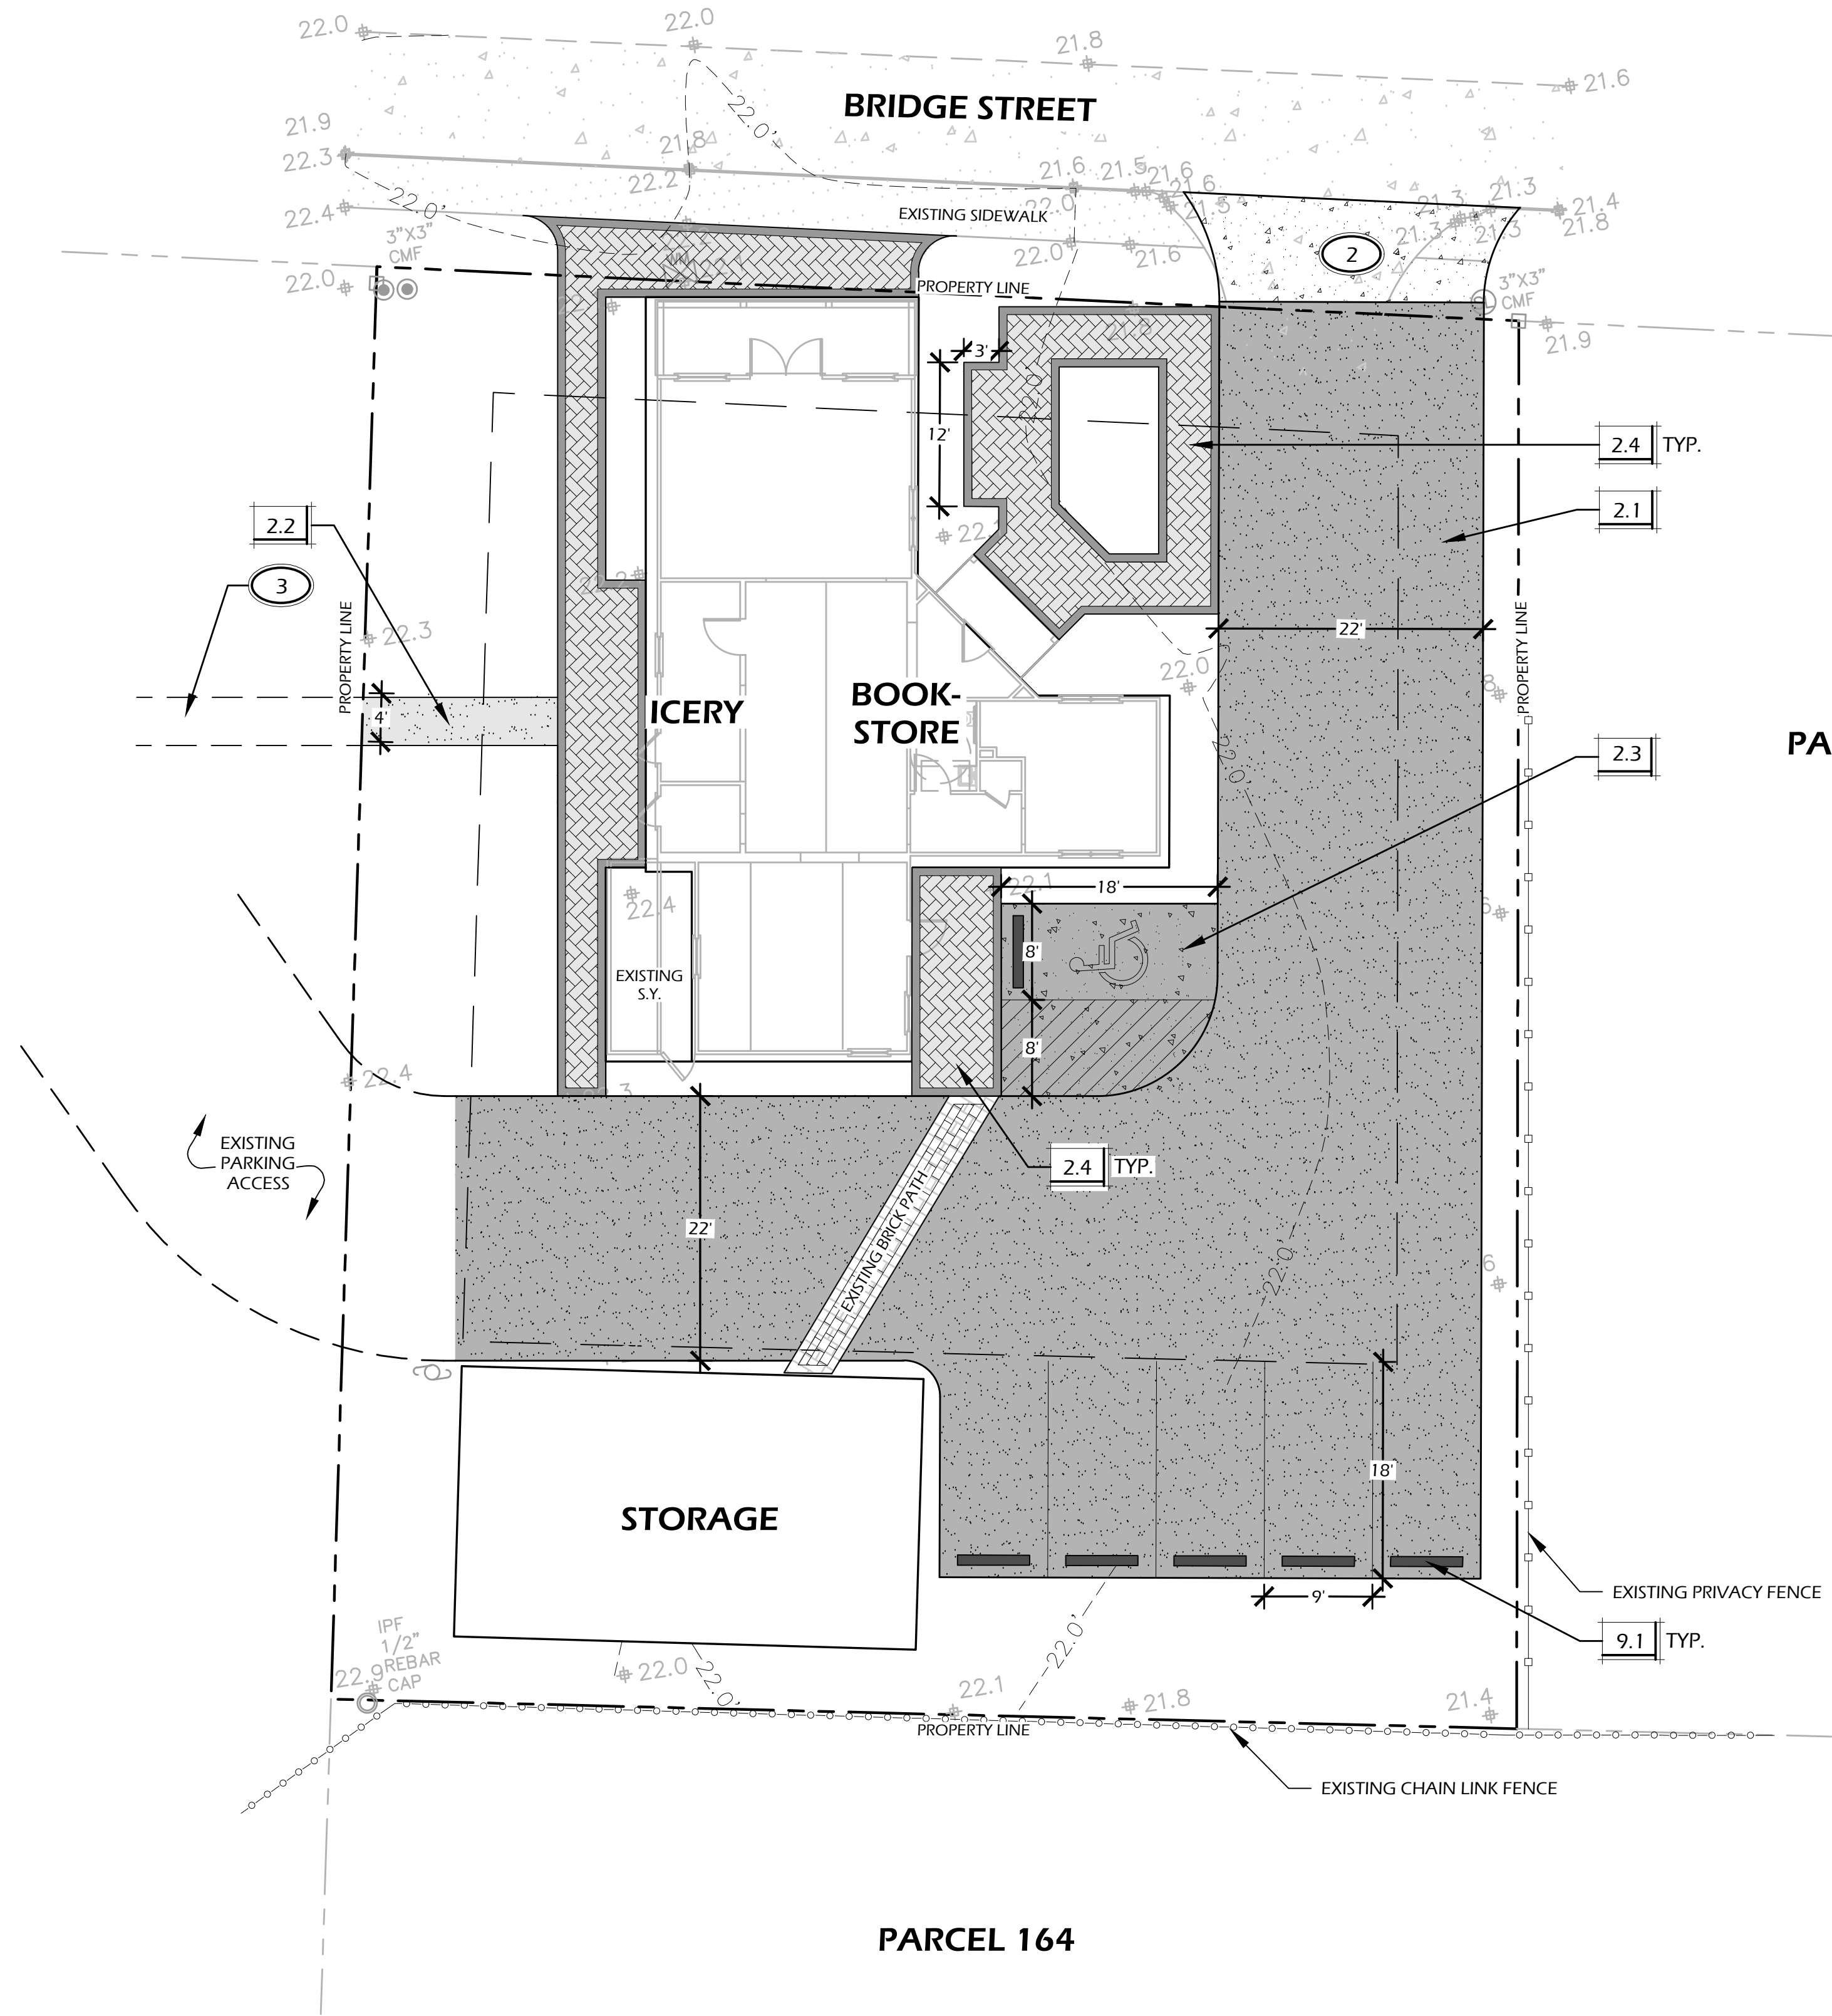

EXISTING SITE COVERAGE TABLE	
	ACTUAL COVERAGE (SF)
TOTAL IMPERVIOUS	7,583 S.F.
TOTAL SITE AREA	11,431 S.F.
% SITE COVERAGE	66.34%
TOTAL INCREASE IN IMPERVIOUS AREA	558 S.F. (4.88%)

REQUIRED PARKING			
DESCRIPTION	S.F.	REQUIREMENTS	PARKING SPACES
RETAIL (BOOKSTORE)	±1,660	02 SPACES/1,000 S.F.	03
CARRY-OUT (ICERY)	±109	02 SPACES/1,000 S.F.	01
TOTAL REQUIRED SPACES			04


PARKING SUMMARY	
DESCRIPTION	PARKING SPACES
CAR	05
ACCESSIBLE CAR / VAN	01
TOTAL PROPOSED SPACES	06
TOTAL EXISTING SPACES	00
TOTAL PARKING SPACES	06

PAVING SCHEDULE			
CALL-OUT	SYMB.	DESCRIPTION	DETAIL
2.1		GRAVEL DRIVE (NEW TOPCOAT)	1/L600
2.2		GRAVEL (S.E.) WALK	2/L600
2.3		TABBY CONCRETE APRON/PARKING	3/L600
2.4		PERVIOUS PAVER WALK	4/L600
NA		BORDER	NA

NOTE: MATERIAL SYMBOLS / HATCHES ARE GRAPHIC IN NATURE AND ARE NOT INTENDED TO BE TO SCALE. REFER TO SITE DETAILS AND LAYOUT PLANS FOR SIZES AND DIMENSIONS.

SITE DETAILS LEGEND		
CALL-OUT	DESCRIPTION	DETAIL
9.1	WHEEL STOP	5/L600

- KEY SHEET REFERENCE NOTES:**
- 1 A.D.A. ACCESSIBLE PARKING.
 - 2 ACCESS DRIVE APRON TO BE INSTALLED AS PART OF THE TOWN OF BLUFFTON'S BRIDGE STREET STREETScape PUBLIC PROJECT.
 - 3 CONNECT GRAVEL WALK TO ADJACENT PARKING LOT.

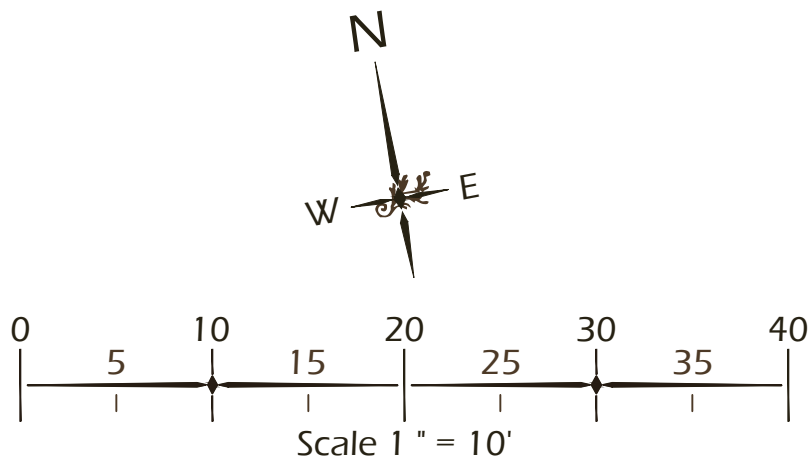

Wimer Jones-Keefer Ltd.
landscape architecture
land planning
www.wjkltd.com

289 Promenade Street, Suite 201 | Bluffton, South Carolina 29910 | ph 843.797.7411

©2023 WJK LTD.
DESIGN CONCEPTS, DRAWING, SHEETS, LOGOS, SPECIFICATIONS, DETAILS, WRITTEN MATERIAL SHALL NOT BE USED OR REPRODUCED IN WHOLE OR IN PART IN ANY FORM WITHOUT PRIOR WRITTEN CONSENT OF WJK LTD.
THIS SHEET TO SCALE AT: 24"x36"

SITE DEVELOPMENT PLANS
FOR
89 BRIDGE STREET
NEIGHBORHOOD CONSERVATION - HD
BLUFFTON, SOUTH CAROLINA


DATE: MAY 28, 2025
PROJECT NO.: XXXXX.XX
DRAWN BY: JM/EB
CHECKED BY: DK



REVISIONS:

DRAWING TITLE
SITE PLAN - PROPOSED CONDITIONS


DRAWING NUMBER
L100

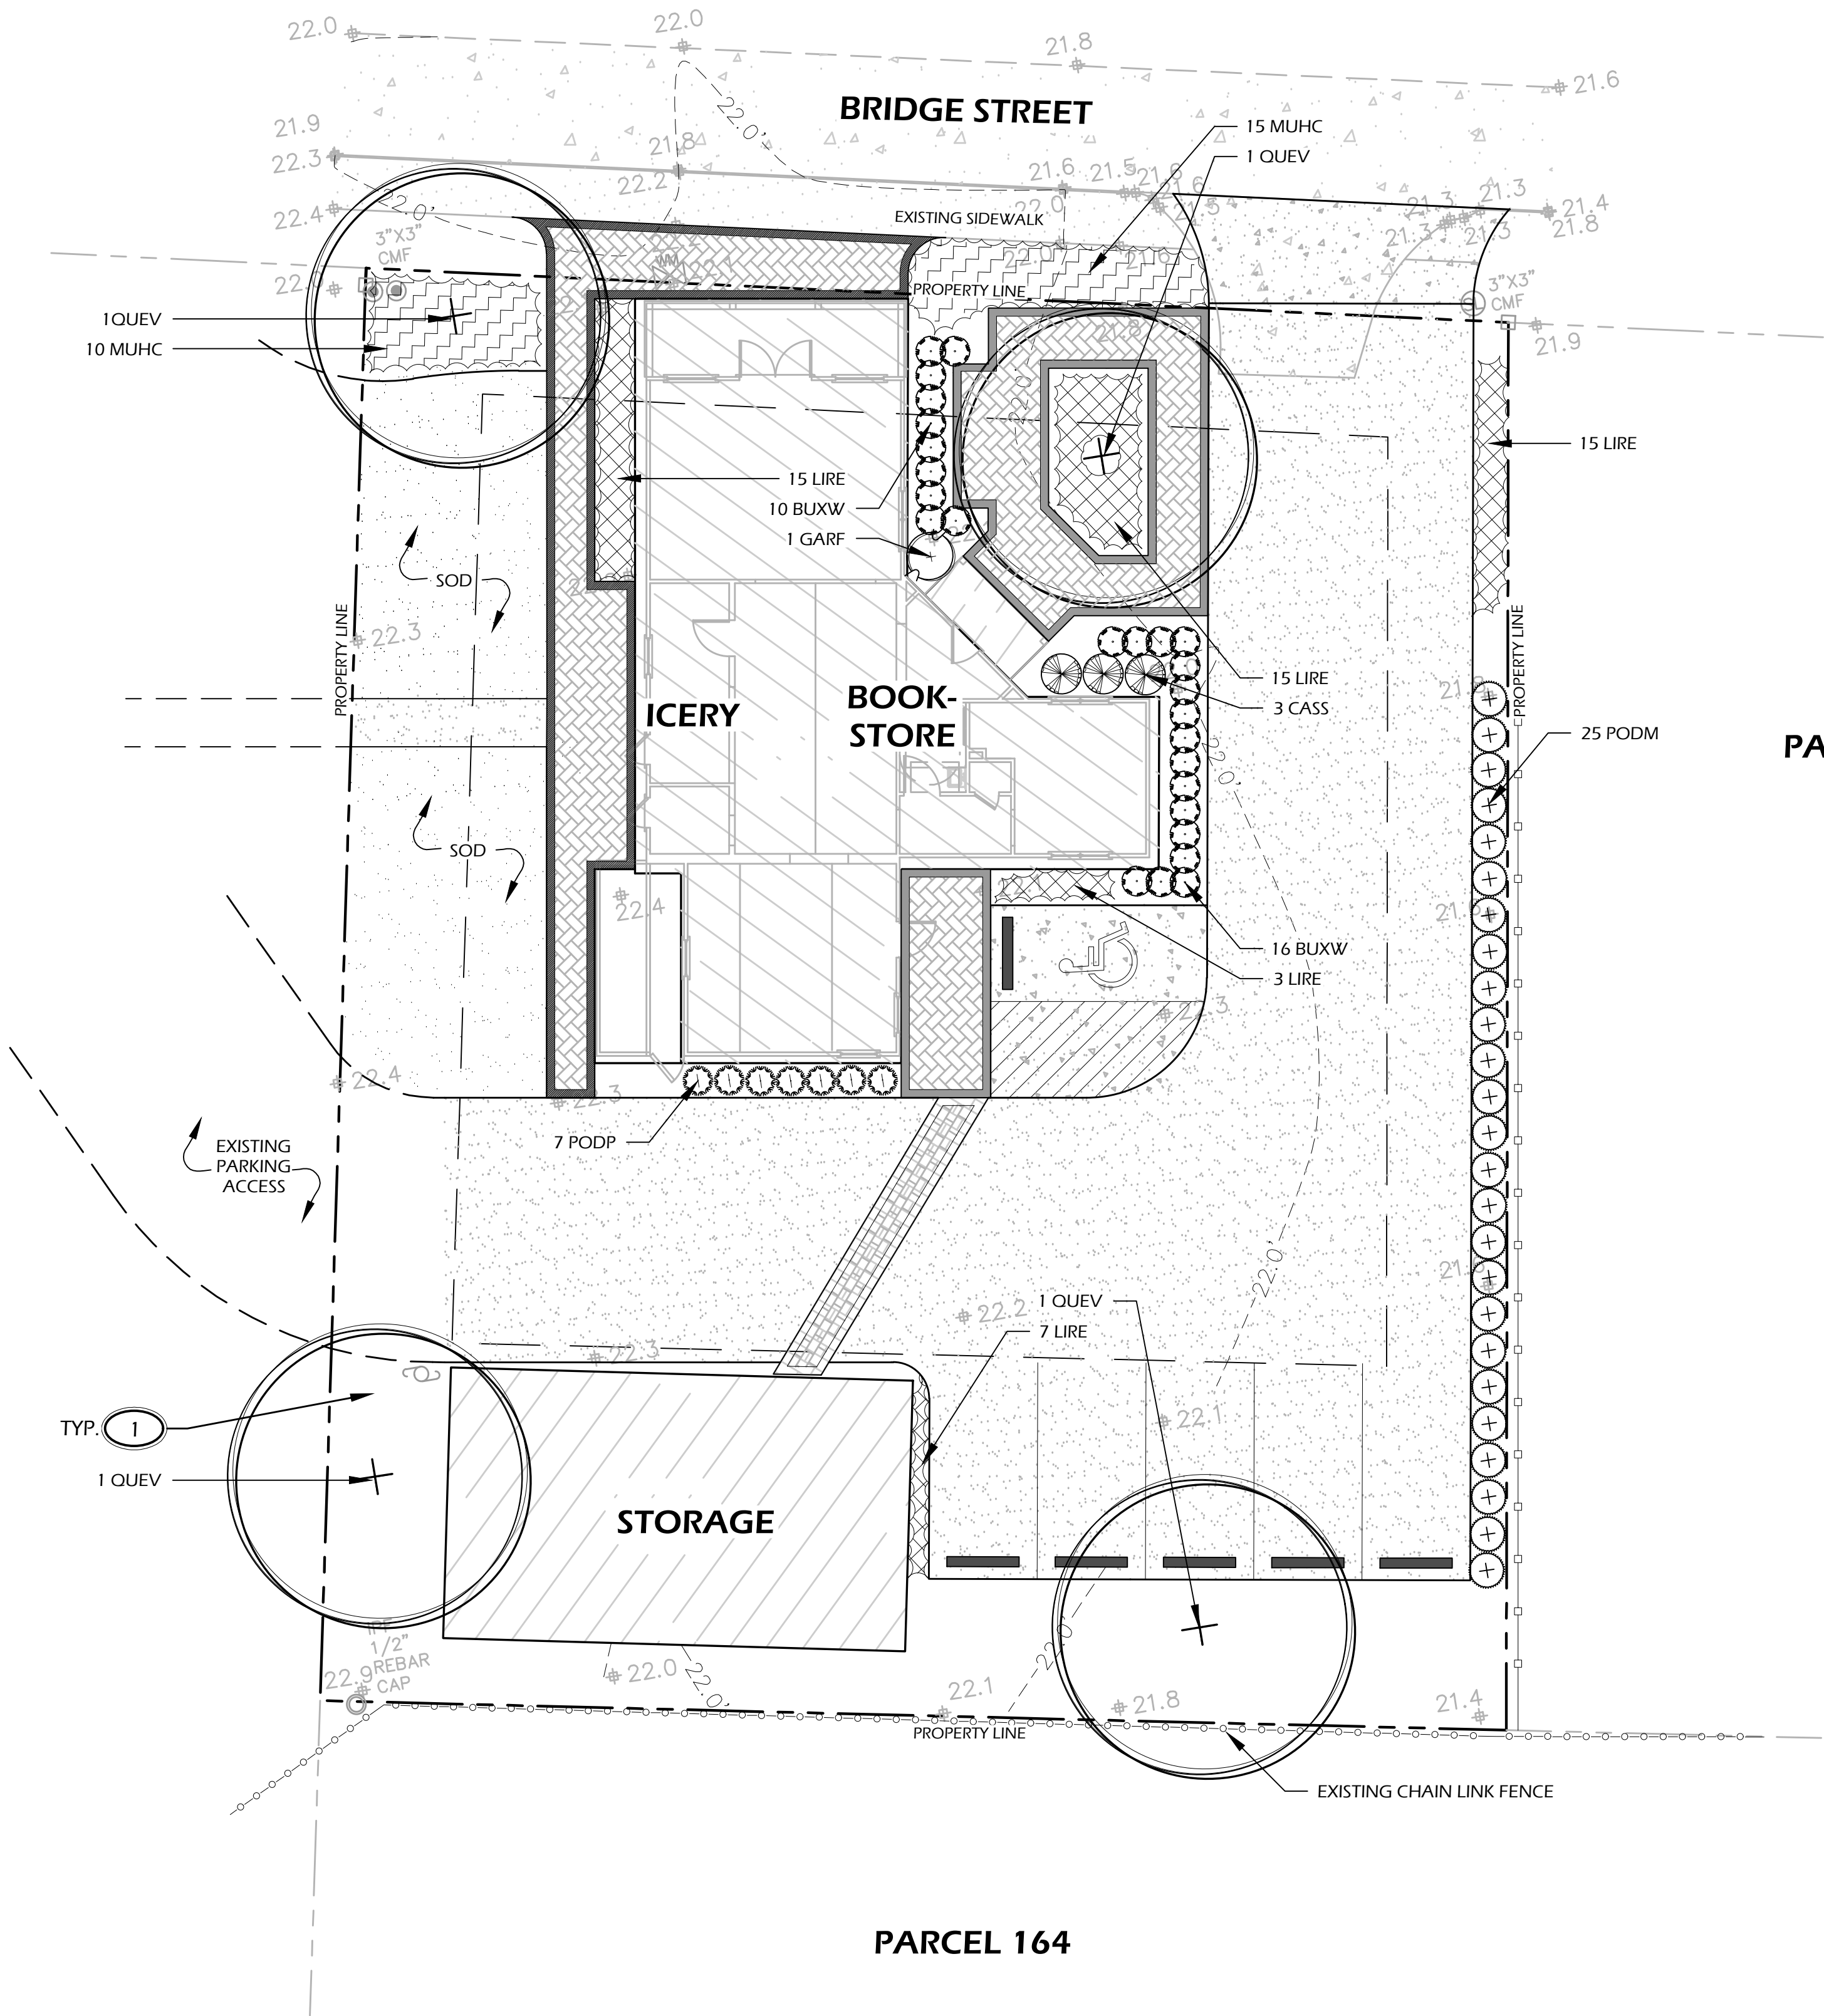

PARCEL 166


PARCEL 164

CANOPY COVERAGE EXHIBIT:

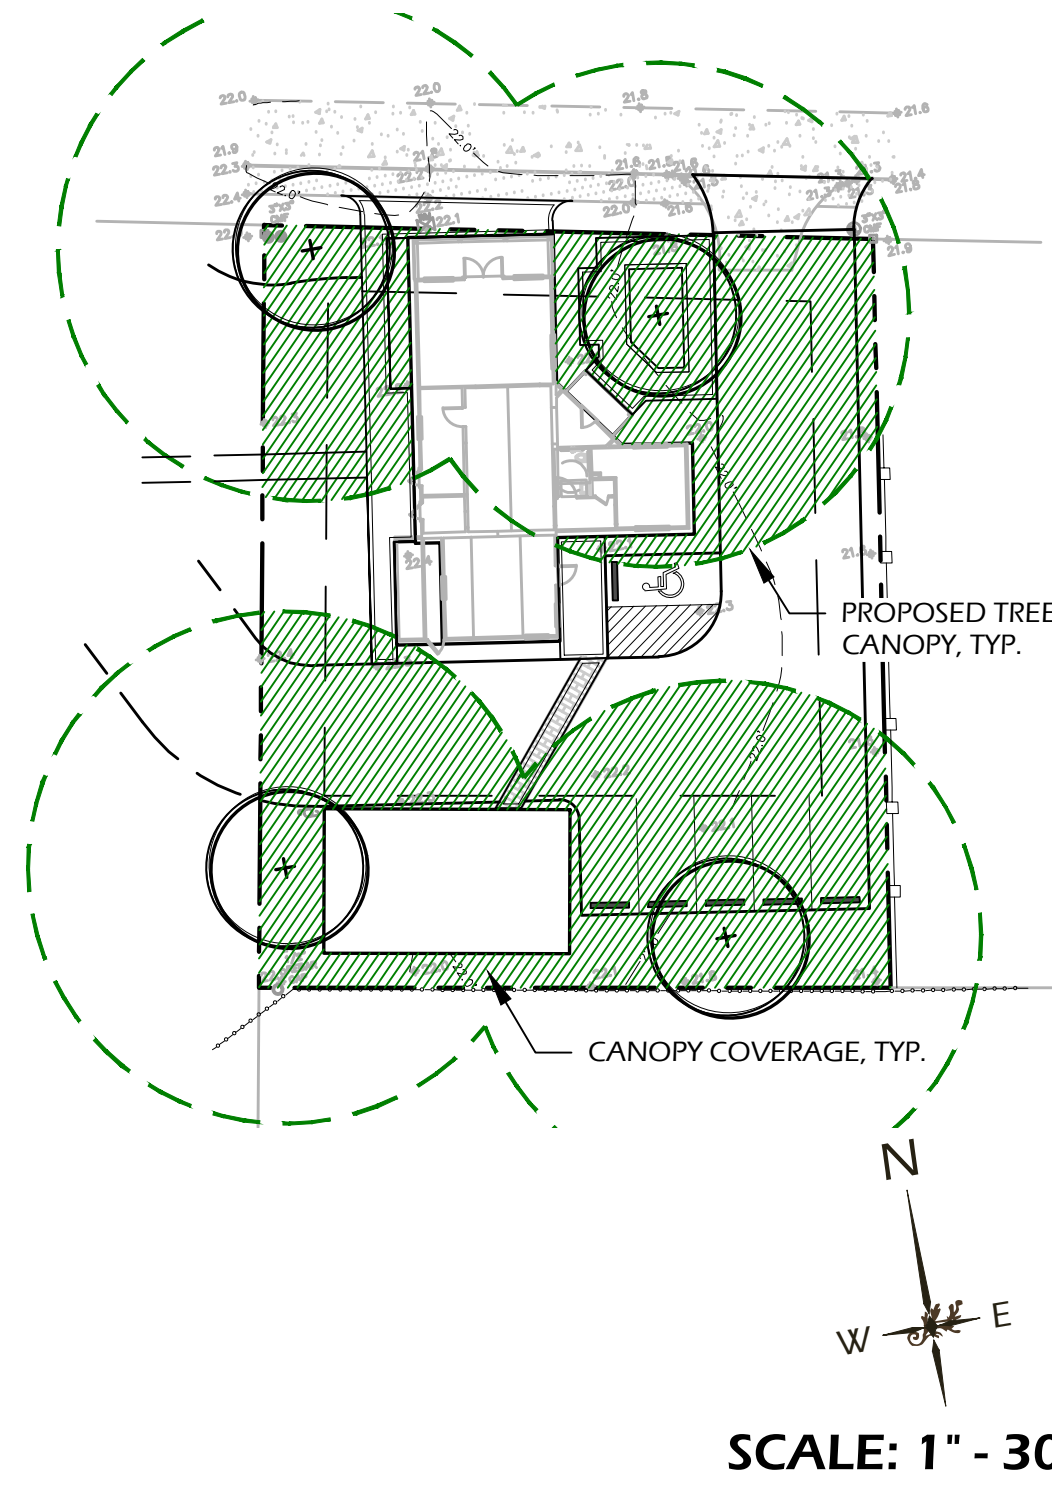

CANOPY COVERAGE TABLE	
DESCRIPTION	ACTUAL COVERAGE (SF)
TOTAL LIMIT OF WORK AREA	11,431 S.F.
BUILDING FOOTPRINT	2,743 S.F.
REMAINING SITE AREA	8,688 S.F.
MATURE CANOPY COVERAGE (EXISTING AND PROPOSED)	6,758 S.F.
% CANOPY COVERAGE (75% MIN.)	77.8%

OPEN SPACE EXHIBIT

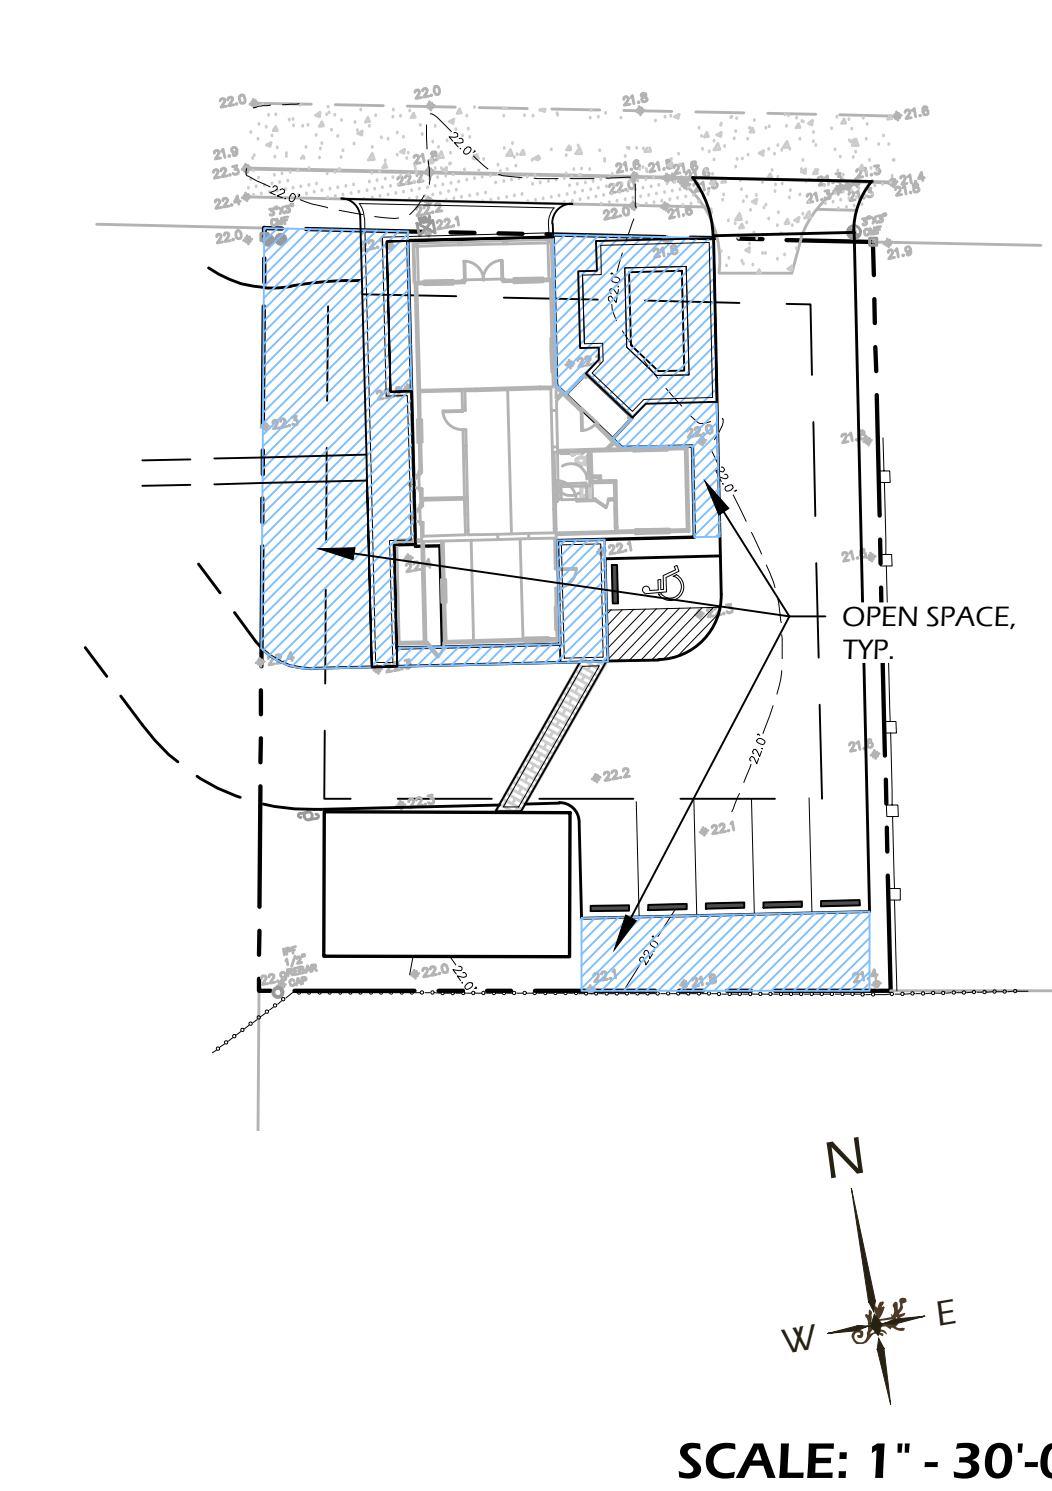


OPEN SPACE TABLE	
DESCRIPTION	ACTUAL COVERAGE (SF)
TOTAL LIMIT OF WORK AREA	11,431 S.F.
OPEN SPACE	3,068 S.F.
% OPEN SPACE (20% MIN.)	26.84%


PLANT KEY LEGEND

Abbrev	Botanical Name	Common Name
TREES		
QUEV	Quercus virginiana	Live Oak
SHRUBS		
BUXW	Buxus microphylla 'Wintergreen'	Wintergreen Boxwood
CASS	Camellia sasanqua 'Shishi Gashira'	Shishi Gashira Dwarf Camellia
GARF	Gardenia jasminoides 'Frost Proof'	Frost Proof Gardenia
PODM	Podocarpus macrophyllus	Podocarpus
PODP	Podocarpus macrophyllus 'Pringles Dwarf'	Dwarf Podocarpus
ORNAMENTAL GRASSES & FERNS		
MUHC	Muhlenbergia capillaris	Pink Muhly Grass
GROUND COVERS, VINES & PERENNIALS		
LIRE	Liriope muscari 'Evergreen Giant'	Evergreen Giant Liriope

PLANTING REFERENCE NOTES:


1 MULCH DISTURBED AREAS DUE TO CONSTRUCTION.

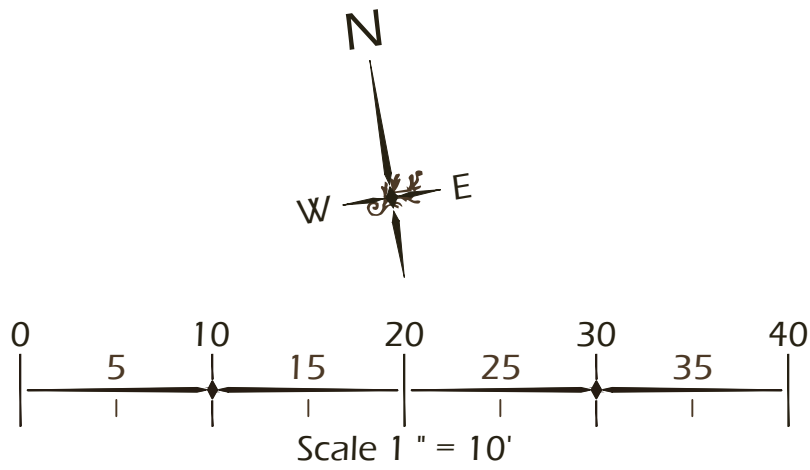

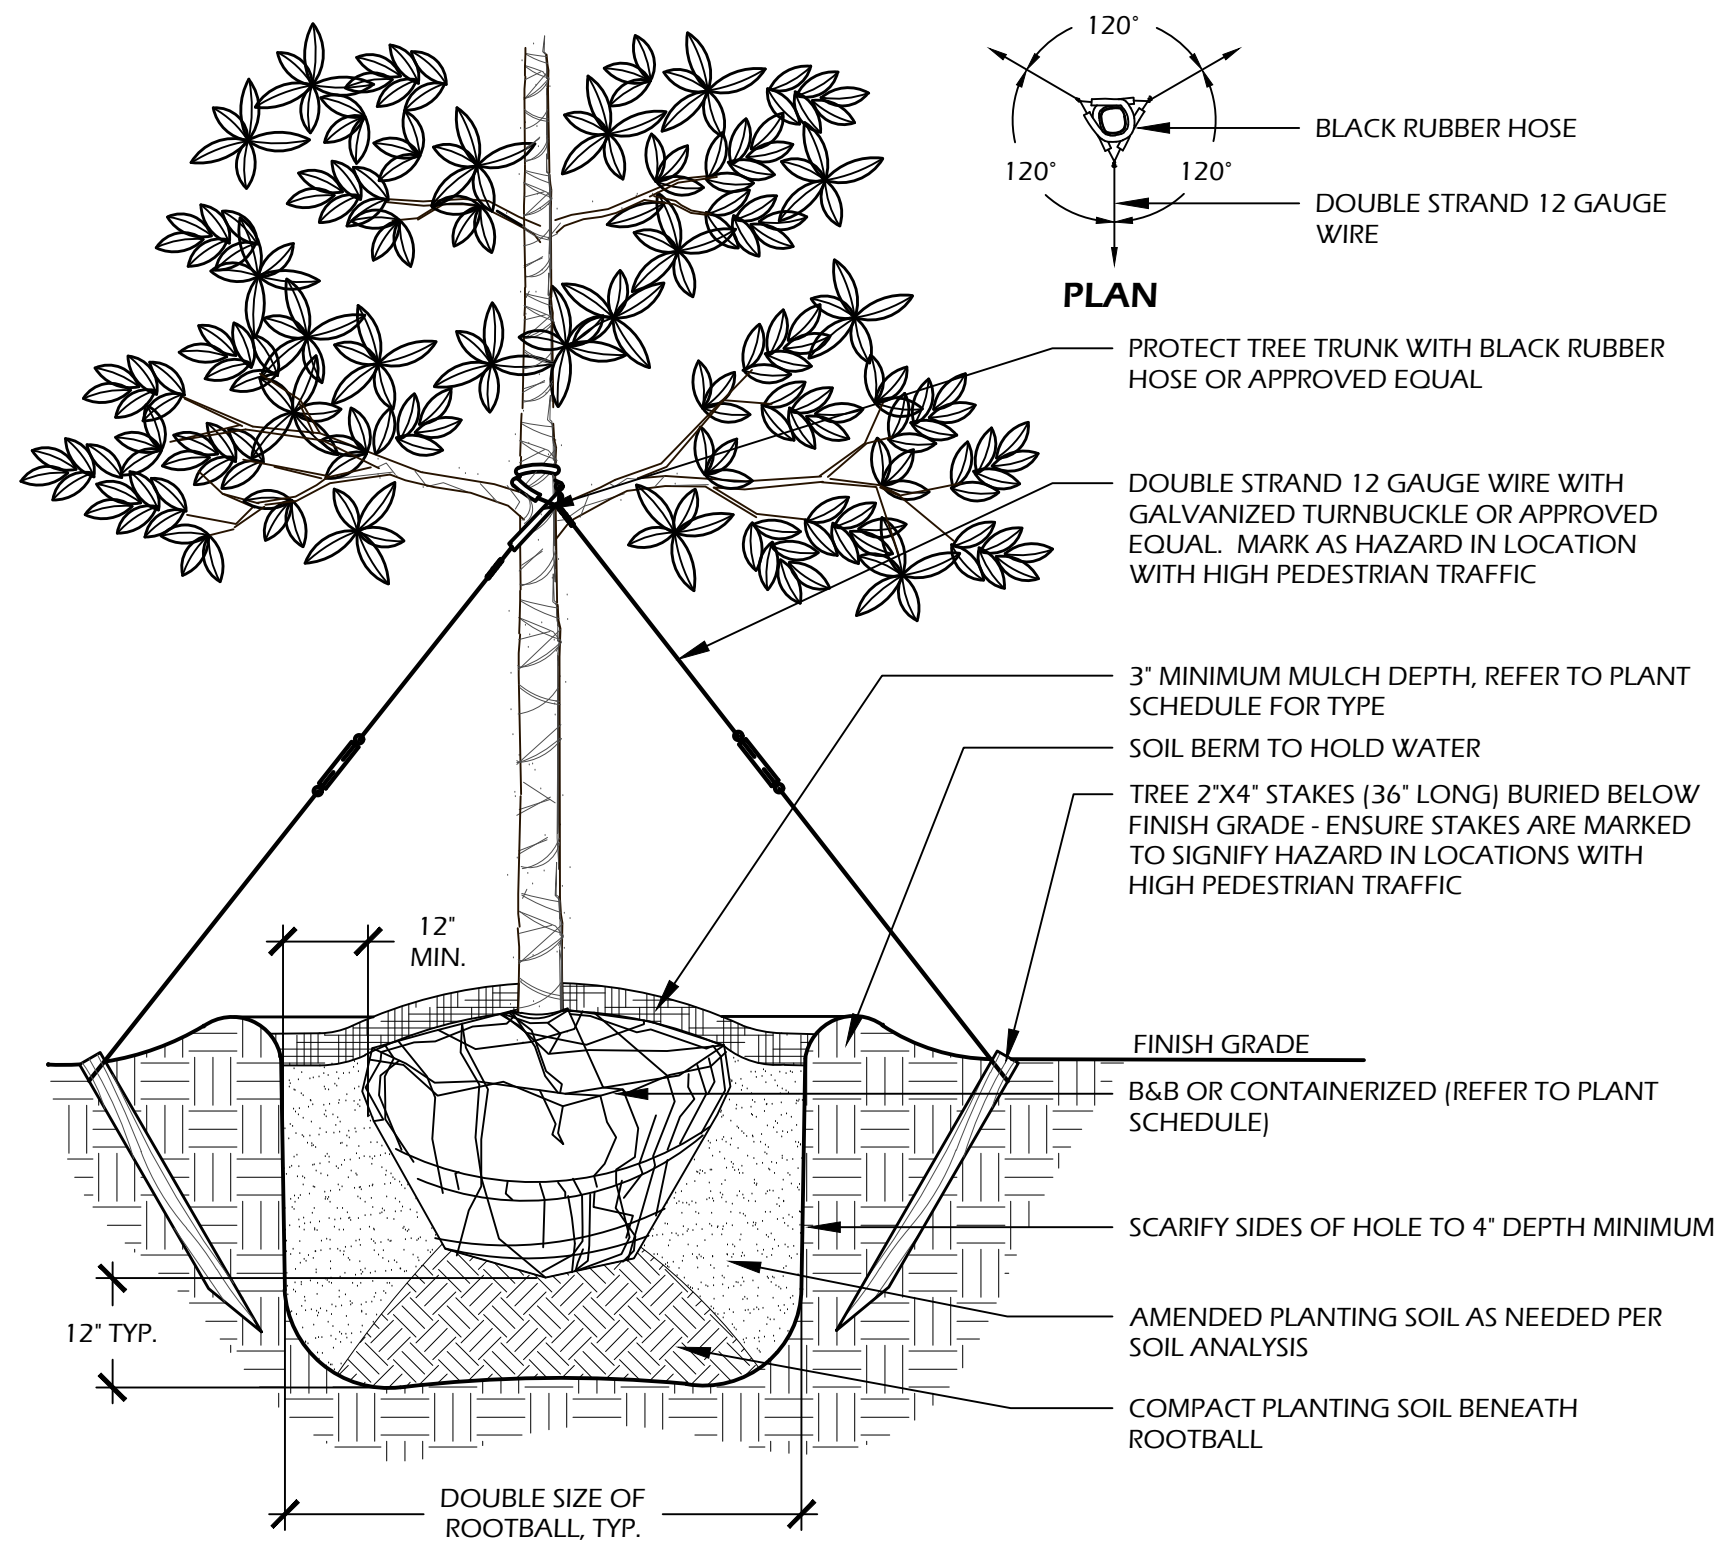


- NOTES:**
1. TREE STAKING OPTIONAL, HOWEVER, LANDSCAPE CONTRACTOR RESPONSIBLE FOR MAINTAINING TREES IN AN UPRIGHT (90 DEGREE/ PERPENDICULAR) POSITION FOR 1 YEAR AFTER PLANTING IS COMPLETE OR UNTIL TREE ROOT SYSTEM IS FULLY ESTABLISHED AND STURDY. FINAL TREE STAKING DETAILS AND PLACEMENT TO BE APPROVED BY OWNER'S REPRESENTATIVE.
 2. CONTRACTOR SHALL ASSURE PERCOLATION OF ALL PLANTING PITS PRIOR TO INSTALLATION.
 3. IN SEMI-IMPERVIOUS SOIL CONDITIONS, ROOTBALL ELEVATION SHALL BE 2" ABOVE FINISH GRADE. COORDINATE WITH OWNER'S REPRESENTATIVE PRIOR TO SETTING ROOTBALL ELEVATIONS.

1 // L501 TREE PLANTING
SCALE: N.T.S.

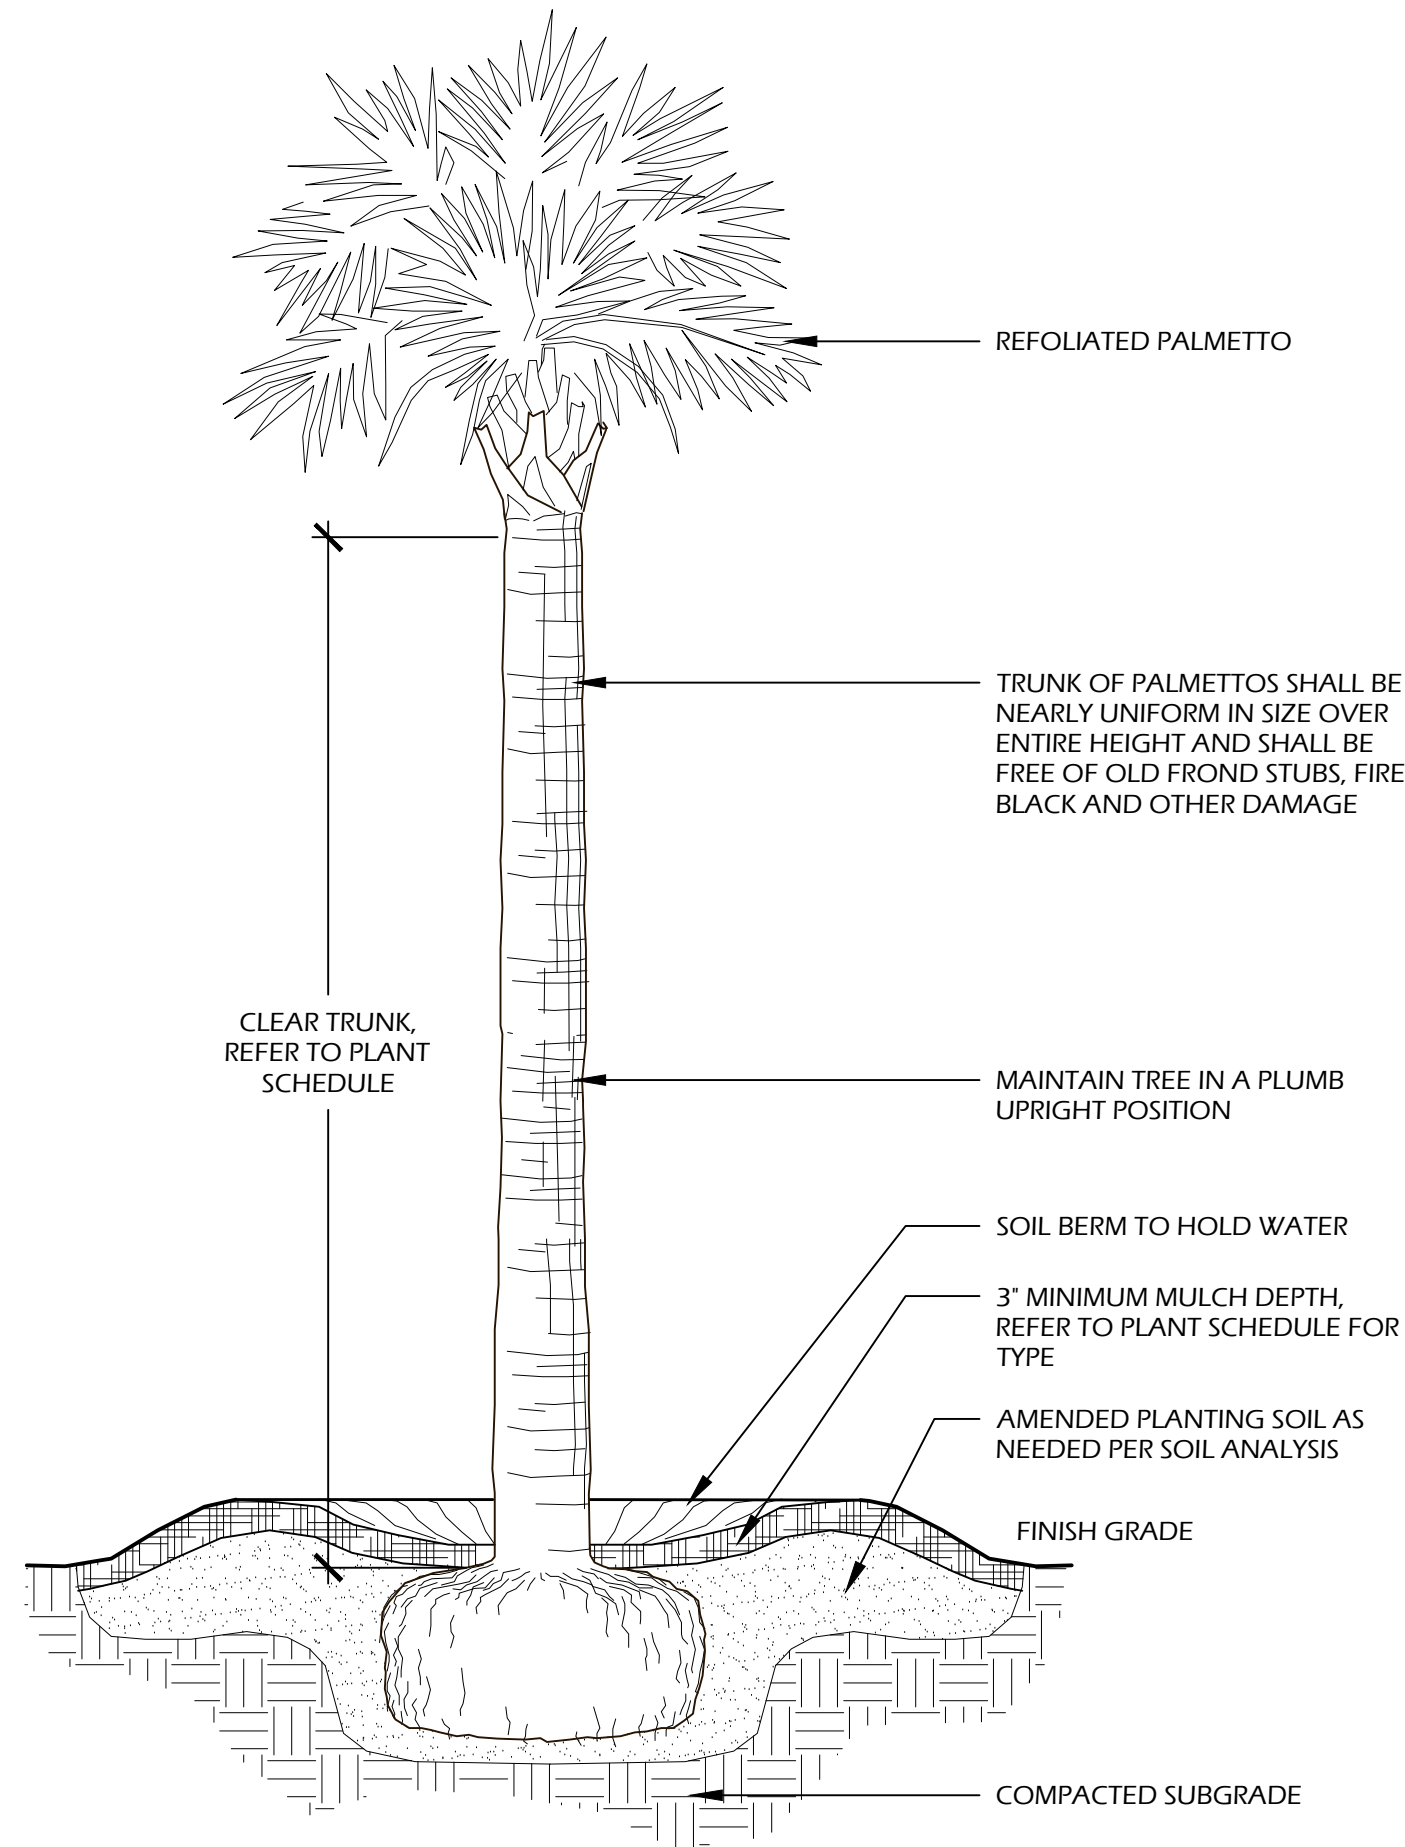


- NOTES:**
1. FINAL TREE STAKING DETAILS AND PLACEMENT TO BE APPROVED BY OWNER OR OWNER'S REPRESENTATIVE.
 2. CONTRACTOR SHALL ASSURE PERCOLATION OF ALL PLANTING PITS PRIOR TO INSTALLATION.
 3. SABAL PALMETTOS SHALL BE REFOLIATED, PROTECT CABBAGE HEAD FROM DAMAGE.

2 // L501 PALM TREE PLANTING
SCALE: N.T.S.

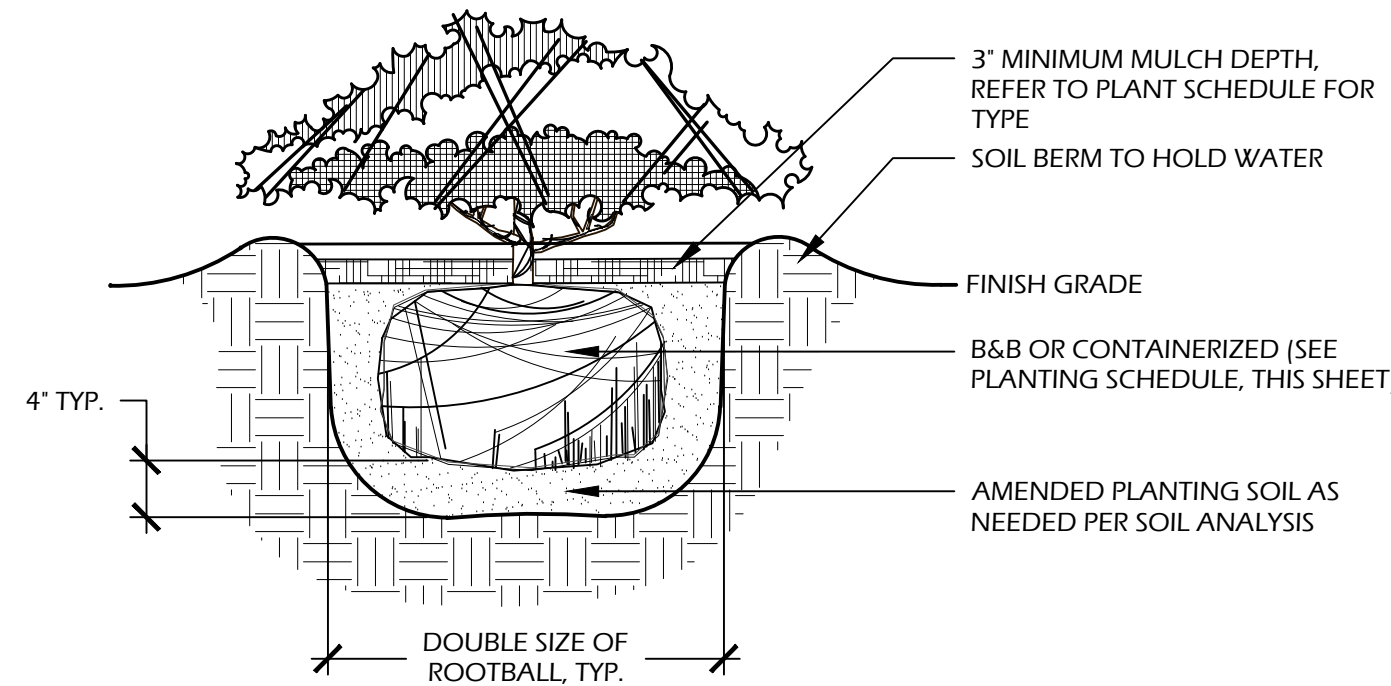

- NOTES:**
1. WHEN GROUNDCOVERS AND SHRUBS ARE USED IS MASSES, ENTIRE BED TO BE EXCAVATED TO RECEIVE PLANTING SOIL AND PLANT MATERIAL.
 2. CONTRACTOR SHALL ASSURE PERCOLATION OF ALL PLANTING PITS PRIOR TO INSTALLATION.
 3. IN SEMI-IMPERVIOUS SOIL CONDITIONS, ROOTBALL ELEVATION SHALL BE ±2" ABOVE FINISH GRADE. COORDINATE WITH OWNER'S REPRESENTATIVE PRIOR TO SETTING ROOTBALL ELEVATIONS.


3 // L501 SHRUB PLANTING
SCALE: N.T.S.

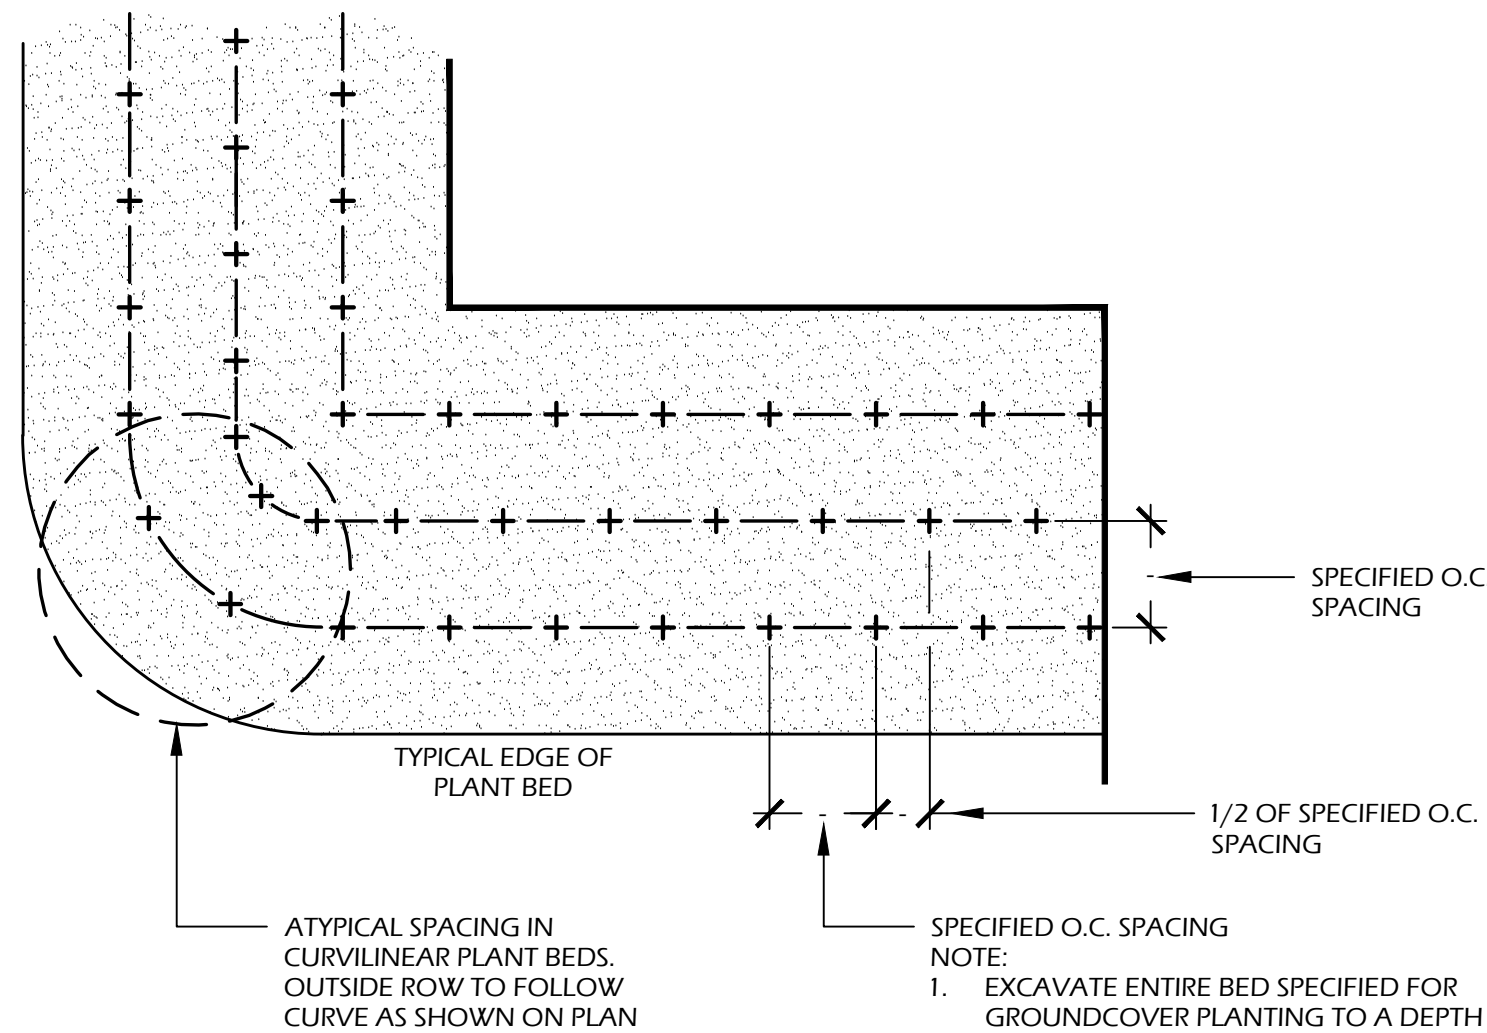

4 // L501 GROUND COVER PLANTING
SCALE: N.T.S.

PLANTING SCHEDULE:

Quantity	Abbrev	Botanical Name	Common Name	Height	Spread	Container	Cal./Spacing	Notes
TREES								
4	QUEV	Quercus virginiana	Live Oak	14'-16'	6'-8'	Cont.	4"	Full
SHRUBS								
26	BUXW	Buxus microphylla 'Wintergreen'	Wintergreen Boxwood	12'-18"	12'-18"	7 gal.	-	Full
3	CASS	Camellia sasanqua 'Shishi Gashira'	Shishi Gashira Dwarf Camellia	18"-24"	2'-3'	7 gal.	-	Full
1	GARF	Gardenia jasminoides 'Frost Proof'	Frost Proof Gardenia	4'-5'	2'-3'	15 gal.	-	Full
25	PODM	Podocarpus macrophyllus	Podocarpus	36"-42"	24"-30"	15 gal.	-	Full
7	PODP	Podocarpus macrophyllus 'Pringles Dwarf'	Dwarf Podocarpus	18"-24"	16"-20"	7 gal.	-	Full
ORNAMENTAL GRASSES & FERNS								
25	MUHC	Muhlenbergia capillaris	Pink Muhly Grass	14'-16"	10'-16"	1 gal.	30" O.C.	Full
GROUND COVERS, VINES & PERENNIALS								
40	LIRE	Liriope muscari 'Evergreen Giant'	Evergreen Giant Liriope	12"-16"	8"-12"	1 gal.	24" O.C.	Full
SOD & MULCH								
950	SODSF	-	Empire Zoysia Sod	-	-	-	-	-
1000	MULCHSF	Pine Straw - all disturbed areas	Pine Straw	-	-	-	-	-

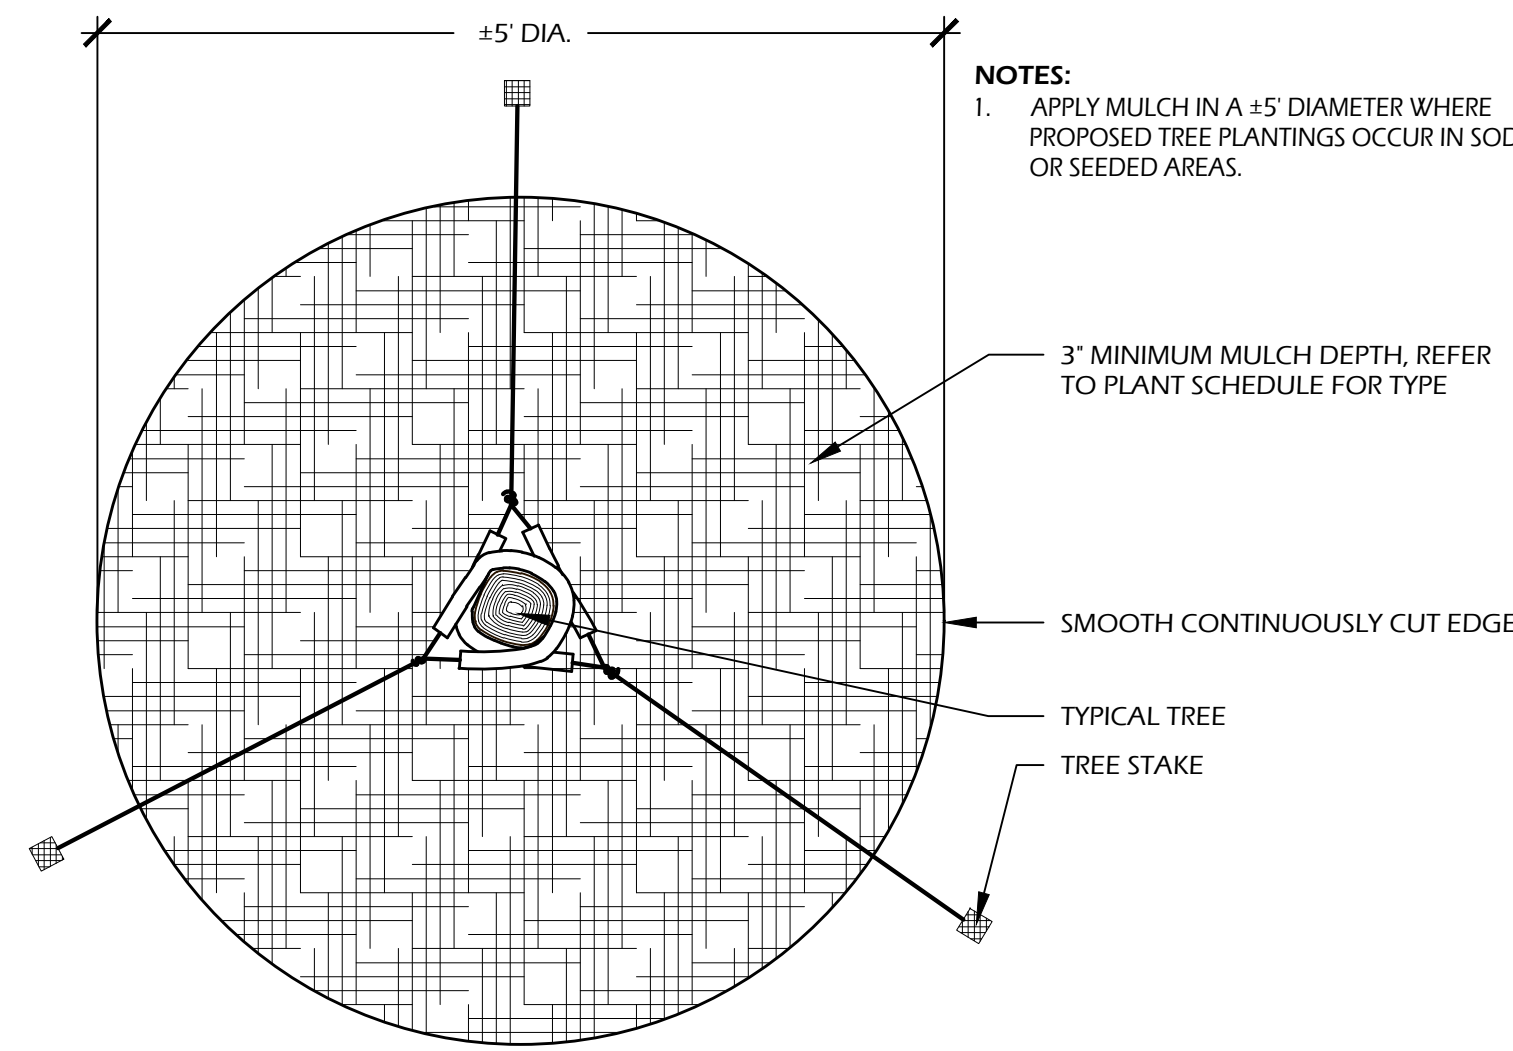

- NOTES:**
1. APPLY MULCH IN A ±5' DIAMETER WHERE PROPOSED TREE PLANTINGS OCCUR IN SOD OR SEEDED AREAS.

5 // L501 TREE STAKING
SCALE: N.T.S.



©2023 WJK LTD.
DESIGN CONCEPTS, DRAWING, SHEETS, LOGOS, SPECIFICATIONS, DETAILS, WRITTEN MATERIAL SHALL NOT BE USED OR REPRODUCED IN WHOLE OR IN PART IN ANY FORM WITHOUT PRIOR WRITTEN CONSENT OF WJK LTD.
THIS SHEET TO SCALE AT: 24"X36"

SITE DEVELOPMENT PLANS FOR
89 BRIDGE STREET
NEIGHBORHOOD CONSERVATION - HD
BLUFFTON, SOUTH CAROLINA



DATE: MAY 28, 2025
PROJECT NO.: XXXXX.XX
DRAWN BY: JM/EB
CHECKED BY: DK

PLANNING COMMISSION
NOT FOR CONSTRUCTION

REVISIONS:

DRAWING TITLE
PLANT SCHEDULE AND DETAILS

DRAWING NUMBER
L501

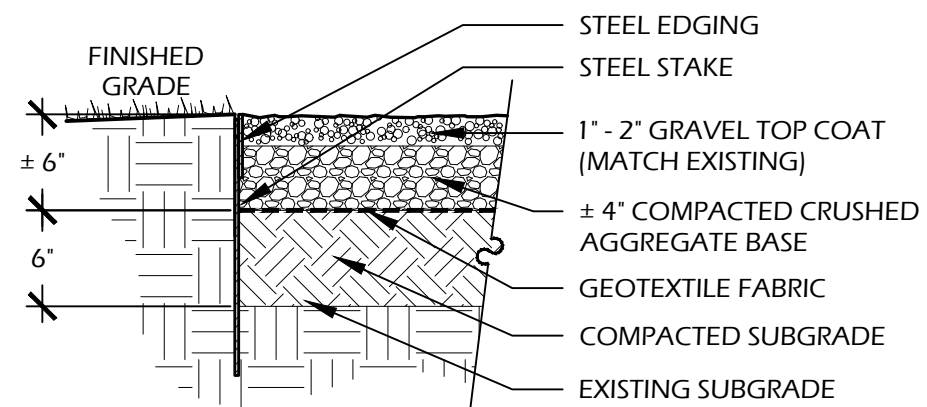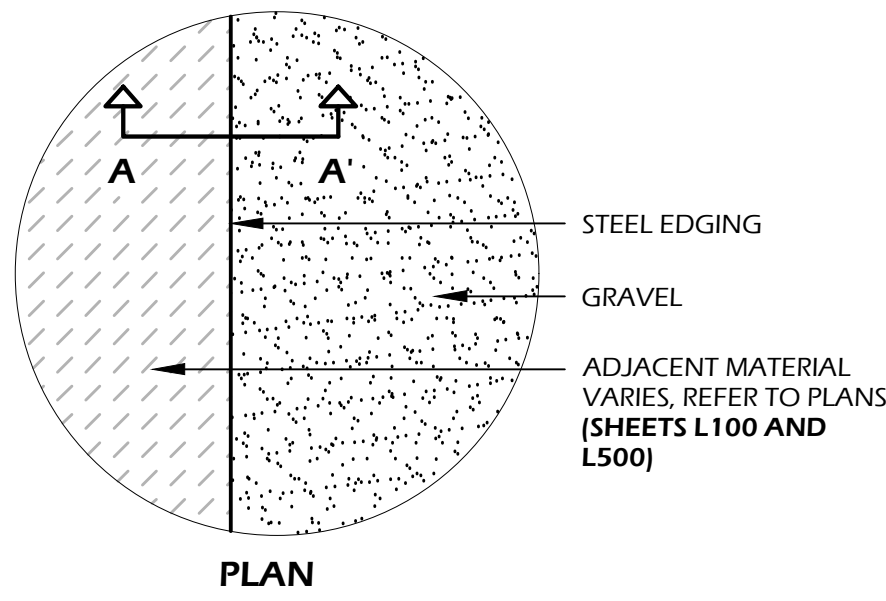

SECTION A-A'

EDGING AND STAKE INFORMATION:



MANUFACTURER:
BORDER CONCEPTS, INC.
7621 LITTLE AVE., SUITE 426
CHARLOTTE, NC. 28226
PHONE: (800) 845.3343
WEB: WWW.BORDER-CONCEPTS.COM

STEEL EDGE: BORDER GUARD 3/16" X 4" X 16"
STAKES: STANDARD STAKE 3/16" THICK X 15" LONG (6 PER 16)
COLOR: BLACK

NOTE: INSTALL FLUSH PER MANUFACTURES SPECIFICATIONS

OTHER INFORMATION:

GEOTEXTILE FABRIC: TYPAR 3401 OR APPROVED EQUAL
SOIL COMPACTION: 95% STANDARD PROCTOR

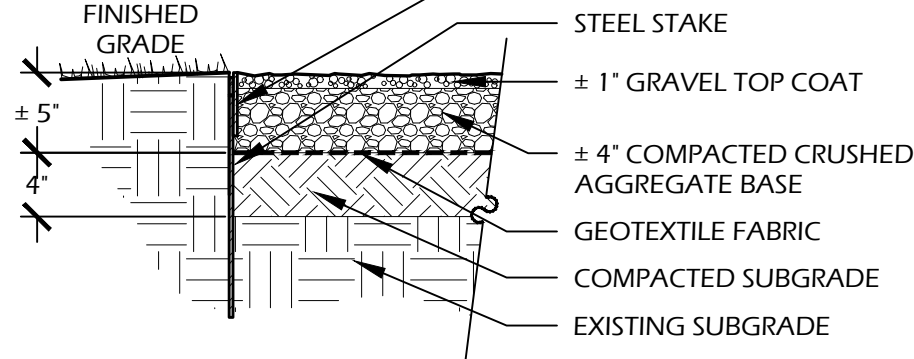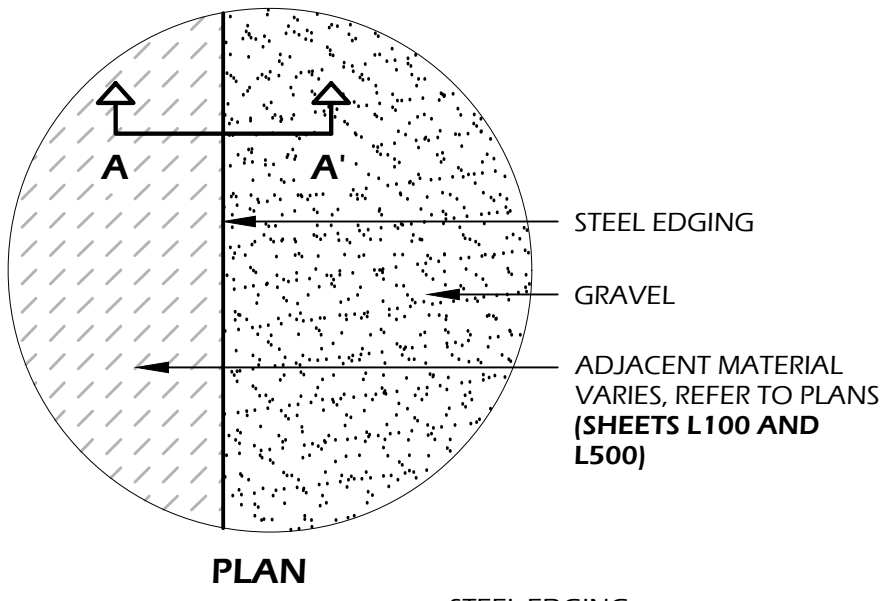

SECTION A-A'

EDGING AND STAKE INFORMATION:



MANUFACTURER:
BORDER CONCEPTS, INC.
7621 LITTLE AVE., SUITE 426
CHARLOTTE, NC. 28226
PHONE: (800) 845.3343
WEB: WWW.BORDER-CONCEPTS.COM

STEEL EDGE: BORDER GUARD 3/16" X 4" X 16"
STAKES: STANDARD STAKE 3/16" THICK X 15" LONG (6 PER 16)
COLOR: BLACK

NOTE: INSTALL FLUSH PER MANUFACTURES SPECIFICATIONS

OTHER INFORMATION:

GEOTEXTILE FABRIC: TYPAR 3401 OR APPROVED EQUAL
SOIL COMPACTION: 95% STANDARD PROCTOR

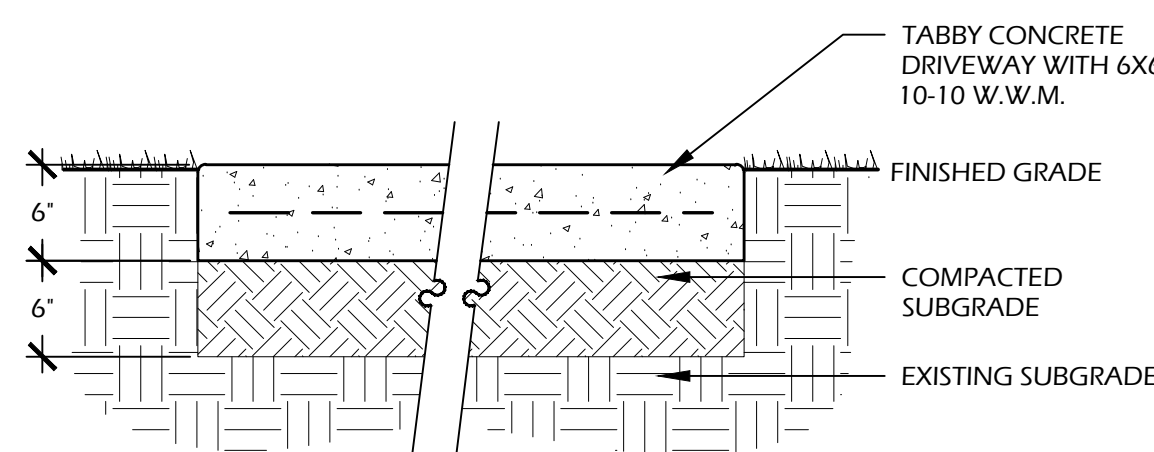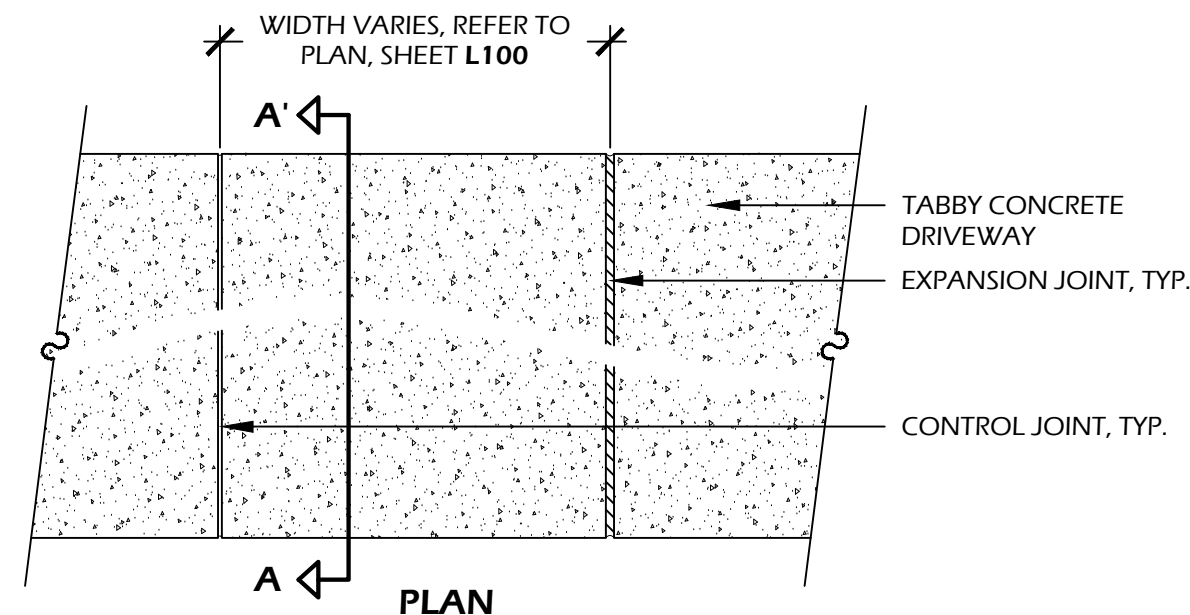

SECTION A-A'

CONCRETE INFORMATION:

CONCRETE: 3,000 P.S.I. AT 28 DAYS
FINISH: TABBY SHELL

SOIL INFORMATION:

SOIL COMPACTION: 95% STANDARD PROCTOR

TABBY SPEC:

- SHELL FINISH SHALL BE OYSTER SHELL MIX (EQUAL PARTS, SIZE #2, AND #3) HAND THROWN / SPREAD TO 100% COVERAGE ON FRESH POURED AND LEVELED CONCRETE.
- HAND FLOAT UNTIL SHELL IS SUBMERGED, THEN AFTER 90% CURED, LIGHTLY PRESSURE WASH UNTIL SHELL IS EXPOSED.



NOTES:

- PROVIDE 1% MIN., 2% MAX. CROSS SLOPE ON ALL PAVED SURFACES FOR POSITIVE DRAINAGE.
- REFER TO PLAN [SHEET L100] FOR WIDTHS OF DRIVEWAY.
- CONSTRUCT EXPANSION JOINTS WHERE WALK MEETS CURBS, STEPS, WALLS OR FIXED SLABS.
- UPON REQUEST, CONTRACTOR SHALL PROVIDE 4'X4' SAMPLE OF CONCRETE WITH 2 SIZES OF OYSTER SHELL FINISH FOR APPROVAL BY OWNER OR LANDSCAPE ARCHITECT.

1 // L600 GRAVEL DRIVE (NEW TOPCOAT)
SCALE: 1" = 1'-0"

2 // L600 GRAVEL WALK
SCALE: 1" = 1'-0"

3 // L600 TABBY CONCRETE APRON/PARKING
SCALE: 1" = 1'-0"

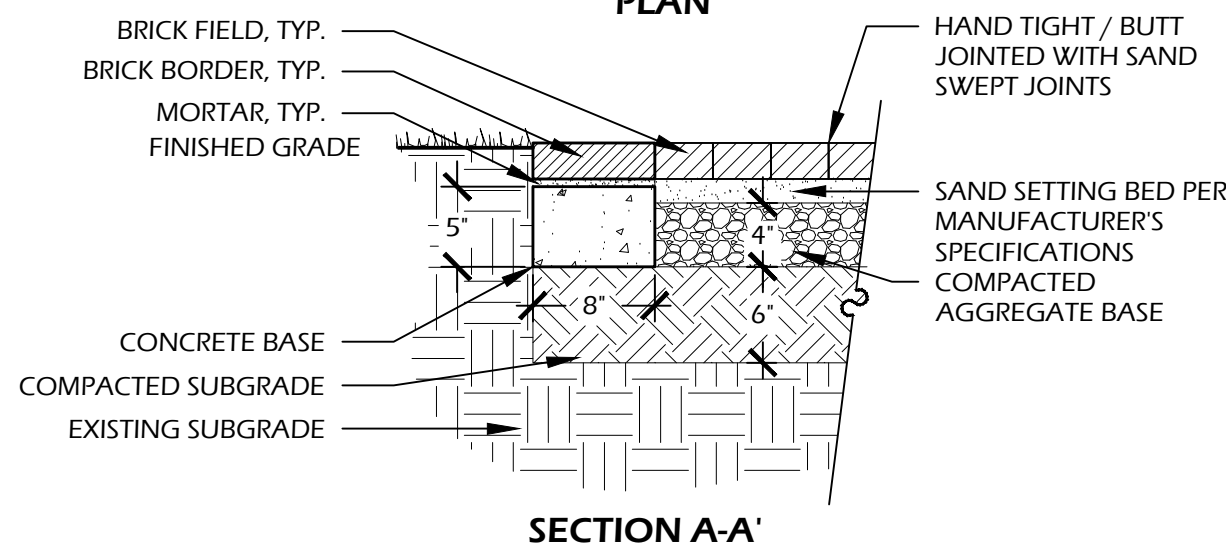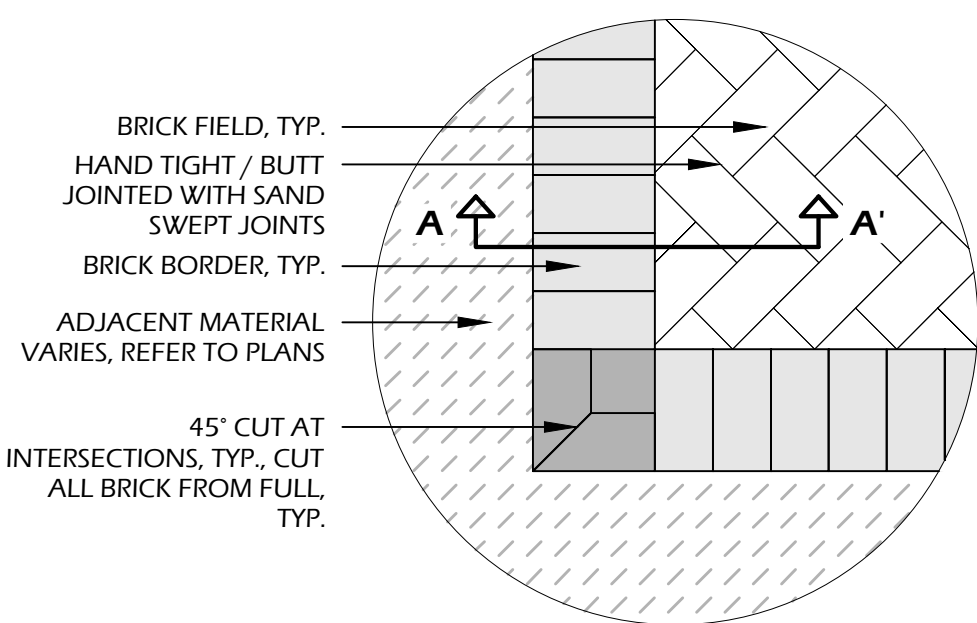

SECTION A-A'

BRICK MANUFACTURER INFORMATION:

MANUFACTURER: TO MATCH ARCHITECTURE


BRICK: TO MATCH ARCHITECTURE
COLOR: TO MATCH ARCHITECTURE
PATTERN: HERRINGBONE FIELD (REFER TO PLAN, SHEET L100, FOR DIRECTION) WITH SINGLE HEADER COURSE BORDER
JOINTS: HAND TIGHT / BUTT JOINTED, SAND SWEEP

OTHER INFORMATION:


CONCRETE: 3,000 P.S.I. AT 28 DAYS
SOIL COMPACTION: 95% STANDARD PROCTOR

NOTES:

- PROVIDE 1% MIN., 2% MAX. CROSS SLOPE ON ALL PAVED SURFACES FOR POSITIVE DRAINAGE.
- REFER TO PLAN [SHEET L100] FOR WIDTHS OF WALKS AND LOCATION OF BRICK BORDERS.
- CONTRACTOR SHALL COORDINATE BORDERS AND PATTERN WITH OWNER'S REPRESENTATIVE PRIOR TO CONSTRUCTION.
- UPON REQUEST, CONTRACTOR SHALL PROVIDE 4'X4' PAVING PANELS OF ALTERNATIVE COLORS PRIOR TO CONSTRUCTION FOR APPROVAL BY OWNER OR LANDSCAPE ARCHITECT.

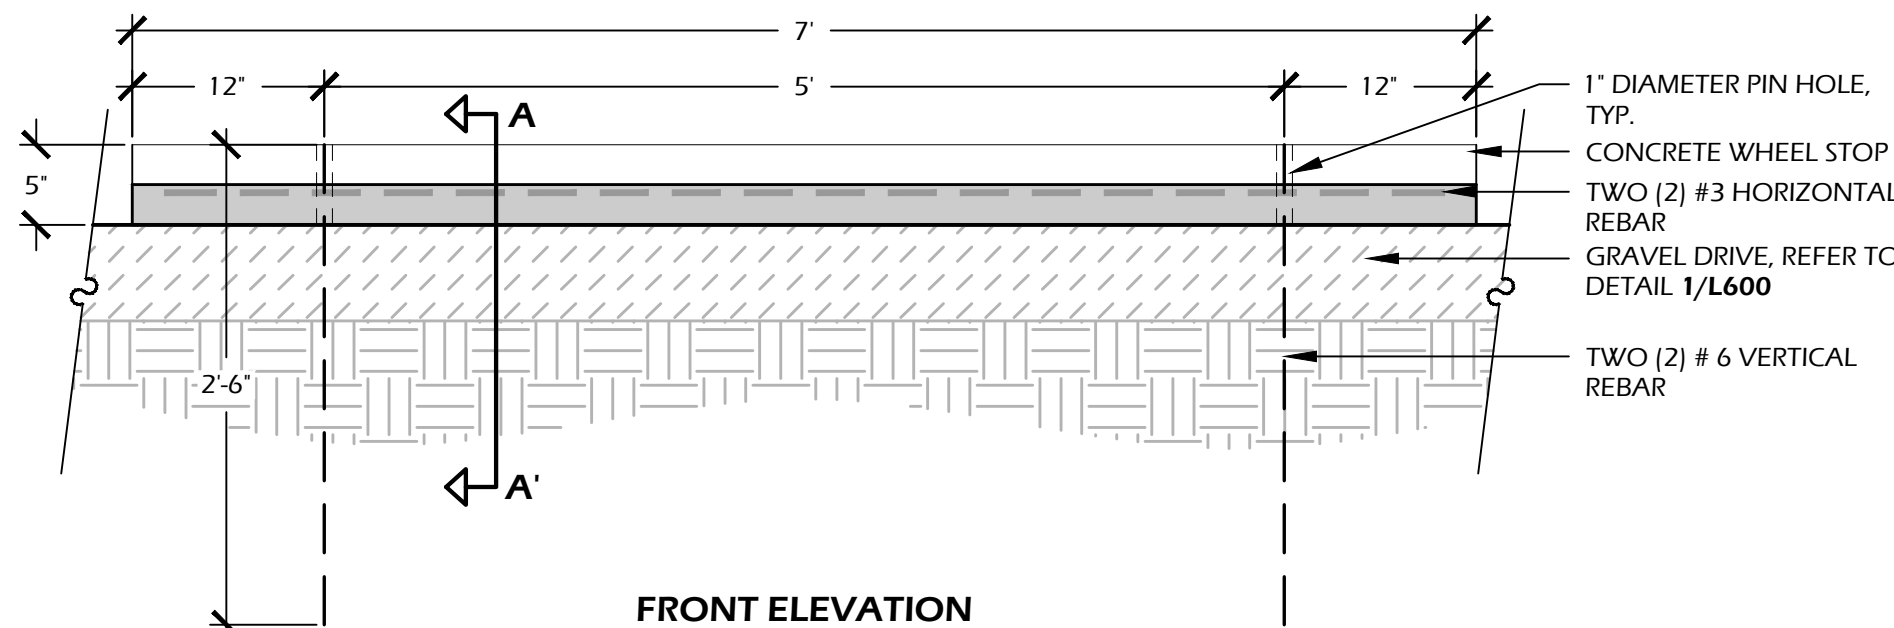

FRONT ELEVATION

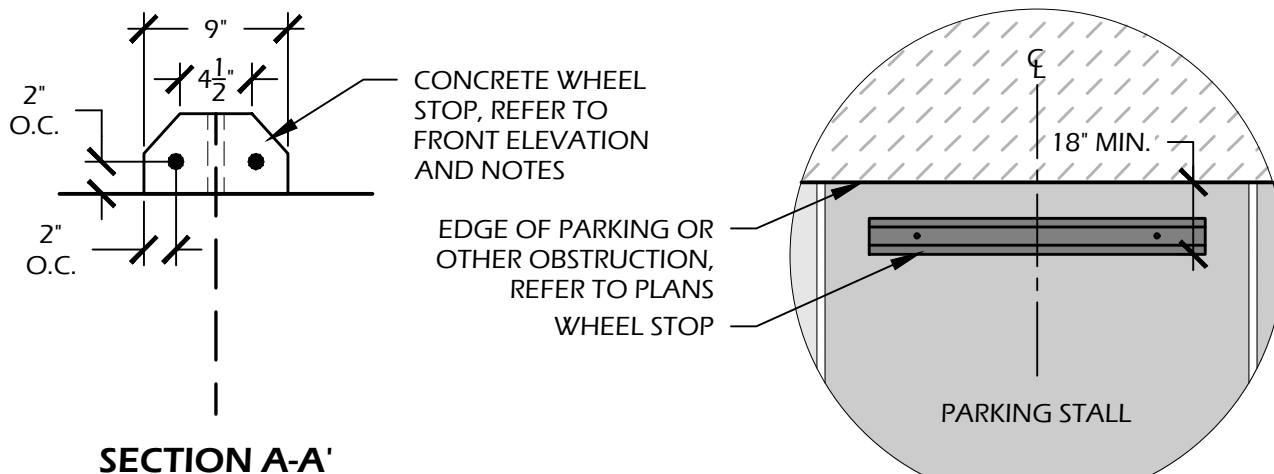

PLAN DIAGRAM - N.T.S.

CONCRETE INFORMATION:

CONCRETE: S.C.D.O.T. CLASS 3,000 P.S.I.

NOTES:

- WHEEL STOPS SHALL BE STEEL REINFORCED PRECAST CONCRETE UNITS.
- WHEEL STOPS SHALL BE INSTALLED PERPENDICULAR TO PARKING STALL AND SHALL BE PLACED A MINIMUM OF 18" FROM END OF PARKING STALL OR OBSTRUCTION.
- ANCHORING PINS SHALL BE DRIVEN FLUSH TO THE TOP OF THE WHEEL STOP AND PIN HOLES SHALL BE SEALED WITH GROUT UPON INSTALLATION.

4 // L600 PERVIOUS PAVER WALK
SCALE: 1" = 1'-0"

5 // L600 WHEEL STOP
SCALE: 1" = 1'-0"

SITE DEVELOPMENT PLANS
FOR
89 BRIDGE STREET
NEIGHBORHOOD CONSERVATION - HD
BLUFFTON, SOUTH CAROLINA

DATE: MAY 28, 2025
PROJECT NO.: XXXXX.XX
DRAWN BY: JM/EB
CHECKED BY: DK

PLANNING
COMMISSION
NOT FOR
CONSTRUCTION

REVISIONS:

DRAWING TITLE
SITE DETAILS

DRAWING NUMBER

L600

©2023 WJK LTD.
DESIGN: CONCEPTS, DRAWING, SHEETS, LOGOS, SPECIFICATIONS, DETAILS, WRITTEN MATERIAL SHALL NOT BE USED OR REPRODUCED IN WHOLE OR IN PART IN ANY FORM WITHOUT PRIOR WRITTEN CONSENT OF WJK LTD.
THIS SHEET TO SCALE AT: 24"X36"

Wimmer Jones-Keefe
landscape architecture
land planning
www.wjkltd.com
289 Promenade Street, Suite 201 | Bluffton, South Carolina 29910 | ph 843.797.7411