

8 Constitution St. Proposed Materials:

-Siding (Original House 1st floor and Garage): LP Smartside Cedar Straight Shake, 7” Exposure

-Siding (2nd floor addition): LP Smartside, 4-7/8” exposure

-Trim/Casings (House and Garage): Replicate existing details - LP Smartside Trim, Fascia, and Soffit

-Roofing (House and Garage): GAF HDZ Architectural asphalt shingles

-Gutters/Downspouts: Fiberglass FiberGutter FG60, 3” Round downspouts, DSPR-10

-Chimney: Brick veneer

-Windows: Aluminum clad (for new windows and replacement on all existing windows except two front windows, existing to remain), Andersen E-Series.

-Entry Doors:

-Front: Fiberglass Therma Tru CCM2800XN

-Side: Fiberglass Therma Tru CCM600XE

-Garage Side Door: Fiberglass Therma Tru CCM600XE

-Patio Doors (House and Garage): Andersen E-Series Aluminum Clad Sliding Patio Door

-Garage Door: Craft Door Custom Wood Side Hinged Garage Door

-Decking:

Porch: Premium Cedar Boards

Deck: Trex Transcend Composite Decking

-Columns: Edura-Stone Fiberglass Column

-Railing/Cap/Posts: Trex Aluminum Railing with Glass Infill

-Exterior Lighting: Progress Lighting P6615-20, Burlington Bronze/Glass Wall Lantern

-Rafter Tails: Use existing or replicate with new wood.

-Driveway: Reinstall/Match Existing Pavers to be reset in new crushed stone

-Fencing: None




8 CONSTITUTION ST.
SIDING & TRIM

COLORFUL SIDING. BEAUTIFUL FINISH.


LP® SMARTSIDE® EXPERTFINISH® TRIM & SIDING

The advanced durability you expect from LP® SmartSide® Trim & Siding comes in ExpertFinish® colors. Your homeowners will love choosing colors to match their style—and you'll love the fast and easy installation that comes with LP SmartSide ExpertFinish Trim and Siding.


- ExpertFinish Lap Joint Siding to avoid the need for most seam caulking, joint molds, or pan flashing
- Now available in brushed smooth and cedar texture
- Advanced Durability for Longer Lasting Beauty®
- Available in 16 versatile colors that will complement most any home's style
- Industry-leading 5/15/50 year prorated limited warranty: 5-year labor and materials, 15-year finish, and 50-year substrate
- Comes in a variety of SKUs and finishes



Snowscape White



Sand Dunes



Desert Stone



Quarry Gray



Prairie Clay



Terra Brown



Harvest Honey



Timberland Suede



Garden Sage



Redwood Red



Tundra Gray



Summit Blue



Rapids Blue



Cavern Steel



Midnight Shadow



Abyss Black

LP **SmartSide®**
ExpertFinish® TRIM & SIDING

For complete product & warranty details, visit LPCorp.com/ExpertFinish


Products Available in LP SmartSide ExpertFinish Colors

Lap Joint Siding

•38 Series 6" x 16' – 5.84 in.
(148 mm) x 192 in. (4.9 m)

•38 Series 8" x 16' – 7.84 in.
(199 mm) x 192 in. (4.9 m)

CEDAR TEXTURE



Trim SMOOTH FINISH

•540 Series 5" x 16' – 194 in. (4.9 m)
x 192 in. (4.9 m)
*Quebec only **

•440/540 Series 4" x 16' – 3.50 in.
(89 mm) x 192 in. (4.9 m)


•440/540 Series 6" x 16' – 5.50 in.
(140 mm) x 192 in. (4.9 m)

•440/540 Series 8" x 16' – 7.21 in. (183 mm) x 192 in.
(4.9 m)

•440/540 Series 10" x 16' – 9.21 in. (234 mm) x 192 in.
(4.9 m)

•440/540 Series 12" x 16' – 11.21 in. (285 mm) x 192 in.
(4.9 m)


•190 Series 3" x 16' – 2.5 in. (64 mm) x 192 in. (4.9 m)



Shakes

•38 Series 12" x 48" –
11.624 in. (295 mm) x 48.63 in. (1.2 m)

•Reversible staggered or **straight edge**



Panel

•38 Series 4' x 8' – 48.56 in.
(1234 mm) x 96 in. (2.4 m)

•38 Series 4' x 10' – 48.56 in.
(1234 mm) x 120 in. (3 m) *



We're not just building for the future, we're promoting forest regeneration and preserving wildlife habitats for the benefit of all generations to come.

All photos are for illustrative purposes only. Please refer regularly to LPCorp.com for correct and up-to-date product installation instructions.

WARNING: Drilling, sawing, sanding or machining wood products can expose you to wood dust, a substance known to the State of California to cause cancer. Avoid inhaling wood dust or use a dust mask or other safeguards for personal protection. For more information go to www.P65Warnings.ca.gov/wood.



Nickel Gap

•Nickel Gap 8" x 16' – 7 in.
(177 mm) x 192 in. (4.9 m)



Vertical Siding

•38 Series 16" x 16' – 15.94 in.
(405 mm) x 192 in. (4.9 m)



Soffit SMOOTH FINISH

•38 Series 12" Closed/Vented Soffit –
11.94 in. (303 mm) x 192 in. (4.9 m)

•38 Series 16" Closed/Vented Soffit –
15.93 in. (405 mm) x 192 in. (4.9 m)

•38 Series 24" Closed/Vented Soffit –
23.94 in. (608 mm) x 192 in. (4.9 m)

•Vented Soffit Only Available in Cedar



Outside Corners


•540 Series 4" x 10' – 3.625 in.
(89 mm) x 120 in. (3.0 m) *

•540 Series 6" x 10' – 5.625 in.
(140 mm) x 120 in. (3.0 m) *




J-Blocks

•540 Series 7.25" x 7.25" – 7.21 in.
(183 mm) x 7.21 in. (183 mm)



Mini Splits

•540 Series 7.25" x 6.75" – 7.21 in.
(183 mm) x 6.75 in. (171 mm)



* Only Available in Cedar Texture
Not all products available in all colors



For complete product & warranty details, visit LPCorp.com/ExpertFinish




NEW LP® SMARTSIDE® CEDAR TEXTURE SHAKES

NOW AVAILABLE IN STRAND!

- The look of traditional cedar with easier maintenance over time
- Staggered edges offer a lively, textured effect
- Can be used on all exterior walls or as a decorative accent
- Shiplap ends for seamless appearance
- Reversible staggered or straight edge offers exceptional design versatility
- Approved for blind nail installation
- Treated engineered wood strand substrate



PRODUCT SPECIFICATIONS

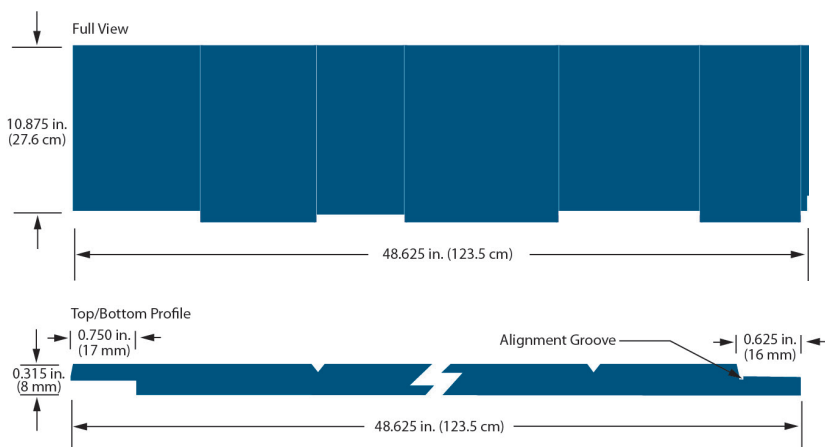

Staggered



Straight

DESCRIPTION	LENGTH	ACTUAL WIDTH	MINIMUM THICKNESS	PID NUMBER	WEIGHT
Cedar Texture Shakes	4ft. (48.63 in.)(1.2 m)	11.625 in. (29.5 cm)	0.315 in. (8 mm)	42092	2 PSF




For product catalog & complete warranty details, visit LPSmartSide.com

WARNING: Drilling, sawing, sanding or machining wood products can expose you to wood dust, a substance known to the State of California to cause cancer. Avoid inhaling wood dust or use a dust mask or other safeguards for personal protection. For more information go to www.P65Warnings.ca.gov/wood.

BUILD BETTER WITH CARBON NEGATIVE SIDING

LP® SmartSide® products store more carbon than the total greenhouse gas emissions released throughout their life cycle.

LP SMARTSIDE PRODUCTS ARE MORE THAN CARBON NEUTRAL, THEY'RE CARBON NEGATIVE

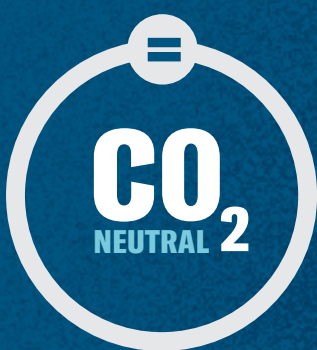


Carbon neutral is when the amount of CO₂ emitted during the product's production is *equal to* the amount of CO₂ the product removes from the atmosphere over its lifetime.

Carbon negative is when the amount of CO₂ emitted through the product's production, use and disposal *is less than* the amount of CO₂ the product stores from the atmosphere over its lifetime.



WHY LP SMARTSIDE PRODUCTS ARE CARBON NEGATIVE



RENEWABLE MATERIALS

LP SmartSide products are primarily made from aspen trees, which naturally regenerate.



INTENTIONAL MANUFACTURING

LP SmartSide Siding is made up of 91% wood fiber, which comes from sustainable wood sources.



EFFICIENT UTILIZATION

LP SmartSide facilities efficiently use 99% of the wood sourced either in our products or as renewable energy in manufacturing.

LP SMARTSIDE PRODUCTS LEAD THE CHARGE IN SUSTAINABILITY

10x
MORE CARBON STORED

in LP SmartSide products than fiber cement-based products

54%
LESS GREENHOUSE GAS

emissions during production from LP SmartSide products than fiber cement-based products

For more information, visit LPCorp.com/SmartSide-EPD



SmartSide®
TRIM & SIDING




© 2022 Louisiana-Pacific Corporation. All rights reserved. LP and SmartSide are registered trademarks of Louisiana-Pacific Corporation. Sustainable Forestry Initiative and associated logo are registered trademarks of Sustainable Forestry Initiative, Inc.

LPZB0889 1/2022

How is it Made?

LP SmartSide Trim & Siding - Treated Engineered Wood Strand Technology

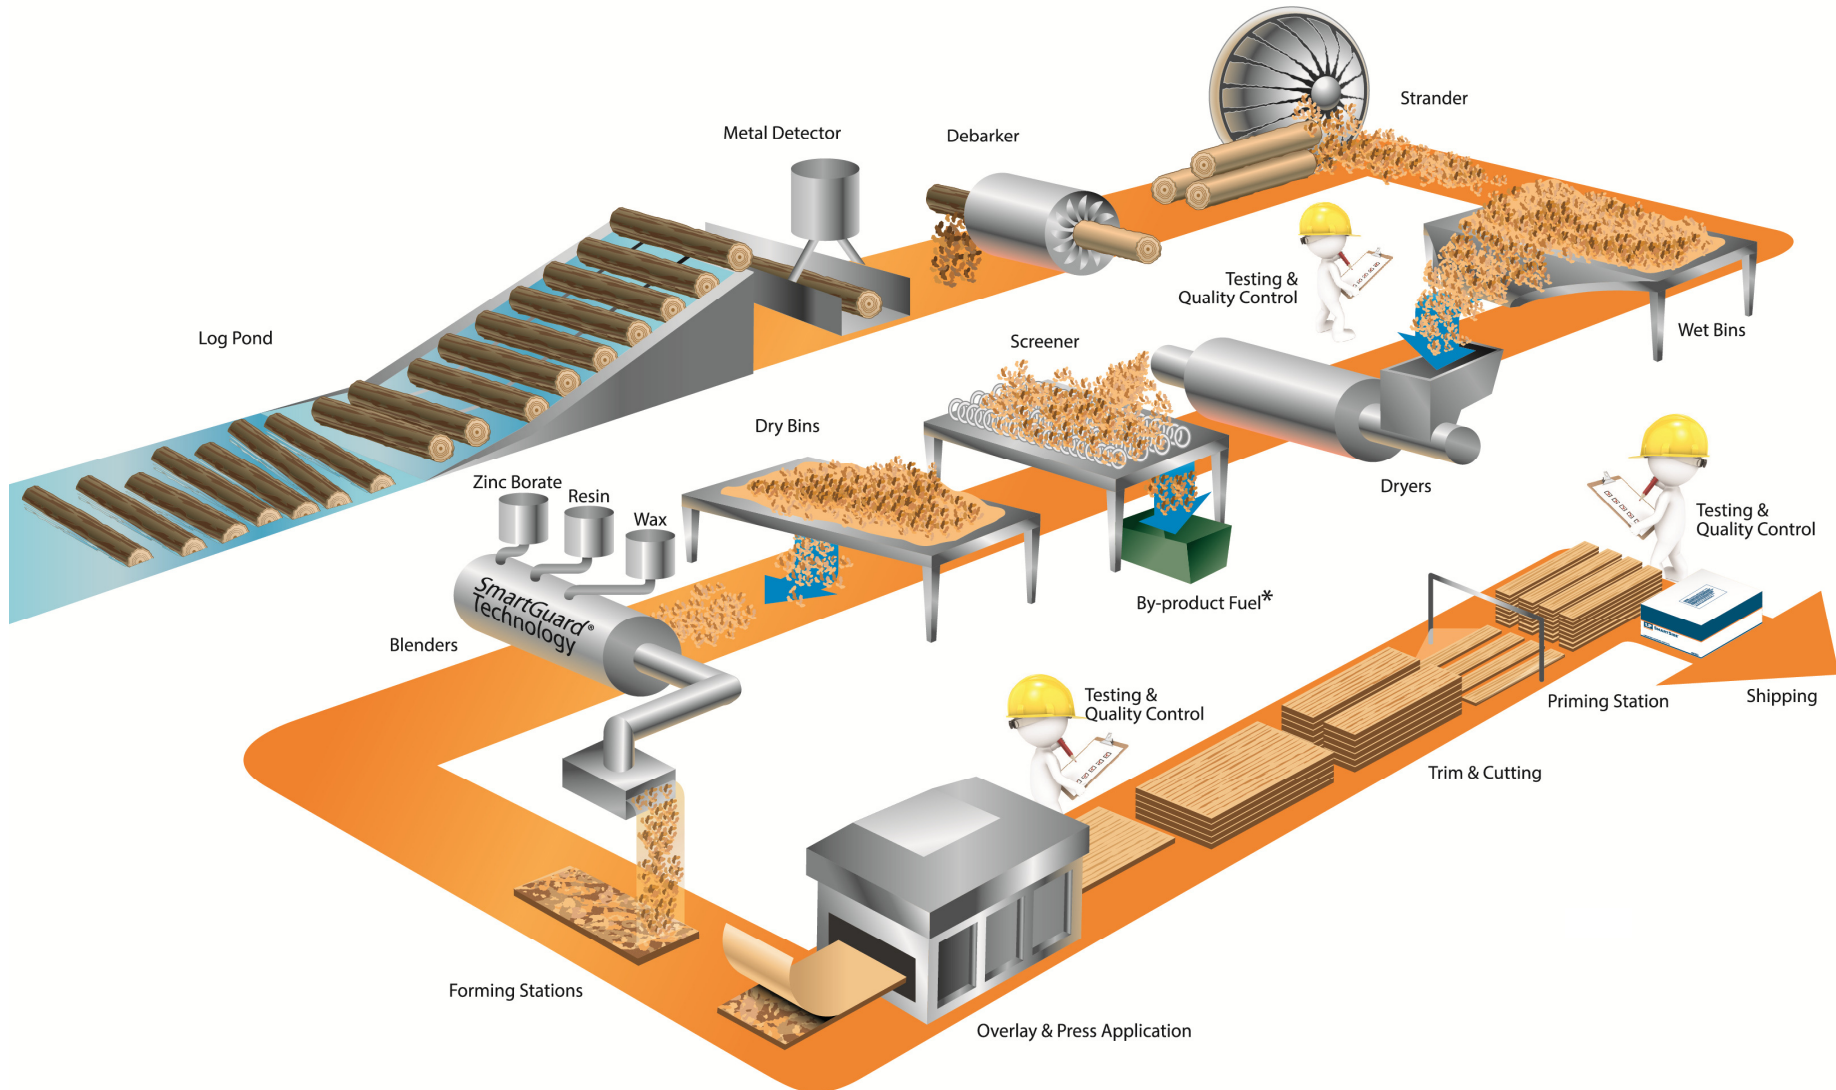



Timberline[®]HDZ[®]

High Definition[®] Lifetime[†] Shingles



As featured on *This Old House*, the Timberline HDZ[®] shingles installed here are Oyster Gray.

**8 CONSTITUTION ST.
ROOFING**

Millions of families have found shelter and peace of mind under a Timberline[®] roof.

And now, a good thing just got even better again.

We protect what matters most[™]




Color Availability



Nationally Available Colors



Harvest Blend Colors

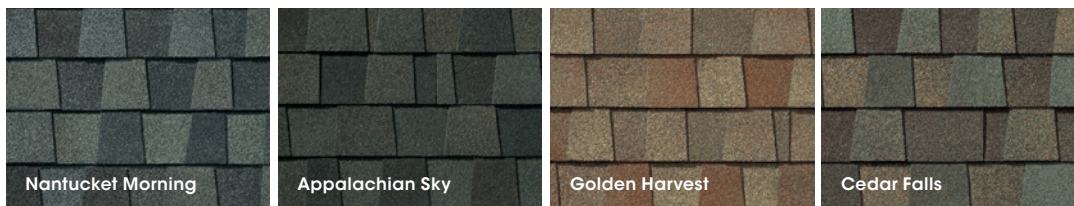

Regionally Available Colors (See next page for details.)




For more details visit gaf.com/TimberlineHDZ

Note: It is difficult to reproduce the color clarity and actual color blends of these products. Before selecting your color, please ask to see several full-size shingles.


Timberline HDZ® Availability

Color Availability Chart	1	2	3	4	5	6	7
Most Popular Colors:							
Barkwood	•	•	•	•	•	•	•
Charcoal	•	•	•	•	•	•	•
Hickory	•	•	•	•	•	•	•
Hunter Green	•	•	•	•	•	•	•
Mission Brown	•	•	•	•	•	•	•
Pewter Gray	•	•	•	•	•	•	•
Shakewood	•	•	•	•	•	•	•
Slate	•	•	•	•	•	•	•
Weathered Wood	•	•	•	•	•	•	•
Harvest Blend Colors:							
Nantucket Morning	•	•	•	•	•	•	•
Appalachian Sky	•	•	•	•	•	•	•
Golden Harvest	•	•	•	•	•	•	•
Cedar Falls	•	•	•	•	•	•	•
Regional Colors:							
Birchwood	•	•	•	•	•	•	•
Biscayne Blue	•	•	•	•	•	•	•
Copper Canyon*	•	•	•	•	•	•	•
Driftwood	•	•	•	•	•	•	•
Fox Hollow Gray	•	•	•	•	•	•	•
Golden Amber*	•	•	•	•	•	•	•
Oyster Gray	•	•	•	•	•	•	•
Patriot Red	•	•	•	•	•	•	•
Sunset Brick	•	•	•	•	•	•	•
Williamsburg Slate	•	•	•	•	•	•	•

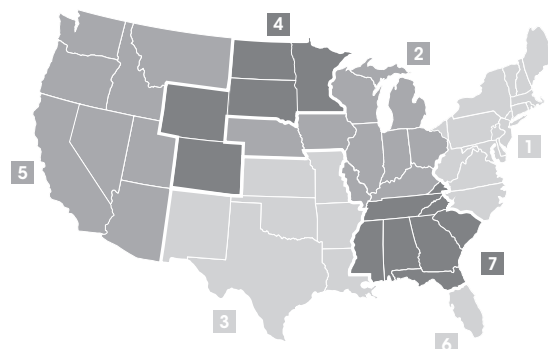


* Rated by the Cool Roof Rating Council (CRRC); can be used to comply with 2022 Title 24 Part 6 Cool Roof Requirements of the California Code of Regulations.

The protective layers of a Timberline HDZ® shingle

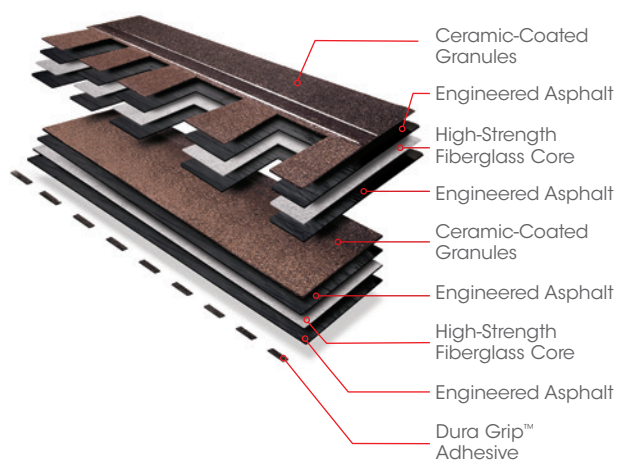

Product/System Specifics

- Fiberglass asphalt construction
- Dimensions (approx.): 13 1/4" x 39 3/8" (337 mm x 1,000 mm)
- Exposure: 5 5/8" (143 mm)
- Bundles/Square: 3
- Pieces/Square: 64
- StainGuard Plus™ Algae Protection Limited Warranty¹
- Hip/Ridge: TimberTex®³; TimberCrest®; Seal-A-Ridge®; Z®Ridge; Ridglass®
- Starter: Pro-Start®; QuickStart®; WeatherBlocker™



Applicable Standards & Protocols:


- Passes UL 2218 Impact-Resistance Test with Class 3 rating
- State of Florida approved
- Classified by UL in accordance with ICC-ES AC438
- Meets ASTM D7158, Class H
- Meets ASTM D3161, Class F
- Meets ASTM D3018, Type 1
- Meets ASTM D3462²
- Miami-Dade County Product Control approved
- ICC-ES Evaluation Reports ESR-1475 and ESR-3267
- Meets Texas Department of Insurance Requirements
- Birchwood, Copper Canyon, and Golden Amber are rated by the CRRC; Can be used to comply with 2022 Title 24 Part 6 Cool Roof Requirements of the California Code of Regulations.

¹ 25-year StainGuard Plus™ Algae Protection Limited Warranty against blue-green algae discoloration is available only on products sold in packages bearing the StainGuard Plus™ logo. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions and qualifying products.

² Periodically tested by independent and internal labs to ensure compliance with ASTM D3462 at time of manufacture.

³ Harvest Blend colors are only available on TimberTex® and Seal-A-Ridge®.

8 CONSTITUTION ST. GUTTER

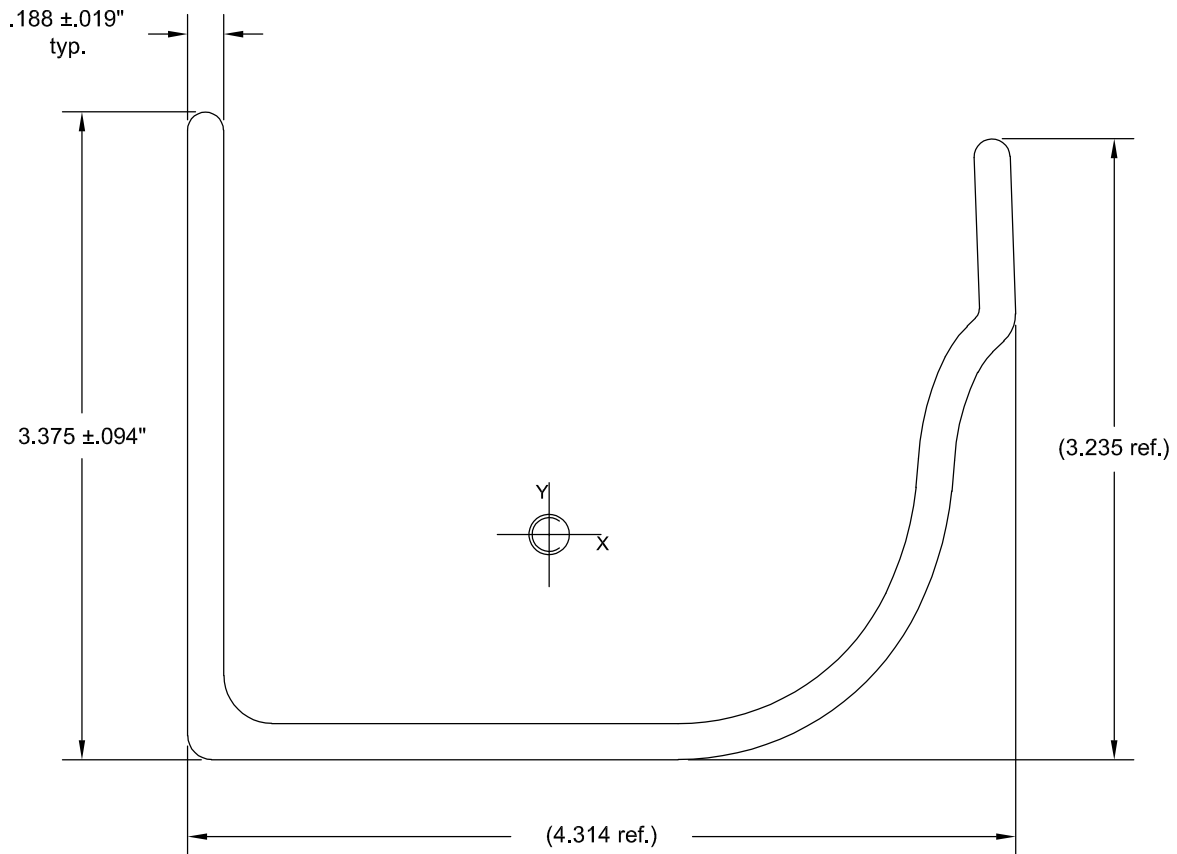

CROSS SECTION PROPERTIES

Area	1.830	in ²
I _x	2.031	in ⁴
I _y	5.068	in ⁴
I _{xy}	-.309	in ⁴
S _x	.922	in ³
S _y	2.086	in ³
r _x	1.054	in
r _y	1.664	in

www.fibergutter.com
546-A Plymouth St
Halifax, MA 02338
info@fibergutter.com



PART NAME:

G-60 Fiberglass Gutter

PART NUMBER:

FG60

REV. NO.

0



Fiberglass Building Products Inc
546 Plymouth St
Halifax, MA 02338
Phone: (781) 754-0118 www.fiberglassgutter.com

Fiberglass Downspout Installation Instructions



• **Materials Needed:**

- Fiberglass downspout (#DSPR-10 – 3" Round) (DSSQ-10 – 3" Square)
- Downspout brackets (#DSHGRD-3 -Round) (#DSHDSS-3 -Square)
- Downspout Elbows (If Applicable) (#DSPR-EL75 -Round) (#DSSQ-EL75 -Square)
- Downspout Connecting Sleeve (#FDSTAB-1 -Round) (#FDSTAB-2 -Square)
- GutterGlue (FGGG220)
- GutterGlue Applicator Gun (FGDISP-220ML)
- 2P10 (2P10-KIT)
- Hex Screws 3/4"
- Measuring tape
- Level
- Power drill and appropriate drill bits
- Safety gloves and goggles

**8 CONSTITUTION ST.
DOWNSPOUTS**

Step 1: Preparing the Installation Area

1. Choose a suitable location for the downspout where it can efficiently direct water away from the building's foundation.
2. Ensure the area is clear of any obstructions, and there is a proper slope for water flow.
3. Measure the distance between the gutter outlet and the ground to determine the length of the downspout needed.
4. Measure the distance from the center of the outlet (leader) to the center of the vertical pipe on the house.

Fiberglassgutter® is a registered trademark of Fiberglass Building Products Inc

Fiberglassgutter products should be installed using the same good building principles and in accordance with the local building codes and the installation guidelines included. Fiberglass Building Products accepts no liability or responsibility for the improper installation of this product.

Thin Brick Collection

A compelling alternative.



8 CONSTITUTION ST. CHIMNEY BRICK VENEER

Product Overview

Glen-Gery brick veneer is the pinnacle of form and function. With a striking appearance, its style is just as convincing as its strength. Whether you take it inside or outside, thin brick has the pull to be the centerpiece. Glen-Gery thin brick is a compelling alternative developed to give architects, engineers, builders and homeowners a choice that expands their design potential.



Details

Suggested use: interior and exterior applications including accent walls, kitchens, bar surround, backsplashes, archways, fireplaces and more!

See the next few pages for color options, or visit www.glengery.com



Sizes

Brick veneer come in a variety of lengths and thicknesses. The following pages showcase our current thin brick offering. Virtually any of our full size facebrick can be cut into thin brick to meet project needs. Please refer to the actual dimensions listed above the products on each page. Contact your Glen-Gery sales representative for more information.



Flats



Corners



E-SERIES DOUBLE-HUNG WINDOW



Interior



Exterior

Summary

Product ID#	DHG2850
Unit Width	32"
Unit Height	60"
Interior Color	Oak
Interior Stain	Clear Coat
Glass	Low-E4® Glass
Hardware	Lock and Keeper, Oil Rubbed Bronze
Optional Hardware	None
Grille Pattern	Diamond - Top Sash Only
Exterior Frame Color	White
Exterior Sash Color	White
Exterior Trim Profile	None

8 CONSTITUTION ST.
REPLACEMENT WINDOWS

DOUBLE-HUNG INSERT WINDOW

FEATURES

DOUBLE-HUNG INSERT WINDOWS


Double-hung insert window fits into an existing window frame making installation a breeze. The appearance of the interior and exterior of the home are maintained because the existing frame, wall coverings and trim work stay completely intact.

FRAME & SASH

A Select wood components are kiln dried and treated with water/insect repellent and preservative. Interior wood surfaces are available in pine, mixed grain Douglas fir, cherry, hickory, mahogany*, maple, oak, walnut, alder or vertical grain Douglas fir. Interior surfaces are available unfinished or factory primed. Optional factory-applied finishes are available in a variety of stains and paints.


B Wood components are fitted with aluminum extrusions on the exterior. 50 exterior colors that meet AAMA 2604 and 2605 specifications are available, as well as custom colors. Also available is a selection of seven exterior anodized options.

C Compression bulb weatherstrip is applied on the bottom sash, head jamb, at the meeting rail and on side jambs for a maximum weather seal.

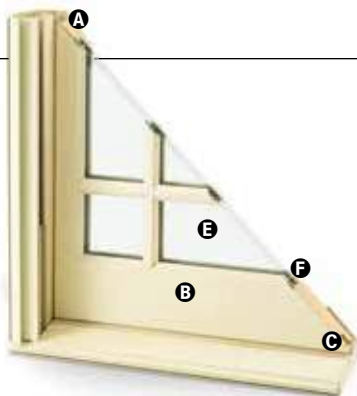

Jamb liners encase balancer assemblies that allow each sash to be tilted 90° inward from a bottom pivot and stay securely in place for washing.

D Basic jamb liners are available in beige or white and are made of synthetic material. Optional painted aluminum exterior inserts and wood-veneered interior inserts also available.



SILL

8 degrees is the standard slope. Filler block is used on existing window sill angles of less than 8 degrees.

GLASS SPACERS available in black, white and stainless steel.

GLASS

E High-Performance Low-E4® glass with a low-conductivity spacer. Triple-pane glass, tinted, clear dual-pane, high-altitude glass and other special glazing options are available.

F Glass is fixed in place from the interior with wood stops that can be removed for easy reglazing if necessary. Glass stops available in ovolo (colonial) and contemporary profiles.

HARDWARE OPTIONS



Lock




Sash Lift

Antique Brass | Black | **Polished Chrome** | Bronze | Gold
Oil Rubbed Bronze | Pewter | **Bright Brass** | **Brushed Chrome** | White

Windows with VeriLock® sensors use a different sash lock. See the next page for details.
Bold name denotes finish shown.

HARDWARE FINISHES

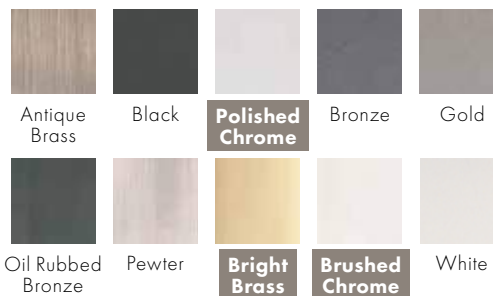

Oil rubbed bronze is a "living" finish that will change with time and use.

EXTERIOR & INTERIOR OPTIONS

EXTERIOR COLORS 50 exterior colors, 7 anodized finishes and custom colors. See exterior colors on page 11.

INTERIOR WOOD SPECIES




Interior custom stains, paints and color matching available.

Naturally occurring variations in grain, color and texture of wood make each window one of a kind.


All factory-finished options are shown on pine.

Painted options available on pine. Dark bronze and black painted options available on pine or maple. Anodized silver painted option available on maple only.

FACTORY-FINISHED INTERIORS



INTERIOR PAINTED OPTIONS



*Actual wood species is either Sapele or Sipo, both non-endangered species grown in Africa, with color and characteristics similar to Central American mahoganies.
Printing limitations prevent exact replication of colors and finishes. Please see your Andersen supplier for actual color and finish samples.

HARDWARE

Sash lock/tilt mechanisms and keepers give a slim, more traditional design and allow opening and tilting of the window in one operation. Tilting the sash from the inside for cleaning is effortless.

Surface mount sash lifts allow for easy operation. Units less than 3' wide use one lift. Units 3' wide and greater use two lifts.

MEASURING GUIDELINES

Measuring guidelines for double-hung insert and picture insert windows can be found on andersenwindows.com/measure.

ACCESSORIES Sold Separately

DOUBLE-HUNG INSERT WINDOWS

HARDWARE

Window Opening Control Device Kit

An optional Window Opening Control Device Kit is available, which limits opening the sash to less than 4" when the window is first opened. Available in stone and white.

VeriLock & Open/Closed Sensors **DISCONTINUED**



VeriLock sensors are unique as they detect whether the windows are locked or unlocked* — a feature no other sensors can provide. Available in all hardware finishes.

Open/Closed Sensors

Wireless open/closed sensors are available in four colors.

See page 27 for Smart Home options.

INSECT SCREENS

TruScene® Insect Screens

Andersen® TruScene insect screens let in over 25% more fresh air and provide 50% greater clarity than conventional Andersen insect screens, all while keeping out unwanted small insects. Frames are available in painted aluminum or wood-veneered options.

Conventional Insect Screens




Charcoal fiberglass screen mesh fits into an aluminum frame in all 50 exterior colors and seven anodized finishes. Available in half or full insect screens. Aluminum screen mesh is available as an option.

See page 24 for more information on our insect screens.

GRILLES

Full Divided Light

Permanent interior and exterior grilles with grille spacer bars between two panes of glass. Available in 5/8", 7/8", 1 1/8", 1 1/2", or 2 1/4" widths and ovolo or contemporary profile. Ovolo profile shown below, not all widths are pictured.

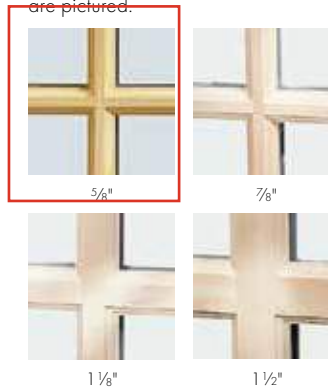


Simulated Divided Light

Permanent exterior and interior grilles without grille spacer bars. Available in 5/8", 7/8", 1 1/8", 1 1/2", or 2 1/4" widths and ovolo or contemporary profile. Ovolo profile shown below, not all widths are pictured.



Finelight™ Grilles-Between-the-Glass

Available in 5/8" flat or 1" contoured aluminum profiles. Two-tone colors of pebble tan/colony white, sierra bronze/colony white or forest green/colony white are available on the 1" profile.

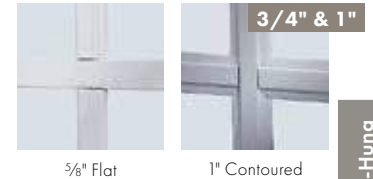

Removable Interior Wood Grilles

Removable interior wood grilles are available in a 7/8" width and ovolo or contemporary profiles. Optional surround for removable grille and permanent exterior grilles also available. Ovolo profile shown below.



See page 22 for more information on grilles.


*When properly configured and maintained with a professionally installed security system and/or self monitoring system compatible with Honeywell® 5800 controls. See your Andersen supplier for more information.

ARCHITECTURALLY AUTHENTIC GRILLES

We offer a variety of grille styles and patterns to choose from, or design your own with varying lines, curves and shapes.

FULL DIVIDED LIGHT (MODERN DIVIDED LIGHT)


Give any window an authentic look with full divided light grilles that are permanently applied to the interior and exterior of your window with a spacer between the glass. Available in ovolo (colonial) and contemporary profiles.



Chamfer exterior grille and ovolo interior grille profiles


SIMULATED DIVIDED LIGHT (CLASSIC DIVIDED LIGHT)

An economical solution with traditional beauty, our simulated divided light features fixed exterior and interior grilles without an internal spacer. Available in ovolo and contemporary profiles.




Contemporary exterior and interior grille profiles

Interior

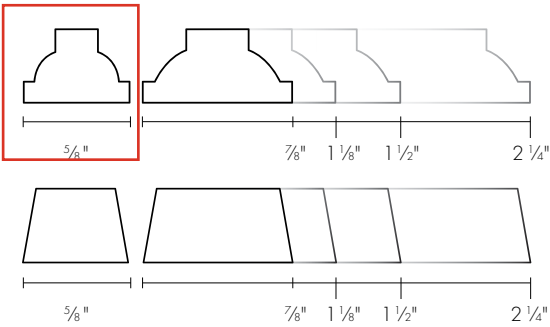


Exterior

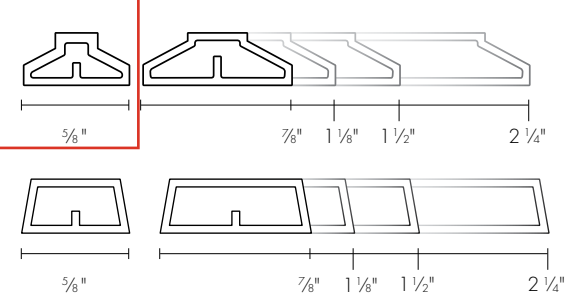


REMOVABLE INTERIOR WOOD GRILLES

Our removable wood grilles are installed on the interior surface. They are available with an optional surround and an optional permanently applied exterior grille. Available in ovolo and contemporary profiles.




Ovolo profile and optional permanently applied exterior grille with chamfer profile

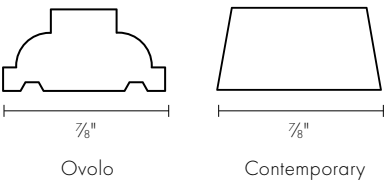


FINELIGHT™ GRILLES-BETWEEN-THE-GLASS

Aluminum grilles conveniently placed between two panes of glass make the glass easy to clean inside and out.



1" contoured profile

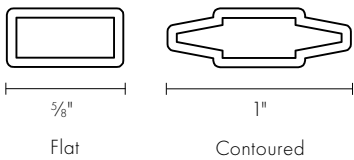

Flat

Contoured

Contoured profile also in 3/4"

5/8" Color Options

- Colony White
- Sierra Bronze
- Pebble Tan
- Forest Green


1" Color Options

- Sierra Bronze/Colony White
- Pebble Tan/Colony White
- Forest Green/Colony White


Choose from our broad palette of 50 colors or select from the two-tone paint combinations shown above.

Available in any color combination in addition to those shown.


Double-Hung Insert Windows

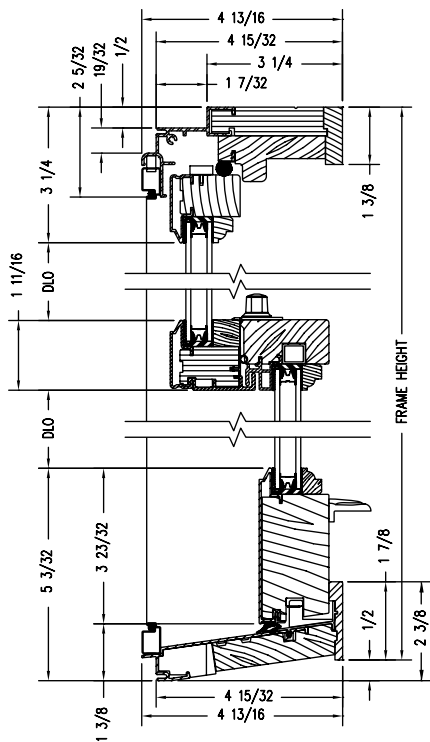

Vertical Section
(For sill angles 8° and greater)

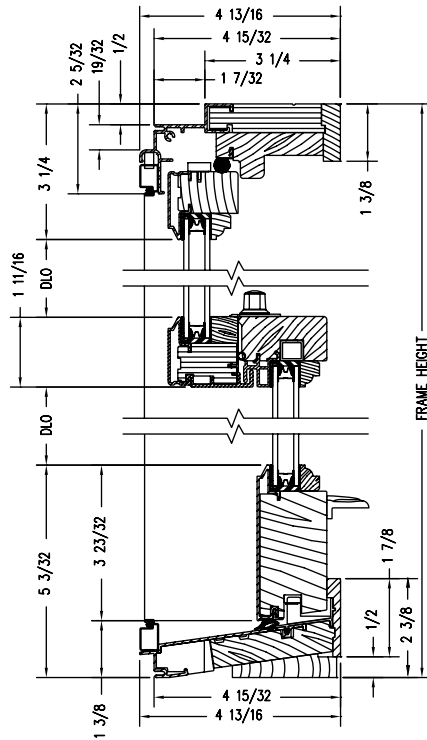

Vertical Section
(For sill angles less than 8°)

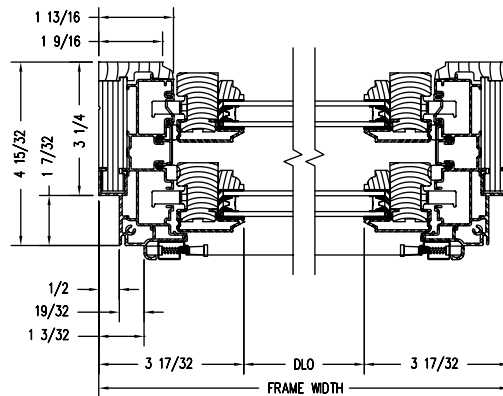

Horizontal Section

Shown with ovolo (colonial) glass stops.

PROPER INSTALLATION AND MAINTENANCE OF E-SERIES PRODUCTS IS ESSENTIAL TO ATTAIN OPTIMUM PERFORMANCE AND OPERATION. WRITTEN INSTALLATION INSTRUCTIONS THAT PROVIDE GUIDELINES FOR PROPER INSTALLATION ARE AVAILABLE BY VISITING ANDERSENWINDOWS.COM. CUSTOM SIZES ARE AVAILABLE. CONTACT YOUR LOCAL SUPPLIER FOR MORE INFORMATION. DRAWINGS ARE NOT TO SCALE.



E-SERIES DOUBLE-HUNG WINDOW



Interior



Exterior

Summary

Product ID#	DHG3050
Unit Width	36"
Unit Height	60"
Interior Color	Oak
Interior Stain	Clear Coat
Glass	Low-E4® Glass
Hardware	Lock and Keeper, Oil Rubbed Bronze
Optional Hardware	None
Grille Pattern	None
Exterior Frame Color	White
Exterior Sash Color	White
Exterior Trim Profile	None

8 CONSTITUTION ST.
ADDITION WINDOWS

DOUBLE-HUNG WINDOW

FEATURES

DOUBLE-HUNG WINDOWS

FRAME & SASH


A Select wood components are kiln dried and treated with water/insect repellent and preservative. Interior wood surfaces are available in pine, mixed grain Douglas fir, cherry, hickory, mahogany*, maple, oak, walnut, alder or vertical grain Douglas fir. Interior surfaces are available unfinished or factory primed. Optional factory-applied finishes are available in a variety of stains and paints.

B Wood components are fitted with aluminum extrusions on the exterior. 50 exterior colors that meet AAMA 2604 and 2605 specifications are available, as well as custom colors. Also available is a selection of seven exterior anodized options.


Optional vinyl installation flanges are pre-applied into a kerf on the frame exterior to facilitate installation. Optional aluminum flanges or metal installation clips are available.

C Compression bulb weatherstrip is applied on the bottom sash, head jamb, at the meeting rail and on side jambs for a maximum weather seal.

Jamb liners encase balancer assemblies that allow each sash to be tilted 90° inward from a bottom pivot and stay securely in place for washing.

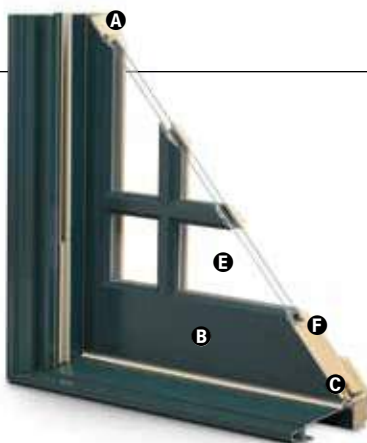

D Double-hung jamb liners incorporate synthetic interior and exterior inserts or optional painted aluminum exterior and wood-veneered interior inserts.



GLASS

E High-Performance Low-E4® glass with a low-conductivity spacer. Triple-pane glass, tinted, clear dual-pane, high-altitude glass and other special glazing options are available.

F Glass is fixed in place from the interior with wood stops that can be removed for easy reglazing if necessary. Glass stops available in ovolo (colonial) and contemporary profiles.

GLASS SPACERS available in black, white and stainless steel.

HARDWARE

Sash lock/tilt mechanisms and keepers give a slim, more traditional design and allow opening and tilting of the window in one operation. Tilting the sash from the inside for cleaning is effortless.

Optional surface mount sash lifts allow for easy operation. Units less than 3' wide use one lift. Units 3' wide and greater use two lifts.

HARDWARE OPTIONS



Lock




Sash Lift

Antique Brass | Black | **Polished Chrome** | Bronze | Gold
Oil Rubbed Bronze | Pewter | **Bright Brass** | **Brushed Chrome** | White

Windows with VeriLock® sensors use a different sash lock. See the next page for details.
Bold name denotes finish shown.

HARDWARE FINISHES

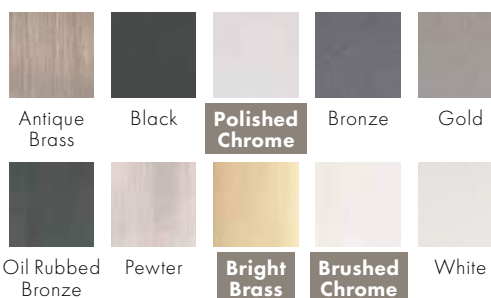

Oil rubbed bronze is a "living" finish that will change with time and use.

EXTERIOR & INTERIOR OPTIONS

EXTERIOR COLORS 50 exterior colors, 7 anodized finishes and custom colors. See exterior colors on page 11.

INTERIOR WOOD SPECIES




Interior custom stains, paints and color matching available.

Naturally occurring variations in grain, color and texture of wood make each window one of a kind.

All factory-finished options are shown on pine.

Painted options available on pine. Dark bronze and black painted options available on pine or maple. Anodized silver painted option available on maple only.

FACTORY-FINISHED INTERIORS





INTERIOR PAINTED OPTIONS



*Actual wood species is either Sapele or Sipo, both non-endangered species grown in Africa, with color and characteristics similar to Central American mahoganies.
Printing limitations prevent exact replication of colors and finishes. Please see your Andersen supplier for actual color and finish samples.

Double-Hung Windows

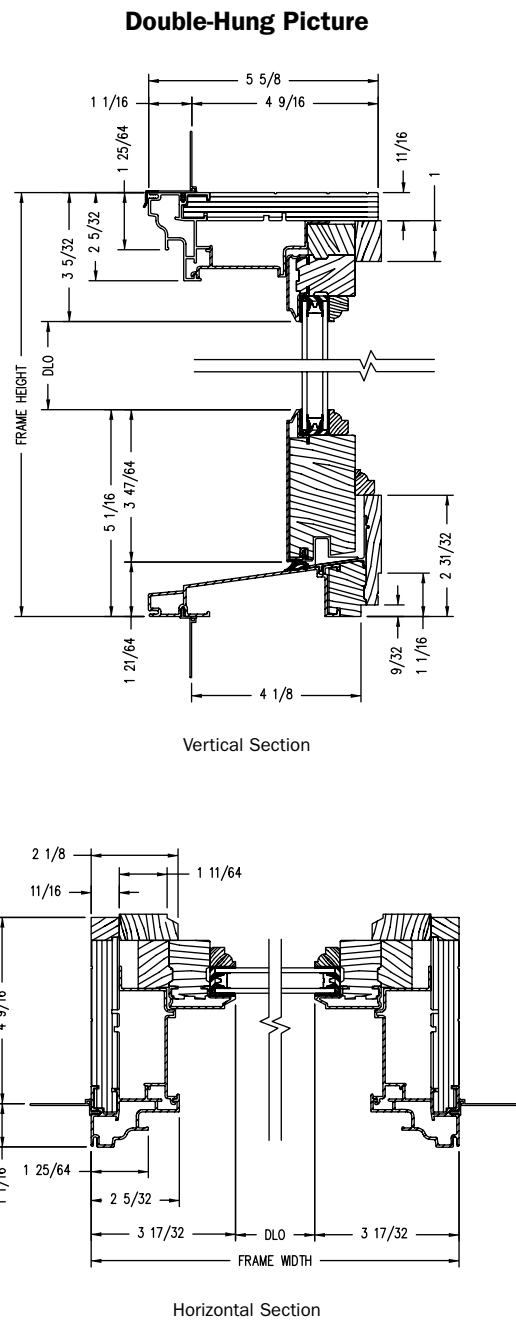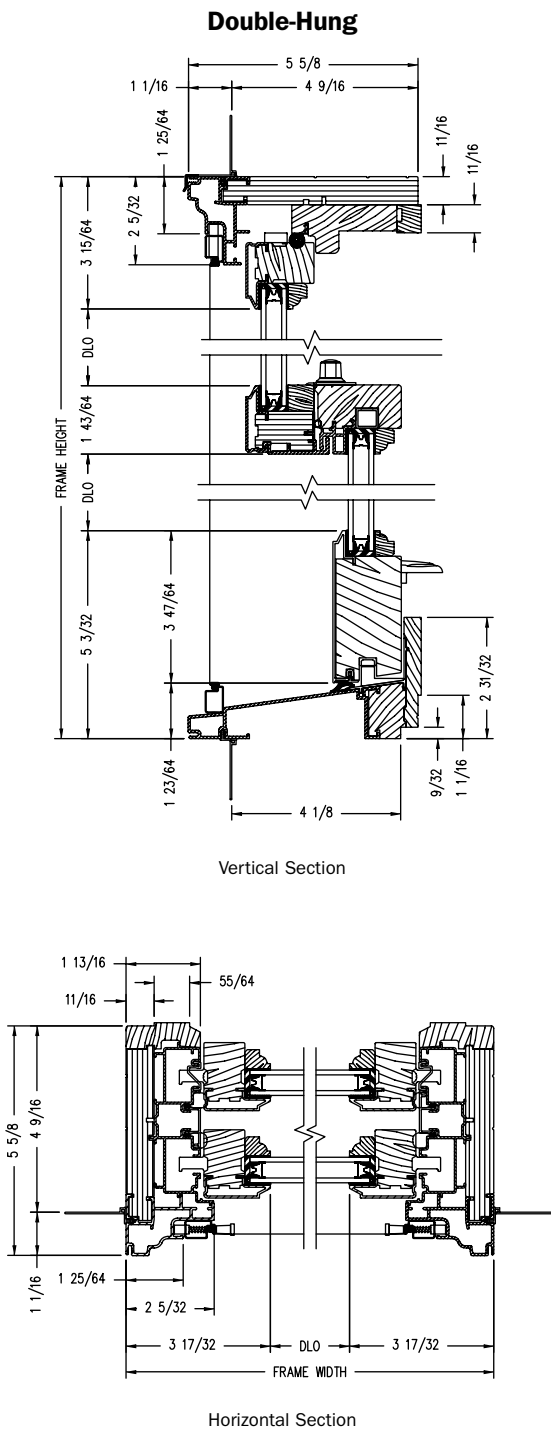

Shown with ovolo (colonial) glass stops.

PROPER INSTALLATION AND MAINTENANCE OF E-SERIES PRODUCTS IS ESSENTIAL TO ATTAIN OPTIMUM PERFORMANCE AND OPERATION. WRITTEN INSTALLATION INSTRUCTIONS THAT PROVIDE GUIDELINES FOR PROPER INSTALLATION ARE AVAILABLE BY VISITING ANDERSENWINDOWS.COM. CUSTOM SIZES ARE AVAILABLE. CONTACT YOUR LOCAL SUPPLIER FOR MORE INFORMATION. DRAWINGS ARE NOT TO SCALE.



Date	4/10/2025
------	-----------

8 CONSTITUTION ST.
FRONT ENTRY DOOR

Style Option = CCM2800XN

Fiberglass Single

Impact Rating : None
Call Width : 3'0"
Call Height : 6'8"
Door Collection : Classic Craft® Mahogany Grain
Line : Classic Craft® Mahogany Grain
Glass Shape : 3/4 Lite
Style Shape : 3/4 Lite 1 Panel Flush-Glazed
Glass Type : Privacy & Textured Glass
Glass Design : Granite
Grille Pattern : None
Grille Style : None
Low-E? : No
Caming : None
Frame Profile : None
Door Prefinish : Paint 1 Color
Door Paint Color : Onyx
Jamb Prefinish : Paint 1 Color
Jamb Paint Color : Same as door
Hardware : Multipoint Hardware
Multipoint Hardware : Lever
Lever Style : Venture Narrow
Lever Finish : Oil Rubbed Bronze
Would you like to include a storm door? : No



Style Option = CCM600XE

8 CONSTITUTION ST.
SIDE ENTRY DOORS

Fiberglass Single

Impact Rating : None
Call Width : 3'0"
Call Height : 6'8"
Door Collection : Classic Craft® Mahogany Grain
Line : Classic Craft® Mahogany Grain
Glass Shape : 1/2 Lite
Style Shape : Half Lite 2 Panel
Glass Type : Privacy & Textured Glass
Glass Design : Satin Etch
Grille Pattern : None
Grille Style : None
Low-E? : No
Caming : None
Frame Profile : Scroll Profile
Door Prefinish : Paint 1 Color
Door Paint Color : Onyx
Jamb Prefinish : Paint 1 Color
Jamb Paint Color : Same as door
Hardware : Multipoint Hardware
Multipoint Hardware : Grip
Grip Style : Prospect
Grip Finish : Oil Rubbed Bronze
Would you like to include a storm door? : No



8 CONSTITUTION ST.
PATIO DOORS

[Home](#) ▶ [Windows & Doors](#) ▶ [Doors](#) ▶ [Sliding Glass Patio Doors](#) ▶ E-Series Gliding Patio Door

E-SERIES GLIDING PATIO DOOR

LEARN

DESIGN IT

TECH SPECS



INTERIOR EXTERIOR

FULLY CUSTOMIZABLE
Unmatched design freedom

A sleek, classic door creates an open view to the outside. Andersen® E-Series gliding patio doors come in custom colors and infinite interior options for unlimited possibilities and unmatched freedom. Made of wood protected by an aluminum exterior, it's our fully customizable gliding patio door.

Andersen® products increase a homes value by at least 15% *

*2024 Andersen brand surveys of U.S. builders, homeowners & realtors

★★★★★ 4.1 (13) | \$\$\$\$\$

Request a quote →

MOST POPULAR INTERIOR OPTIONS

Black Canvas Sandtone White

View all options →

IS IT RIGHT FOR YOU?

Material

Wood protected by aluminum exterior.

Read more →

Colors

50 standard exterior + 7 anodized finishes. 14 interior colors along with natural, unfinished or stained wood to give you the option of a modern or traditional look.

Sizes


Available in standard sizes with a height of 6'8", 6'10" and 8' and standard width for Single panel: 2'8", 3'2" and 4'2", 2-panel: 5', 6' and 8', 4-panel: 9'10 3/4", 11'10 3/4" and 15'10 3/4" configurations. Custom sizes also available in 1/8" increments. Check out The Essentials under the Tech Specs tab for sizing document links.

Accessories

7 hardware styles with up to 9 finish options and standard, custom grille patterns, and glass let you personalize the final look to match the character of your home. Andersen offers a variety of options and accessories.

Explore more →



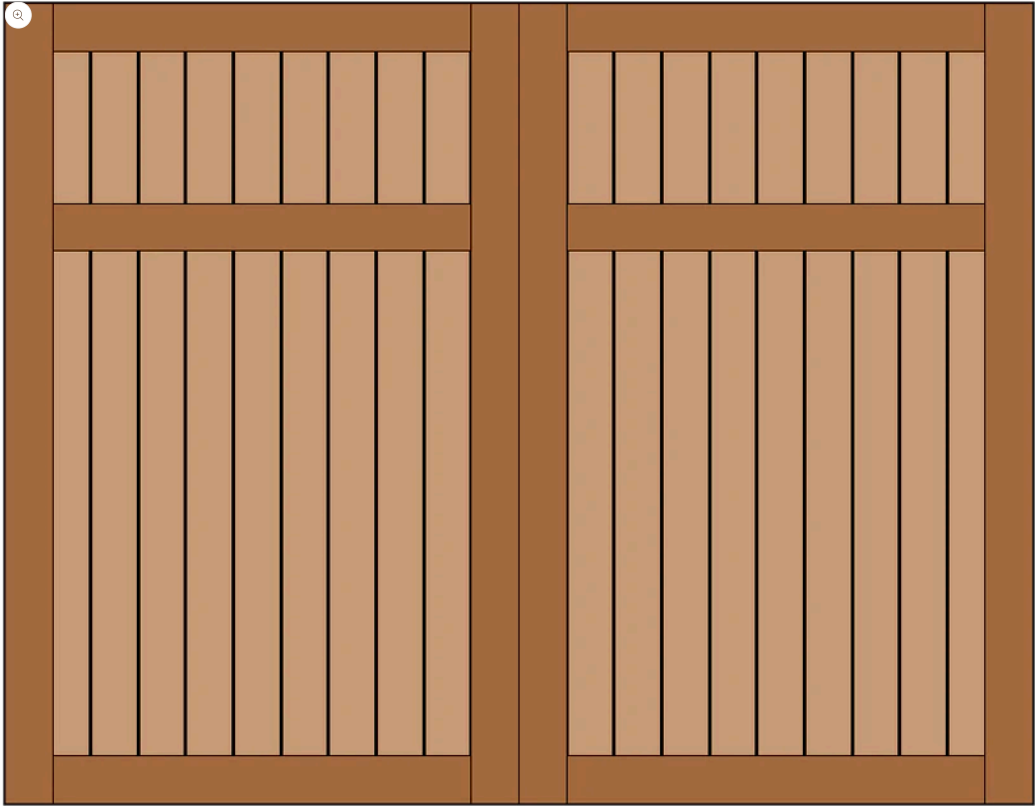

8 CONSTITUTION ST.
GARAGE DOOR

< NaN/-infinity >

CRAFT DOORS USA
Model 19

SpringFest is here — find fresh deals for your home and landscape. Shop Now >

☰

👤🛒

What can we help you find?

🔍

Shop All

New

MyLow

Appliances

Bathroom

Building Supplies

Flooring

Lawn & Garden

Lighting

Outdoor

Tools

Plumbing

Doors & Windows

Earth Day

🏠 Warwick Lowe's 10 PM

📞 02920



Prices, Promotions, styles, and availability may vary. Our local stores do not honor online pricing. Prices and availability of products and services are subject to change without notice. Errors will be corrected where discovered, and Lowe's reserves the right to revoke any stated offer and to correct any errors, inaccuracies or omissions including after an order has been submitted.

8 CONSTITUTION ST. PORCH DECKING

< [Back to Results](#) / [Building Supplies](#) / [Decking](#) / [Wood Deck Boards](#)



Trending Now

1k+ bought last week

5/4-in x 6-in x 12-ft #1 S4S Cedar Kiln-Dried Deck Board Lumber

Item #430693 | Model #430693

★★★★☆ 3.9

32

\$21^{.38}

5/4-in x 6-in x 12-ft #1 S4S Cedar Kiln-Dried Deck Board Lumber ~~\$21.38~~ [How](#)

★★★★☆ 3.9

32

Delivery

Need assistance?

📦 FREE Pickup [Open Store Map](#)

DECKING:

Trex Transcend Lineage in Biscayne (BC)

RAILING:

Trex Signature X-Series in Charcoal Black (BK)
with stainless steel cable infill

8 CONSTITUTION ST.
BALCONY DECKING



\$\$\$\$



SCRATCH RESISTANCE

TrexTranscend®
LINEAGE®


**The next generation of design
and performance**

Winner of *Green Builder's* 2023 Sustainable Product of the Year and
Good Housekeeping's 2024 Sustainable Innovation Awards



Cooler to the touch— even on the hottest days

Thanks to SunComfortable* heat-mitigating technology, Trex is making decking feel even more civilized, even on the kind of days that melt popsicles before they find your mouth.

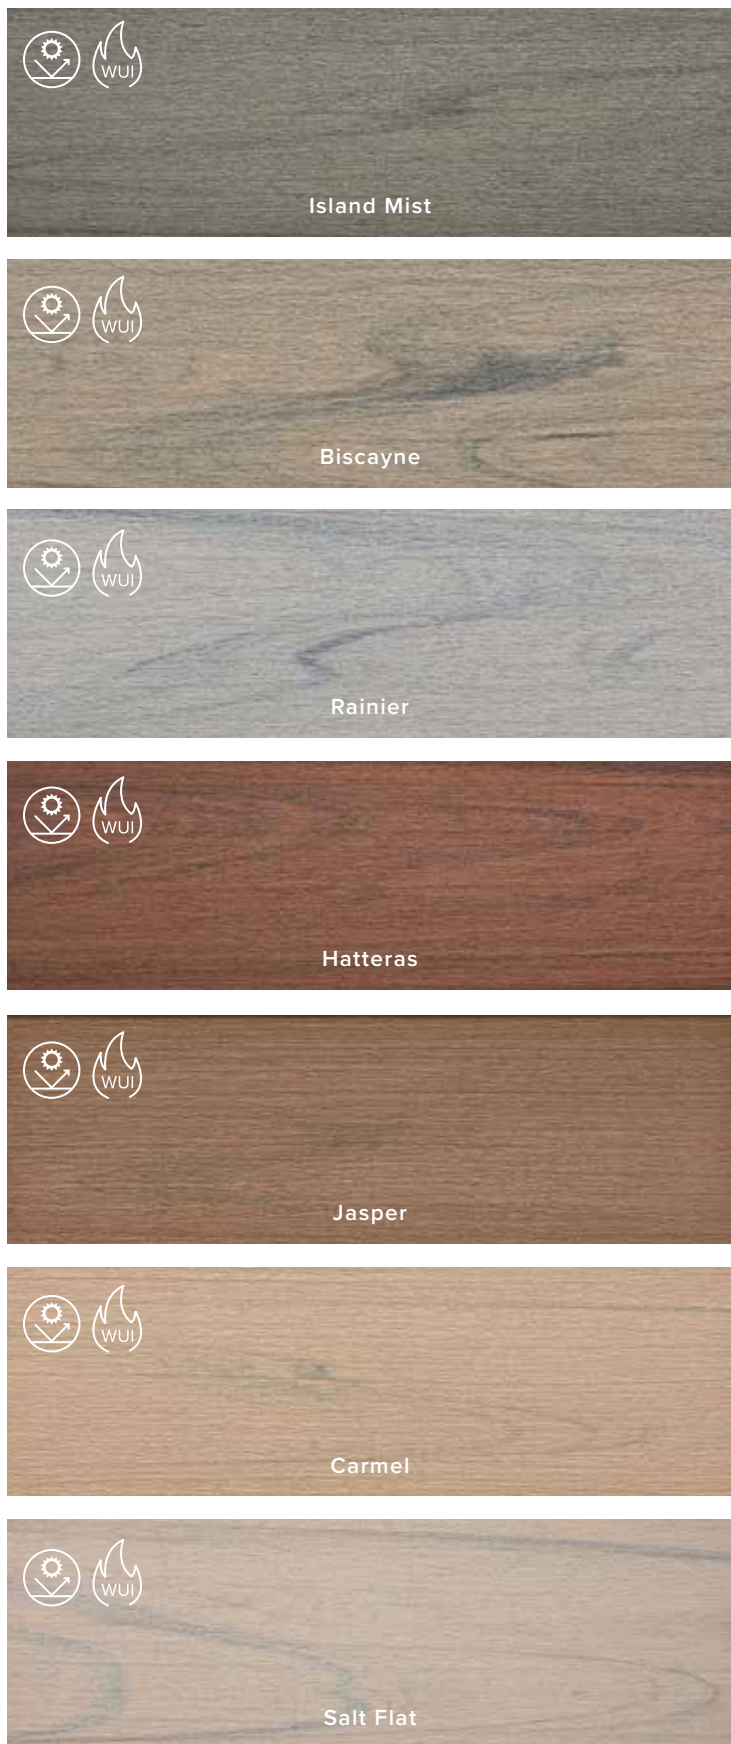

*Our SunComfortable™ products with heat-mitigating technology are designed to be cooler than most other composite decking products of a similar color. Although engineered to be more comfortable, they can still get hot to the touch when direct sunlight and high temperatures converge for extended periods of time. On such days, care should be taken.






\$\$\$\$



TrexTranscend®

**Elevated aesthetics from
the original high-performance
decking**

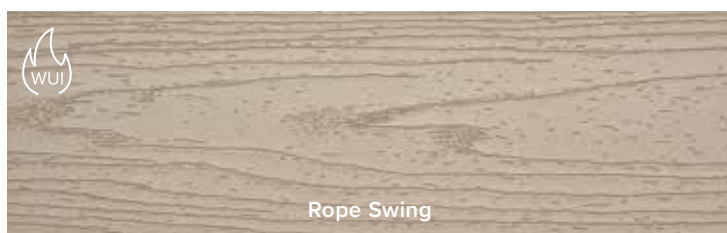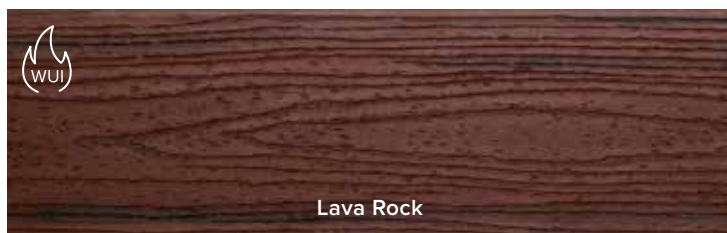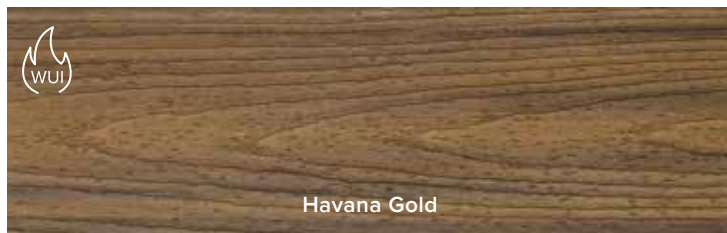

Performance-Engineered™ colors for high impact design to last a lifetime

Find the perfect fit for your build with our Trex Color Selector tool.



TRANSFORMING STRUCTURES WITH ENDURA-STONE® COLUMNS

Endura-Stone® FRP Columns are the product of choice for homeowners and builders who demand beauty, value, and performance. Endura-Stone® FRP Columns are architecturally proportioned from rotocast fiberglass-reinforced polymer — the most advanced construction material in the world — so pound for pound they are stronger than concrete, steel, or aluminum.

LIMITED LIFETIME WARRANTY

Endura-Stone® FRP Columns are virtually maintenance-free. They are impervious to termite and carpenter ant attack as well as staining and decaying fungi. High-humidity environments have no effect on these non-porous, waterproof columns. All Endura-Stone® Columns are covered by a limited lifetime warranty to the original purchaser. Warranty details are available from our website.

8 CONSTITUTION ST. PORCH COLUMNS



NOW WITH FLAME GUARD™




Endura-Stone® FRP Columns are the first fiberglass-reinforced polymer columns to achieve the distinction of passing an industry test (ASTME, 84-01) that measures the flame spread and smoke development of building components in a fire.

Endura-Stone® FRP Columns with Flame Guard set a new industry standard:		
FLAME GUARD	Flame Spread Index (FSI)	Smoke Developed Index (SDI)
Industry Standard for FRP Columns	70-85	900-1025
Endura-Stone® Columns	15*	335**

*Achieving Class I Flame-Spread classification under 1997 uniform fire code.
**Well below the allowable SDI index of 450.


PLAN TYPES

Endura-Stone® FRP Columns are available in the plan types below. Please specify when you order. (Fractional components shown are typical. Customer may specify actual returns, wall thicknesses, etc.)

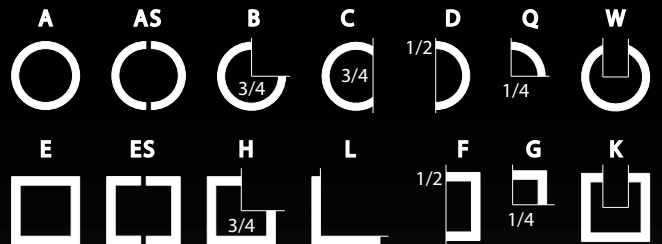

Trex Signature® X-Series™ Frameless Glass Railing

Streamlined design and totally unobstructed views.

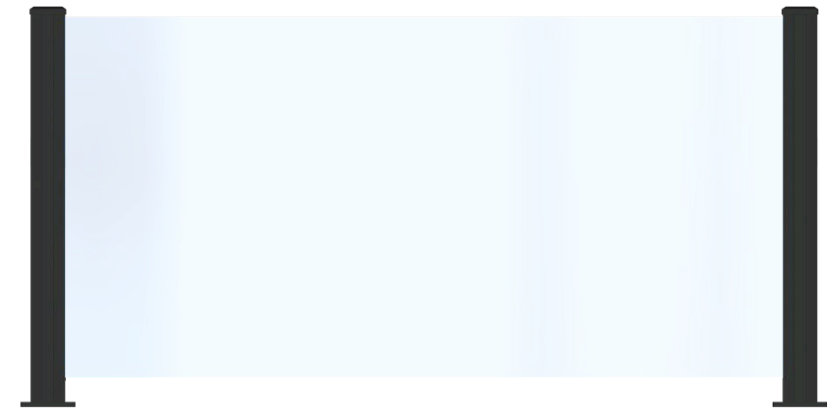


Posts
CHARCOAL BLACK
Infill
LAMINATED GLASS PANEL

Trex® glass infills sold separately at glass.trex.com, only available in 6 ft spans.
Not for use on stairs.

Trex Signature® Glass Railing

Put your view front and center with elegant, tempered glass infill. **8 CONSTITUTION ST.
BALCONY RAILING**

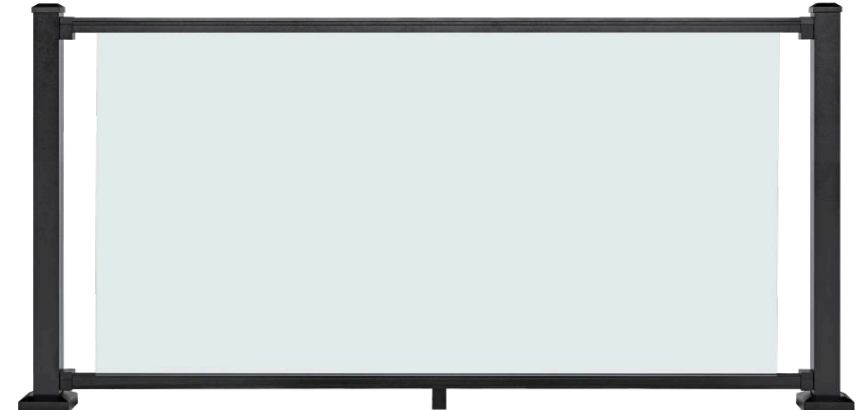

Rails	
CHARCOAL BLACK	CLASSIC WHITE
Infill	
LAMINATED GLASS PANEL	

- ALTERNATE POST OPTION
- 4X4 ALUMINUM POST SLEEVE (BB, BK)
 - 4X4 COMPOSITE POST SLEEVE (VL, BK, WT, RS)
 - 6X6 COMPOSITE POST SLEEVE (WT)
- MORE LIGHTING AVAILABLE WITH ALTERNATIVE POST OPTIONS

Trex® glass infills sold separately at glass.trex.com, only available in 6 ft spans.
Not for use on stairs.

CUSTOMIZATIONS

 ALUMINUM POST CAP LIGHT

 WEDGE LIGHT

 ADA

DATE: _____ TYPE: _____

NAME: _____

PROJECT: _____

8 CONSTITUTION ST. EXTERIOR LIGHTING

Incandescent

P6615-20

Burlington

The one-light wall lantern from the Burlington outdoor collection is constructed from aluminum for durable, weather-resistant performance. An Antique Bronze finish complements the clear beveled glass. Open bottom design allows individuals to replace lamps without removing any glass shade.

- Antique Bronze finish
- Durable aluminum construction
- Complemented by clear beveled glass
- Open bottom design allows individuals to easily replace lamps

Category: Outdoor

Finish: Antique Bronze (painted)

Construction: Aluminum construction

Glass/Shade: Clear beveled glass panels



Width: 7"

Height: 12-7/8"

Depth: 7-3/4"

H/CTR: 4-1/8"

MOUNTING	ELECTRICAL	LAMPING	ADDITIONAL INFORMATION
<p>Wall mounted</p> <p>Mounting strap for outlet box included</p> <p>Backplate covers a standard 4" hexagonal recessed outlet box</p>	<p>Pre-wired</p> <p>6" of wire supplied</p> <p>120 V</p>	<p>Quantity:</p> <p>One 100w max. Medium Base</p> <p>E26 base ceramic socket</p>	<p>cCSAus Wet location listed</p> <p>1 year warranty</p>

8 CONSTITUTION ST.
EXISTING PAVERS

