



CSLB #980409
DIR 1000004282
www.source-mme.com
Toll Free 1-888-484-9968

May 13, 2024

City of Orland
431 E. South Street
Orland, CA 95963

Tel: 530-624-2870
cityshop@cityoforland.com

Attention: Roy Stewart, Fleet Manager

We are pleased to provide the following quotation on the Vac-Con Combination Sewer and Storm Drain Cleaner for your review.

One (1) Each Vac-Con Model VPD2130SHAS/500 complete with the following standard features:

- PD2130 Roots 616 PD Blower 16"HG/2500CFM
- Transfer Case Blower Drive with High Performance Carbon Chord Timing Belt
- 3/16" 3.5 Yd³ Corten Steel Debris Tank - 5 Year Warranty
- Outlet Screen Assembly - 8" Diameter
- Full Opening Rear Door with Hydraulic Rear Door Locks
- 8" Automatic Vacuum Breaker Door System
- Poly Float Ball Load Level Indicator
- 10' Layflat Hose with Bar Screen
- Strainer (Trash Bars) on Both Ports of Debris Dome
- Built in Body Prop, Sub Frame Mounted
- Debris Tank Dumping: Minimum 45 Deg., Hydraulic Lift
- Dump Height 60"
- Rear Mounted Bumper
- 500 Gallons Capacity Aluminum Water Tank - 5 Year Warranty
- 1/4" Ball Valve for Water Tank Drain
- 5' X 6" Diameter Extendable Boom with Pendant Control Station
- 6 Way Pendant Control Station - Unless Wireless Remote Selected
- Behind Cab Boom Support Chassis Frame Mounted Boom Cradle Assembly with Bumper Mounted Boom Docking Assembly
- Triplex Water Pump - Hydrostatic Drive
- Water Pump Remote Oil Drain
- 30 GPM/3000 PSI Water Pump System
- 400' High Pressure Jet Rodder Hose (3/4")
- Front Mounted / Swiveling Hose Reel, 500' Max Capacity (3/4")
- (1) Each Sanitary and Penetrator Nozzles
- Water Manifold Assembly
- Hose Guide (Tiger Tail)
- Manual Hose Wind Guide
- 30" Leader Hose
- 800 PSI Wash Down Hand Gun with 25' of Hose and Nozzle
- Handgun Bracket Assembly
- (1) 22" X 51" X 25.5" Aluminum Sealed and Locking Tool Box
- 20.5' Aluminum Intake Pipe (1-3', 1-5', 1-6', and 1-6.5' Nozzle)
- 4 Pipe Storage Rack Mounted Curbside - Ground Level

4634 Mayhew Road
Sacramento, CA 95827
Office: 916-922-1101
Fax: 916-922-1034

4750 Caterpillar Road, #D
Redding, CA 96003
Office: 530-243-4856
Fax: 530-243-1447

13922 Gracebee Avenue
Norwalk, CA 90650
Office: 714-528-8770
Fax: 714-528-8744

1930 W. Winton Avenue, #1
Hayward, CA 94545
Office: 510-670-0230
Fax: 510-670-9003



May 13, 2024
City of Orland
Vac-Con Model VPD2130SHAS/500 Quotation
Page 2

- Long Handle Storage 72"L X 20"W X 5 1/4"H – Integrated in Mainframe with Lockable Door
- Plastic Engraved Decals – Adhesive Type
- LED / ICC Lighting
- 5# Fire Extinguisher
- Set of Triangles
- PPG Ambershield Zinc Primed, PPG Delfleet Single Stage Polyurethane Paint and PPG Ambershield Textured Black Paint
- 12 Month Standard Warranty - See Certificate for Details

Complete with the following selected features:

Main Information:

- Boom: Extendable, 6" Intake System – Standard
- Hose Reel: Front Mounted Swivel Hose Reel – Standard with 3-Yard
- Jet Rodder Hose: 500' x 3/4" Piranha Brand Jet Rodder Hose
- Water System: Giant 0-30 GPM / 3000 PSI, 3/4" Hose

Debris Body:

- Rear Splash Guard (2 – 10 O'clock) – Tank Mounted

Water System:

- 50' Capacity Retractable Hand Gun Hose Reel
- Debris Body "Power Flush" System, 8 Jets
- Hydroexcavation Package Includes: 50' Handgun Hose Reel with 1/2" Hose, 711-53686 72" 1/2" Schedule 80 Lance with Single Forward Spray Nozzle, Storage Tubes for Lances, Heavy Duty Unloader Valve, Main Control Valve, Variable Flow Valve

Hose Reel:

- Hose Footage Counter, Standard

Misc. Machine Options:

- Cone Storage Rack Placement – Rear of Frame

Lighting:

- LED 4 Strobes – (2) Front Bumper / (2) Rear Bumper – Whelen 500 Series TIR6 01-0663507129E – Amber
- LED Arrow Stick – Whelen TAM85 Traffic Advisor
- LED Boom Mounted Flood Lights with Limb Guard – Whelen NP6BB Worklight
- LED Midbody Flood Lights with Guards – Whelen NP6BB (Driver's Side and Curbside)
- LED Rear Mounted Flood Lights with Limb Guard – Whelen NP6BB Worklight

Electrical:

- Traffic Camera with Monitor – Rear Camera Placement



May 13, 2024
City of Orland
Vac-Con Model VPD2130SHAS/500 Quotation
Page 3

- Paint
- Single-Stage Polyurethane Elite White with your Choice of Standard White or Blue Stripping Package

Mounted on a new Freightliner M2 106 4x2 CA CARB truck chassis complete with the following features:


- Cummins B6.7 300 HP 2600 RPM Engine
- Allison 2100 RDS Transmission
- Driver's Side Air Seat
- Air Conditioning
- AM/FM
- Painted White

Price F.O.B. Orland, CA	\$494,362.00
Less Current Estimated Sourcewell Discount	- 33,079.25
Sub-Total	\$461,282.75
7.75% Estimated Sales Tax	35,749.41
CA Tire Fee (6 @ \$1.75 Each)	10.50
Total	\$497,042.66


- Quotation includes delivery and on-site training.
- Normal delivery 180-210 days A.R.O., depending on chassis and component availability during production.
- CARB Disclosure: A vehicle operated in California may be subject to California Air Resources Board Advanced Clean Fleets regulations. It therefore could be subject to the requirements to reduce emissions of air pollutants. For more information, please visit the CARB Advanced Clean Fleets webpage at <https://www2.arb.ca.gov/our-work/programs/advanced-clean-fleets>
- Due to California emissions requirements, special permits may be required on diesel engines. MME cannot provide these permits and we recommend you contact your local Air Resources Management District for the specific requirements.
- Sales tax applicable at time of delivery will be shown on invoice.
- Terms: Net 15
- Quotation valid for 15 days.

Thank you for your interest in this fine product line. Should you have any questions or need additional information, please let us know. We look forward to being of service.

Sincerely,
Municipal Maintenance Equipment, Inc.



James Wheeler,
President

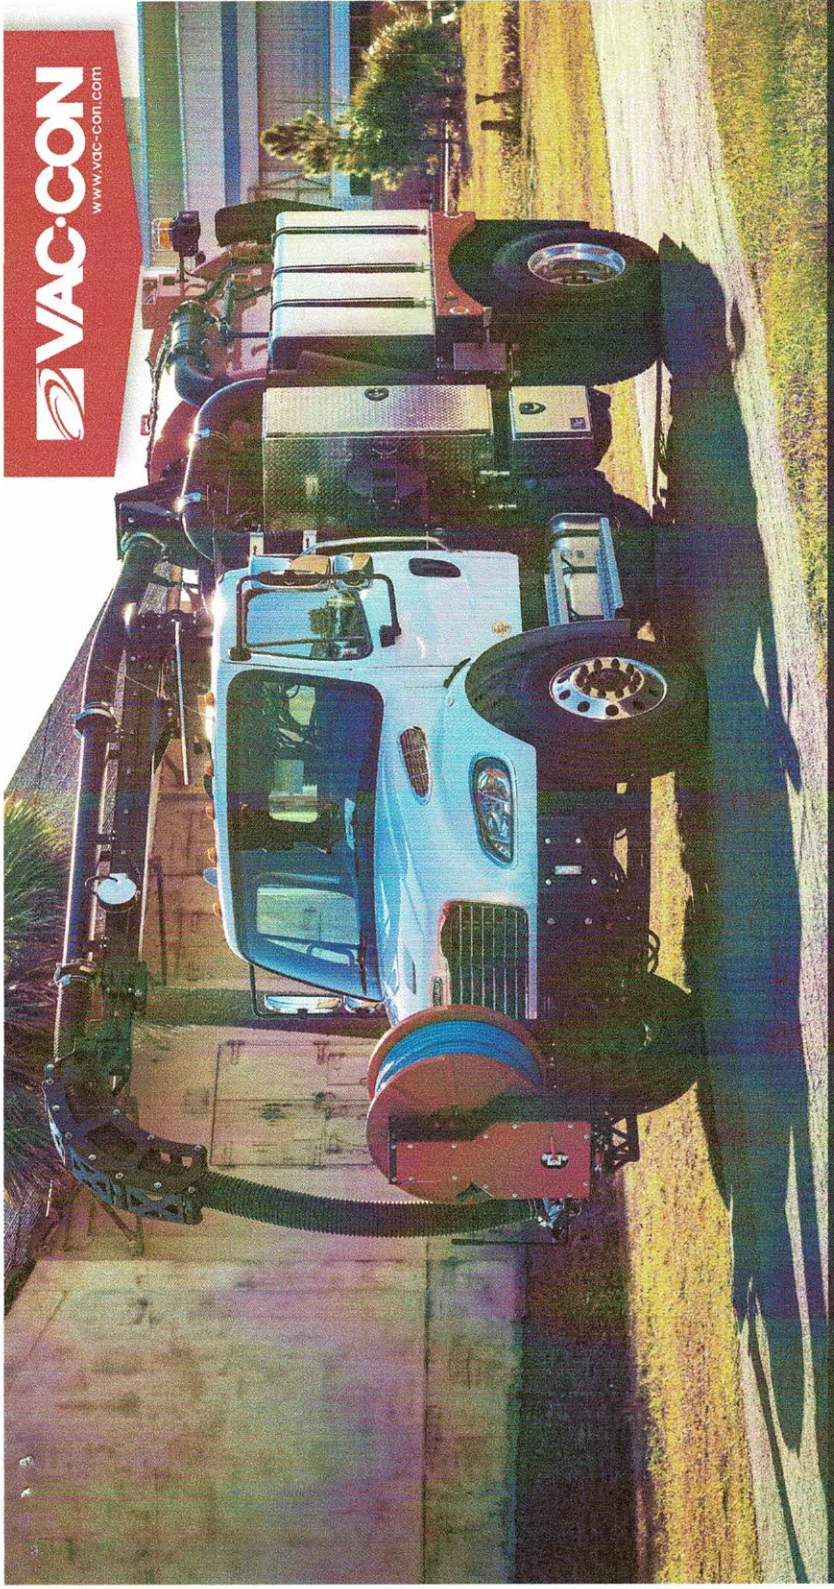

3-YARD

**A truly non-CDL truck
designed for optimal
performance and
minimal footprint**


FEATURES

- Under 26,000 GVWR with full freshwater capacity*
- 3-yard usable capacity debris tank
- Under 11.5-ft. overall height and 28-ft. overall length

** Additional equipment or optional features may impact overall unit weight*

3-YARD

Vac-Con is proud to introduce a truly non-CDL combination sewer cleaning truck with all of the performance expected from a Vac-Con and minimal footprint

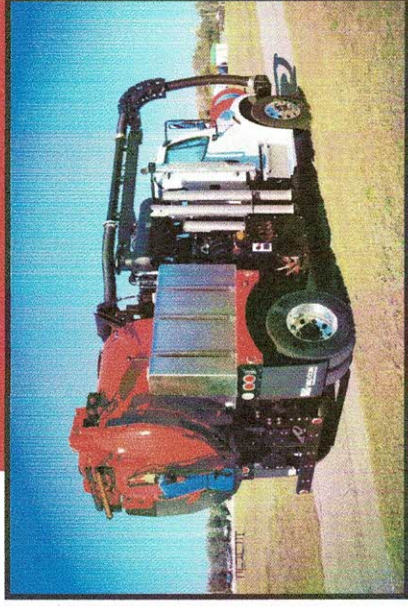

WHY 3-YARD NON-CDL

Powerful PD blower vacuum system with silencer rates up to 2,100 CFM and 16-in. Hg.

T-case with direct belt drive.

Titan style 60-in. diameter debris tank with 45-degree dump angle.

60-in. dump height available.

Improved Titan filtration with cyclone separator and final filter.

Automatic vacuum breaker system.

Dual joystick controls at the hose reel.

Lightweight aluminum water tanks feature 500-gallon capacity.

Hydrostatically-driven water system for independent flow adjustment.

30 GPM @ 3,000 PSI.

FEATURES

Front-mounted hose reel rotates 180-degrees with capacity of 500-ft. x 3/4-in. hose.

Boom rotates 180-degrees and extends 5-ft. with lifting capacity of 500-lbs. at full extension.

Optimal storage includes lockable toolbox for long handle storage and ground level vacuum pipe storage.

Rear bumper with tow hooks.

Winter recirculation.

Hydro-excavation package.

50-ft. low pressure handgun.

 **VAC·CON**

www.vac-con.com