

OUTLINE DEVELOPMENT PLAN GREAT PLAINS VILLAGE

LOCATED IN SECTION 2, 35 AND 36, TOWNSHIP 4 AND 5 NORTH, RANGE 68 WEST OF THE SIXTH PRINCIPAL MERIDIAN, IN JOHNSTOWN, COUNTIES OF WELD AND LARIMER, STATE OF COLORADO

A. INTRODUCTION

THE PURPOSE OF THIS SECTION IS TO ESTABLISH GENERAL PROVISIONS AND CLARIFY STANDARDS AND REQUIREMENTS FOR DEVELOPMENT WITHIN THE GREAT PLAINS VILLAGE PUD. DUE TO THE SIZE OF LAND AREA CONTAINED WITHIN THIS PUD AND THE CORRESPONDING LONG TERM BUILD OUT THAT IS ANTICIPATED, A RATHER BROAD RANGE OF DENSITIES AND/OR SQUARE FOOTAGES HAVE BEEN PROPOSED FOR EACH LAND USE PARCEL. THESE RANGES WILL ALLOW A VARIETY OF COMMERCIAL, LIGHT INDUSTRIAL, AND HOUSING PRODUCTS. IN ADDITION TO PROMOTING LAND USE AND DENSITY FLEXIBILITY, RANGES WILL ACCOMMODATE HOUSING PRODUCT, LAND PLANNING, MARKET AND TECHNOLOGICAL CHANGES INTO THE FUTURE. REFER TO THE PLANNING AREA SUMMARY FOR SPECIFIC DENSITIES AND SQUARE FOOTAGES.

B. DENSITY RANGES

RESIDENTIAL DENSITY RANGES ARE SPECIFIED WITHIN EACH ZONE AS LABELED ON THE LAND USE PLAN (REFER TO THE PLANNING AREA SUMMARY WITHIN THIS DOCUMENT FOR DENSITY RANGES). THE FINAL AVERAGE DENSITY OF A DEVELOPMENT PARCEL MUST BE WITHIN 10% OF THE SPECIFIED DENSITY RANGE INDICATED FOR THAT PLANNING AREA. THE FINAL AVERAGE DENSITY OF A PLANNING AREA SHALL BE BASED ON ALL RESIDENTIAL UNITS APPROVED THROUGH THE FINAL PLAT PROCESS WITHIN THE PLANNING AREA, WHETHER APPROVED AS A SINGLE PLAT OR AS MULTIPLE PLATS.

C. MAXIMUM RESIDENTIAL UNITS PER AREA

TRANSFER(S) OF RESIDENTIAL UNITS FROM PLANNING AREA TO PLANNING AREA (TRANSFER OF UNITS MAY NOT EXCEED 30% OF THE RECIPIENT PLANNING AREA MAX UNITS PER AREA) MAY BE PERMITTED BY THE DEVELOPER WITH APPROVAL BY THE PLANNING AND DEVELOPMENT DIRECTOR. UNIT TRANSFERS SHALL BE TRACKED BY THE DEVELOPER AND PROVIDED TO THE PLANNING AND DEVELOPMENT DIRECTOR WITH EACH SUCH TRANSFER AT THE FINAL PLAT STAGE OF THE SUBDIVISION PROCESS. HOWEVER, AT NO TIME SHALL THE TOTAL RESIDENTIAL UNITS WITHIN THIS PUD EXCEED 2,000 WITHOUT AN AMENDMENT TO THE ODP, APPROVED BY TOWN COUNCIL.

D. RESIDENTIAL UNITS TRANSFERS

ONCE A PLANNING AREA HAS BEEN FULLY PLATTED THROUGH THE FINAL PLAT PROCESS, ANY REMAINING RESIDENTIAL DENSITY/UNITS DESIGNATED ON THE PUD ZONE DOCUMENT WITHIN SAID PLANNING AREA SHALL REMAIN AVAILABLE FOR TRANSFER TO OTHER REMAINING RECIPIENT PLANNING AREAS.


E. PLANNING AREA BOUNDARIES

PLANNING AREA ACREAGES AND BOUNDARIES ARE CONCEPTUAL AND SUBJECT TO CHANGE WITH DETAILED PLANNING. PLANNING AREA ACREAGES MAY CHANGE UP TO 30% WITH APPROVAL BY THE PLANNING AND DEVELOPMENT DIRECTOR. SUCH CHANGES WILL RESULT IN CORRESPONDING CHANGES TO THE MAX SQ. FT./AREA OR MAX UNITS/AREA SHOWN IN THE PLANNING AREA SUMMARY.

IF PLANNING AREA CHANGES ARE MADE, ALL STREET CLASSIFICATIONS (AS SHOWN ON SHEET 7) ARE SUBJECT TO CHANGE.

F. MAXIMUM COMMERCIAL SQUARE FOOTAGE PER AREA

TRANSFER(S) OF COMMERCIAL SQUARE FOOTAGE FROM PLANNING AREA TO PLANNING AREA (TRANSFER OF SQUARE FOOTAGE MAY NOT EXCEED 30% OF THE RECIPIENT PLANNING AREA MAX SQ. FT. PER AREA) MAY BE PERMITTED WITH APPROVAL BY THE PLANNING AND DEVELOPMENT DIRECTOR. SQUARE FOOTAGE TRANSFERS SHALL BE TRACKED BY THE DEVELOPER AND PROVIDED TO THE PLANNING AND DEVELOPMENT DIRECTOR WITH EACH SUCH TRANSFER AT THE FINAL PLAT STAGE OF THE SUBDIVISION PROCESS. HOWEVER, AT NO TIME SHALL THE OVERALL PUD COMMERCIAL SQUARE FOOTAGE EXCEED 2,400,000 SQUARE FEET WITHOUT AN AMENDMENT TO THE ODP, APPROVED BY TOWN COUNCIL.

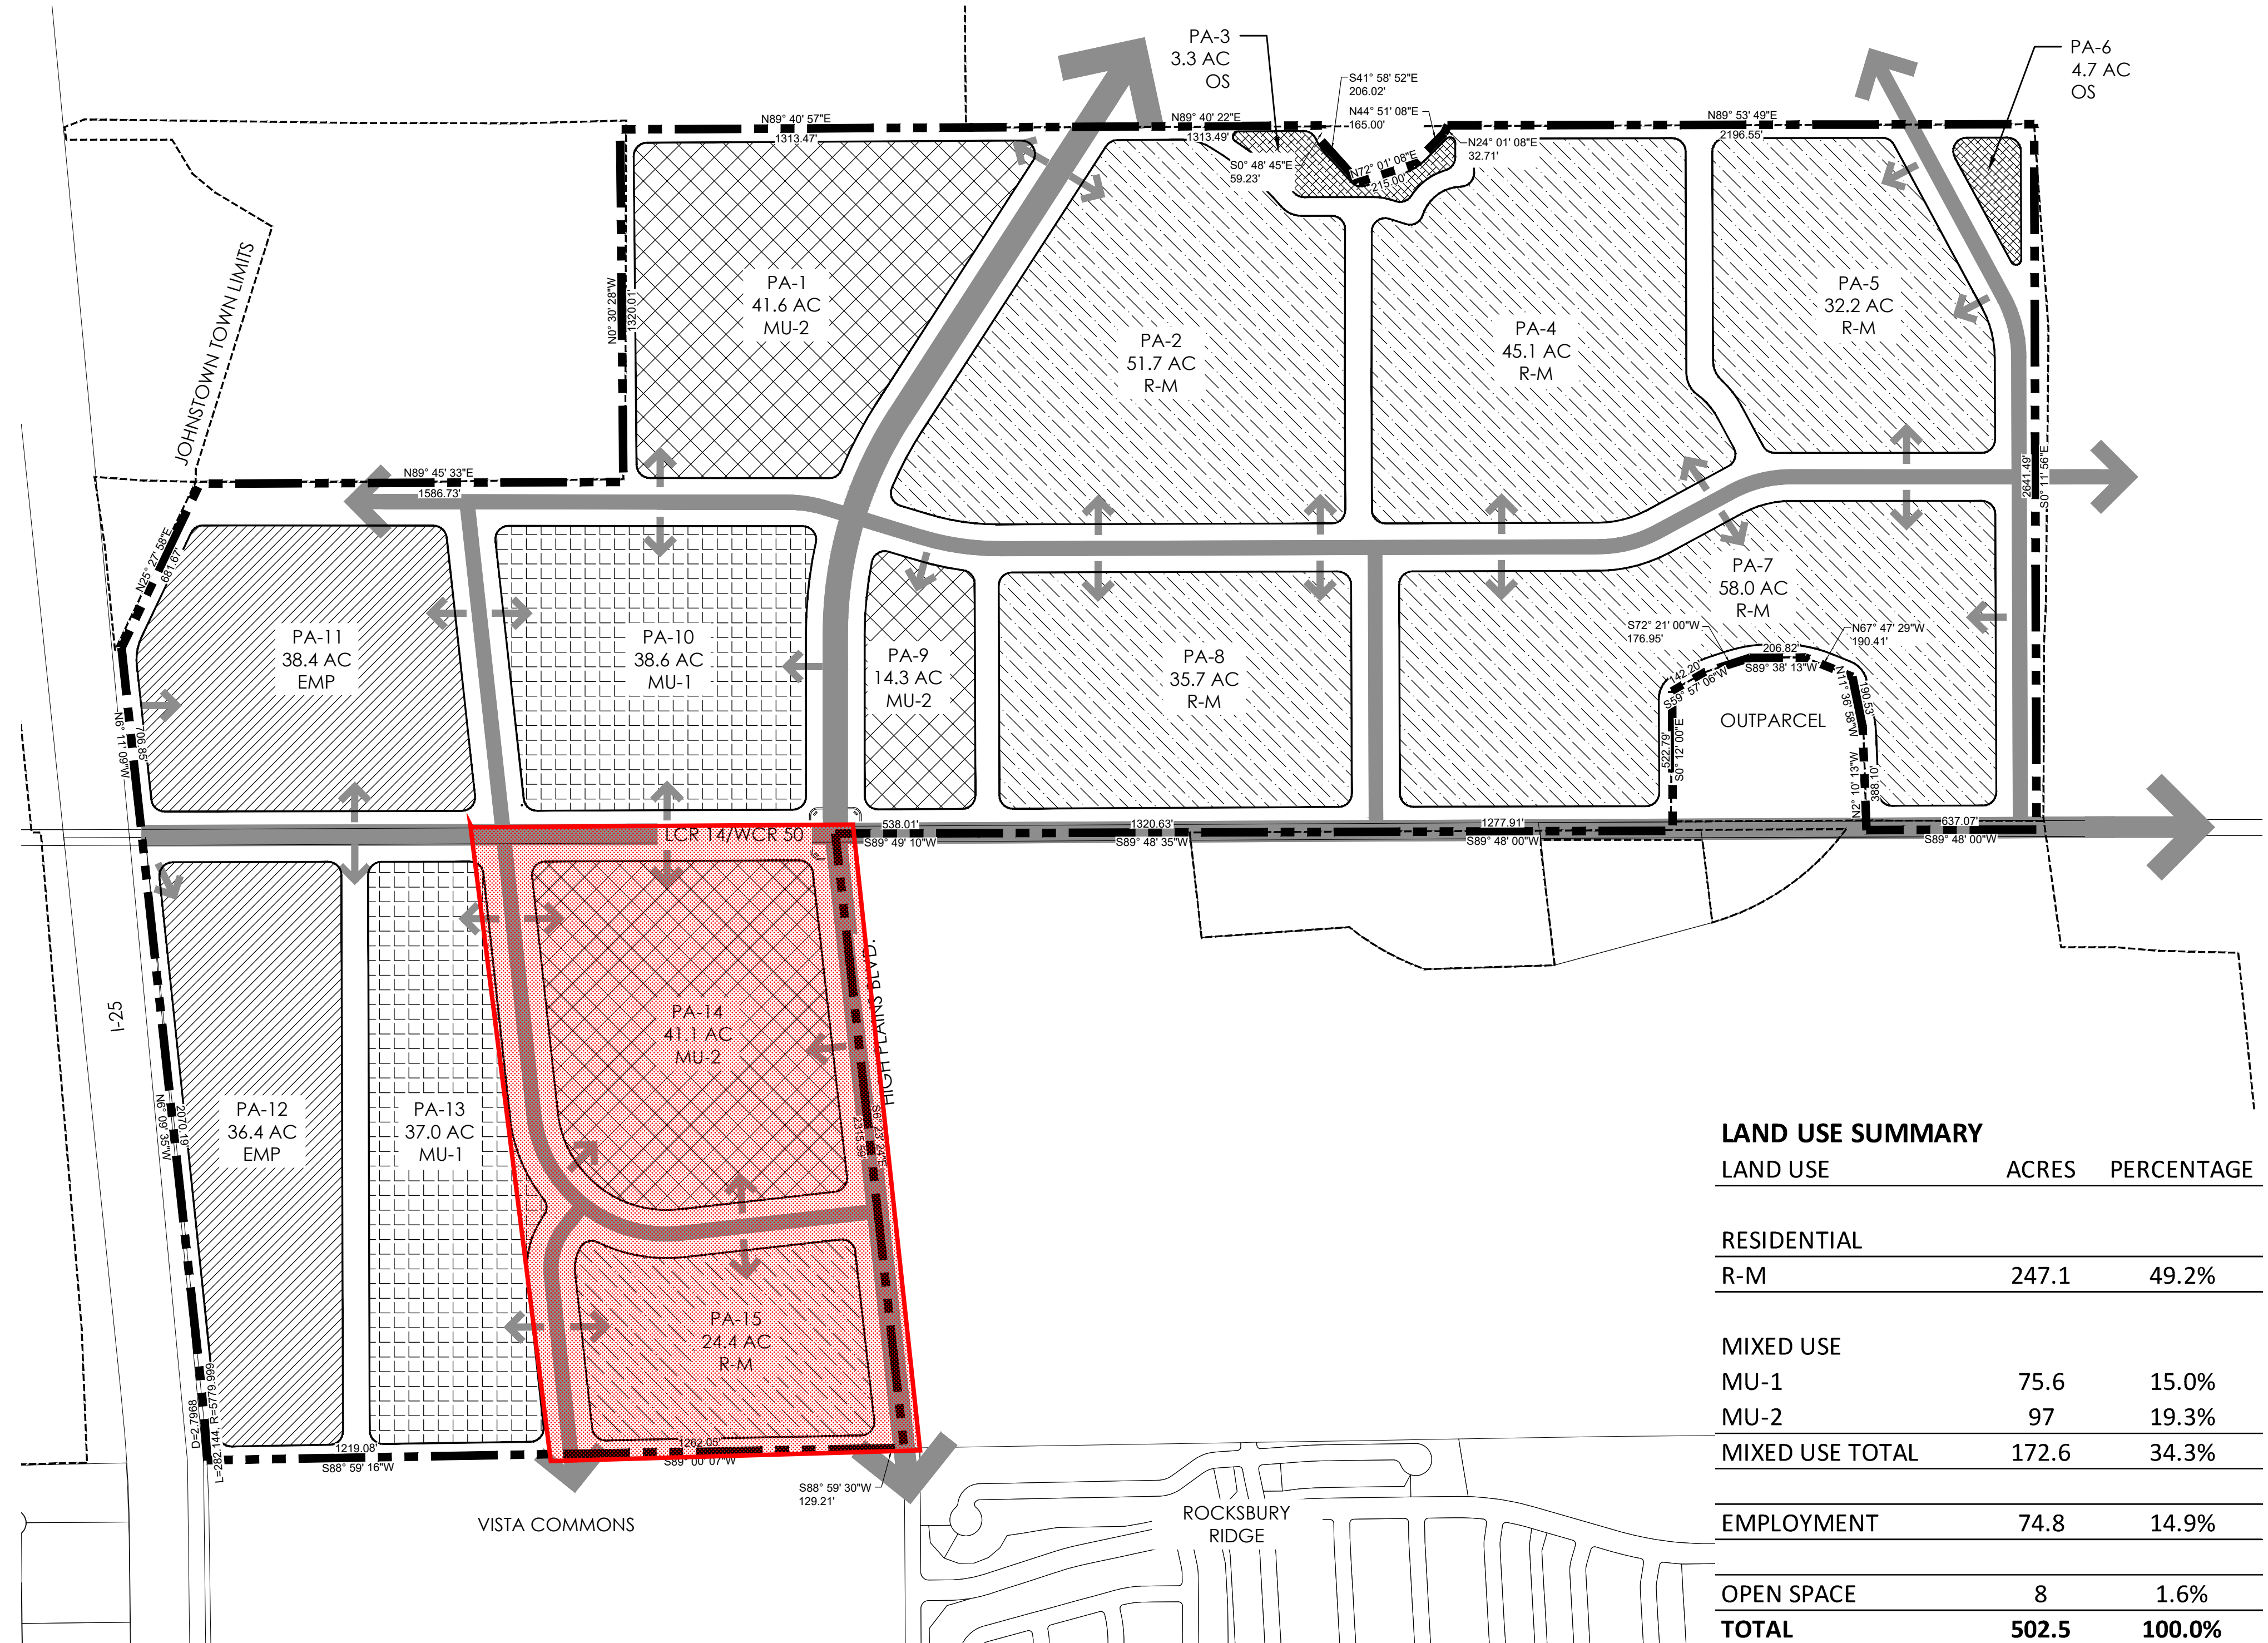

LAND USE SUMMARY

LAND USE	ACRES	PERCENTAGE
RESIDENTIAL		
R-M	247.1	49.2%
MIXED USE		
MU-1	75.6	15.0%
MU-2	97	19.3%
MIXED USE TOTAL	172.6	34.3%
EMPLOYMENT	74.8	14.9%
OPEN SPACE	8	1.6%
TOTAL	502.5	100.0%

LEGEND

	MIXED USE - 1 (MU-1)
	MIXED USE - 2 (MU-2)
	EMPLOYMENT (EMP)
	MEDIUM DENSITY RESIDENTIAL (R-M)
	OPEN SPACE (OS)

PLANNING AREA	LAND USE	APPROX. ACRES	COMMERCIAL MAX SQ.FT./AREA	RESIDENTIAL		
				MIN. DU /ACRE	MAX. DU /ACRE	MAX UNITS/AREA
PA-1	MIXED USE-2	41.6	634,234	3	15	624
PA-2	MEDIUM DENSITY RESIDENTIAL	51.7		3	6	310
PA-3	OPEN SPACE	3.3				0
PA-4	MEDIUM DENSITY RESIDENTIAL	45.1		3	6	271
PA-5	MEDIUM DENSITY RESIDENTIAL	32.2		3	6	193
PA-6	OPEN SPACE	4.7				
PA-7	MEDIUM DENSITY RESIDENTIAL	58.0		3	8	464
PA-8	MEDIUM DENSITY RESIDENTIAL	35.7		3	8	286
PA-9	MIXED USE-2	14.3	186,872	3	20	286
PA-10	MIXED USE-1	38.6	504,425			
PA-11	EMPLOYMENT	38.4	501,811			
PA-12	EMPLOYMENT	36.4	554,954			
PA-13	MIXED USE-1	37.0	483,516			
PA-14	MIXED USE-2	41.1	537,095	3	15	617
PA-15	MEDIUM DENSITY RESIDENTIAL	24.4		3	8	195

DENSITY TRANSFER TRACKING CHART

PLANNING AREA	APPROVED DENSITY PRIOR TO TRANSFER		APPROVED DENSITY AFTER TRANSFER	
	ACRES	RESIDENTIAL UNITS	DENSITY TRANSFER	RESIDENTIAL UNITS
X				
Y				
Z				
TOTAL				

Scale: 1" = 400'-0"

